Edition 1

one LIGHT



2025

Lighting Catalogue

one light catalogue 2025 Edition 1


one
LIGHT

Message from our CEO

We proudly present our new catalogue 2025 Edition 1.

In our new catalogue you will find many new items as well as upgrades to a large range of existing ones. Specifically, we would like to point your attention to the following:

- New MINI and MIDI magnetic profiles which complement our existing MAXI magnetic profile.
- New range of magnetic luminaires.
- The introduction in our products of ceiling fans which you can find in new Section 27.
- New selection of drivers and emergency kits.

We also invite you to review our new products 2025 Edition 2 which is found at the beginning of this catalogue. There you will find over 200 new items including several new ranges of decorative and pendant fittings.

In 2024 we have started to replace existing fittings into CCT V (CCT Variable) and PV (Power Variable) versions. These versions have the advantage of flexibility as they allow the CCT and/or Power of the fitting to be selected by the end-user, thereby customizing luminaires to specific installations. Advantages of this improvement are as follows:

- Often clients are unsure of what they want before they see it. Now clients can install fittings and select the CCT and/or Power levels at the time of installation and in the actual location they will be used.
- Shops and stores will often change their floor layout and display windows. Now they would be able to tailor the CCT and Power levels of their luminaires whenever they change designs.
- Reduced stock levels, as now one item code can cover three colour temperatures.

In 2024 we have begun co-operation with more than 30 new distributors worldwide and are proud to announce that we have entered five new markets. This increased market reach and our growth gives us new capabilities as a company from which all our partners benefit.

We sincerely thank you for your trust and support and look forward to a mutual success in the coming year.

Yiotis Demetriou
CEO
ONE Light Ltd



"Do it with passion or forget it!"

The Company

Founded in 2011 ONE Light supplies technical lighting to retailers, wholesalers and distributor partners across 65 countries globally. ONE Light specialises in modern design LED lighting offering quality at affordable prices.



Warehouse

Operating from it's modern 5000m^2 warehouse, ONE Light provides 99% stock availability on all catalogue products. All orders can be prepared for dispatch within 24hours.



Graphics Department

Our graphics department designs every single product package and catalogues. All item photos are taken in our own photo studio.





Technical Department

ONE Light products are tested to meet the technical and quality standards demanded by our international customers.



Online Catalogue Order

To get a copy of our latest catalogue fill in the application form on our website.



I would like to receive the ONE Light catalogue:

Name *

Company Name

Company Website

Email address *

Tel No.

Country *

–

Profession *

- Lighting retailer (Shop)
- Lighting wholesaler / distributor
- Lighting installer / electrician
- Architect / Designer
- Private use
- Other

Type verification code *

5149

ORDER

B2B Customer Login


All the info you need to know.. on your screen with a touch of a button.

Online Features

Connect with our B2B customer login application on our website to access all the information you will need to work with ONE Light.




Info On B2B Application

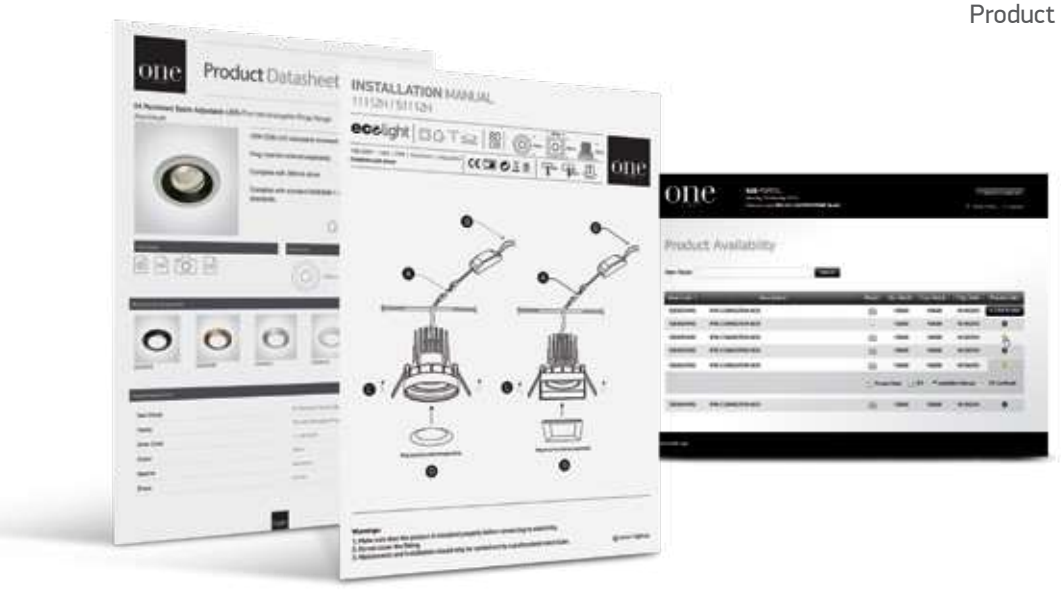

- Product availability & arrival dates
- Open orders
- Photos
- Product data sheets
- Installation manuals
- Photometric files
- CE certificates
- Account statements


B2B e-shop/Orders

All registered customers & distributors can place orders using our e-shop

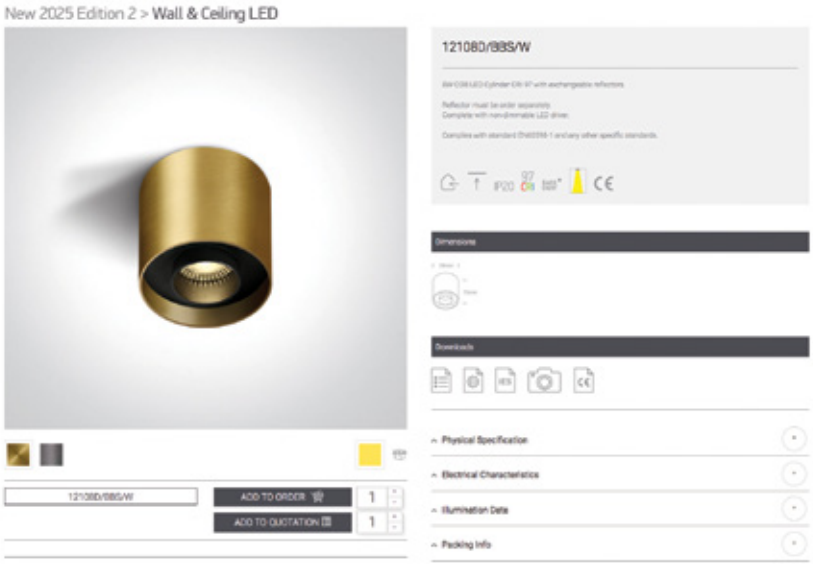


1

Select product code and quantity.
Add to order.

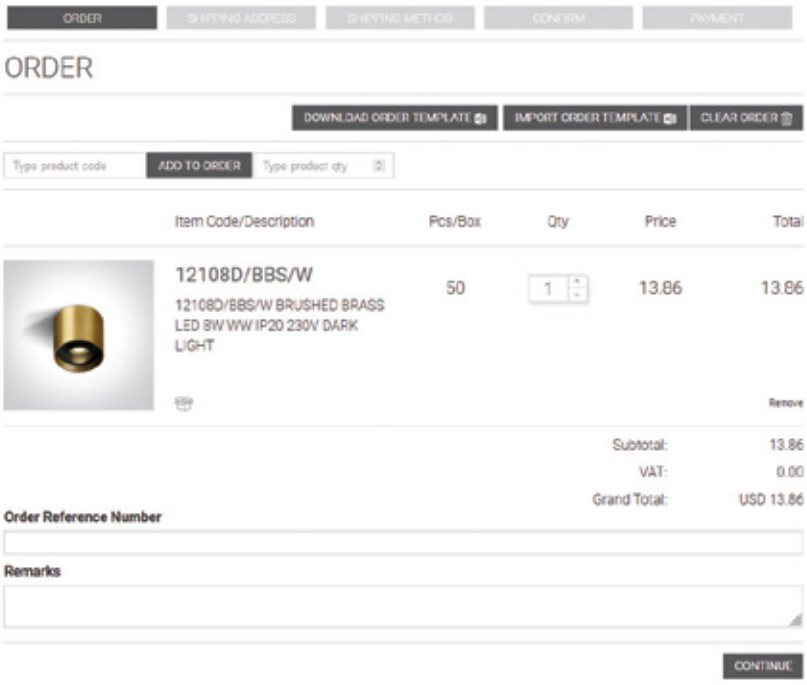

2

View your order.

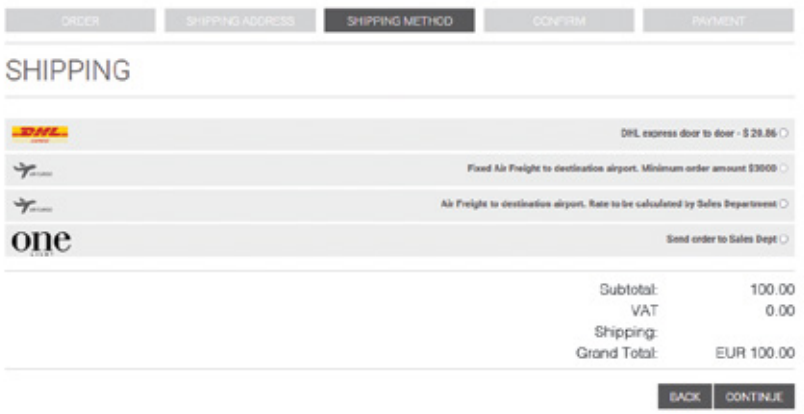


3

Select shipping method and payment.


B2B e-shop/Quotations

All registered customers & distributors can create quotations using our e-shop.

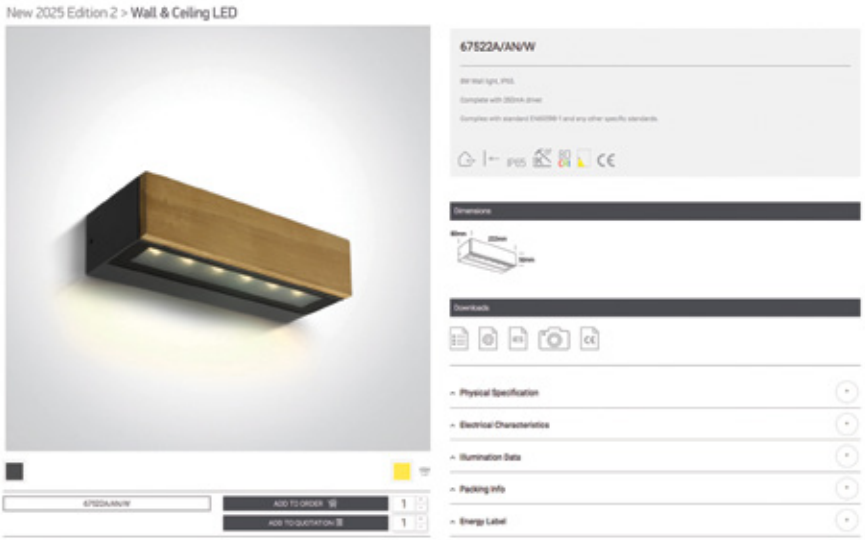


1

Select product code and quantity.
Add to quotation.

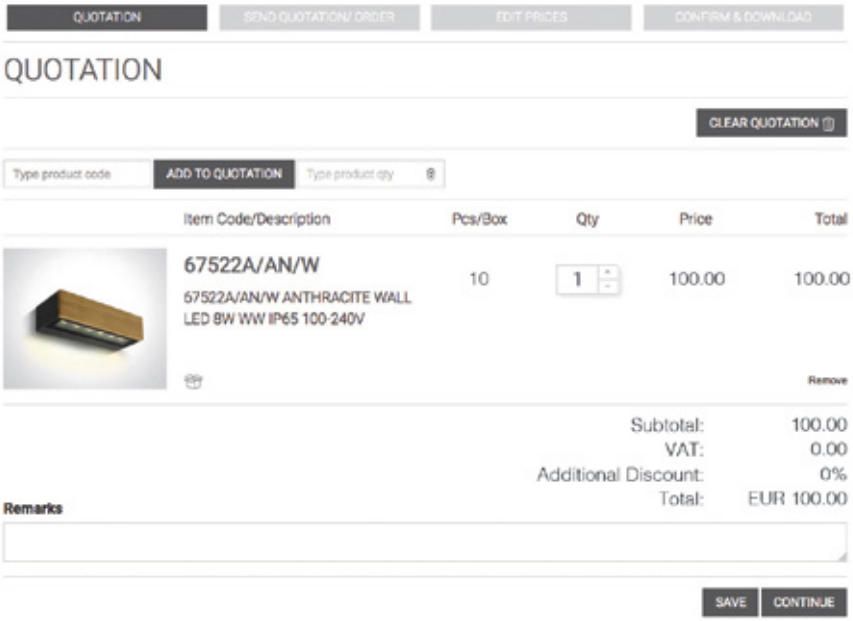

2


View your quotation.

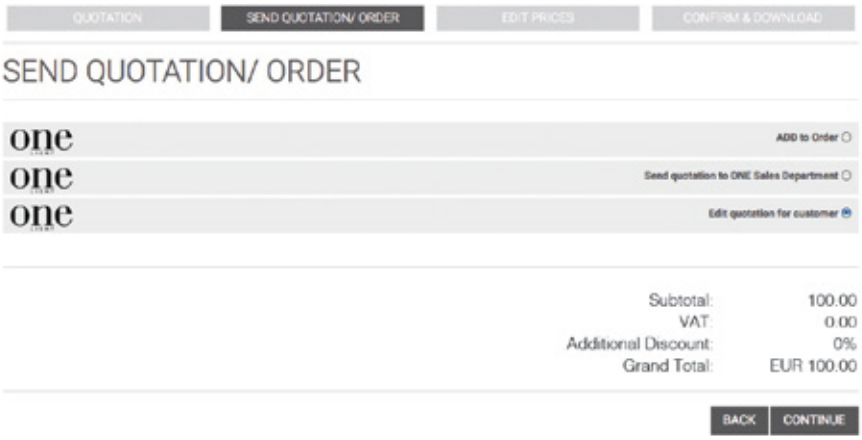

3


Select from 3 options:
1. Create order from your quotation
2. Send quotation to our sales department
3. Create quotation for your customers

B2B e-shop/Quotations for your customers

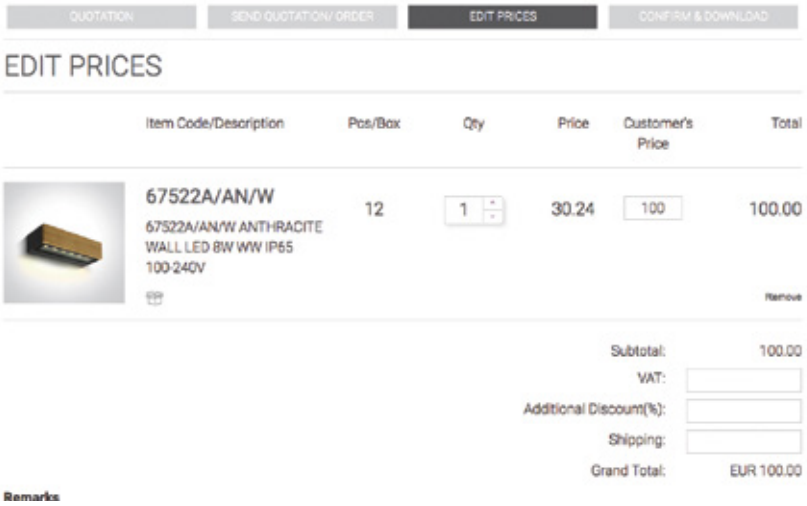


4

1. Select product codes and quantities
2. Add to quotation
3. Edit prices for your customers

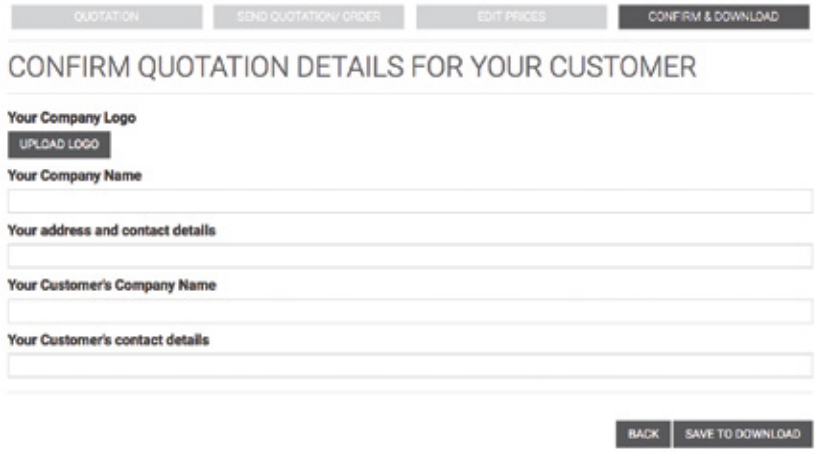

5

Upload your company logo and add your customers contact details to complete the quotation.

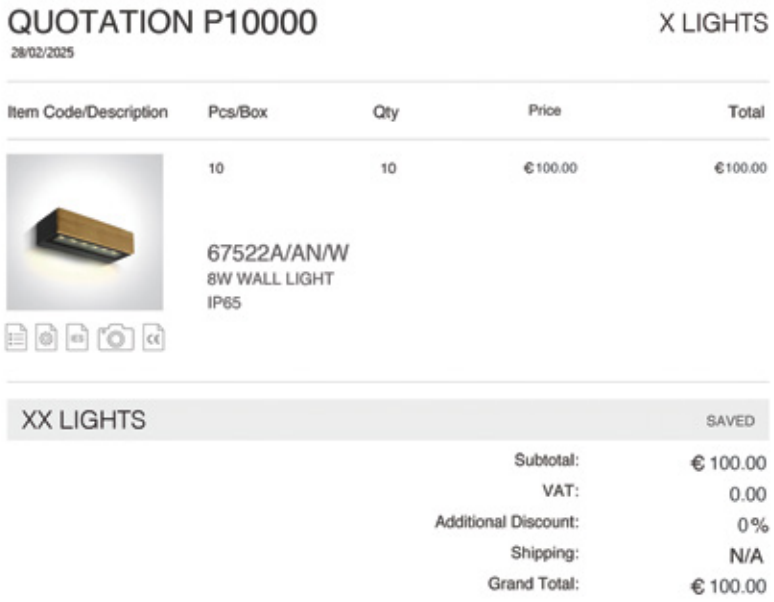

6

Create pdf quotation with all links for yor customers. The pdf can be sent to your customers by email.

Symbols

Decoding our catalogue.



EUROPEAN CONFORMITY MARK

ITEMS OFFERED AT SPECIAL PRICE

offer

CLASS PROTECTION

III

MOUNTING POSITION

POWER VARIABLE

PV

FIRE RATED

FIRE RATED

INDOOR/OUTDOOR INSTALLATION

YEARS OF WARRANTY

2 YEAR 3 YEAR 5 YEAR

IP RATING

IP20 IP65

NEW PRODUCTS

new

LED BUILT IN

LED BUILT IN

CCT VARIABLE

CCT V

ROTATION RANGE

ADJUSTABLE 2 directions

ADJUSTABLE 1 direction

CEILING DEPTH REQUIRED

CABLE LENGTH

BATTERY

COLOUR RENDERING INDEX

80 CRI

CUTOUT HOLE

DARK LIGHT

DARK LIGHT

FAST CONNECTION

QUICK FIX

SOLAR PANEL

Solar

IMPACT PROTECTION RATING

IK 08

LIGHT DISTRIBUTION & BEAM ANGLE

30°

PIECES PER BOX

MAXIMUM UNDERWATER DEPTH

1m max

SENSOR

DIMMABLE

DIMMABLE

PUSH TO DIM

PUSH TO DIM

Colour Codes

Decoding our colours.







Why ONE Light?

Choose ONE Light as your lighting partner.

1-DAY Delivery

Have your lighting products the moment you need them. ONE Light's fast delivery service promises shipment within 24hours from order confirmation. Our exports staff will quote the best freight rate for your orders. We offer competitive worldwide sea and air freight rates.





99% Stock Availability

ONE Light's capability of immediate delivery is based on the fact that 99% of all catalogue items are in stock and ready for delivery from our new 5000m^2 warehouse.

Packaging

ONE Light's new packaging is fresh and eye catching, designed to clearly display the information and the product.



Products

With over 2000 product codes covering the majority of your technical lighting needs, ONE Light provides a one stop solution to satisfy most of the customers searching for quality lighting.

one

NEW PRODUCTS 2025

EDITION 2

Recessed Spots Fixed



10105ALG/W/BS


10105ALG | 10W | MR16 | GU10 | Aluminium

new DARK LIGHT IP20

CE 5 YEAR



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105ALG/W/BS	White	Brass	10W	100-240V		15cm	78mm	150mm	50	-



10105AD/W/W

10105AD | 10W | MR16 | GU10 | Aluminium


new DARK LIGHT IP20


CE 5 YEAR





Complete with 0950GB.



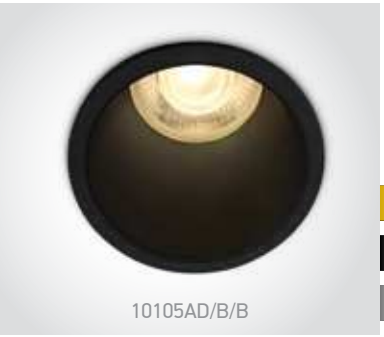

10105AD/B/B

10105AD | 10W | MR16 | GU10 | Aluminium


new DARK LIGHT IP20

CE 5 YEAR





Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105AD/W/W	White	White	10W	100-240V		15cm	64mm	130mm	36	-
10105AD/B/B	Black	Black	10W	100-240V		15cm	64mm	130mm	36	-



10105D8/B/BS


10105D8 | 10W | MR16 | GU10 | Aluminium

new DARK LIGHT IP20

CE 5 YEAR



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105D8/B/BS	Black	Brass	10W	100-240V		15cm	62mm	130mm	50	-




10105Y | 10W | MR16 | GU10 | Aluminium

new
DARK LIGHT
IP20

CE 5 YEAR








10105Y | 10W | MR16 | GU10 | Aluminium

new
DARK LIGHT
IP20

CE 5 YEAR





Order Code	Colour	Watts	Input	Class					Notes
10105Y/W	White	10W	100-240V		15cm	68mm	120mm	50	-
10105Y/B	Black	10W	100-240V		15cm	68mm	120mm	50	-




10105YTR | 10W | MR16 | GU10 | Trimless | Aluminium

new
DARK LIGHT
IP20

CE 5 YEAR



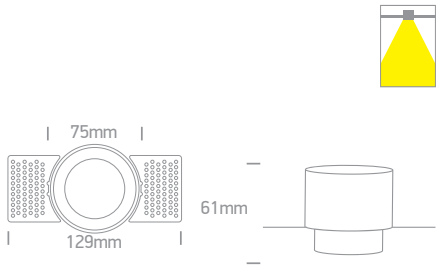

Order Code	Colour	Watts	Input	Class					Notes
10105YTR/W	White	10W	100-240V		15cm	80mm	130mm	50	-

Recessed Spots Fixed LED


10103LB | 3W | COB LED | Aluminium



new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103LB/W/W	White	Warm white	3000K	3W	300lm	36°	350mA	III	40cm	38mm	55mm	100	Requires 350mA driver
10103LB/B/W	Black	Warm white	3000K	3W	300lm	36°	350mA	III	40cm	38mm	55mm	100	Requires 350mA driver


10107DB | 6,5W | COB LED | Aluminium



new
DARK LIGHT
IP65

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
5 YEAR



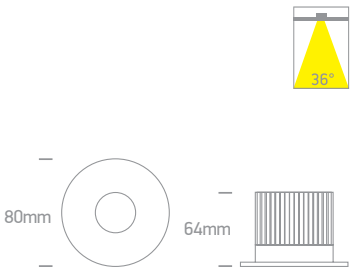

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107DB/B/W	Black	Warm white	3000K	6,5W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver


10112C | 12W | COB LED | Die cast



new
DARK LIGHT
IP65

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
5 YEAR



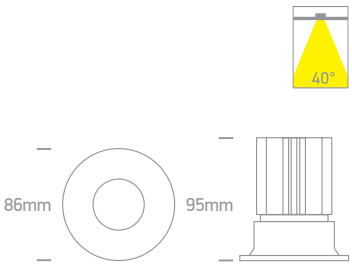

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112C/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	75mm	120mm	50	Requires 700mA driver



10107A/W/W

10107A | 7W | SMD LED | Die cast

Semi-Recessed.

LED BUILT IN · 90 CRI · CE · 3 YEAR

new · IP20







10107A/B/W

10107A | 7W | SMD LED | Die cast

Semi-Recessed.

LED BUILT IN · 90 CRI · CE · 3 YEAR

new · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107A/W/W	White	Warm white	3000K	7W	600lm	38°	230V	☐	54mm	40mm	50	Complete with 180mA driver
10107A/B/W	Black	Warm white	3000K	7W	600lm	38°	230V	☐	54mm	40mm	50	Complete with 180mA driver



10112A/W/W


10112A | 12W | SMD LED | Die cast


Semi-Recessed.

LED BUILT IN · 90 CRI · CE · 3 YEAR

new · IP20





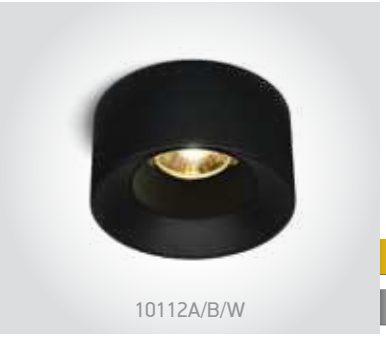

10112A/B/W


10112A | 12W | SMD LED | Die cast

Semi-Recessed.

LED BUILT IN · 90 CRI · CE · 3 YEAR

new · IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112A/W/W	White	Warm white	3000K	12W	1100lm	38°	230V	☐	72mm	40mm	50	Complete with 300mA driver
10112A/B/W	Black	Warm white	3000K	12W	1100lm	38°	230V	☐	72mm	40mm	50	Complete with 300mA driver



10110U | 10W | SMD LED | Die cast








Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110U/W/V	White	CCT V	3000K-4000K-6000K	10W	850lm	230V		86mm	55mm	40	Complete with 200mA driver



10124U | 24W | SMD LED | Die cast








Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10124U/W/V	White	CCT V	3000K-4000K-6000K	24W	2000lm	230V		160mm	55mm	20	Complete with 500mA driver




10130U | 30W | SMD LED | Die cast







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10130U/W/V	White	CCT V	3000K-4000K-6000K	30W	2500lm	230V		205mm	65mm	10	Complete with 750mA driver

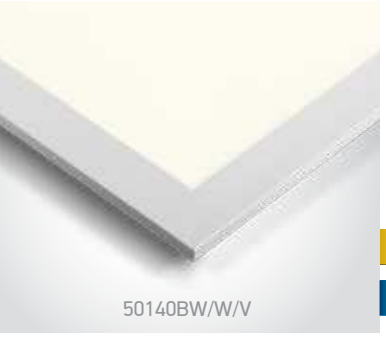

50140BW | 40W | SMD LED | 595x595mm | Aluminium + Steel


Backlit.



Optional suspension kit.
Order code 050017.



Optional
recessed kit (4pcs).
Order code 050108.

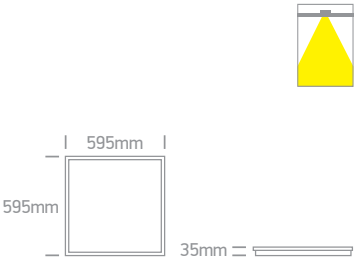


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140BW/W/V	White	CCT V	3000K-4000K-5700K	40W	4000lm	230V		60mm	4	Complete with IP65 950mA driver



10107B | 7W | SMD LED | Die cast



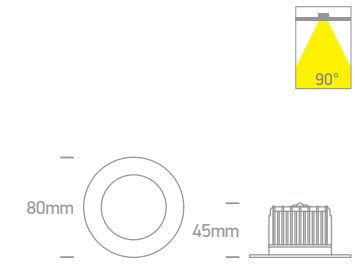


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107B/W/V	White	CCT V	3000K-4000K-5000K	7W	540lm	90°	230V		65mm	70mm	50	Complete with 180mA driver



10113B | 13W | SMD LED | Die cast



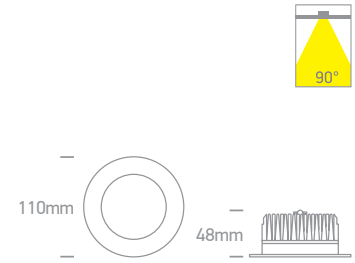


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10113B/W/V	White	CCT V	3000K-4000K-5000K	13W	950lm	90°	230V		95mm	70mm	24	Complete with 300mA driver



10118B | 18W | SMD LED | Die cast



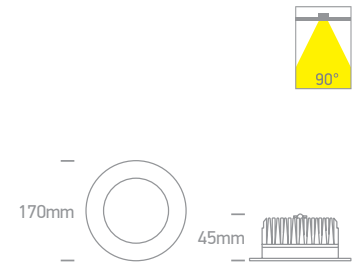


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118B/W/V	White	CCT V	3000K-4000K-5000K	18W	1400lm	90°	230V		140mm	70mm	30	Complete with 450mA driver



10125B | 25W | SMD LED | Die cast



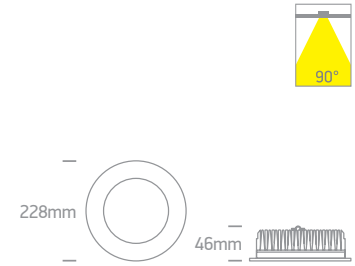

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10125B/W/V	White	CCT V	3000K-4000K-5000K	25W	2000lm	90°	230V		210mm	80mm	10	Complete with 650mA driver

Downlights Fixed LED


10109D | 12W | SMD LED | Die cast



new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
IK07
CCT V
CE
5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10109D/W/V	White	CCT V	3000K-4000K-5000K	12W	1000lm	100°	230V	⧈	110mm	70mm	40	Complete with 300mA driver
10109D/B/V	Black	CCT V	3000K-4000K-5000K	12W	1000lm	100°	230V	⧈	110mm	70mm	40	Complete with 300mA driver


10122D | 22W | SMD LED | Die cast



new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
IK07
CCT V
CE
5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10122D/W/V	White	CCT V	3000K-4000K-5000K	22W	1900lm	100°	230V	⧈	165mm	75mm	20	Complete with 600mA driver
10122D/B/V	Black	CCT V	3000K-4000K-5000K	22W	1900lm	100°	230V	⧈	165mm	75mm	20	Complete with 600mA driver


10109FD | 9W | SMD LED | Die cast



new
DARK LIGHT
IP65

LED BUILT IN
90 CRI
IK07
CCT V
CE
5 YEAR



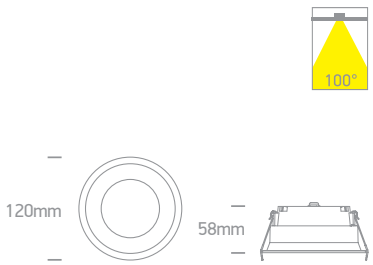

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10109FD/W/V	White	CCT V	3000K-4000K-5000K	9W	900lm	100°	230V	⧈	111mm	80mm	40	Complete with 220mA driver
10109FD/B/V	Black	CCT V	3000K-4000K-5000K	9W	900lm	100°	230V	⧈	111mm	80mm	40	Complete with 220mA driver


10120FD | 20W | SMD LED | Die cast



new
DARK LIGHT
IP65

LED BUILT IN
90 CRI
IK07
CCT V
CE
5 YEAR



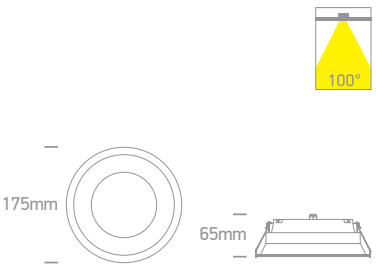

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120FD/W/V	White	CCT V	3000K-4000K-5000K	20W	2000lm	100°	230V	⧈	166mm	85mm	20	Complete with 500mA driver
10120FD/B/V	Black	CCT V	3000K-4000K-5000K	20W	2000lm	100°	230V	⧈	166mm	85mm	20	Complete with 500mA driver



7843E | 10W/m | COB LED | 400LEDs/m | Ultra slim

3M Double face adhesive.

new IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 2cm
(8-LED segment)

5mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7843E/C	Cool white	4000K	10W/m	900lm/m	24V DC	III	50	Requires 24V DC driver
7843E/W	Warm white	3000K	10W/m	810lm/m	24V DC	III	50	Requires 24V DC driver
7843E/EW	Extra warm white	2700K	10W/m	790lm/m	24V DC	III	50	Requires 24V DC driver



7844E | 10,5W/m | COB LED | 480LEDs/m

3M Double face adhesive.

new IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 5cm
(24-LED segment)

8mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7844E/C	Cool white	4000K	10,5W/m	950lm/m	24V DC	III	40	Requires 24V DC driver
7844E/W	Warm white	3000K	10,5W/m	860lm/m	24V DC	III	40	Requires 24V DC driver
7844E/EW	Extra warm white	2700K	10,5W/m	820lm/m	24V DC	III	40	Requires 24V DC driver



7844 | 10W/m | COB LED | 480LEDs/m

Supplied in 5m roll / 3M Double face adhesive.

new IP20

LED BUILT IN · DIMMABLE · CE · 5 YEAR






Dimming remote control.
Order code 20030.



Cut every 5cm
(24-LED segment)

8mm

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7844/A	Amber	2000K	10W/m	24V DC	III	50	Requires 24V DC driver

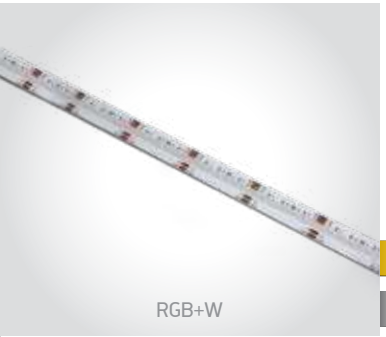

7846 | RGBW | 18W/m | COB LED | 840LEDs/m

Supplied in 5m roll / 3M Double face adhesive.

new IP20

LED BUILT IN · DIMMABLE · CE · 5 YEAR



DALI & Push to DIM controller.
Order code 89100LP.



Dimming remote control.
Order code 20036.



Cut every 3,3 cm
(28-LED segment)

12mm


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846/RGBW	RGB + Warm white	RGB + 3000K	RGB 12W/m + WW 6W/m	500lm/m (3000K)	24V DC	III	50	Requires 24V DC driver




7940/B

new

7940 | Wall-to-wall kit | Aluminium | Suitable for LED strips up to 15mm



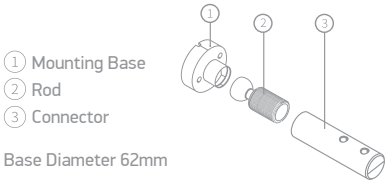

1 Mounting Base
2 Rod
3 Connector

Base Diameter 62mm

Order Code	Colour		Notes
7940/B	Black	20	Requires 7940A/B or 7940B/B



7940A/B

new

7940A | 10m Metal belt for 7940 | Suitable for LED strips up to 15mm

Order Code	Colour		Notes
7940A/B	Black	20	-



7940B/B

new

7940B | 20m Metal belt for 7940 | Suitable for LED strips up to 15mm

Order Code	Colour		Notes
7940B/B	Black	20	-



new

7900/W | 2m Profile for heat dissipation | Aluminium | Suitable for LED Strips up to 12mm




Order Code	Colour		Notes
7900/W	White	50	-



38104B | 4W | SMD LED | Plastic

Connect 25 fittings maximum.



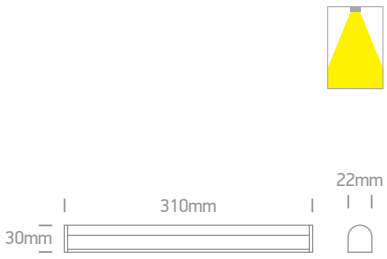


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38104B/V	CCT V	3000K-4000K-6000K	4W	440lm	230V		120cm	30	Complete with driver



38108B | 8W | SMD LED | Plastic

Connect 12 fittings maximum.



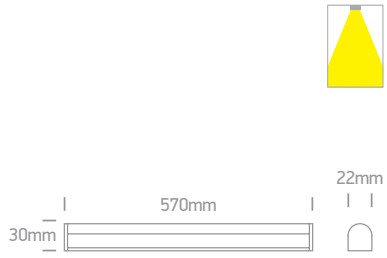

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38108B/V	CCT V	3000K-4000K-6000K	8W	880lm	230V		120cm	30	Complete with driver



38114B | 14W | SMD LED | Plastic

Connect 7 fittings maximum.





Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38114B/V	CCT V	3000K-4000K-6000K	14W	1540lm	230V		120cm	30	Complete with driver

Track Lights




65105NT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE · CE · 5 YEAR


65105NT/B/B


Suitable for GU10 LED lamp.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NT/W/W	White	White	10W	100-240V	⏚	12	-
65105NT/B/B	Black	Black	10W	100-240V	⏚	12	-




65105DT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE · CE · 5 YEAR


Complete with Black & White reflectors.


Suitable for GU10 LED lamp.






65105DT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE · CE · 5 YEAR


Complete with Black & Brass reflectors.


Suitable for GU10 LED lamp.




Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105DT/W	White	Black & White	10W	100-240V	⏚	40	-
65105DT/B	Black	Black & Brass	10W	100-240V	⏚	40	-



63108AT | 8W | COB LED | Die cast

LED BUILT IN · 90 CRI · CE · 3 YEAR


63108AT/B/W



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
63108AT/W/W	White	White	Warm white	3000K	8W	560lm	36°	230V	▢	20	Complete with 300mA driver
63108AT/B/W	Black	Black	Warm white	3000K	8W	560lm	36°	230V	▢	20	Complete with 300mA driver


65026T | 40W | SMD LED | Linear track light | Aluminium + plastic



new IP20

LED BUILT IN · 90 CRI · ±45° ADJUSTABLE · CCT V · CE · 3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65026T/W/V	White	CCT V	3000K-4000K-5000K	40W	3400lm	100°	230V		10	Complete with 1000mA driver
65026T/B/V	Black	CCT V	3000K-4000K-5000K	40W	3400lm	100°	230V		10	Complete with 1000mA driver


65018T | 16W | SMD LED | Linear track light | Aluminium + PC



new IP20

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR



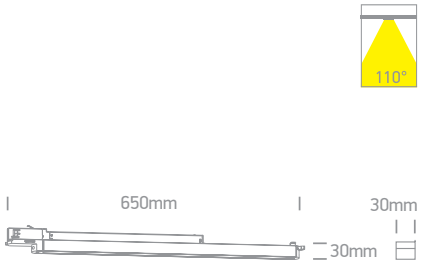

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65018T/W/V	White	CCT V	3000K-4000K-5000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65018T/B/V	Black	CCT V	3000K-4000K-5000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver


65025T | 25W | SMD LED | Linear track light | Aluminium + PC



new IP20

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR



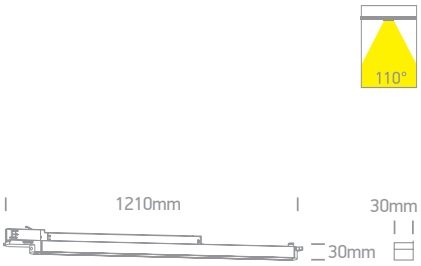

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65025T/W/V	White	CCT V	3000K-4000K-5000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver
65025T/B/V	Black	CCT V	3000K-4000K-5000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver


65170BT | 60W PV | SMD LED | Linear track light | Aluminium



new IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR



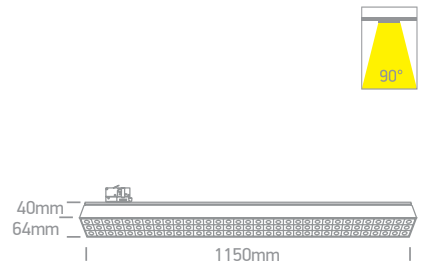

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65170BT/W/V	White	CCT V	3000K-4000K-5000K	40W-50W-60W	5400lm@60W	90°	230V		12	Complete with PV driver
65170BT/B/V	Black	CCT V	3000K-4000K-5000K	40W-50W-60W	5400lm@60W	90°	230V		12	Complete with PV driver



42003 | 48V | 3m Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

new

5 YEAR




Optional suspension kit. Order code 42026.



Complete with 2pcs end caps.



Complete with cover.



Order Code	Colour	Length	Input	Class		Notes
42003/B	Black	3m	48V	III	1	-



42100AL | 15W | SMD LED | Linear light | DALI | Aluminium + PC

new

IP20


LED BUILT IN


90 CRI

DALI DIMMABLE

3 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100AL/B/W	Black	Warm white	3000K	15W	1200lm	120°	48V	III	40	-




12105AL/W/W

12105AL | 10W | MR16 | GU10 | Aluminium

new DARK LIGHT IP20

CE 5 YEAR






12105AL/W/BS

12105AL | 10W | MR16 | GU10 | Aluminium

new DARK LIGHT IP20

CE 5 YEAR



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105AL/W/W	White	White	10W	100-240V		20	-
12105AL/W/BS	White	Brass	10W	100-240V		20	-





12105N/W/W

12105N | 10W | MR16 | GU10 | Aluminium

new DARK LIGHT IP20

CE 5 YEAR



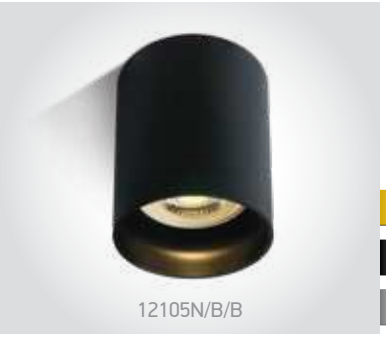


12105N/B/B

12105N | 10W | MR16 | GU10 | Aluminium

new DARK LIGHT IP20

CE 5 YEAR



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105N/W/W	White	White	10W	100-240V		36	-
12105N/B/B	Black	Black	10W	100-240V		36	-



38150A | 40W PV | SMD LED | Linear system | Diffuser | Aluminium

Can be connected in line.

new IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19





Complete with 4 fixing clips & 4 connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38150A/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V		300cm	12	Complete with PV driver
38150A/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V		300cm	12	Complete with PV driver



38151A | 50W PV | SMD LED | Linear system | Diffuser | Aluminium

Can be connected in line.

new IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19





Complete with 4 fixing clips & 4 connectors.




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38151A/W/V	White	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V		300cm	9	Complete with PV driver
38151A/B/V	Black	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V		300cm	9	Complete with PV driver



050170D | 14W PV | SMD LED | Corner for 38150A & 38151A | Diffuser | Aluminium

new IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19






050170D | 14W PV | SMD LED | Corner for 38150A & 38151A | Diffuser | Aluminium

new IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
050170D/W/V	White	CCT V	3000K-4000K-5000K	6W-8W-10W-14W	680lm@8W	230V		150cm	10	Complete with PV driver
050170D/B/V	Black	CCT V	3000K-4000K-5000K	6W-8W-10W-14W	680lm@8W	230V		150cm	10	Complete with PV driver



38160A | 40W PV | SMD LED | Linear system | Diffuser | Aluminium

Can be connected in line.


new

IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19



Complete with
4 fixing clips & 4 connectors.





38160A | 40W PV | SMD LED | Linear system | Diffuser | Aluminium

Can be connected in line.


new

IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19



Complete with
4 fixing clips & 4 connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	S		Notes
38160A/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V	⏚	300cm	12	Complete with PV driver
38160A/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V	⏚	300cm	12	Complete with PV driver



38161A | 50W PV | SMD LED | Linear System | Diffuser | Aluminium

Can be connected in line.

new

IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19



Complete with
5 fixing clips & 4 connectors.





38161A | 50W PV | SMD LED | Linear System | Diffuser | Aluminium

Can be connected in line.

new

IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19



Complete with
5 fixing clips & 4 connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	S		Notes
38161A/W/V	White	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V	⏚	300cm	9	Complete with PV driver
38161A/B/V	Black	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V	⏚	300cm	9	Complete with PV driver



38150B | 40W PV | 48LEDs | Linear system | Aluminium


Can be connected in line.

new · DARK LIGHT · IP20 · LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR17





Complete with 4 fixing clips & 4 connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38150B/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3800lm@40W	34°	230V	⏚	300cm	12	Complete with PV driver
38150B/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3800lm@40W	34°	230V	⏚	300cm	12	Complete with PV driver



38150C | 40W PV | 24LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.

new · IP20 · LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19





Complete with 4 fixing clips & 4 connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38150C/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V	⏚	300cm	12	Complete with PV driver
38150C/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V	⏚	300cm	12	Complete with PV driver



38150BU | 40W PV + 25W PV Uplight | 48LEDs + Diffuser | Linear system | Aluminium


Can be connected in line.

new · DARK LIGHT · IP20 · LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR17





Complete with 4 fixing clips & 4 connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38150BU/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W+16W-20W-25W	3800lm/1800lm	34°/120°	230V	⏚	300cm	12	Complete with 2x PV drivers
38150BU/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W+16W-20W-25W	3800lm/1800lm	34°/120°	230V	⏚	300cm	12	Complete with 2x PV drivers




38145BR | 40W PV | SMD LED | Recessed linear system | Aluminium

Can be connected in line.

new · DARK LIGHT · IP20 · LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR17



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38145BR/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	4000lm@40W	34°	230V	⏚	1280x37mm	80mm	12	Complete with PV driver



38145AR | 40W PV | SMD LED | Recessed linear system | Aluminium

Can be connected in line.


new IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19





Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.





38145AR | 40W PV | SMD LED | Recessed linear system | Aluminium

Can be connected in line.


new IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · UGR19





Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
38145AR/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3800lm@40W	230V		1200x37mm	80mm	12	Complete with PV driver
38145AR/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3800lm@40W	230V		1200x37mm	80mm	12	Complete with PV driver



38152R | 40W PV | SMD LED | Recessed linear system | Aluminium

Can be connected in line.


new IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR





Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38152R/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3600lm@40W	120°	230V		1200x60mm	80mm	12	Complete with PV driver




38152RC | 14W PV | SMD LED | Corner for 38152R | Aluminium

new IP20

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR



Complete with 4pcs fixing clips, 4pcs connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38152RC/W/V	White	CCT V	3000K-4000K-5000K	6W-8W-10W-14W	720lm@8W	120°	230V		160x160x60mm	80mm	10	Complete with PV driver

Wall & Ceiling LED



12112D | 12W | SMD LED | Aluminium

LED BUILT IN · 90 CRI · CCT V · CE · 5 YEAR · UGR19 · new · IP44







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112D/W/V	White	CCT V	3000K-4000K-5000K	12W	1200lm	120°	230V		30	Complete with 300mA driver
12112D/B/V	Black	CCT V	3000K-4000K-5000K	12W	1200lm	120°	230V		30	Complete with 300mA driver




12120D | 20W | SMD LED | Aluminium

LED BUILT IN · 90 CRI · CCT V · CE · 5 YEAR · UGR19 · new · IP44







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12120D/W/V	White	CCT V	3000K-4000K-5000K	20W	2000lm	120°	230V		30	Complete with 500mA driver
12120D/B/V	Black	CCT V	3000K-4000K-5000K	20W	2000lm	120°	230V		30	Complete with 500mA driver




12125D | 25W | SMD LED | Aluminium

LED BUILT IN · 90 CRI · CCT V · CE · 5 YEAR · UGR19 · new · IP44







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12125D/W/V	White	CCT V	3000K-4000K-5000K	25W	2500lm	120°	230V		20	Complete with 650mA driver
12125D/B/V	Black	CCT V	3000K-4000K-5000K	25W	2500lm	120°	230V		20	Complete with 650mA driver




12130D | 30W | SMD LED | Aluminium

LED BUILT IN · 90 CRI · CCT V · CE · 5 YEAR · UGR19 · new · IP44







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12130D/W/V	White	CCT V	3000K-4000K-5000K	30W	3000lm	120°	230V		12	Complete with 750mA driver
12130D/B/V	Black	CCT V	3000K-4000K-5000K	30W	3000lm	120°	230V		12	Complete with 750mA driver

12107R | 7W | COB LED | Dimmable | Aluminium



12107R/W/W


LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CE · 5 YEAR · new · IP20



12107R/B/W



Optional White reflector code 050106A/W.



Optional Brass reflector code 050106A/BS.



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107R/W/W	White	Black	Warm white	3000K	7W	500lm	38°	230V		50	AC LED
12107R/B/W	Black	Black	Warm white	3000K	7W	500lm	38°	230V		50	AC LED

12110R | 10W | COB LED | Aluminium



12110R/W/W


LED BUILT IN · 90 CRI · CE · 5 YEAR · new · IP20



12110R/B/W



Optional White reflector code 050106B/W.



Optional Brass reflector code 050106B/BS.



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12110R/W/W	White	Black	Warm white	3000K	10W	1000lm	38°	230V		30	Complete with 250mA driver
12110R/B/W	Black	Black	Warm white	3000K	10W	1000lm	38°	230V		30	Complete with 250mA driver

12118R | 18W | COB LED | Aluminium



12118R/W/W


LED BUILT IN · 90 CRI · CE · 5 YEAR · new · IP20




12118R/B/W



Optional White reflector code 050106C/W.



Optional Brass reflector code 050106C/BS.



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12118R/W/W	White	Black	Warm white	3000K	18W	1800lm	38°	230V		20	Complete with 450mA driver
12118R/B/W	Black	Black	Warm white	3000K	18W	1800lm	38°	230V		20	Complete with 450mA driver

12125R | 25W | COB LED | Aluminium



12125R/W/W


LED BUILT IN · 90 CRI · CE · 5 YEAR · new · IP20




12125R/B/W



Optional White reflector code 050106D/W.



Optional Brass reflector code 050106D/BS.



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12125R/W/W	White	Black	Warm white	3000K	25W	2500lm	38°	230V		18	Complete with 650mA driver
12125R/B/W	Black	Black	Warm white	3000K	25W	2500lm	38°	230V		18	Complete with 650mA driver

Wall & Ceiling LED




65004A | 5W | COB LED | Aluminium

new IP20

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR



Complete with Black, Brass & White reflectors.






65004A | 5W | COB LED | Aluminium

new IP20

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR



Complete with Black, Brass & White reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65004A/W/W	White	Warm white	3000K	5W	450lm	36°	230V		30	Complete with 500mA driver
65004A/B/W	Black	Warm white	3000K	5W	450lm	36°	230V		30	Complete with 500mA driver




65004B | 2x5W | COB LED | Aluminium

new IP20

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR



Complete with Black, Brass & White reflectors.






65004B | 2x5W | COB LED | Aluminium

new IP20

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR



Complete with Black, Brass & White reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65004B/W/W	White	Warm white	3000K	2x5W	900lm	36°	230V		24	Complete with 220mA driver
65004B/B/W	Black	Warm white	3000K	2x5W	900lm	36°	230V		24	Complete with 220mA driver




65004C | 3x5W | COB LED | Aluminium

new
IP20

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR


65004C/B/W


Complete with Black, Brass & White reflectors.

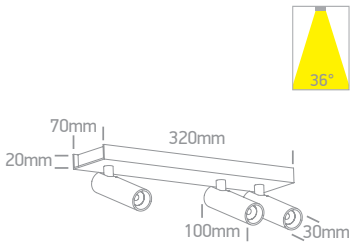

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65004C/W/W	White	Warm white	3000K	3x5W	1350lm	36°	230V		12	Complete with 500mA driver
65004C/B/W	Black	Warm white	3000K	3x5W	1350lm	36°	230V		12	Complete with 500mA driver




65004D | 3x5W | COB LED | Aluminium

new
IP20


LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR


65004D/B/W


Complete with Black, Brass & White reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65004D/W/W	White	Warm white	3000K	3x5W	1350lm	36°	230V		8	Complete with 500mA driver
65004D/B/W	Black	Warm white	3000K	3x5W	1350lm	36°	230V		8	Complete with 500mA driver

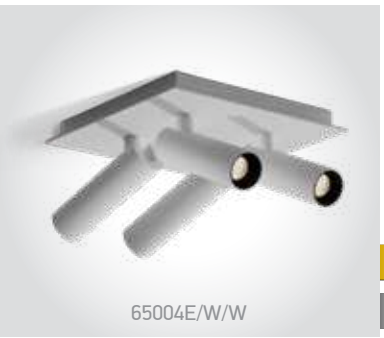


65004E | 4x5W | COB LED | Aluminium

new
IP20

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR


65004E/B/W


Complete with Black, Brass & White reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65004E/W/W	White	Warm white	3000K	4x5W	1800lm	36°	230V		6	Complete with 500mA driver
65004E/B/W	Black	Warm white	3000K	4x5W	1800lm	36°	230V		6	Complete with 500mA driver




65748 | 12W | SMD LED | Solar powered | Night sensor + PIR sensor | PC + ABS

4 modes of operation.

new
Solar
IP54

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR

Mode 1: 100% output for 18 seconds when motion detected.
Mode 2: Fixed 30 lumen output. 100% output for 18 seconds when motion detected.
Mode 3: Fixed 30 lumen output.
Mode 4: Sleep mode.




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)		Notes
65748/B/C	Black	Cool white	4000K	12W	1600lm	20	2x2200mAh lithium battery



62006 | 18W | SMD LED | ABS Body

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · new · IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62006/W/V	White	CCT V	2800K-3200K-4000K	18W	1440lm	230V		10	Complete with driver
62006/B/V	Black	CCT V	2800K-3200K-4000K	18W	1440lm	230V		10	Complete with driver



62006A | 24W | SMD LED | ABS Body

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · new · IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62006A/W/V	White	CCT V	2800K-3200K-4000K	24W	1920lm	230V		10	Complete with driver
62006A/B/V	Black	CCT V	2800K-3200K-4000K	24W	1920lm	230V		10	Complete with driver



62006B | 32W | SMD LED | ABS Body

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · new · IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62006B/W/V	White	CCT V	2800K-3200K-4000K	32W	2560lm	230V		10	Complete with driver
62006B/B/V	Black	CCT V	2800K-3200K-4000K	32W	2560lm	230V		10	Complete with driver



62006C | 40W | SMD LED | ABS Body

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · new · IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62006C/W/V	White	CCT V	2800K-3200K-4000K	40W	3200lm	230V		8	Complete with driver



62006C | 40W | SMD LED | ABS Body

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · new · IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62006C/B/V	Black	CCT V	2800K-3200K-4000K	40W	3200lm	230V		8	Complete with driver



62006D | 50W | SMD LED | ABS Body

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · new · IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62006D/W/V	White	CCT V	2800K-3200K-4000K	50W	4000lm	230V		4	Complete with driver



62006D | 50W | SMD LED | ABS Body

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · new · IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62006D/B/V	Black	CCT V	2800K-3200K-4000K	50W	4000lm	230V		4	Complete with driver


62134N/W/V

62134N | 30W | SMD LED | Aluminium

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR · new · IP20





62134N/BBS/V

62134N | 30W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20


62134N/BGL/V


62134N/B/V




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62134N/W/V	White	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA driver
62134N/B/V	Black	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62134N/BBS/V	Brushed brass	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62134N/BGL/V	Brushed gold	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver


62142N/W/V

62142N | 42W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62142N/W/V	White	CCT V	2700K-3000K-4000K	42W	3570lm	120°	230V		1	Complete with 1050mA dimmable driver


62132NA/W/V

62132NA | 38W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20


62132NA/B/V




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62132NA/W/V	White	CCT V	2700K-3000K-4000K	38W	3230lm	120°	230V		1	Complete with 1050mA dimmable driver
62132NA/B/V	Black	CCT V	2700K-3000K-4000K	38W	3230lm	120°	230V		1	Complete with 1050mA dimmable driver


62130L/W/V

62130L | 30W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · new · IP20 · CE · 3 YEAR


62130L/B/V





62130L/BBS/V

62130L | 30W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · new · IP20 · CE · 3 YEAR


62130L/BGL/V




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62130L/W/V	White	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62130L/B/V	Black	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62130L/BBS/V	Brushed brass	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62130L/BGL/V	Brushed gold	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver


62148L/W/V

62148L | 48W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · new · IP20 · CE · 3 YEAR







62148L/B/V

62148L | 48W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · new · IP20 · CE · 3 YEAR






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62148L/W/V	White	CCT V	2700K-3000K-4000K	48W	4080lm	120°	230V		1	Complete with 1200mA dimmable driver
62148L/B/V	Black	CCT V	2700K-3000K-4000K	48W	4080lm	120°	230V		1	Complete with 1200mA dimmable driver



67366 | 12W | SMD LED | PC

Emergency version 67366E/W/V.






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67366/W/V	White	CCT V	3000K-4000K-5000K	12W	1000lm	230V		20	Complete with 160mA driver



67368 | 18W | SMD LED | PC






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67368/W/V	White	CCT V	3000K-4000K-5000K	18W	1500lm	230V		10	Complete with 250mA driver




67370 | 25W | SMD LED | PC






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67370/W/V	White	CCT V	3000K-4000K-5000K	25W	2000lm	230V		10	Complete with 300mA driver

67220A | 26W | SMD LED | PC

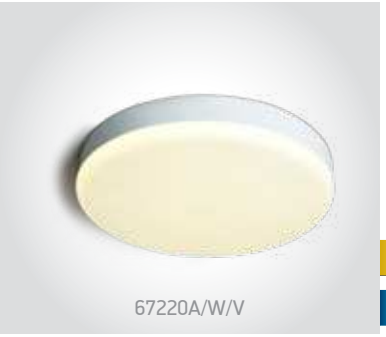






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67220A/W/V	White	CCT V	3000K-4000K-6000K	26W	2750lm	230V		5	Complete with 145mA driver
67220A/B/V	Black	CCT V	3000K-4000K-6000K	26W	2750lm	230V		5	Complete with 145mA driver

67220B | 35W | SMD LED | PC








Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67220B/W/V	White	CCT V	3000K-4000K-6000K	35W	3675lm	230V		5	Complete with 145mA driver
67220B/B/V	Black	CCT V	3000K-4000K-6000K	35W	3675lm	230V		5	Complete with 145mA driver

67220E | 35W | SMD LED | PC






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67220E/W/V	White	CCT V	3000K-4000K-6000K	35W	3675lm	230V		5	Complete with 140mA driver

67498 | 20W | SMD LED | ABS + PC






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67498/W/V	White	CCT V	3000K-4000K-6500K	20W	1300lm	230V		10	Complete with 500mA driver.




63146A | 5x7W | MR16 | GU10 | Aluminium





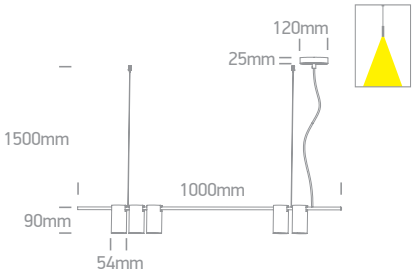


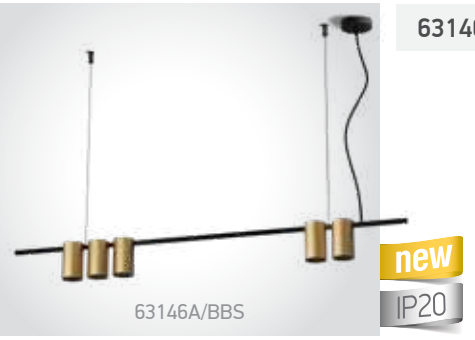


63146A | 5x7W | MR16 | GU10 | Aluminium





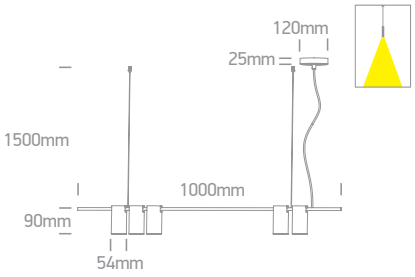


Order Code	Colour	Watts	Input	Class		Notes
63146A/B	Black	5x7W	100-240V		1	-
63146A/BBS	Brushed Brass	5x7W	100-240V		1	-

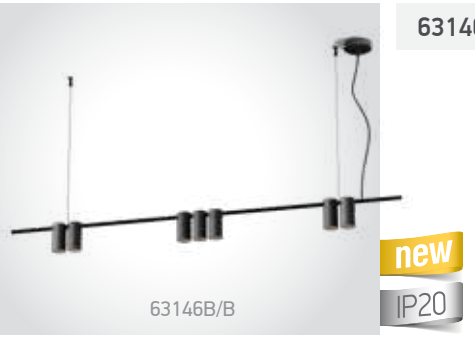


63146B | 7x7W | MR16 | GU10 | Aluminium





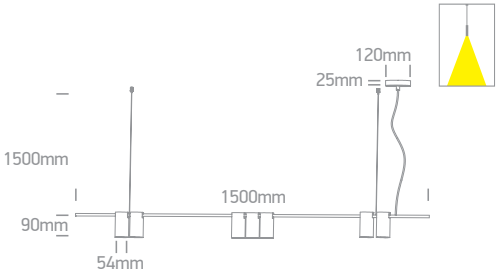


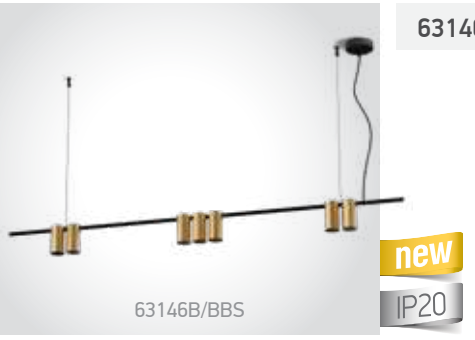

63146B | 7x7W | MR16 | GU10 | Aluminium





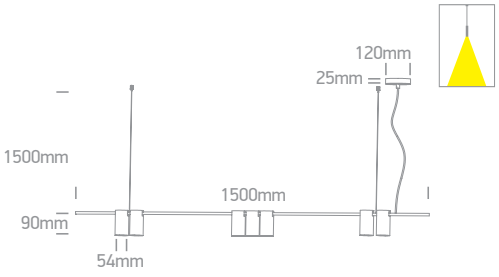

Order Code	Colour	Watts	Input	Class		Notes
63146B/B	Black	7x7W	100-240V		1	-
63146B/BBS	Brushed Brass	7x7W	100-240V		1	-




63146C | 10x7W | MR16 | GU10 | Aluminium

new

IP20

CE 5 YEAR



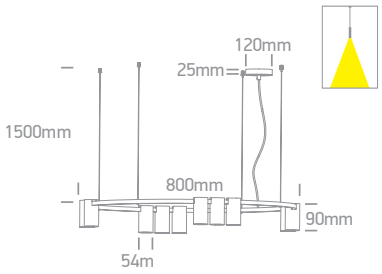




63146C | 10x7W | MR16 | GU10 | Aluminium

new

IP20

CE 5 YEAR



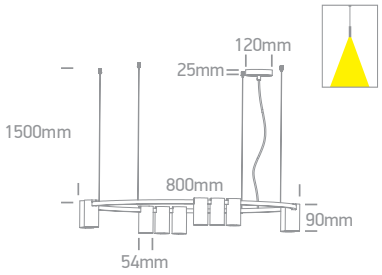

Order Code	Colour	Watts	Input	Class		Notes
63146C/B	Black	10x7W	100-240V		1	-
63146C/BBS	Brushed Brass	10x7W	100-240V		1	-




63146D | 15x7W | MR16 | GU10 | Aluminium

new

IP20

CE 5 YEAR



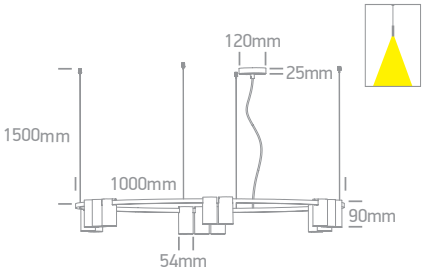




63146D | 15x7W | MR16 | GU10 | Aluminium

new

IP20

CE 5 YEAR



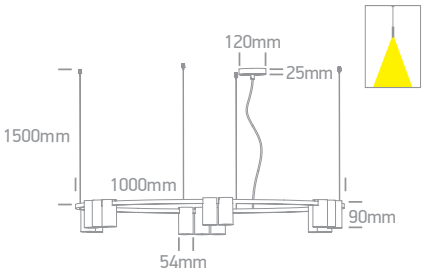


Order Code	Colour	Watts	Input	Class		Notes
63146D/B	Black	15x7W	100-240V		1	-
63146D/BBS	Brushed Brass	15x7W	100-240V		1	-



63152A | 20W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR · new · IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63152A/B/W	Black	Warm white	3000K	20W	1400lm	230V		1	Complete with 500mA dimmable driver



63152B | 30W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR · new · IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63152B/B/W	Black	Warm white	3000K	30W	2100lm	230V		1	Complete with 700mA dimmable driver



63152C | 40W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR · new · IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63152C/B/W	Black	Warm white	3000K	40W	2800lm	230V		1	Complete with 1050mA dimmable driver



63150 | 48W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR · new · IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63150/B/W	Black	Warm white	3000K	48W	3550lm	230V		1	Complete with 1200mA dimmable driver



63150A | 65W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR · new · IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63150A/B/W	Black	Warm white	3000K	65W	4800lm	230V		1	Complete with 2x700mA dimmable drivers



63150B | 65W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR · new · IP20



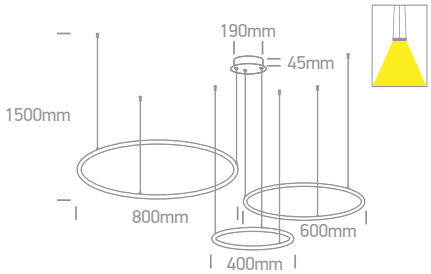


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63150B/B/W	Black	Warm white	3000K	65W	4800lm	230V		1	Complete with 2x700mA dimmable drivers



63150C | 100W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR · new · IP20



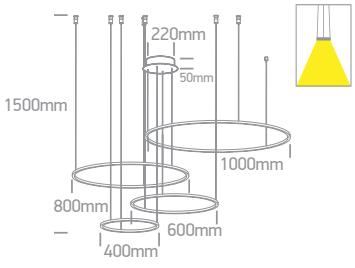


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63150C/B/W	Black	Warm white	3000K	100W	7400lm	230V		1	Complete with 2x1200mA dimmable drivers

63154A | 40W | SMD LED | Dimmable | Aluminium



LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63154A/B/W	Black	Warm white	3000K	40W	2800lm	230V		1	Complete with 1050mA dimmable driver
63154A/CH/W	Champagne	Warm white	3000K	40W	2800lm	230V		1	Complete with 1050mA dimmable driver

63154B | 20W | SMD LED | Dimmable | Aluminium



LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63154B/B/W	Black	Warm white	3000K	20W	1400lm	230V		1	Complete with 500mA dimmable driver
63154B/CH/W	Champagne	Warm white	3000K	20W	1400lm	230V		1	Complete with 500mA dimmable driver

63154C | 40W | SMD LED | Dimmable | Aluminium




LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR



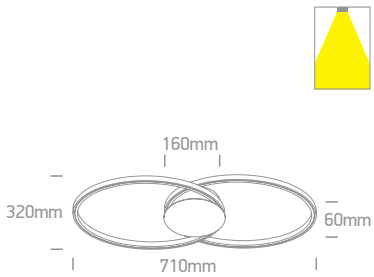


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63154C/B/W	Black	Warm white	3000K	40W	2800lm	230V		1	Complete with 1050mA dimmable driver
63154C/CH/W	Champagne	Warm white	3000K	40W	2800lm	230V		1	Complete with 1050mA dimmable driver

63154D | 60W | SMD LED | Dimmable | Aluminium

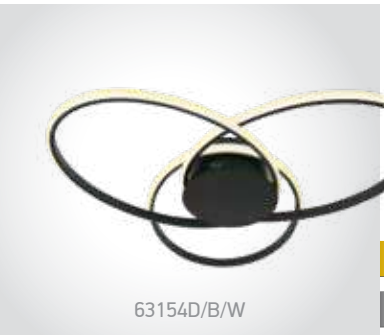

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63154D/B/W	Black	Warm white	3000K	60W	4200lm	230V		1	Complete with 2x700mA dimmable drivers
63154D/CH/W	Champagne	Warm white	3000K	60W	4200lm	230V		1	Complete with 2x700mA dimmable drivers



65148A | 12W | SMD LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
2 YEAR
new
IP20








65148A | 12W | SMD LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
2 YEAR
new
IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65148A/W/W	White	Warm white	3000K	12W	950lm	230V	⏚	12	Complete with 280mA driver
65148A/B/W	Black	Warm white	3000K	12W	950lm	230V	⏚	12	Complete with 280mA driver



65148B | 15W | SMD LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
2 YEAR
new
IP20








65148B | 15W | SMD LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
2 YEAR
new
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65148B/W/W	White	Warm white	3000K	15W	1200lm	230V	⏚	12	Complete with 350mA driver
65148B/B/W	Black	Warm white	3000K	15W	1200lm	230V	⏚	12	Complete with 350mA driver




63076A | 5W | COB LED | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR

new

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63076A/B/W	Black	Warm white	3000K	5W	300lm	230V	⏚	6	Complete with 500mA driver




63076C | 5x5W | COB LED | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR

new

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63076C/B/W	Black	Warm white	3000K	5x5W	1500lm	230V	⏚	1	Complete with 2x500mA drivers




63076D | 9x5W | COB LED | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR

new

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63076D/B/W	Black	Warm white	3000K	9x5W	2700lm	230V	⏚	1	Complete with 3x500mA drivers




63076E | 5x5W | COB LED | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR

new

IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63076E/B/W	Black	Warm white	3000K	5x5W	1500lm	230V	⏚	1	Complete with 5x500mA drivers


69028A/W

69028A | 2W | LED | Stainless Steel 316

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · new · IP67






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69028A/W	Stainless steel	Warm white	3000K	2W	90lm	30°	230V	⏚	200cm	100mm	130mm+300mm drainage	12	AC LED


67508A/AN/C

67508A | 8W | SMD LED | Die cast

LED BUILT IN · 80 CRI · IK06 · CE · 2 YEAR · new · IP65


67508A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67508A/AN/C	Anthracite	Cool white	4000K	8W	600lm	230V	⏚	2	Complete with 500mA driver
67508A/AN/W	Anthracite	Warm white	3000K	8W	600lm	230V	⏚	2	Complete with 500mA driver



67508B/AN/C

67508B | 8W | SMD LED | LED Bollard with 2xSchuko Sockets 1000W each | Die cast

LED BUILT IN · 80 CRI · IK06 · CE · 2 YEAR · new · IP65


67508B/AN/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67508B/AN/C	Anthracite	Cool white	4000K	8W	600lm	230V	⏚	2	Complete with 500mA driver
67508B/AN/W	Anthracite	Warm white	3000K	8W	600lm	230V	⏚	2	Complete with 500mA driver



38115LB/V

38115LB | 15W | SMD LED | PC

LED BUILT IN · 80 CRI · IK08 · CCT V · new · IP66 · CE · 2 YEAR


Complete with 2pcs fixing clips.



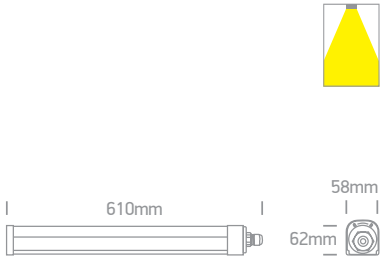


38130LB/V

38130LB | 30W | SMD LED | PC

LED BUILT IN · 80 CRI · IK08 · CCT V · new · IP66 · CE · 2 YEAR


Complete with 3pcs fixing clips.







38150LB/V

38150LB | 50W | SMD LED | PC

LED BUILT IN · 80 CRI · IK08 · CCT V · new · IP66 · CE · 2 YEAR


Complete with 3pcs fixing clips.



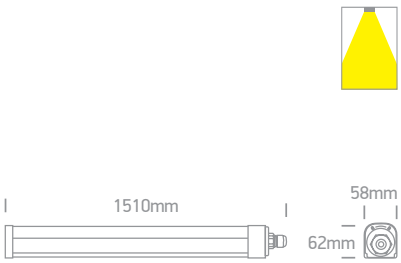


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38115LB/V	White	CCT V	3000K-4000K-6000K	15W	1725lm	230V		15	Complete with 140mA driver
38130LB/V	White	CCT V	3000K-4000K-6000K	30W	3450lm	230V		12	Complete with 230mA driver
38150LB/V	White	CCT V	3000K-4000K-6000K	50W	5750lm	230V		9	Complete with 300mA driver



70112 | 75W PV | LED | Die cast

LED BUILT IN · 80 CRI · IK08 · CCT V · new · IP66 · PV · CE · 5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
70112/B/V	Black	CCT V	2700K-3300K-4000K	25W-40W-60W-75W	8250lm@75W	120-240V		150cm	1	Complete with PV driver




89001/EME | 1-30W | Built-in Emergency kit for LED fittings | Emergency 3Hrs Maintained | Use inside fittings/Self-test.


2 YEAR

new


IP20



Battery Dimensions



WIRING DIAGRAM

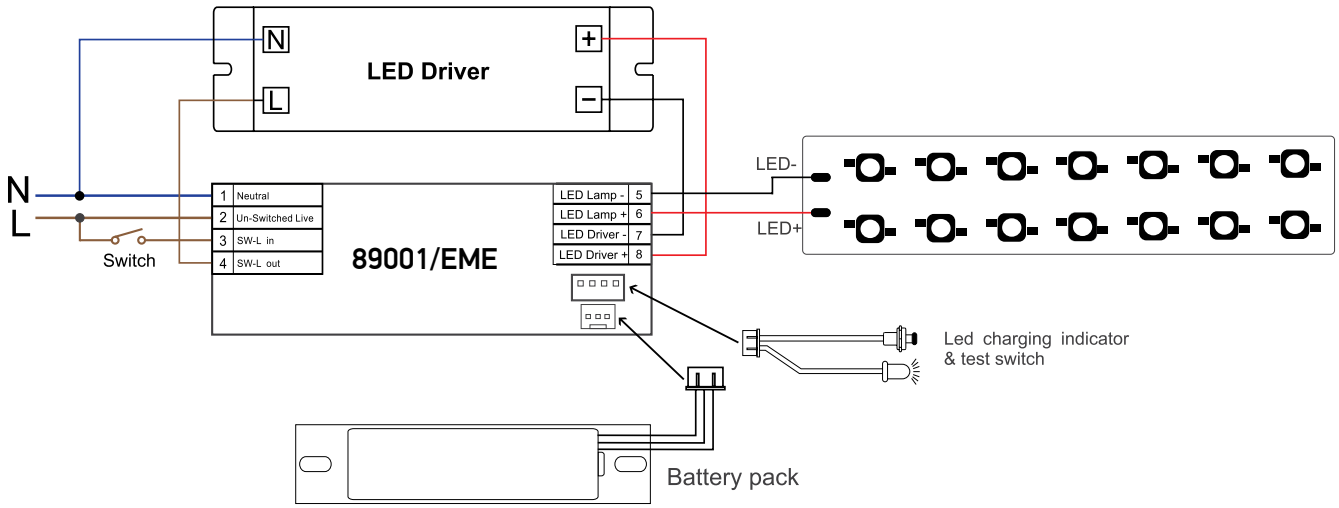

This kit will only operate with LED Fittings/Strips 1-30W suitable for 9-45V DC power supply.
The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	10W	15W	20W	25W	30W
	20%	10%	7%	5%	4%	3%

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89001/EME	230V	1-30W	⧈	LiFePO4 3,2V 1,6Ah	24Hrs	3Hrs	50	Supplied with battery




89005B/EME | 5-50W | Emergency kit for LED Downlights and LED strips | Emergency 3Hrs Maintained Self-test.

2 YEAR


new

IP20





WIRING DIAGRAM

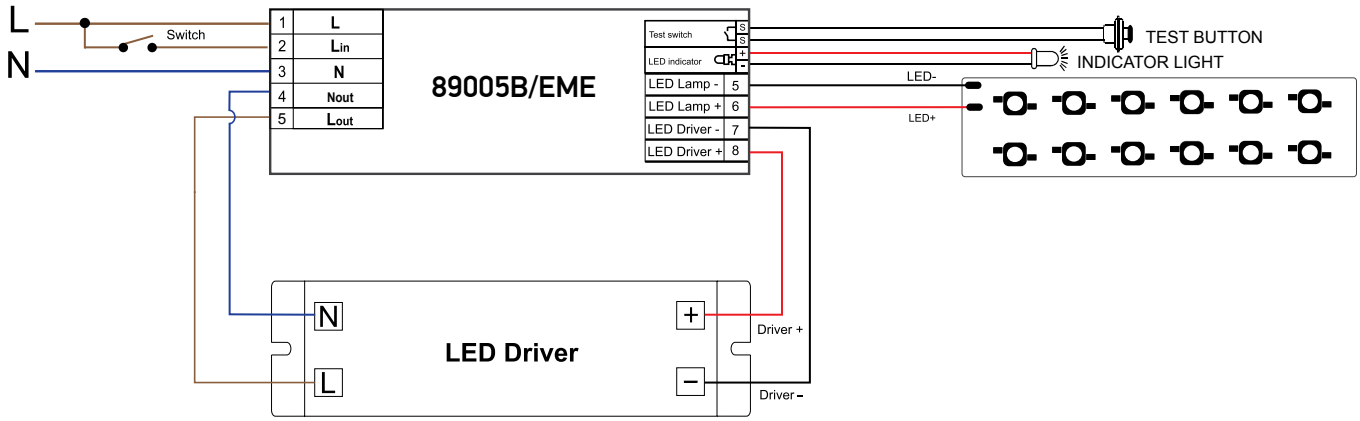

This kit will only operate with LED Fittings/Strips 5-50W suitable for 8-60V DC power supply.
The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	50%	35%	25%	20%	17%	12%	10%	8%	7%	6%	6%	5%

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89005B/EME	230V	5-50W	⧈	LiFePO4 3,2V 3,2Ah	24Hrs	3Hrs	25	Supplied with battery

TRIAC Dimmable Mini Series
Constant current



89007T | 3,5-7W | 350mA | TRIAC | Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

new · IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89007T	230V	3,5-7W	350mA	⧈	YES	100	Use TRIAC dimmer



89010AT | 5-10W | 700mA | TRIAC | Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

new · IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89010AT	230V	5-10W	700mA	⧈	YES	100	Use TRIAC dimmer

The TRIAC Dimmable Range
100-350mA Constant current



89009UT | TRIAC | Dimmable

Adjustable output using DIP switch.

TRIAC DIMMABLE · CE · 3 YEAR

new · IP20



Output Current	100mA	150mA	200mA	250mA	300mA	350mA
Output Power	0,9-4,2W	1,35-6,3W	1,8-8,4W	2,25-8,25W	2,7-8,1W	3,15-8,4W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89009UT	230V	Refer to table	Adjustable	⧈	YES	126	Use TRIAC dimmer


Adjustable Constant Current DALI Dimmable


DALI & Push to DIM



89007AL | DALI & Push to DIM | Dimmable

Adjustable output using DIP switches.







new

IP20


Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Power	1,75-7W	2-8W	2,25-7,65W	2,5-8W	2,75-7,7W	3-7,8W	3,25-7,8W	3,5-7,7W


Order Code	Input	Power	Output	Class	Dimmable		Notes
89007AL	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM



89015L | DALI & Push to DIM | Dimmable

Adjustable output using DIP switches.







new

IP20


Output Current	120mA	150mA	180mA	210mA	250mA	280mA	320mA	350mA
Output Power	1,08-5,76W	1,35-7,20W	1,62-8,64W	1,89-10W	2,25-12W	2,52-13,44W	2,88-15W	3,15-14,7W


Order Code	Input	Power	Output	Class	Dimmable		Notes
89015L	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM



89015AL | DALI & Push to DIM | Dimmable

Adjustable output using DIP switches.







new

IP20

Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Power	3,15-14,7W	3,6-14,8W	4,05-14,85W	4,5-15W	4,95-14,85W	5,4-15W	5,85-14,95W	6,3-14,7W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89015AL	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM


Adjustable Constant Current DALI Dimmable


DALI & Push to DIM



89026AL | DALI & Push to DIM | Dimmable

Adjustable output using DIP switches.







new

IP20


Output Current	160mA	200mA	250mA	300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Power	4,80-8W	6-10W	5-12,50W	6-15W	7-17,50W	8-20W	9-22,50W	10-25W	11-25,85W	12-25,80W	13-26W	14-26W


Order Code	Input	Power	Output	Class	Dimmable		Notes
89026AL	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM



89044L | DALI & Push to DIM | Dimmable

Adjustable output using DIP switches.







new

IP20

Output Current	700mA	750mA	800mA	850mA	900mA	950mA	1000mA	1050mA
Output Power	14-35W	15-37,50W	16-40W	17-42,50W	18-43W	19-43,70W	20-40W	21-40W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89044L	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM

The 24V DC TRIAC Dimmable Range
Constant voltage



89050VT | 12-50W | 24V DC | TRIAC | Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89050VT	230V	12-50W	24V DC	⧈	YES	20	Use TRIAC dimmer



89150VT | 20-150W | 24V DC | TRIAC | Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89150VT	230V	20-150W	24V DC	⧈	YES	15	Use TRIAC dimmer



89200VT | 75-200W | 24V DC | TRIAC | Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89200VT	230V	75-200W	24V DC	⧈	YES	15	Use TRIAC dimmer

The 24V DC Slim Range
Constant voltage



89240VL | 240W | 24V DC

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89240VL	230V	240W	24V DC		NO	50	-

The 24V DC Slim Dimmable
Constant voltage



89150VLT | 30-150W | 24V DC | TRIAC | Dimmable

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89150VLT	230V	30-150W	24V DC		YES	20	Use TRIAC dimmer


The 48V DC Slim Range
Constant voltage



89240XL | 240W | 48V DC

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89240XL	230V	240W	48V DC		NO	50	-

The 24V DC Waterproof IP67 Range


DALI & Push to DIM



89150VPL | 15-150W | 24V DC | DALI & Push to DIM | Dimmable

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

new · IP67




Order Code	Input	Power	Output	Class		Dimmable		Notes
89150VPL	230V	15-150W	24V DC	⏚	100cm	YES	10	-



89240VPL | 24-240W | 24V DC | DALI & Push to DIM | Dimmable

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

new · IP67



Order Code	Input	Power	Output	Class		Dimmable		Notes
89240VPL	230V	24-240W	24V DC	⏚	100cm	YES	10	-

Marketing



060052 | ONE LIGHT Catalogue 2025 | Edition 1

5

new

one

INDEX
2025

EDITION 1

01 | RECESSED SPOTS FIXED Pages 03 - 36

03

10102

04

10105X


10105XS

05

10103


10105

06

10105GU

07

10105CM

08

10105A1

09

10105ALG


50105ALG

10

10105ALG

11

10105DG


10105TG


50105TG

12

10105D1


10105D2


10105D4

13

10105H

14

050182


050182R


050182RA


050182RB

15


10105D9

16

10105E1

17

10105AD

18

10105D8

19


10105M/W

20

10105M/B

21

10105MD

22

50105M

23

50105MA

24

10105GL2


50105AR

25

10105CJ

26

10109F

27

50105R1

28

10105R1


10105R1P

29

10105R2

30

10105R2P

31

10105GT1


10105GT2


50105GT1

32

10105TR

34

10105RM


050099 Reflectors

36

50105RM


050098 Reflectors

02 | RECESSED SPOTS FIXED LED Pages 39 - 90

39

10101L


10101LA

40

10103B

42

10103E

43

50103L


50401L


50601L

44

10103N

45

10108D


10108R

46

10108A


50108A

47

10108D1

48

10112HA


050182



050182R


050182RA


050182RB

49


10107DC

50

10112TD

52

10105FD


10110FD


10115FD


54

10107Z



10112Z


10120Z


050378A / 050378B / 050378C Reflectors

56

10106DC


10112DC


10118DC

57

10103H


50103H

58

10110H


50110H


50012H

59

10106DH


10112DH


10118DH

60

10106X


10112X

61

10120X


10107K

62

050104 Reflectors


10112K

63

050280 Reflectors


50106B

64

50306B


50406B


50506B


50006B

65


50102B


50202B

66

50302B


50502B


50902B

67

50107B


50207B


50307B


50507B

68

50406C

69

50906C


10107WD

70

10107M


10108H

71

10103M


10103P

72

10102H


10107DL


10107H

73

10107DB

74

10107WP


10112P

75

10112C


10112TP


10110P

76

10112R


050162 Rings

77

10106V


10103NP


10106P

78

10107PV


10106PF

79

050042 Rings


10107DF

80

10107DFV


050178 Rings

81

10101C


50101

82

10106G


10106L

83

10104M


50104M

84

10103A


10108J

85

10103BTR

86

10107BT

87

10112BTR

88

50103ATR


50203ATR


50403ATR

89

10106XTR


10112XTR

90

10110HTR


50110HTR


50012HTR


50024HTR

03 | RECESSED SPOTS ADJUSTABLE Pages 93 - 114

93

11103A


11103C


11105

94

11105GU

95

11105C

96

11105CGU

97

51105

98

51105GA

99

51103AB


51105AB

100

11105AL


11105AC

101

51105B


51205B

102

11105U


11105UA


11105UB

103

11105ABGL

104

11105ABG


51105ABG


51205ABG

105

11105M/W

106

11105M/B

107

11105A1


11105D8

108

11105D4


11105DT


11105TG

109

51105N


51205N

110

51105TA

111

51105TG


51105B1


51105D


112

11109FA


11105F

113

11105TR


11105UTR


11105DTR

114

51010TR

04 | RECESSED SPOTS ADJUSTABLE LED Pages 117 - 150

117

11103B

118

11103K

119

11101B


51101B


51101AL

120

51201AL


51301AL


51401AL

121

11103LC

122

11103N

123

11103L


11103LB

124

51103L


51103LW


51103LB

125

11103D

126

11106K


11109KD

127

11107B

128

51107

129

51106A


51110A

130

11112


51112

131

11112H


050086 Rings


050086A Ring


51112H


050088 Rings


050088A Ring

132

11104K

050100 Rings

11107K

050102 Rings
133

11107FD

11112TA
134

11112E

51112E

51212E
135

11107WD

11207WD
136

11107P

11113D

11106PK
137

11112P
138

11106T

11107T
139

11111C

050302 Rings

51111C


51211C
140

11109B

11107C

11207C
141

11113E
142

11108LA
143

11103M

11106M
144

51106M

51206M
145

51406B

51506B
146

51012H

51024H
147

11107RA

11112RA
148

11112RB
149

11106PF

050044 Rings
150

11107BT

11112T

11107TTR

05 | DOWNLIGHTS Pages 153 - 160

153


10004

10007
154

11110N

51110N
155

11070RD
156

11110AB

51110
157

51110AD
158

51110ATR
159

51100TR
160

11110TR

11070TR

06 | DOWNLIGHTS FIXED LED Pages 163 - 204

163

10103FA

10108FA

10112FA
164

10118FA

10130FA
165

10103FA/../V

10108FA/../V

10112FA/../V
166

10118FA/../V

10130FA/../V
167

50116FA

50122FA

50130FA
168

50116FA/../V

50122FA/../V

50130FA/../V
169

10140F

10148PE

10148P
170

50140B
171

50140BU

50140BU/../V

50148AU
172

50140BAU

50140BW
173

50148RE

50140BR

50140BRU
174

10105E

10115E
175

10130A

10112KD

10108ED
176

62116F

62116FA

10124
177

10103T

10107T

10115T
178

10124T
179

10110CE

10114CE

10120CE
180

50110CE

50114CE

50120CE
181

10107CA

10110CA

10115CA
182

10120CA
183

10130CA

10160CA

10116FD
184

10108FD

10116FD

10122FD
185

10112

10128
186

10120

10142
187

10100 Rings

10105K

10110K
188

10120K

10130K

10130KA
189

50105K
190

50120B

50130B
191

10107CD
192

10115CD

10109D

10122D
193

50122D

10107UV

10113UV/W
194

10120UV/W

10130UV/W

10113UV/B

10120UV/B
195

10130UV/B

10110U

10124U
196

10130U/../V

10130U

50110UV
197

50115UV

50125UV

50130UV

10107B
198

10113B

10118B

10125B
200

10110TD

10118TD

10125TD
201

10109FD

10120FD
202

10108CF

10115CF

203 204



10130CF 10110G 10115G 10120G 10150G

07 | DOWNLIGHTS ADJUSTABLE LED Pages 207 - 216

207 208 209 210 211



11130BT 11106LB 11109L 11112L 51125 51140 51120 51130 51230 11110E

212 213 214 215 216



11120E 11130E 11126F 51120B 51240B 11150B 51140TR 11115G/W 11128G/W 11115G/B



11128G/B

08 | STRIPS & PROFILES Pages 219 - 274

219 220 221 222 223 224



7848 7848/RGBW 7843 7823 7833 7820 7820W 7829A 7829 7835C

225 226 227 228 229 230



7835 7835W 7839 7844 7846 7846W 7846WA 7820L 7820WL 7820V

231 232 233



7835V 7825 7870 7875 7845 7887 7880 7882 7884 7885

234 235 236 237 238 239



7835/DEW 7820/BL 7820W/BL 7820A/RGB 7830/RGB 7830/RGBW 7846/RGB 7830W/RGB 7830W/RGBW 7903

240

7903R


7903TR

241

7902/B/B


7904/B/B


7912/B/B

242

7902R/B/B


7912R/B/B


7910R/B/B


7901TR/B/B


7904TR/B/B

243

7900


7901


7902

244

7904


7905

245

7912


7912A

246

7910

247

7910A


050122

248

7906


7906D

249

7901R


7902R

250

7904R

251

7906R


7912R

252

7910R


7910AR

253

7900TR


7901TR


7904TR


7906TR


7904ATR

254

7909TR

255

7908A


7908


7937T

256

7922

257

7920

258

7918


7914R


7915R

259

7840


7842

260

7840A


7840B


7840D

261

38104L


38115L

262

38207L


38215L


38230L

263

38001A


38002A


38005A

264

38104B


38108B


38114B

265

38103


38105


38110

266

38102A


38102B


38102C


38101A


38101B


38101C


38101D

267

7850

268

7860


7862

269

7864

270

7872

271

7901A


7901AR


7811

272

7841A


7841


7841B

273

7868

274

7866


7866F

09 | TRACK LIGHTS Pages 277 - 312

277

65610AT

278

65620AT

279

65611NT/W


65612NT/W


65614NT/W

280

65611NT/B


65612NT/B


65614NT/B

281

65660AT/W


050300A Rings


050300AH Honeycomb


0750A/15 & 0750A/24


65660BT/W


050300B Rings


050300BH Honeycomb


0750B/15 & 0750A/24

282

65660AT/B


050300A Rings


050300AH Honeycomb


0750A/15 & 0750A/24


65660BT/B


050300B Rings


050300BH Honeycomb


0750B/15 & 0750A/24

283

65660BTT


050300B Rings


050300BH Honeycomb


0750B/15 & 0750A/24

284

65660BTL


050300B Rings


050300BH Honeycomb


0750B/15 & 0750A/24

285

65642AT/W


65642BT/W


65642CT/W

286

65642AT/B


65642BT/B


65642CT/B

287

65656AT/W


65656BT/W


65656CT/W


65656DT/W

288

65656AT/B


65656BT/B


65656CT/B


65656DT/B

289

65306BT


65506BT

290

65406BT


65906BT

291

65644T


65652T

292

65646T


65108AT


65108T


65524T

293

65628T


65620TA


65620T

294

65626T


65226T


65619T

295

65662AT/W


65662BT/W

296

65662AT/B


65662BT/B

297

65650AT/W


65650BT/W


65650CT/W

298

65650AT/B


65650BT/B


65650CT/B


65650T

299

65024T


65026T

300

65024TA


65018T


65025T

301

65170AT


65170BT


65168T

302

65028AT

303

65028BT


65028CT

304

65172AT


65172BT


65664AT


65664BT

305

65105NAT

306

65105NT


65105BT

307

65105WT


65019T

308

65105CT

309

65518T


310

65520T


65522T


65519T


65105GT

311

65111AT

312


65118AT


65668T

10 | TRACKS & MAGNETIC Pages 315 - 342

315


40001A


40002A


40003A


40002C

316


40020


41026R


41032

317


41020


41004A


41010A

318


41008A


41012A


41016A


41018A


41024A


41022A

319


40003


41020


41004


41010

320


41008


41012


41016


41018

321



41022


40003R


41034R


41004B


41008B


41012B

322


41016B


41002


41002A


41030

323


42001A


42002A


42012AA


42012BA

324


42001B


42002B

325


42012AB


42012BB



42001


42002


42003


42012A


42012B


42012C

326


42001TR


42002TR

327


42012ATR


42012BTR


42001RB


42002RB


42012ARB


42012BRB

328


42001R


42002R


42012AR


42012BR

329


42032A


42032


42022A


42022B


42022

330


42004A


42004C


42006BX

331


42100AA


42100BA

332


42100A


42100B


42100BL


42100EA


42100E


42100EL

333


42120B


42102A


42102B


42102BL

334

42106A

42106B

42106BL
335

42112AA

42112BA

42104B

42124AA

42124BA
336

42128A

42128B
337

42128C

42134

42134A
338

42122A

42108

42108L

42108A

42108AL
339

42110

42114A
340

42114B

42114BL

42116C

42114C

42114CL

42118

42118L
341

42130A

42130B

42132
342

42132L

42126AA

42126BA

42134B

42136

11 | OFFICE & KITCHEN Pages 345 - 360

345

61066

61066T
346

61108

61110

61110A
347

38248M
348

38225M

38248M/../V

38250M
349

38148N
350

38120L

38135L

38248L
351

38150B

38150C

38150BU
352

38150E

050170C

050170
353

38150A
354

38151A

050170D

38150E

050170C

050170
355

38160A

38161A

050170
356

38140AU
357

38152R
358

38152RC

38152RL

38145AR
359

38150AR

38150BR
360

36002

36004

12 | WALL & CEILING Pages 363 - 410

363

12105F

12105L
364

12105J

12105K
365

12105H
366

12105E1

12105E2

12105E3
367

12105M

050112 Reflectors
368

12105MA

050112 Reflectors
369

12105N
370

12105NA

12205NA
371

12105T

12205T
372

12105TA

12205TA
373

12132

12126

12124

12134

12120
374

12105E

12105AL
375

12105AC

12105B
376

12105AB
377

12105Y

12205Y
378

12105YA

12205YA
379

12142

12138G
380

12144

12144A
381

62310A
382

65105NB
383

65105N/B

65205N/B

65305N/B

65405N/B

65505N/B
384

65105N/BBS

65205N/BBS

65305N/BBS

65405N/BBS

65505N/BBS
385

12105E4

12105E6
386

65105E

65205E

65105EA
387

6017G

6022

6005
388

60056

6017

6017A

6030
389

60038

60040

60042
390

67518
391

67142A

67142B
392

67142F

67142G

67536A

67536B
393

67142D

67142H

67142K
395

67130C
396

67400A

67400B
397

67130E

67130
398

67426

67426A
399

67130D

67130DD
400

67130F

67130A
401

67426D
402

67426B

67426C
403

67132C

67142C

67400D
404

67400E
405

67132D
406

67132A
407

67204B

67204

67216
408

67208B

67208

67210

409

67328

410

67420


67420A


67420B

13 | WALL & CEILING LED Pages 413 - 484

413

67454

414

60008A


60008


65102


62401AL

415

12115G

416

12108LA


12208LA


65107

417

12101

418

60001


60010

420


67466A


67466B


67466C

421

12110D

422

12107K


12107KA


050106 Rings

423

12115D

424

12108T


12112T


12107V


12108C


12122C

425

12108D


12108DB


050206 Reflectors

426

12122D


050208 Reflectors

427

12112Z


12120Z


12130Z

428

12112ZA


12120ZA

429

12112A


12120A


12128A

430

12115F


12120F

431

12106X


12112X

432

12120X


12124X

433

12110H


12110HB

434

12112H


12124H

435

12107B


12207B

436

12307B


12110HA

437

12115HA


12106B


12406B

438

12906B


12406C


12606C

439


12906C


12108X

440

12108XA


12208XA

441

12115L


12125L


12135L

442

12112D


12120D


12125D


12130D

443

12108FD

444

12116FD


12130LA

445

67380


67380A

446

67516A


67516C

447

67138E/G


67138C/G


67138D/G

448

67138C


67138D

449

67138E

450

67138F

451

67138


67138A

452


67138EL



67138L

453

67480A


67480B

454

67524A


67524B

455

67440


67440A

456

67076


67076A

457

67374


67374A

458

67492


67492P

459

67474A


67362C

460

67392

461

67526B1


67526B2


67526B3

462

67526A1


67526A2


67526A3

463

67394A


67394


67364

464

67472A


67472

465

67378A

466

67376


67376A


67412

467

67340A


67354

468

67398


67398A


67398C

469

67450


67532


67450A

470

67422


67422A


67512

471

67124

472

67170



67386A

473


67386C



67396


67396A

474

67388B


67388C

475

67359


67360

476

67359A


67360A


67359B

477

67430A

478

67414


67417


67418

479

67174


67176

480

67502A


67502B


67502C


67444C

481

67442B


67442

482

67420AL


67484

483

67478


67336

484

67242


67126

14 | PLAFO Pages 487 - 528

487

64002

64004

64010
488

62102

62104
489

62010

62010A

62014
490

62024C
491

62022A
492

62022B

62026A

62026B

62026C

62026D
493

67448

67448A
494

62154
495

62118D

62125D
496

62150D

67438
497

62146

62146A
498

62160

62160A
499

62140FB

62160FB

62152
500

67402

62025
501

62018AF
502

62018F

62030F

62038F
503

62132N

62142N
504

62130N

62132N/../V
505

62134N
506

62144N
507

62130L
508

62148L
509

62182

62182A
510

62132NA

62142NA
511

62112

62135NA
512


67452
513

62115F

62130F
514

62122F

62130AF
515

62140F

62140RF
516

62140AE

62140BF

62140RE
517

62140BAU

62140BFU

62150BFU
518

62140BRU

62150BRU
519

67366

67366E
520

67368

67370
521

67372

67384

67384A
522

67362

67363

67362A

67363A
523

67282N

67282AN

67282BN

67282ANE
524

67280N

67280AN

67280BN

67280ANE
525

67282E

67282EA
526

67280E

67280EA
527

67390
528

67498

67218

67218E

67218R

15 | PENDANTS Pages 531 - 548

531

63105M

050112 Reflectors

532

63105MA

050112 Reflectors

533


63105N

534

63108A

63108B

535

63124

63124B

63124C

536

63122

63122B

537

63140

63140B


63140C

538

63072

539

63126

63126A

540

0990

0992

541

63040

63042

542

63044

63020

543

63016A/W

63022/W


63022A/W

63022B/W

544

63016A/B

63022/B


63022A/B

63022B/B

545

63038

546

38018

38016

547

63142

548

63142

63142A

16 | DECORATIVE Pages 551 - 594

551

9C004B

552

61050A

61050B

554

61082A

555

61082B

61082

556

61100

61102

557

61090

61106

558

61094

61092

559

61000

61084

560

61088

61096

561

61098

61104

562

61086

61086A

563

61118

61118A

564

62156C

62156D

565

63046

63046A

566

63046B

63048

567

63050

62144NB

568

63114

63144A

569

63144B

63066A

570

63066

63062

571

63068A

63068


63054A

63054C

572

63056

63058

573

62142NB

62180NB

574

62148A

62148B

575

63110C

63112

576

62184A

62184B

577

578 
63184C

579 
62116A


60116


61116

580 
63116


63116A

581 
63174C

582 
62172A


62172B


62172C


583 
63134P


584 
63132P


60132

585 
63136


63138

586 
62170A


62170B

587 
62162A

588 
60158


60162


60168


589 
62164A

590 
63130P

591 
62166B


63166P

592 
60178B

593 
10105C4

594 
62120


62120A

17 | HOTEL & BEDROOM Pages 597 - 608


597 
61046


61076

598 
61080

599 
61120


61122

600 
60118


61116A

601 
65746


65746A


65746R

602 
65746B

603 
65738

604 
65738A


65744

605 
65146


65146A


65147


65147A

606 
65144


61132A


61132B

607 
65740


65740A

608 
65105NA


65105NBA

18 | BATHROOM Pages 611 - 622

611 
38118K

612 
38118N

613 
38114R


38120R


38120D


614 
38112C


38118C

615 
38115C

38120C


38114M

616 
38114EL

617 
38115D


38116P

618 
38114DE


38114EE


38114GE

619 
38110BD


60106


60106A

620 
38108N

38114N

38114T

621


61126


60204

622


60208


60208A


19 | WALL RECESSED & INGROUND Pages 625 - 656

625


68007

626


68006N


050176
Cover plates


68006N/BOX

627


68008

628


68070


68004


68004A

629


68030

630


68032

631


68074


68074A


68074B

632


68076


68076A

633


68072A


68072C

634


68068


68068A


68068C

635


68048

636


68062


68064


68066

637


68001


68002

638


68080B

639


69042A


69042B


69044

640


69015A


69015B


69015C

641


69016


69016A


69016B

642


69016G


69016AG


69016BG

643


69042M

644


69042


69052


69052A

645


69056A


69056B


69056C

646


69070A


69070B


69070C

647


69040

648


69050


69060

649


69054

650


69054A


69072


69074A


69074B


69074C

651


69062

652


69058A

653


69058B


69058C


69006G

654


69046G


69048G

655


69006


69008

656


69002A

20 | GARDEN & UNDERWATER Pages 659 - 696

659

7070


7068

660

67456


67458


67482

661

67198G


67198AG


67464G

662

67200G


67202G

663

67196BG

664

67196A


67196B


67196C

665

7046

666

7047

667

67488A


67488B


67488C

668

7052B


67514


7052

669

7008A

670

67204G


67204E

671

67094


67098

672

67100


67102

673

67534A


67534B


67534C

674

67494


67494A

675

67470


67470A

676

67460A


67460B

677

67490


67490A

678

67358


67034

679

67506


67506A

680

67504


67504A

681

67510


67510A


67510B

682

67410


67410A

683

67406


67406A


67406B


67406C

684

67406D


67406E

685

67530A


67530B


67462

686

67520


67520A


050250

687

67496

688

67050



67408

689

63028


63028A


63028B

690

7072



7072A

691


0994


692

0996


694

69064A



69064B


69064C

695

69066M


69066


69066A

696

69066B


69066D

21 | INDUSTRIAL & FLOODLIGHTS Pages 699 - 724

699

38118E

38136E

38158E
700

38218E

38236E

38258E
701

38118M

38136ME

38158M
702

38236M

703

38118LC

38136LC

38145LC
704

38236LC

38245LC
705

38118LA

38136LA

38145LA
706

38115LB

38130LB


38150LB
707

38280
708

63100NA

63150NA

63200NA
709

63100N

63150N

050114HA
710

63200N

050114GB


050114HB


050114FA
711

63150NL

63240NL
712

63100N/V

63150N/V

63200N/V
713

7020

7030

7022


7040
714

7028A
715

7028CB

7028CC
716

7028CD

7028CE

7028CF
717

7028AG
718

70114

70116B


70116C
719

7055B/RGB
720

7055A

7055B
721

7058A

7058

7058R
722

7056A
723

70112

70112/../V

724

70110

70105

22 | EMERGENCY LIGHTS Pages 727 - 736

727

89412
728

67366E

67280ANE

67282ANE
729

67218E

67218R
730

89002B

89002C

89002
731

89408


89410

89406

89406R
732

89404
733

89005A/EME
734

89005/EME
735

89009/EME
736

89002A

23 | DRIVERS Pages 739 - 766

739


89004


89006P


89006PC


89004A


89006PA

740


89004T


89007T


89004AT


89010AT

741


89008

742


89015


89020


89015C


89020C


89030C

743


89008A


89015A


89030A

744


89048T


89060

745


89008UT


89009UT


89016UT


89024UT


89030UT

746


89015T


89015CT


89006AT


89008AT


89015AT

747


89040AT


89028M


89028AM

748


89015W


89030W

749


89075W


89015V


89030V

750


89075V


89100V

751


89150V


89200V


89320V


89040VT


89050VT

752



89075VT


89100VT



89150VT

753



89200VT


89060VN

754


89100VN


89150VN


89200VN


89350VN


89100VND

755


89200VND


89030VL


89060VL


89075VL


89100VL

756


89150VL


89240VL


89060VLD


89100VLT


89150VLT

757


89100VLL


89150VLL


89240VLL

758


89060VR


89090VR

759


89030VD


89100VP


89150VP


89200VP


89300VP

760


89150VPL


89240VPL


761


89200X


89320X


89240XL

762


89200XN


89350XN


89240XR

763


89009L


89050LL

764


89025L


89040L

765


89050TLD


89007AL


89015L

766


89015AL


89026AL


89044L

24 | CONTROL & DIMMING Pages 769 - 776

769

22006

22022

770

22008

22004

22014

771

89102L

772

89100L

89104LT

773

89302

89100LP

774

22000

22020

775

20030

20032

776

20034

20036

25 | LAMPS Pages 779 - 804

779

7106GPH

7103ALG

7106ALG

7107ALG

780

7103ALGD

7106ALGD

781

7101AL

7201G

7307BG

782

7305EG

783

7305EGD

7306KGD

7306GZ

784

7306GC

7306GCD

785

7301CG

7303CG

7306CG

7306CBG

786

7306CHG

787

7304GE

7306CGD

7306CG/BL

7307M

7313M

788

7306GDV

789

7310H

790

7315G

7315GB

7315GD

791

10106NA

792

7512D

7524D

7524BD

793

9G10L

9G10V

9G09/RGBW

9G09T

794

9G12B

9G12D

795

9F01

9F07L

796

9G80N

797

9G03RAD

9T05RD

9G04RAD


9G06RD

798

9C02R

9G03R

9G06RD

799

9G08K

800

9G04E

9G08D

9G08E

801

9018L

9022L

9026L

802

9009L

9018L/V

9022L/V

803

9007LA

9016LA

9018LA

9922L

9940L

804

9G01/../E

9G01/../B

26 | ACCESSORIES & GADGETS Pages 807 - 816

807


89003/EXT


89006A/EXT

808


61134A

809


0903F


0903M


0904F


0904M


0904MA

810


050180


050180A


050180C


050180E

811


0800BA


0800B


0800A


0800C

812


0950GA


0950G


0950GB


0802

813


094004


062002

814


70038


70044

815


61138


61136

816


7010P

27 | CEILING FANS Pages 819 - 828

819


6300

820


6316

821


6302C/W


6302/W


6304/W


6306/W

822


6302C/B


6302/B


6304/B


6306/B

823


6310C/W


6310/W

824


6310C/B


6310/B

825


6312LC/W


6308L/W

826


6312LC/B


6314LC/B


6308L/B


6312L/B


6314L/B

827


6312DC/B


6314DC/B


6308D/B


6312D/B


6314D/B

828


24002

28 | MARKETING Pages 831 - 832

831


060020 / 060020A


060016


060018


060008

832


060052


060010


060014


060012


060026 / 060027


060028 / 060029





one

Recessed Spots Fixed

Pages 03-36

01





10102 | 20W | G4 | Die cast

IP20

offer


5 YEAR





Suitable for G4 LED lamp.





Order Code	Colour	Watts	Input	Class					Notes
10102/BS	Brass	20W	12V	III	40cm	24mm	30mm	100	-



The Classic MR16

10105X | 50W | MR16 | GU5,3 | Die cast




10105X/W



10105X/B

IP20

5 YEAR



10105X | 50W | MR16 | GU5,3 | Die cast




10105X/C

IP20

offer

5 YEAR



10105XS | 50W | MR16 | GU5,3 | Pressed metal




10105XS/MC

IP20

offer

5 YEAR



Order Code	Colour	Watts	Input	Class					Notes
10105X/W	White	50W	12V	III	40cm	63mm	60mm	100	-
10105X/B	Black	50W	12V	III	40cm	63mm	60mm	100	-
10105X/C	Chrome	50W	12V	III	40cm	63mm	60mm	100	-
10105XS/MC	Brushed chrome	50W	12V	III	40cm	63mm	60mm	100	-

The Classic MR11 & MR16
12V





10103 | 35W | MR11 | GU4 | Die cast


IP20

offer

5 YEAR



Suitable for MR11 LED lamp.






10105/W

10105 | 50W | MR16 | GU5,3 | Die cast

IP20

5 YEAR








10105/MC

10105 | 50W | MR16 | GU5,3 | Die cast

IP20

5 YEAR





Order Code	Colour	Watts	Input	Class					Notes
10103/BS	Brass	35W	12V	III	40cm	51mm	45mm	100	-
10105/W	White	50W	12V	III	40cm	70mm	60mm	100	-
10105/MC	Brushed chrome	50W	12V	III	40cm	70mm	60mm	100	-





10105GU/W


10105GU | 10W | MR16 | GU10 | Die cast

5 YEAR

IP20



Complete with 0950G.





10105GU/G

10105GU | 10W | MR16 | GU10 | Die cast


5 YEAR

IP20

offer



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
10105GU/W	White	10W	100-240V		15cm	70mm	150mm	100	-
10105GU/G	Grey	10W	100-240V		15cm	70mm	150mm	100	-

The Cement Range



10105CM | 10W | MR16 | GU10 | Cement + aluminium reflector


DARK LIGHT

IP20

offer

CE 5 YEAR



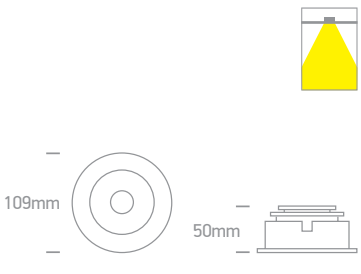

Order Code	Colour	Watts	Input	Class					Notes
10105CM	Cement	10W	100-240V	⏚	15cm	95mm	120mm	12	-





10105A1/W


10105A1 | 10W | MR16 | GU10 | Aluminium

CE 5 YEAR

IP20



Complete with 0950G.

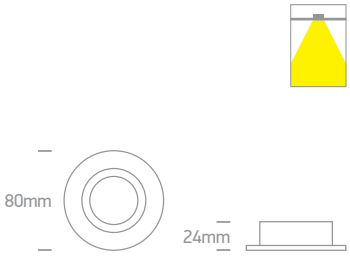



10105A1/B


10105A1 | 10W | MR16 | GU10 | Aluminium

CE 5 YEAR


IP20



Complete with 0950G.

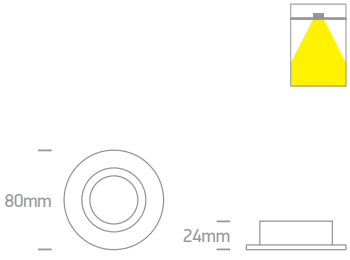

Order Code	Colour	Watts	Input	Class					Notes
10105A1/W	White	10W	100-240V	⏚	15cm	68mm	120mm	100	-
10105A1/B	Black	10W	100-240V	⏚	15cm	68mm	120mm	100	-

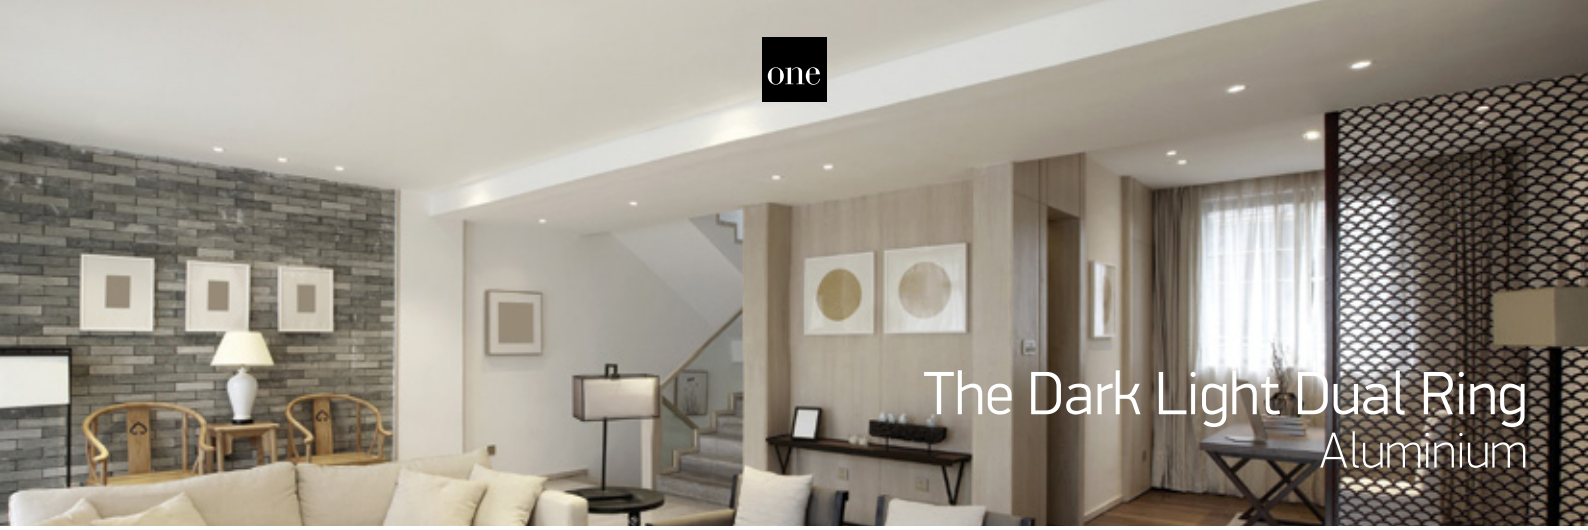

The Dark Light Dual Ring
Aluminium




10105ALG/W

10105ALG | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
5 YEAR



Complete with 0950GB.






10105ALG/B

10105ALG | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
5 YEAR



10105ALG/AL






50105ALG/W

50105ALG | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
5 YEAR



Complete with 0950GB.

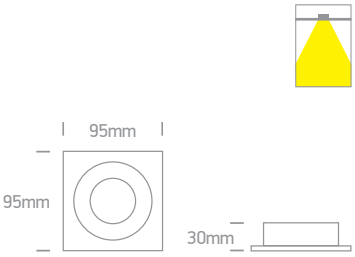




50105ALG/AL

50105ALG | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
offer
5 YEAR



Complete with 0950GB.

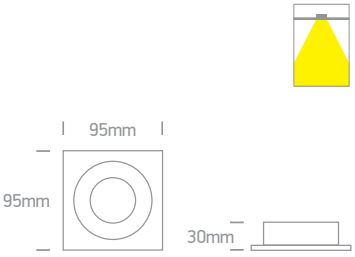

Order Code	Colour	Watts	Input	Class					Notes
10105ALG/W	White	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/B	Black	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/AL	Aluminium	10W	100-240V		15cm	78mm	150mm	50	-
50105ALG/W	White	10W	100-240V		15cm	78mm	150mm	50	-
50105ALG/AL	Aluminium	10W	100-240V		15cm	78mm	150mm	50	-

The Dark Light Dual Ring
Aluminium





10105ALG/W/B

10105ALG | 10W | MR16 | GU10 | Aluminium


5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105ALG/W/BS

10105ALG | 10W | MR16 | GU10 | Aluminium

new

5 YEAR

DARK LIGHT


IP20



10105ALG/W/GL



Complete with 0950GB.





10105ALG/B/GL

10105ALG | 10W | MR16 | GU10 | Aluminium


5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105ALG/W/B	White	Black	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/W/BS	White	Brass	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/W/GL	White	Gold	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/B/GL	Black	Gold	10W	100-240V		15cm	78mm	150mm	50	-



The Semi Trimless Dark Light




10105DG | 10W | MR16 | GU10 | Semi trimless | Aluminium







Complete with 0950G.

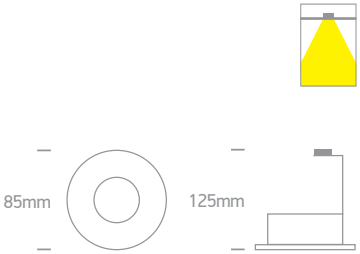



10105TG/W


10105TG | 10W | MR16 | GU10 | Semi trimless | Aluminium







Complete with 0950G.

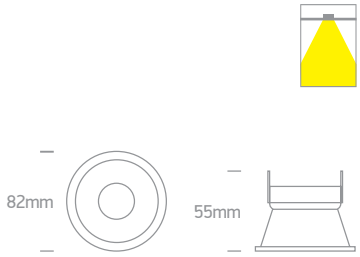



10105TG/B


10105TG | 10W | MR16 | GU10 | Semi trimless | Aluminium







Complete with 0950G.

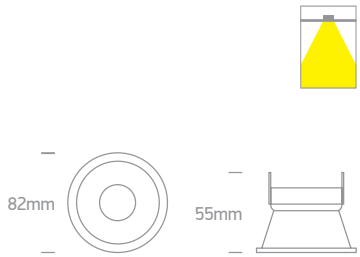




50105TG | 10W | MR16 | GU10 | Semi trimless | Die cast







Complete with 0950G.

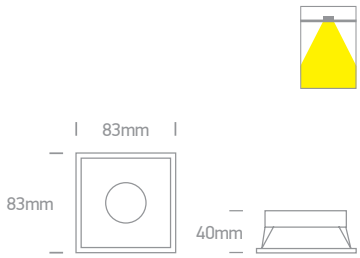

Order Code	Colour	Watts	Input	Class					Notes
10105DG/W	White	10W	100-240V		15cm	76mm	155mm	50	-
10105TG/W	White	10W	100-240V		15cm	75mm	140mm	50	-
10105TG/B	Black	10W	100-240V		15cm	75mm	140mm	50	-
50105TG/W	White	10W	100-240V		15cm	76x76mm	140mm	50	-



The Semi Dark Light Range
Aluminium



10105D1/W

10105D1 | 10W | MR16 | GU10 | Aluminium

5 YEAR


IP20



10105D1/B



Complete with 0950GB.





10105D2/W

10105D2 | 10W | MR16 | GU10 | Aluminium

5 YEAR


IP20



10105D2/B



Complete with 0950G.





10105D4/W

10105D4 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT


IP20




10105D4/B



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
10105D1/W	White	10W	100-240V		15cm	62mm	135mm	50	-
10105D1/B	Black	10W	100-240V		15cm	62mm	135mm	50	-
10105D2/W	White	10W	100-240V		15cm	62mm	120mm	50	-
10105D2/B	Black	10W	100-240V		15cm	62mm	120mm	50	-
10105D4/W	White	10W	100-240V		15cm	68mm	140mm	50	-
10105D4/B	Black	10W	100-240V		15cm	68mm	140mm	50	-

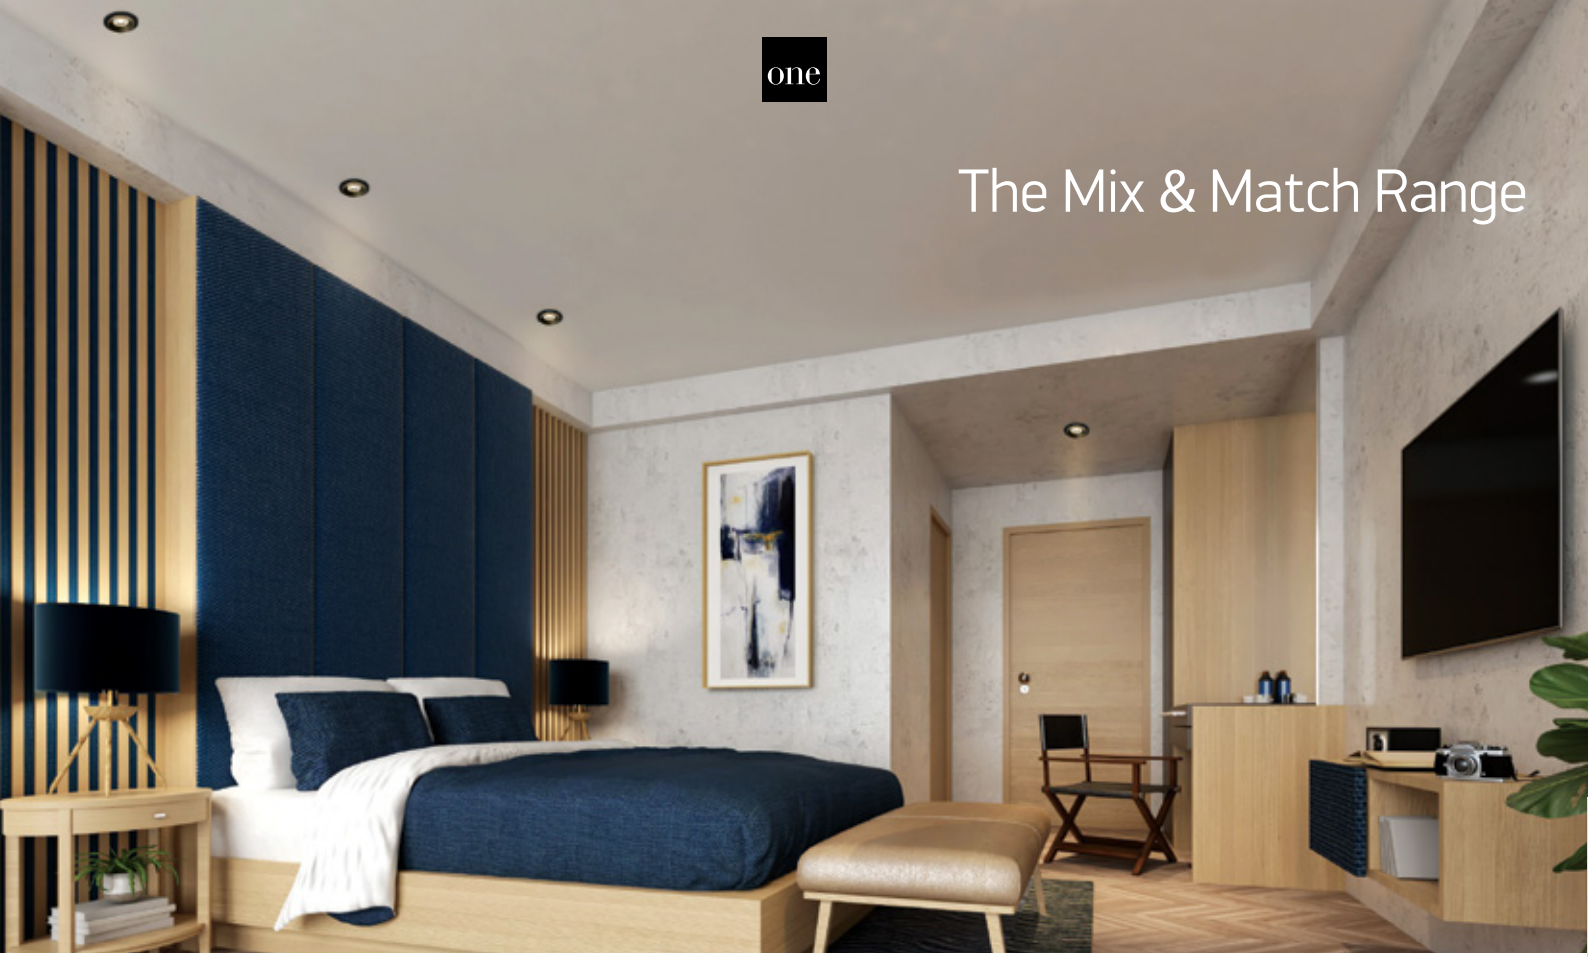

The Mix & Match Range



10105H/W

10105H | 10W | MR16 | GU10 | Die cast

LED version on page 48.


5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.

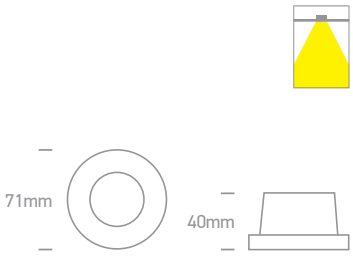



10105H/B

10105H | 10W | MR16 | GU10 | Die cast

LED version on page 48.


5 YEAR


DARK LIGHT

IP20



Complete with 0950GB.

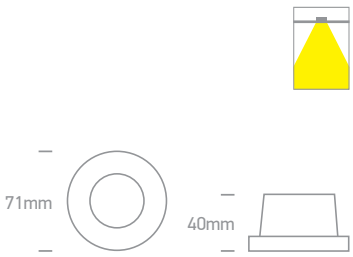

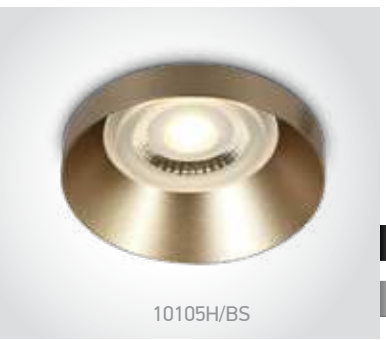

10105H/BS

10105H | 10W | MR16 | GU10 | Die cast


5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.

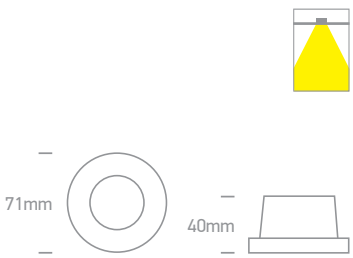

Order Code	Colour	Watts	Input	Class					Notes
10105H/W	White	10W	100-240V		15cm	64mm	100mm	50	-
10105H/B	Black	10W	100-240V		15cm	64mm	100mm	50	-
10105H/BS	Brass	10W	100-240V		15cm	64mm	100mm	50	-

The Mix & Match Range



10105H/B + 050182/W + 050182R/W

050182 | Rings for 10105H | Aluminium



050182/W White


IP20 | CE | 5 YEAR



050182/B Black



050182/BS Brass



050182R | Round base for 10105H | Aluminium



050182R/W White


IP20 | CE | 5 YEAR



050182R/B Black



050182R/BS Brass



050182RA | Square base for 10105H | Aluminium



050182RA/W White


IP20 | CE | 5 YEAR



050182RA/B Black



050182RA/BS Brass



050182RB | Double Square base for 10105H | Aluminium



050182RB/W White


IP20 | CE | 5 YEAR



050182RB/B Black



050182RB/BS Brass





Recessed Cylinders
Aluminium



10105D9/W/B


10105D9 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

5 YEAR



Complete with 0950GB.





10105D9/W/GL


10105D9 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

5 YEAR



Complete with 0950GB.





10105D9/B/B


10105D9 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

5 YEAR



Complete with 0950GB.





10105D9/B/GL


10105D9 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

5 YEAR



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105D9/W/B	White	Black	10W	100-240V		15cm	62mm	100mm	50	-
10105D9/W/GL	White	Gold	10W	100-240V		15cm	62mm	100mm	50	-
10105D9/B/B	Black	Black	10W	100-240V		15cm	62mm	100mm	50	-
10105D9/B/GL	Black	Gold	10W	100-240V		15cm	62mm	100mm	50	-



Recessed Cut Cylinders
Aluminium



10105E1/W/B

10105E1 | 10W | MR16 | GU10 | Aluminium


5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105E1/B/GL

10105E1 | 10W | MR16 | GU10 | Aluminium


5 YEAR

DARK LIGHT


IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105E1/W/B	White	Black	10W	100-240V		15cm	62mm	100mm	50	-
10105E1/B/GL	Black	Gold	10W	100-240V		15cm	62mm	100mm	50	-

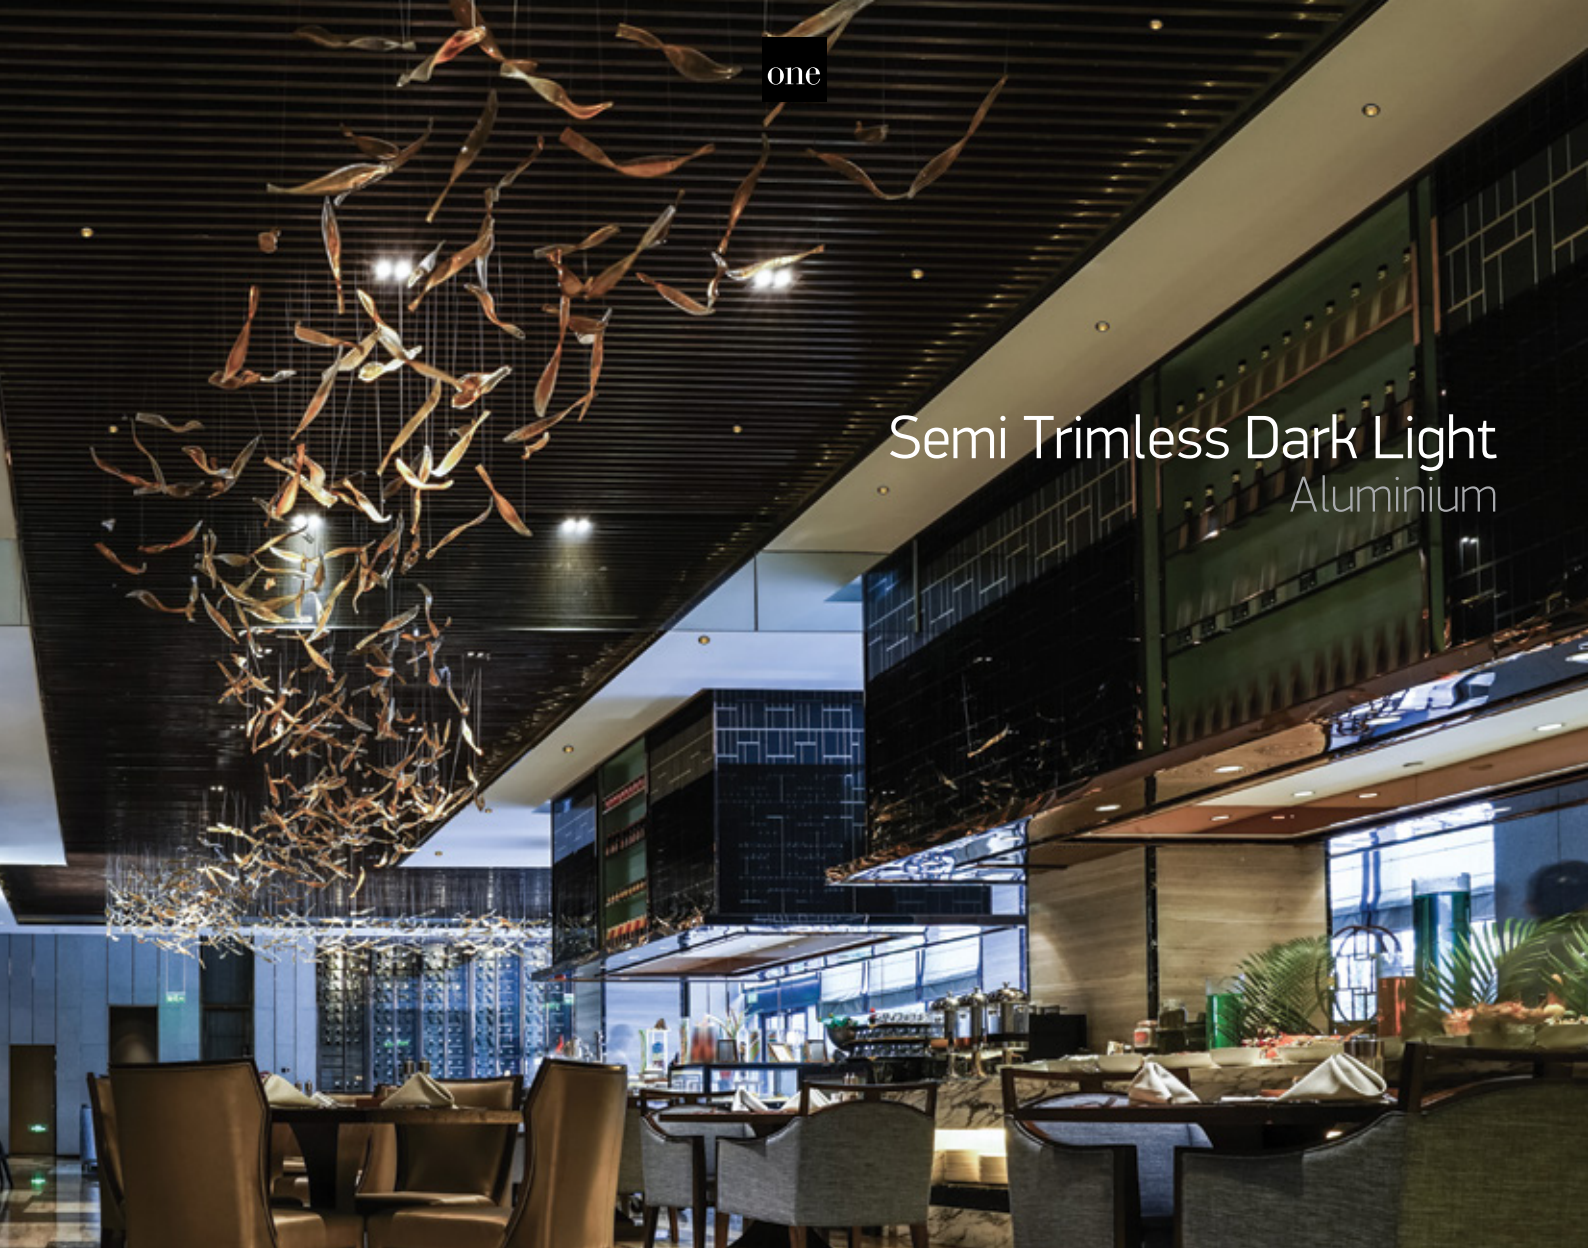

Semi Trimless Dark Light
Aluminium



10105AD/W/B

10105AD | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR


new




10105AD/W/W



Complete with 0950GB.



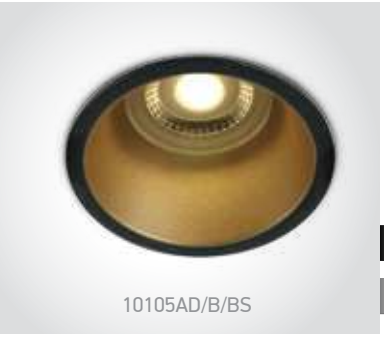

10105AD/B/BS

10105AD | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR


new



10105AD/B/B



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105AD/W/W	White	White	10W	100-240V		15cm	64mm	130mm	36	-
10105AD/W/B	White	Black	10W	100-240V		15cm	64mm	130mm	36	-
10105AD/B/B	Black	Black	10W	100-240V		15cm	64mm	130mm	36	-
10105AD/B/BS	Black	Brass	10W	100-240V		15cm	64mm	130mm	36	-

Semi Trimless Dark Light
Aluminium





10105D8/W/B

10105D8 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20


10105D8/W/GL


Complete with 0950GB.




10105D8/B/B


10105D8 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

new


10105D8/B/BS


Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105D8/W/B	White	Black	10W	100-240V		15cm	62mm	130mm	50	-
10105D8/W/GL	White	Gold	10W	100-240V		15cm	62mm	130mm	50	-
10105D8/B/B	Black	Black	10W	100-240V		15cm	62mm	130mm	50	-
10105D8/B/BS	Black	Brass	10W	100-240V		15cm	62mm	130mm	50	-



The Chill Out Range
Round




10105M/W/W

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20
CE 5 YEAR



Complete with 0950GB.






10105M/W/B


10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20
CE 5 YEAR



Complete with 0950GB.



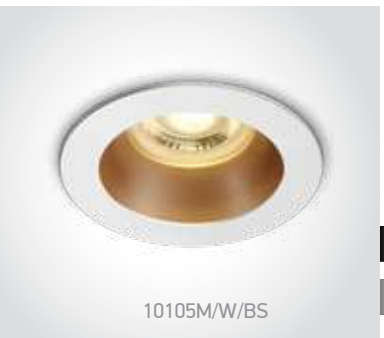


10105M/W/BS

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20
CE 5 YEAR



Complete with 0950GB.






10105M/W/CU

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20
CE 5 YEAR



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105M/W/W	White	White	10W	100-240V		15cm	70mm	120mm	50	-
10105M/W/B	White	Black	10W	100-240V		15cm	70mm	120mm	50	-
10105M/W/BS	White	Brass	10W	100-240V		15cm	70mm	120mm	50	-
10105M/W/CU	White	Copper	10W	100-240V		15cm	70mm	120mm	50	-



The Chill Out Range
Round



10105M/B/B

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector


5 YEAR


DARK LIGHT

IP20



Complete with 0950GB.



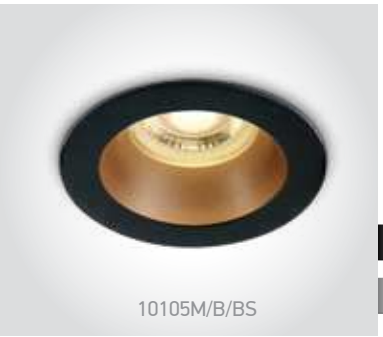

10105M/B/BS

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector


5 YEAR


DARK LIGHT

IP20



Complete with 0950GB.



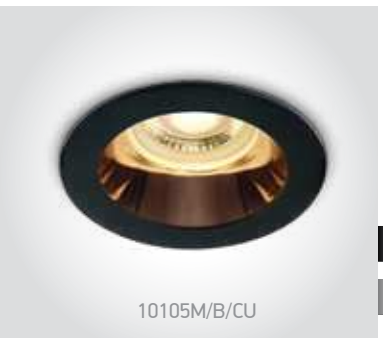

10105M/B/CU

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector


5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105M/B/B	Black	Black	10W	100-240V		15cm	70mm	120mm	50	-
10105M/B/BS	Black	Brass	10W	100-240V		15cm	70mm	120mm	50	-
10105M/B/CU	Black	Copper	10W	100-240V		15cm	70mm	120mm	50	-

The Chill Out Range
Round




10105MD/W/C


10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20


Complete with 0950GB.

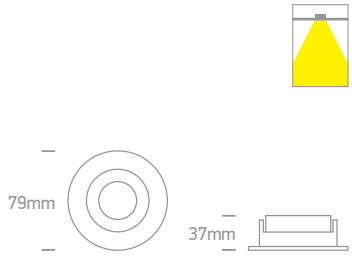


10105MD/W/GL


10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector


5 YEAR

DARK LIGHT

IP20


Complete with 0950GB.

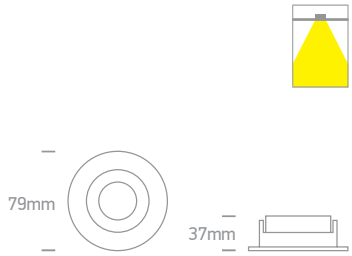

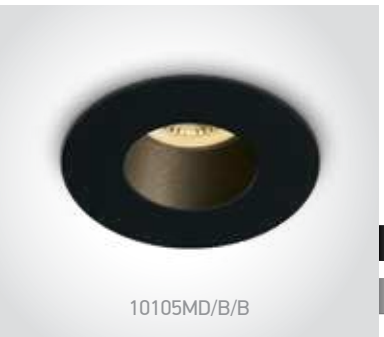
10105MD/B/B


10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.

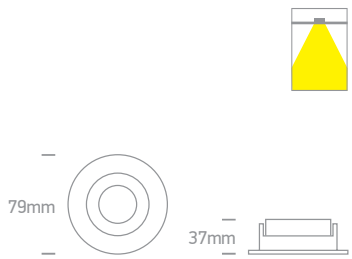

Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105MD/W/C	White	Chrome	10W	100-240V		15cm	70mm	120mm	50	-
10105MD/W/GL	White	Gold	10W	100-240V		15cm	70mm	120mm	50	-
10105MD/B/B	Black	Black	10W	100-240V		15cm	70mm	120mm	50	-



The Chill Out Range
Square

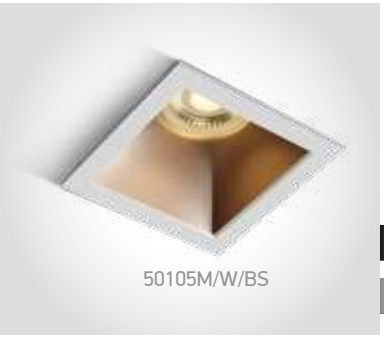

50105M/W/BS

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector


5 YEAR


DARK LIGHT

IP20



Complete with 0950GB.



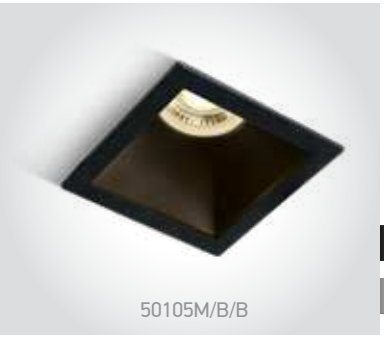

50105M/B/B

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector


5 YEAR


DARK LIGHT

IP20



Complete with 0950GB.



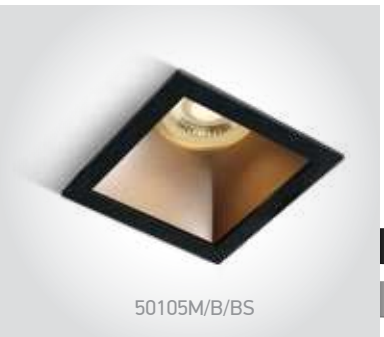

50105M/B/BS

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector


5 YEAR


DARK LIGHT

IP20



Complete with 0950GB.



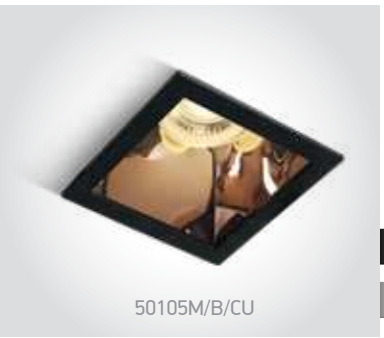

50105M/B/CU

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector


5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
50105M/W/BS	White	Brass	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/B/B	Black	Black	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/B/BS	Black	Brass	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/B/CU	Black	Copper	10W	100-240V		15cm	76x76mm	130mm	50	-

The Asymmetric Chill Out Range
Square



50105MA/W/B



50105MA/B/B



50105MA/W/B

50105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Asymmetric for shelf illumination.


DARK LIGHT

IP20

5 YEAR



Asymmetric.





50105MA/B/B

50105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Asymmetric for shelf illumination.


DARK LIGHT

IP20

5 YEAR



Asymmetric.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
50105MA/W/B	White	Black	10W	100-240V		15cm	76x76mm	150mm	50	Asymmetric
50105MA/B/B	Black	Black	10W	100-240V		15cm	76x76mm	150mm	50	Asymmetric



The Decorative Spots





10105GL2 | 50W | MR16 | GU5,3 | Natural aluminium + glass

IP20

offer

5 YEAR








50105AR | 50W | MR16 | GU5,3 | Natural aluminium

IP20

offer

5 YEAR





Order Code	Colour	Watts	Input	Class					Notes
10105GL2/AL	Aluminium	50W	12V	III	40cm	60mm	50mm	50	-
50105AR/AL	Aluminium	50W	12V	III	40cm	70mm	75mm	50	-



The Bathroom Range
Die cast




10105CJ/MC/5

10105CJ | 50W | MR16 | GU5,3 | Die cast

DARK LIGHT
IP43
offer
5 YEAR








10105CJ/ABS/5

10105CJ | 50W | MR16 | GU5,3 | Die cast

DARK LIGHT
IP43
offer
5 YEAR






Order Code	Colour	Watts	Input	Class					Notes
10105CJ/MC/5	Brushed chrome	50W	12V	III	40cm	102mm	120mm	50	-
10105CJ/ABS/5	Antique brass	50W	12V	III	40cm	102mm	120mm	50	-





10109F | 10W | MR16 | GU10 | Fire Rated | Die cast



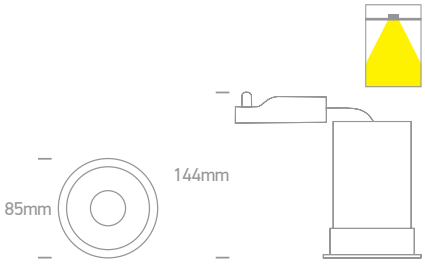

Order Code	Colour	Watts	Input	Class				Notes
10109F/W	White	10W	100-240V		73mm	160mm	30	-

The IP65 Bathroom Range
Aluminium





50105R1/W

50105R1 | 10W | MR16 | GU10 | Aluminium

Complete with 0950GB.

IP65


CE 5 YEAR



50105R1/B



50105R1/AL



Order Code	Colour	Watts	Input	Class					Notes
50105R1/W	White	10W	100-240V		15cm	68mm	120mm	50	Clear glass
50105R1/B	Black	10W	100-240V		15cm	68mm	120mm	50	Clear glass
50105R1/AL	Aluminium	10W	100-240V		15cm	68mm	120mm	50	Clear glass



The IP65 Bathroom Range
Aluminium



10105R1/W

10105R1 | 10W | MR16 | GU10 | Aluminium

5 YEAR


IP65



Complete with 0950GB.



Clear glass.





10105R1/B

10105R1 | 10W | MR16 | GU10 | Aluminium

5 YEAR


IP65



Complete with 0950GB.



Clear glass.





10105R1/AL

10105R1 | 10W | MR16 | GU10 | Aluminium

5 YEAR


IP65



Complete with 0950GB.



Clear glass.





10105R1P | 10W | MR16 | GU10 | Aluminium

5 YEAR


IP65



Complete with 0950GB.



Prismatic glass.



Order Code	Colour	Watts	Input	Class					Notes
10105R1/W	White	10W	100-240V	⏚	15cm	68mm	120mm	50	Clear glass
10105R1/B	Black	10W	100-240V	⏚	15cm	68mm	120mm	50	Clear glass
10105R1/AL	Aluminium	10W	100-240V	⏚	15cm	68mm	120mm	50	Clear glass
10105R1P/W	White	10W	100-240V	⏚	15cm	68mm	120mm	50	Prismatic glass

The IP65 Dark Light Range
Aluminium





10105R2 | 10W | MR16 | GU10 | Aluminium



5 YEAR

DARK LIGHT

IP65



Complete with 0950G.



Clear glass.







Order Code	Colour	Watts	Input	Class					Notes
10105R2/W	White	10W	100-240V	⏚	15cm	82mm	130mm	50	Clear glass

The IP65 Dark Light Range
Aluminium



10105R2P | 10W | MR16 | GU10 | Aluminium







Complete with 0950G.



Prismatic glass.








Order Code	Colour	Watts	Input	Class					Notes
10105R2P/W	White	10W	100-240V	⏚	15cm	82mm	130mm	50	Prismatic glass

Trimless Gypsum

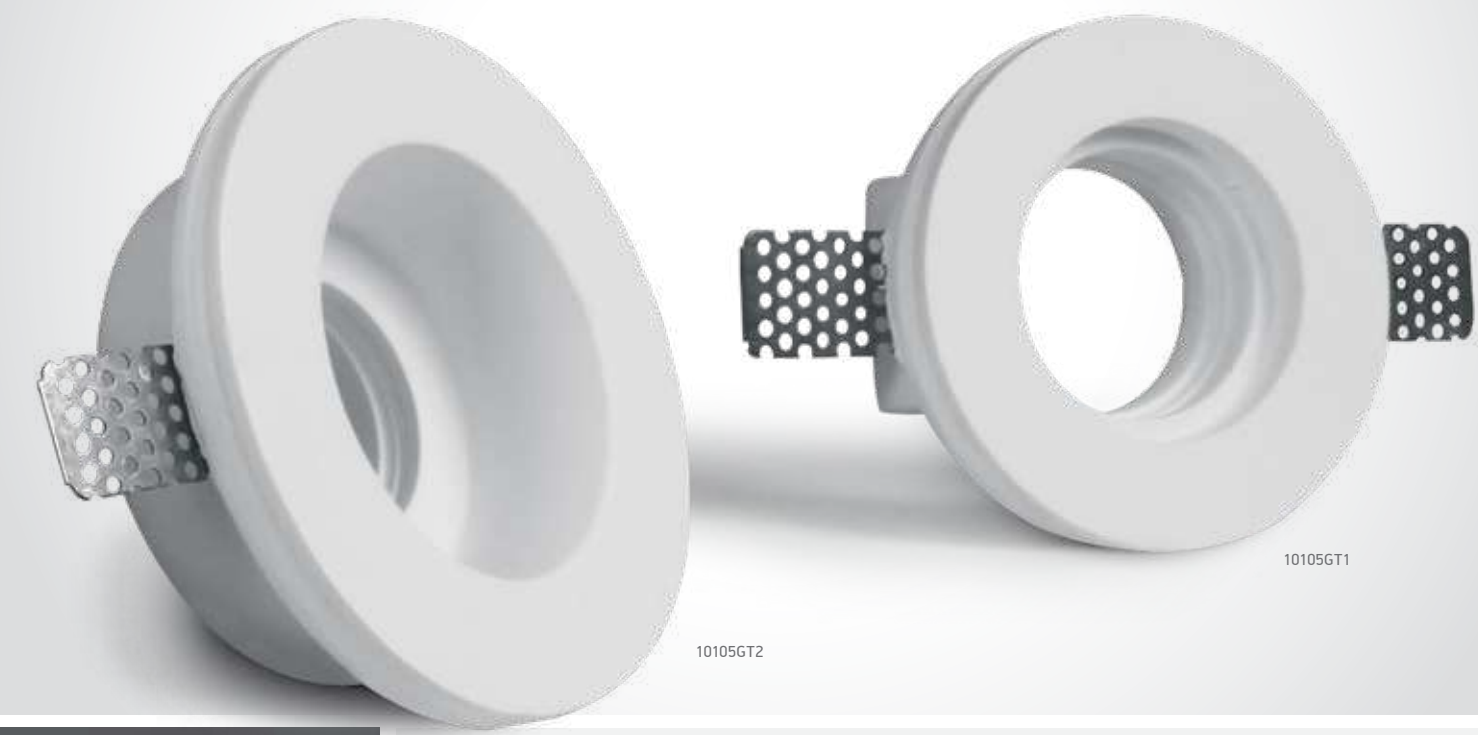




10105GT1 | 10W | MR16 | GU10 | Trimless | Gypsum

5 YEAR

IP20



Suitable for GU10 LED lamp.

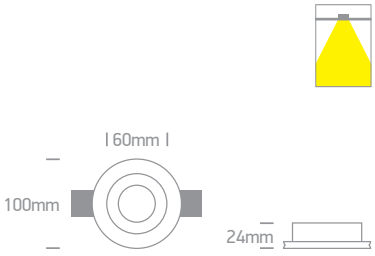



10105GT2 | 10W | MR16 | GU10 | Trimless | Gypsum


5 YEAR

DARK LIGHT

IP20



Suitable for GU10 LED lamp.

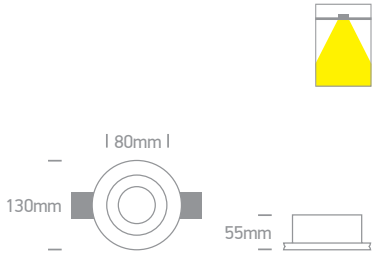




50105GT1 | 10W | MR16 | GU10 | Trimless | Gypsum

5 YEAR

IP20



Suitable for GU10 LED lamp.

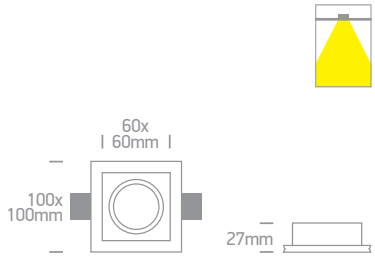

Order Code	Colour	Watts	Input	Class					Notes
10105GT1	White	10W	100-240V		15cm	102mm	100mm	24	-
10105GT2	White	10W	100-240V		15cm	132mm	150mm	24	-
50105GT1	White	10W	100-240V		15cm	102x102mm	100mm	24	-

The Trimless Chill Out Range
Aluminium





10105TR | 10W | MR16 | GU10 | Trimless | Aluminium

10105TR/W

5 YEAR

DARK LIGHT


IP20



Complete with 0950GB.



2 Step reflector.





10105TR | 10W | MR16 | GU10 | Trimless | Aluminium

10105TR/B

5 YEAR

DARK LIGHT


IP20



Complete with 0950GB.



2 Step reflector.





10105TR | 10W | MR16 | GU10 | Trimless | Aluminium

10105TR/BS

5 YEAR

DARK LIGHT


IP20



Complete with 0950GB.



2 Step reflector.



Order Code	Colour	Watts	Input	Class					Notes
10105TR/W	White	10W	100-240V		15cm	70mm	120mm	60	-
10105TR/B	Black	10W	100-240V		15cm	70mm	120mm	60	-
10105TR/BS	Brass	10W	100-240V		15cm	70mm	120mm	60	-

The Trimless Chill Out Range
Round



10105RM + 050099/W



10105RM + 050099/B




10105RM + 050099/BS



10105RM + 050099/CU




10105RM + 050099/DC

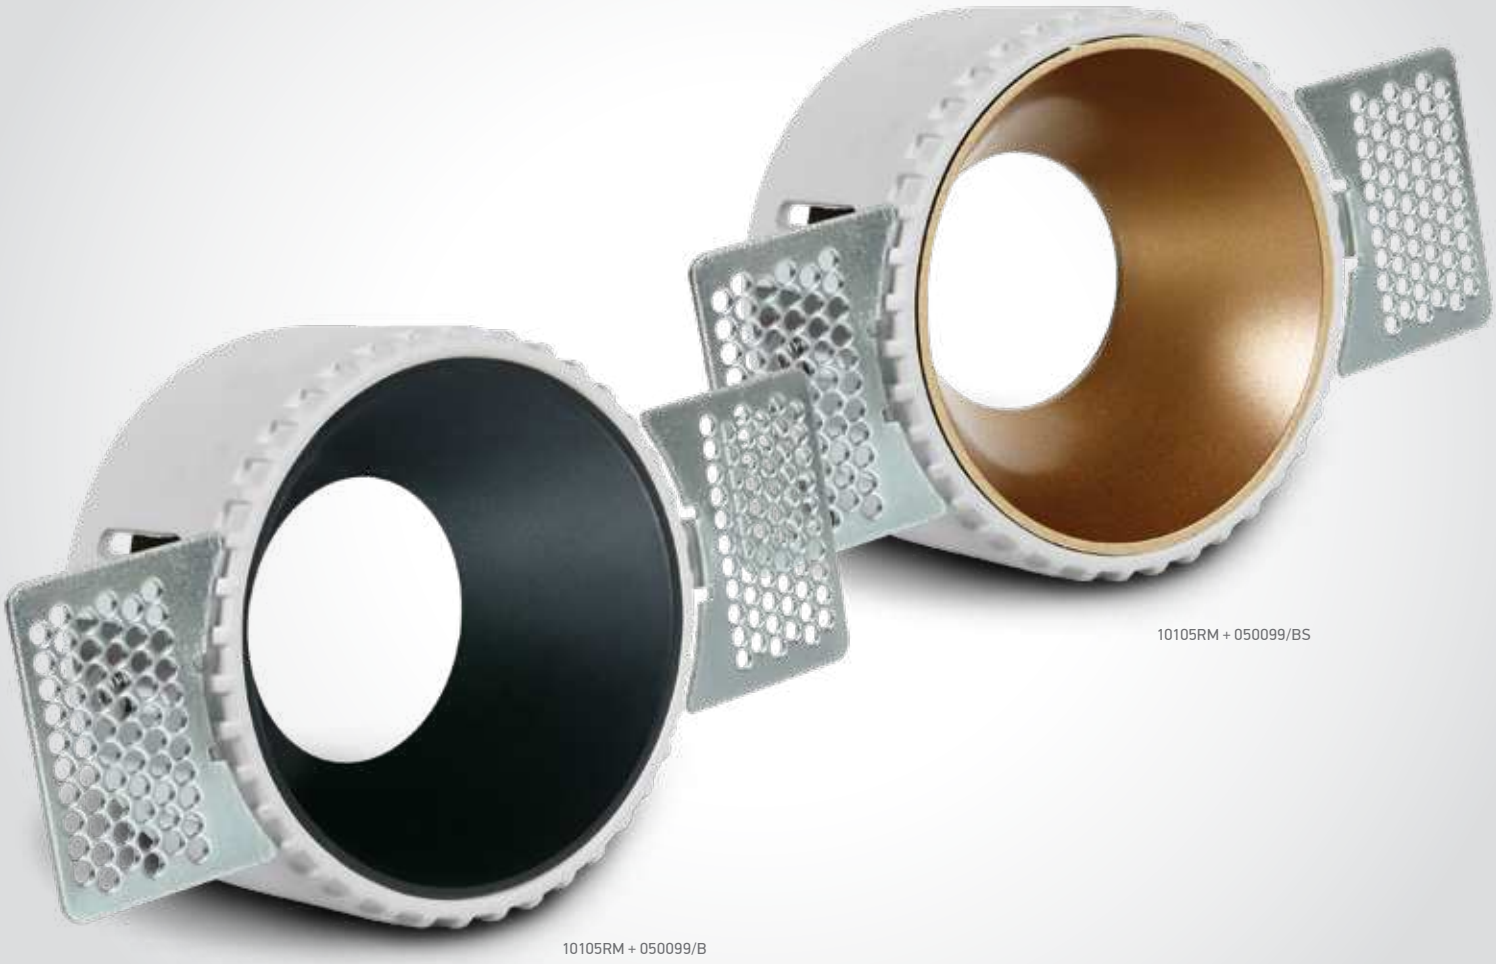

10105RM + 050099/BS

10105RM + 050099/B

The Trimless Chill Out Range
Round

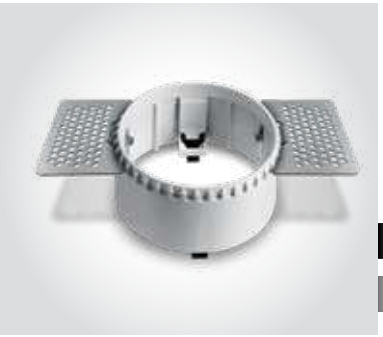

10105RM | 10W | MR16 | GU10 | Trimless | Die cast body + plastic reflector

Reflector must be ordered separately.


DARK LIGHT

IP20

CE 5 YEAR



Complete with 0950GB.

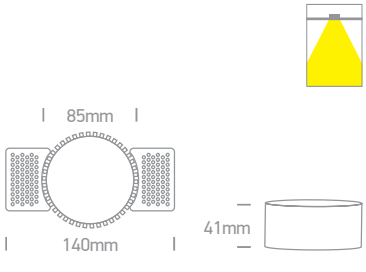




050099/W White




050099/B Black



050099/BS Brass



050099/CU Copper



050099/DC
Dark chrome

Order Code	Colour	Watts	Input	Class					Notes
10105RM	White	10W	100-240V	⏚	15cm	90mm	130mm	50	-

The Trimless Chill Out Range
Square



50105RM + 050098/W



50105RM + 050098/B



50105RM + 050098/BS



50105RM + 050098/CU

50105RM + 050098/B

The Trimless Chill Out Range
Square



50105RM | 10W | MR16 | GU10 | Trimless | Die cast body + plastic reflector

Reflector must be ordered separately.


DARK LIGHT

IP20

5 YEAR



Complete with 0950GB.

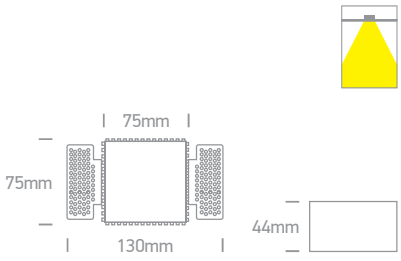




050098/W White



050098/B Black

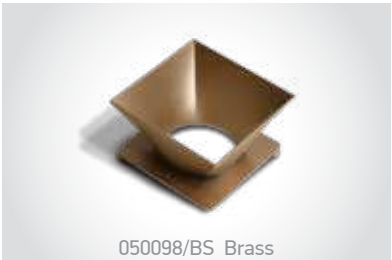

050098/BS Brass



050098/CU Copper

Order Code	Colour	Watts	Input	Class					Notes
50105RM	White	10W	100-240V	⏚	15cm	85x75mm	130mm	50	-





Recessed Spots Fixed LED

Pages 39-90

02

The Super Mini Series






10101L/W/W

10101L | 1W | LED | Aluminium

Driver can not pass through the cut-out hole.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP44


10101L/B/W





10101L/W/BL

10101L | 1W | LED | Aluminium

Driver can not pass through the cut-out hole.

LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP44








10101LA | 2W | COB LED | Die cast

Driver can not pass through the cut-out hole.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP44

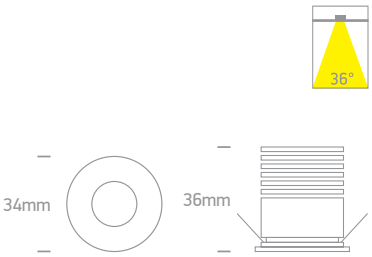

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10101L/W/W	White	Warm white	3000K	1W	95lm	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101L/W/BL	White	Blue	-	1W	-	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101L/B/W	Black	Warm white	3000K	1W	95lm	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101LA/W/W	White	Warm white	3000K	2W	190lm	36°	700mA	III	200cm	27mm	55mm	100	Requires 700mA driver



The 1W/2W LED Spots
Aluminium




10103B/W/C


10103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · IP20



10103B/W/W




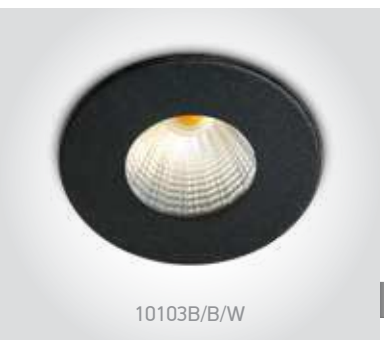

10103B/B/W

10103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · IP20






10103B/AL/W

10103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103B/W/C	White	Cool white	4000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/W/W	White	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/B/W	Black	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/AL/W	Aluminium	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver


The 3W Dark Light Range
Aluminium



10103E/W/W/W



10103E/W/BS/W

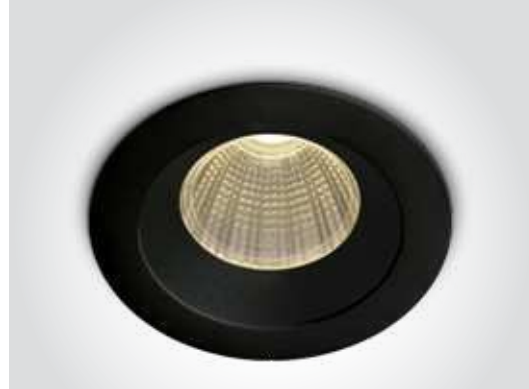

10103E/B/B/W


The 3W Dark Light Range
Aluminium




10103E/W/B/W


10103E | 3W | COB LED | Aluminium









Suitable for 89004 driver.




10103E/B/BS/W


10103E | 3W | COB LED | Aluminium








Suitable for 89004 driver.



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103E/W/W/W	White	White	Warm white	3000K	3W	240lm	36°	350mA		40cm	44mm	60mm	50	Requires 350mA driver
10103E/W/B/W	White	Black	Warm white	3000K	3W	240lm	36°	350mA		40cm	44mm	60mm	50	Requires 350mA driver
10103E/W/BS/W	White	Brass	Warm white	3000K	3W	240lm	36°	350mA		40cm	44mm	60mm	50	Requires 350mA driver
10103E/B/B/W	Black	Black	Warm white	3000K	3W	240lm	36°	350mA		40cm	44mm	60mm	50	Requires 350mA driver
10103E/B/BS/W	Black	Brass	Warm white	3000K	3W	240lm	36°	350mA		40cm	44mm	60mm	50	Requires 350mA driver



50103L/D/35



50401L/D/35



50601L/D/35

Fixed Spots




50103L | 3x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
IP20
2 YEAR
offer



Suitable for 89004 driver.






50401L | 4x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
IP20
2 YEAR
offer








50601L | 6x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
IP20
2 YEAR
offer



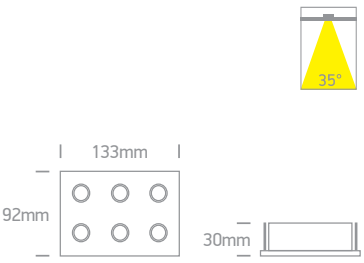

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA		40cm	60mm	40mm	100	Requires 350mA driver
50103L/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA		40cm	60mm	40mm	100	Requires 350mA driver
50401L/D/35	Aluminium	Daylight	6000K	4x1W	240lm	35°	350mA		40cm	80x80mm	40mm	50	Requires 350mA driver
50401L/W/35	Aluminium	Warm white	3000K	4x1W	180lm	35°	350mA		40cm	80x80mm	40mm	50	Requires 350mA driver
50601L/D/35	Aluminium	Daylight	6000K	6x1W	360lm	35°	350mA		40cm	118x80mm	40mm	50	Requires 350mA driver
50601L/W/35	Aluminium	Warm white	3000K	6x1W	270lm	35°	350mA		40cm	118x80mm	40mm	50	Requires 350mA driver



3W LED Glass Lens
Aluminium



10103N/W/D/35

10103N | 3x1W | LED | Aluminium

LED BUILT IN

DIMMABLE QUICK FIX CE

IP20


2 YEAR

offer





Suitable for 89004 driver.





10103N/B/W/35

10103N | 3x1W | LED | Aluminium

LED BUILT IN

DIMMABLE QUICK FIX CE

IP20


2 YEAR

offer





Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103N/W/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/B/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/B/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver

The 8W Range






10108D/W/W

10108D | 8W | COB LED | Die cast

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20










10108D/B/W

10108D | 8W | COB LED | Die cast

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20









10108R/W/W


10108R | 8W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
3 YEAR
IP20



10108R/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108D/W/W	White	Warm white	3000K	8W	600lm	36°	230V	☐	73mm	90mm	50	Complete with 300mA driver
10108D/B/W	Black	Warm white	3000K	8W	600lm	36°	230V	☐	73mm	90mm	50	Complete with 300mA driver
10108R/W/W	White	Warm white	3000K	8W	750lm	60°	230V	☐	68mm	50mm	50	Complete with 350mA driver
10108R/B/W	Black	Warm white	3000K	8W	750lm	60°	230V	☐	68mm	50mm	50	Complete with 350mA driver



The 8W Asymmetric Range



10108A | 8W | COB LED | Die cast | Asymmetric reflector

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20



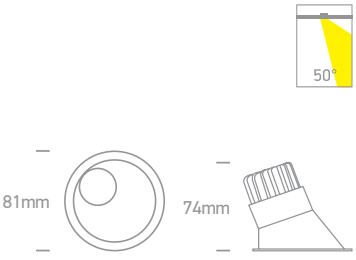



50108A | 8W | COB LED | Die cast | Asymmetric reflector

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20



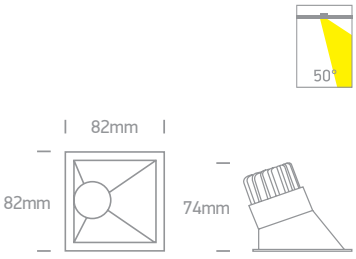

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108A/W/W	White	Warm white	3000K	8W	560lm	50°	230V		68mm	85mm	20	Complete with 350mA driver
50108A/W/W	White	Warm white	3000K	8W	560lm	50°	230V		73x73mm	85mm	50	Complete with 350mA driver

The Dark Light Range



10108D1 | 8W | COB LED | Die cast

LED BUILT IN

80 CRI

3 YEAR

DARK LIGHT

IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10108D1/W/W	White	Warm white	3000K	8W	560lm	36°	230V		-	73mm	105mm	50	Complete with 300mA driver



The Mix & Match Range

10112HA | 12W | COB LED | Die cast

GU10 version on page 13.




10112HA/W/W

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 5 YEAR



10112HA/B/W



050182 | Rings for 10112HA | Aluminium



050182/W White


CE · IP20



050182/B Black



050182/BS Brass



050182R | Round base for 10112HA | Aluminium



050182R/W White


CE · IP20



050182R/B Black



050182R/BS Brass



050182RA | Square base for 10112HA | Aluminium



050182RA/W White


CE · IP20



050182RA/B Black



050182RA/BS Brass



050182RB | Double Square base for 10112HA | Aluminium



050182RB/W White


CE · IP20



050182RB/B Black



050182RB/BS Brass



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112HA/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	66mm	135mm	50	Requires 700mA driver
10112HA/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	66mm	135mm	50	Requires 700mA driver



The 7W Dark Light Range
Die cast



10107DC/W/W

10107DC | 7W | COB LED | Die cast

LED BUILT IN

80 CRI


CE


2 YEAR

DARK LIGHT

IP20





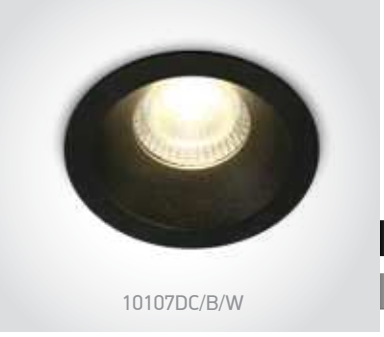

10107DC/B/W

10107DC | 7W | COB LED | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR

DARK LIGHT

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107DC/W/W	White	Warm white	3000K	7W	560lm	50°	230V	☐	15cm	55mm	110mm	50	Complete with 300mA driver
10107DC/B/W	Black	Warm white	3000K	7W	560lm	50°	230V	☐	15cm	55mm	110mm	50	Complete with 300mA driver



10112TD/B/W

10112TD/W/C

The 12W Dark Light Range
Die cast



10112TD/W/W

10112TD | 12W | COB LED | Die cast

LED BUILT IN


90 CRI

3 YEAR

DARK LIGHT

IP20







10112TD/B/W

10112TD | 12W | COB LED | Die cast

LED BUILT IN


80 CRI

3 YEAR

DARK LIGHT

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112TD/W/C	White	Cool white	4000K	12W	960lm	20°	230V	⧈	82mm	100mm	50	Complete with 300mA driver
10112TD/W/W	White	Warm white	3000K	12W	960lm	20°	230V	⧈	82mm	100mm	50	Complete with 300mA driver
10112TD/B/W	Black	Warm white	3000K	12W	960lm	20°	230V	⧈	82mm	100mm	50	Complete with 300mA driver

The Dark Light Pro Range
Aluminium



10105FD/B/W



10110FD/B/W



10115FD/B/W



The Dark Light Pro Range
Aluminium



10105FD/B/W

10105FD | 5W | COB LED | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20


10105FD/W/W







10110FD/B/W

10110FD | 10W | COB LED | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20


10110FD/W/W







10115FD/B/W

10115FD | 15W | COB LED | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20


10115FD/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10105FD/W/W	White	Warm white	3000K	5W	300lm	24°	230V		50mm	120mm	50	Complete with 300mA driver
10105FD/B/W	Black	Warm white	3000K	5W	300lm	24°	230V		50mm	120mm	50	Complete with 300mA driver
10110FD/W/W	White	Warm white	3000K	10W	800lm	24°	230V		68mm	130mm	50	Complete with 300mA driver
10110FD/B/W	Black	Warm white	3000K	10W	800lm	24°	230V		68mm	130mm	50	Complete with 300mA driver
10115FD/W/W	White	Warm white	3000K	15W	1275lm	24°	230V		82mm	150mm	20	Complete with 350mA driver
10115FD/B/W	Black	Warm white	3000K	15W	1275lm	24°	230V		82mm	150mm	20	Complete with 350mA driver

The Retro Dark Light Range



10107Z/B/W



10112Z/W/W



10120Z/B/W

The Retro Dark Light Range



10107Z | 7W | COB LED | Die cast + plastic



10107Z/W/W


LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



10107Z/B/W



Complete with Black & Brass reflectors. Optional White reflector code 050378A/W.

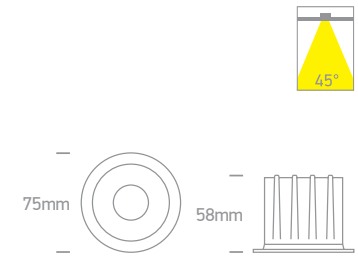

10112Z | 12W | COB LED | Die cast + plastic



10112Z/W/W


LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



10112Z/B/W



Complete with Black & Brass reflectors. Optional White reflector code 050378B/W.

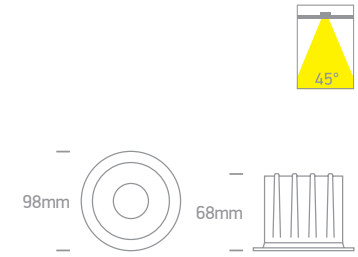

10120Z | 20W | COB LED | Die cast + plastic



10120Z/W/W


LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



10120Z/B/W



Complete with Black & Brass reflectors. Optional White reflector code 050378C/W.

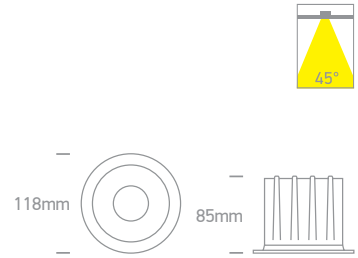

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107Z/W/W	White	Warm white	3000K	7W	560lm	45°	230V	☐	65mm	80mm	40	Complete with 160mA driver
10107Z/B/W	Black	Warm white	3000K	7W	560lm	45°	230V	☐	65mm	80mm	40	Complete with 160mA driver
10112Z/W/W	White	Warm white	3000K	12W	960lm	45°	230V	☐	82mm	88mm	30	Complete with 300mA driver
10112Z/B/W	Black	Warm white	3000K	12W	960lm	45°	230V	☐	82mm	88mm	30	Complete with 300mA driver
10120Z/W/W	White	Warm white	3000K	20W	1600lm	45°	230V	☐	105mm	105mm	20	Complete with 500mA driver
10120Z/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V	☐	105mm	105mm	20	Complete with 500mA driver

The COB LED Dark Light Range



10106DC/B/W



10112DC/B/W



10118DC/B/W



The COB LED Dark Light Range




10106DC | 6W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 5 YEAR










10112DC | 12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 5 YEAR










10118DC | 18W | COB LED | Die cast


LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 5 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106DC/W/W	White	Warm white	3000K	6W	570lm	36°	350mA	III	40cm	55mm	75mm	50	Requires 350mA driver
10106DC/B/W	Black	Warm white	3000K	6W	570lm	36°	350mA	III	40cm	55mm	75mm	50	Requires 350mA driver
10112DC/W/W	White	Warm white	3000K	12W	1100lm	36°	700mA	III	40cm	75mm	100mm	50	Requires 700mA driver
10112DC/B/W	Black	Warm white	3000K	12W	1100lm	36°	700mA	III	40cm	75mm	100mm	50	Requires 700mA driver
10118DC/W/W	White	Warm white	3000K	18W	1750lm	36°	500mA	III	40cm	94mm	100mm	30	Requires 500mA driver
10118DC/B/W	Black	Warm white	3000K	18W	1750lm	36°	500mA	III	40cm	94mm	100mm	30	Requires 500mA driver

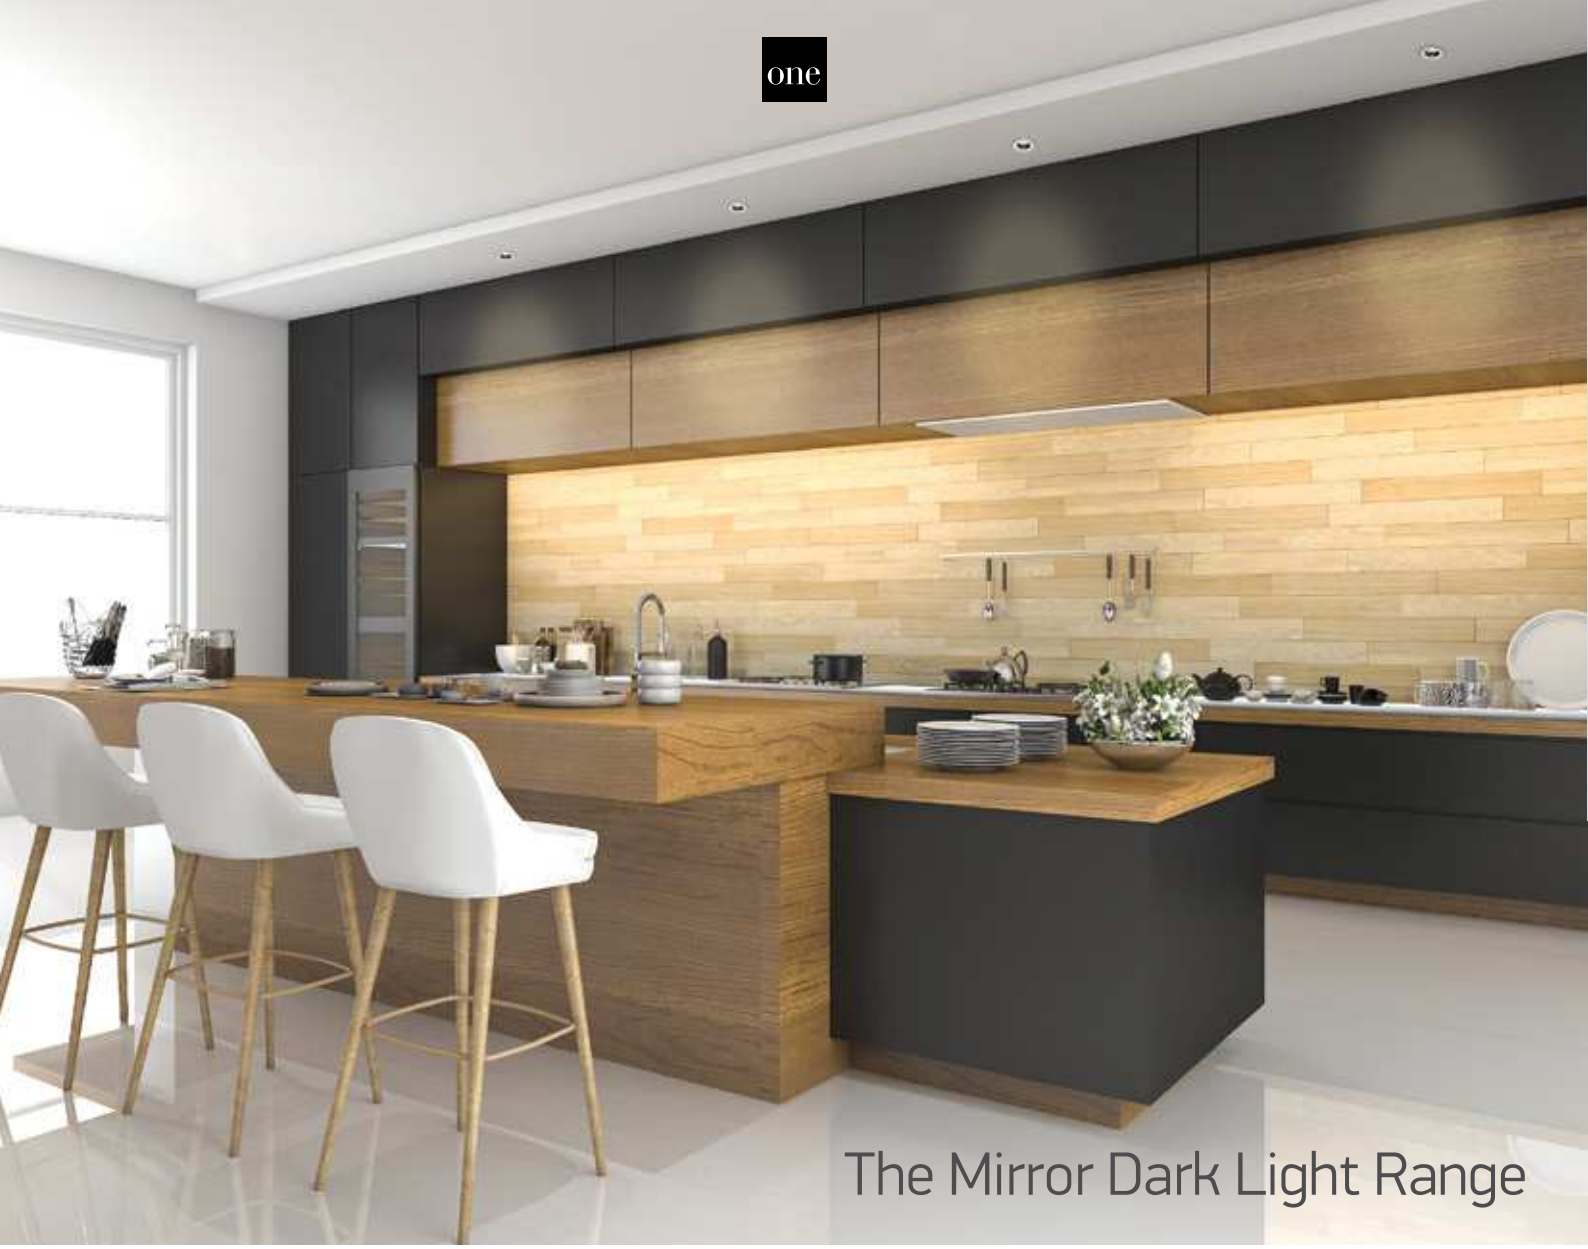

The Mirror Dark Light Range

10103H | 3W | SMD 3535 | Aluminium



10103H/B/W

LED BUILT IN

90 CRI

CE


5 YEAR

DARK LIGHT

IP20



10103H/W/W



50103H | 3W | SMD 3535 | Aluminium



50103H/B/W

LED BUILT IN

90 CRI

CE


5 YEAR

DARK LIGHT

IP20



50103H/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103H/W/W	White	Warm white	3000K	3W	160lm	38°	230V	⧈	35mm	70mm	60	Complete with 700mA driver
10103H/B/W	Black	Warm white	3000K	3W	160lm	38°	230V	⧈	35mm	70mm	60	Complete with 700mA driver
50103H/W/W	White	Warm white	3000K	3W	160lm	38°	230V	⧈	38x38mm	70mm	60	Complete with 700mA driver
50103H/B/W	Black	Warm white	3000K	3W	160lm	38°	230V	⧈	38x38mm	70mm	60	Complete with 700mA driver



10110H/W/W



50110H/B/W

The Mirror Dark Light Range




10110H/B/W

10110H | 10W | SMD 3535 | Aluminium

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20



10110H/W/W






50110H/B/W

50110H | 10W | SMD 3535 | Aluminium

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20



50110H/W/W






50012H/B/W

50012H | 12W | SMD 3535 | Aluminium

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20



50012H/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110H/W/W	White	Warm white	3000K	10W	700lm	38°	230V		75mm	60mm	40	Complete with 700mA driver
10110H/B/W	Black	Warm white	3000K	10W	700lm	38°	230V		75mm	60mm	40	Complete with 700mA driver
50110H/W/W	White	Warm white	3000K	10W	700lm	38°	230V		68x68mm	60mm	40	Complete with 700mA driver
50110H/B/W	Black	Warm white	3000K	10W	700lm	38°	230V		68x68mm	60mm	40	Complete with 700mA driver
50012H/W/W	White	Warm white	3000K	12W	840lm	38°	230V		140x36mm	80mm	40	Complete with 700mA driver
50012H/B/W	Black	Warm white	3000K	12W	840lm	38°	230V		140x36mm	80mm	40	Complete with 700mA driver

The Honeycomb Dark Light Range





10106DH | 6W | COB LED | Die cast


Complete with honeycomb.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20





Suitable for 89008 driver.





10112DH | 12W | COB LED | Die cast


Complete with honeycomb.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20





Suitable for 89015A driver.





10118DH | 18W | COB LED | Die cast


Complete with honeycomb.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20





Suitable for 89030C driver.

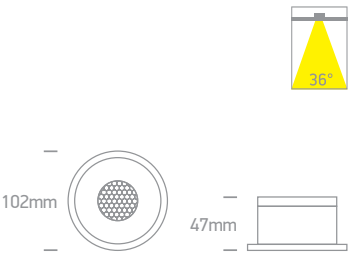

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106DH/W/W	White	Warm white	3000K	6W	500lm	36°	350mA	III	40cm	63mm	60mm	50	Requires 350mA driver
10112DH/W/W	White	Warm white	3000K	12W	1000lm	36°	700mA	III	40cm	72mm	60mm	50	Requires 700mA driver
10118DH/W/W	White	Warm white	3000K	18W	1500lm	36°	500mA	III	40cm	91mm	70mm	30	Requires 500mA driver




The Round Mirror Range

10106X | 6W | SMD 3030 | Aluminium




LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20



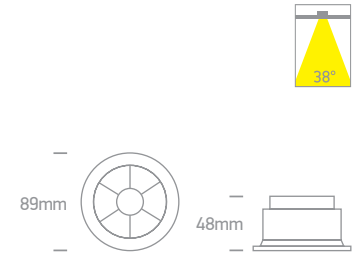


10112X | 12W | SMD 3030 | Aluminium

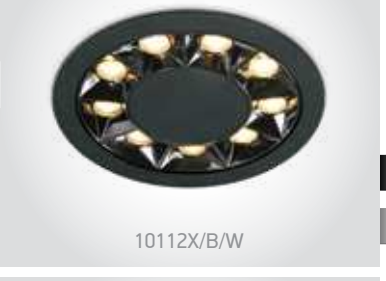

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20



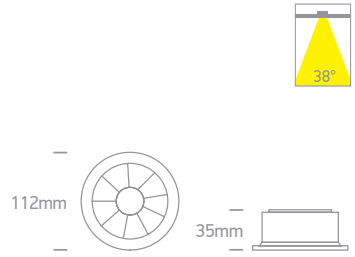


10120X | 20W | SMD 3030 | Aluminium



LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20



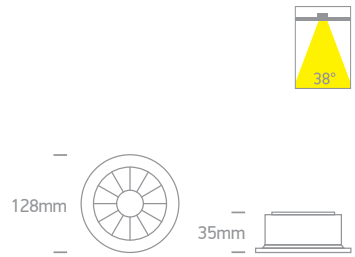

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10106X/W/W	White	Warm white	3000K	6W	480lm	38°	230V		75mm	60mm	40	Complete with 150mA driver
10106X/B/W	Black	Warm white	3000K	6W	480lm	38°	230V		75mm	60mm	40	Complete with 150mA driver
10112X/W/W	White	Warm white	3000K	12W	960lm	38°	230V		100mm	50mm	40	Complete with 300mA driver
10112X/B/W	Black	Warm white	3000K	12W	960lm	38°	230V		100mm	50mm	40	Complete with 300mA driver
10120X/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		116mm	50mm	30	Complete with 450mA driver
10120X/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		116mm	50mm	30	Complete with 450mA driver



10107K | 6,5W | COB LED | Aluminium

Ring must be ordered separately.



10107K/W/W + 050104/B

LED BUILT IN

80 CRI

DIMMABLE

QUICK FIX

5 YEAR

DARK LIGHT

IP20



10107K/B/W + 050104/BS







050104/W White



050104/B Black



050104/C Chrome



050104/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
10107K/W/W	White	Warm white	3000K	6,5W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
10107K/B/W	Black	Warm white	3000K	6,5W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver



10112K/W/W + 050280/B

10112K/B/W + 050280/W

10107K/W/W + 050104/B

10107K/B/W + 050104/BS

The COB Dark Light Range
Interchangeable Reflector




10112K/B/W + 050280/BS

10112K | 12W | COB LED | Die cast

Reflector must be ordered separately.



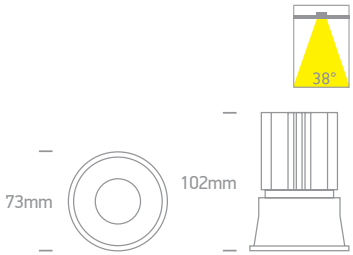




10112K/W/W + 050280/B

10112K | 12W | COB LED | Die cast

Reflector must be ordered separately.



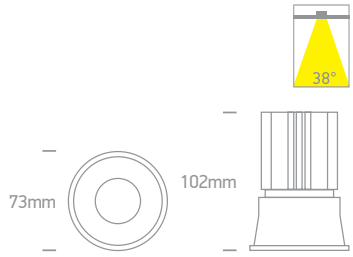



050280/W White



050280/B Black



050280/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112K/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/C	Black	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver



50106B/B/W



50306B/W/W

Mirror Square Boxes
Die cast

50106B | 6W | COB LED | Die cast




50106B/W/W

LED BUILT IN
90 CRI
CE
3 YEAR
IP20



50106B/B/W

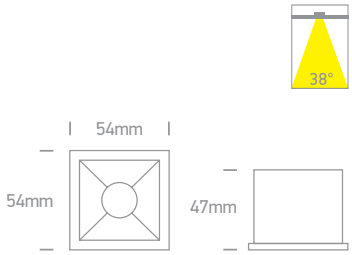

50306B | 12W | COB LED | Die cast




50306B/W/W

LED BUILT IN
90 CRI
CE
3 YEAR
IP20



50306B/B/W

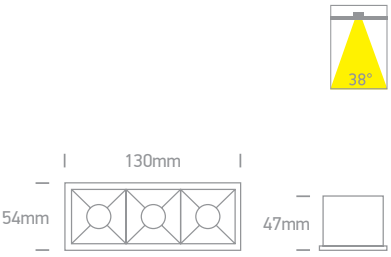

50406B | 16W | COB LED | Die cast

Adjustable version page 145.




50406B/W/W

LED BUILT IN
90 CRI
CE
3 YEAR
IP20



50406B/B/W

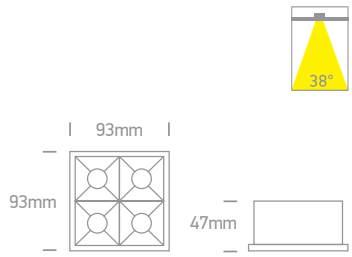

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50106B/W/W	White	Warm white	3000K	6W	480lm	38°	230V	☐	50x45mm	70mm	50	Complete with 135mA driver
50106B/B/W	Black	Warm white	3000K	6W	480lm	38°	230V	☐	50x45mm	70mm	50	Complete with 135mA driver
50306B/W/W	White	Warm white	3000K	12W	960lm	38°	230V	☐	124x45mm	70mm	48	Complete with 300mA driver
50306B/B/W	Black	Warm white	3000K	12W	960lm	38°	230V	☐	124x45mm	70mm	48	Complete with 300mA driver
50406B/W/W	White	Warm white	3000K	16W	1280lm	38°	230V	☐	85x85mm	70mm	36	Complete with 400mA driver
50406B/B/W	Black	Warm white	3000K	16W	1280lm	38°	230V	☐	85x85mm	70mm	36	Complete with 400mA driver



Mirror Square Boxes
Die cast


50506B/W/W

50506B | 20W | COB LED | Die cast

Adjustable version page 145.


LED BUILT IN

90 CRI CE 3 YEAR

IP20


50506B/B/W







50006B/W/W

50006B | 40W | COB LED | Die cast


LED BUILT IN

90 CRI CE 3 YEAR

IP20


50006B/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50506B/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		200x45mm	70mm	20	Complete with 500mA driver
50506B/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		200x45mm	70mm	20	Complete with 500mA driver
50006B/W/W	White	Warm white	3000K	40W	3200lm	38°	230V		386x45mm	70mm	15	Complete with 1000mA driver
50006B/B/W	Black	Warm white	3000K	40W	3200lm	38°	230V		386x45mm	70mm	15	Complete with 1000mA driver



Mini Shop Square Boxes
Die cast




50102B/W/W

50102B | 2W | LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20



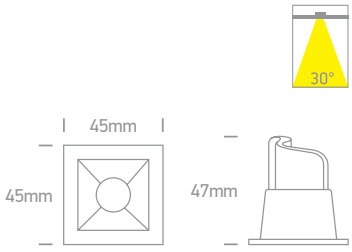




50102B/B/W

50102B | 2W | LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20



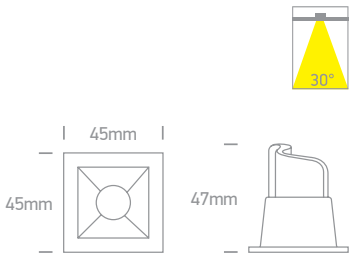




50202B/W/W

50202B | 2x2W | LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20



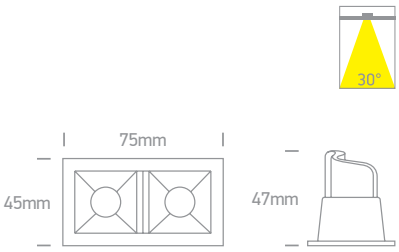




50202B/B/W

50202B | 2x2W | LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20



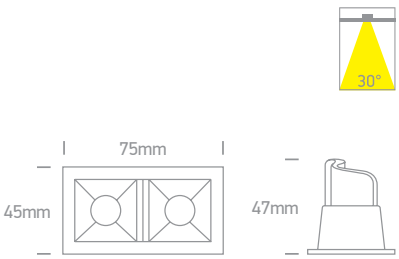

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50102B/W/W	White	Warm white	3000K	2W	160lm	30°	700mA	III	30cm	36x36mm	60mm	100	Use 89004A driver
50102B/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA	III	30cm	36x36mm	60mm	100	Use 89004A driver
50202B/W/W	White	Warm white	3000K	2x2W	2x160lm	30°	700mA	III	30cm	66x36mm	60mm	60	Use 89006PA driver
50202B/B/W	Black	Warm white	3000K	2x2W	2x160lm	30°	700mA	III	30cm	66x36mm	60mm	60	Use 89006PA driver

Mini Shop Square Boxes
Die cast




50302B | 3x2W | LED | Die cast


50302B/W/W

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20


50302B/B/W

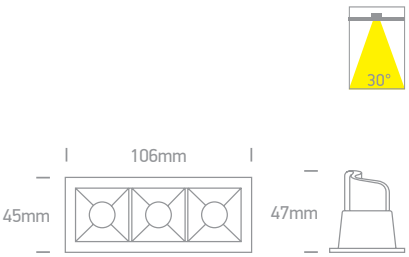


50502B | 5x2W | LED | Die cast


50502B/W/W

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20


50502B/B/W

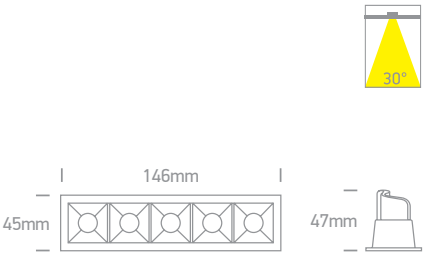


50902B | 10x2W | LED | Die cast


50902B/W/W

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20


50902B/B/W

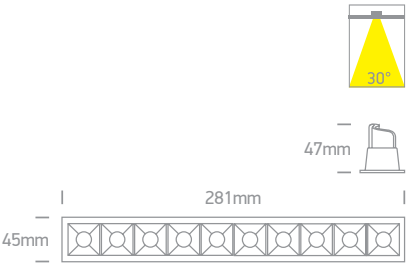

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50302B/W/W	White	Warm white	3000K	3x2W	3x160lm	30°	700mA	III	30cm	97x36mm	60mm	50	Use 89008A driver
50302B/B/W	Black	Warm white	3000K	3x2W	3x160lm	30°	700mA	III	30cm	97x36mm	60mm	50	Use 89008A driver
50502B/W/W	White	Warm white	3000K	5x2W	5x160lm	30°	700mA	III	30cm	137x36mm	60mm	30	Use 89015A driver
50502B/B/W	Black	Warm white	3000K	5x2W	5x160lm	30°	700mA	III	30cm	137x36mm	60mm	30	Use 89015A driver
50902B/W/W	White	Warm white	3000K	10x2W	10x160lm	30°	700mA	III	30cm	272x36mm	60mm	20	Use 89030A driver
50902B/B/W	Black	Warm white	3000K	10x2W	10x160lm	30°	700mA	III	30cm	272x36mm	60mm	20	Use 89030A driver




Medium Shop Square Boxes

50107B | 6,5W | COB LED | Aluminium + steel



LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20






50207B | 2x6,5W | COB LED | Aluminium + steel



LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20



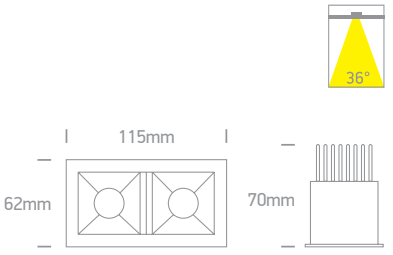


50307B | 3x6,5W | COB LED | Aluminium + steel



LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20



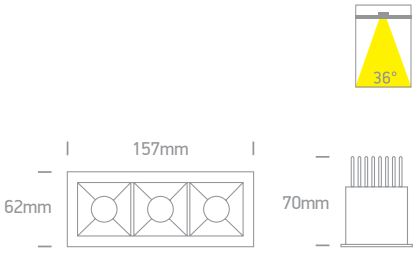


50507B | 5x6,5W | COB LED | Aluminium + steel



LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20



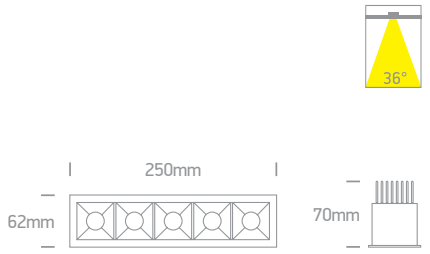

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50107B/W/W	White	Warm white	3000K	6,5W	550lm	36°	350mA	III	40cm	57x57mm	90mm	60	Use 89008 driver
50207B/W/W	White	Warm white	3000K	2x6,5W	2x550lm	36°	350mA	III	40cm	108x57mm	90mm	36	Use 89015 driver
50307B/W/W	White	Warm white	3000K	3x6,5W	3x550lm	36°	350mA	III	40cm	150x57mm	90mm	24	Use 89020 driver
50507B/W/W	White	Warm white	3000K	5x6,5W	5x550lm	36°	350mA	III	40cm	240x57mm	90mm	16	Use 1x89015 & 1x89020 drivers



50406C | 10W | SMD 3535 | Die cast



50406C/W/W

LED BUILT IN

85 CRI

3 YEAR


DARK LIGHT

IP20



50406C/B/W





50906C | 22W | SMD 3535 | Die cast



50906C/W/W

LED BUILT IN


85 CRI

3 YEAR

DARK LIGHT

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50406C/W/W	White	Warm white	3000K	10W	800lm	25°	230V		68x68mm	70mm	30	Complete with 700mA driver
50406C/B/W	Black	Warm white	3000K	10W	800lm	25°	230V		68x68mm	70mm	30	Complete with 700mA driver
50906C/W/W	White	Warm white	3000K	22W	1760lm	25°	230V		96x96mm	70mm	18	Complete with 700mA driver






10107WD | 6,5W | COB LED | Die cast

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
5 YEAR
DARK LIGHT
IP54









10107M | 7W | COB LED | Die cast

LED BUILT IN
90 CRI
3 YEAR
DARK LIGHT
IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107WD/W/C	White	Cool white	4000K	6,5W	600lm	36°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10107WD/W/W	White	Warm white	3000K	6,5W	600lm	36°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10107M/W/W	White	Warm white	3000K	7W	490lm	40°	230V		-	68mm	80mm	50	Complete with 300mA driver

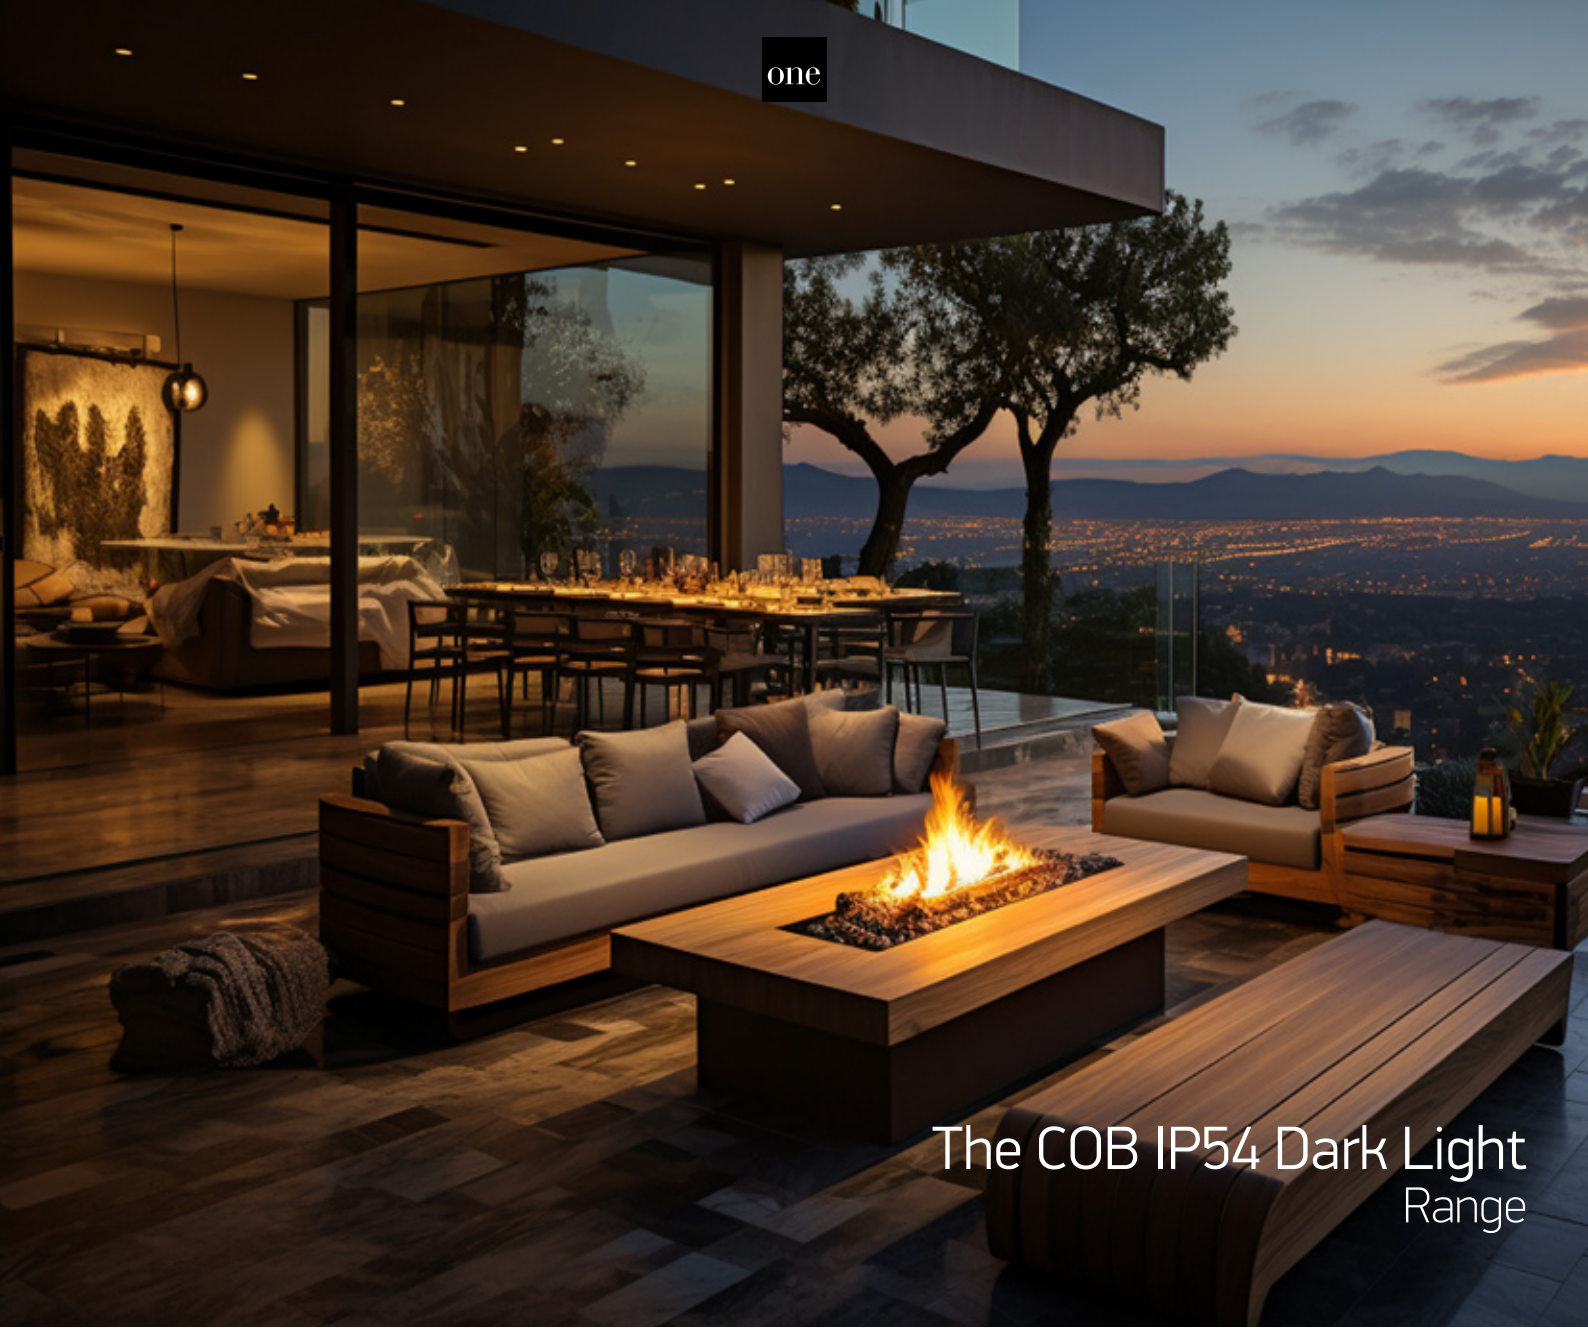

The COB IP54 Dark Light Range



10108H/W/W

10108H | 8W | COB LED | Die cast

LED BUILT IN

90 CRI


CE

5 YEAR

DARK LIGHT

IP54







10108H/B/W

10108H | 8W | COB LED | Die cast

LED BUILT IN

90 CRI


CE

5 YEAR

DARK LIGHT

IP54






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10108H/W/W	White	Warm white	3000K	8W	625lm	36°	230V	☐	-	75mm	70mm	50	Complete with 200mA driver
10108H/B/W	Black	Warm white	3000K	8W	625lm	36°	230V	☐	-	75mm	70mm	50	Complete with 200mA driver



The IP65 Mini Range

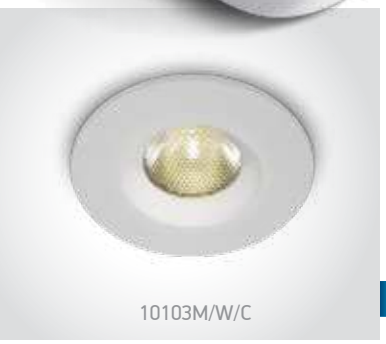

10103M/W/C

10103M | 3W | SMD 3535 | Aluminium


LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · IP65



10103M/W/W



Suitable for 89004A driver.





10103M/B/W


10103M | 3W | SMD 3535 | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · IP65





Suitable for 89004A driver.





10103M/AL/W


10103M | 3W | SMD 3535 | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · IP65





Suitable for 89004A driver.





10103P | 1W/3W | COB LED | Aluminium


1W@350mA / 3W@700mA

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP65





Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103M/W/C	White	Cool white	4000K	3W	270lm	30°	700mA		60cm	38mm	55mm	50	Requires 700mA driver
10103M/W/W	White	Warm white	3000K	3W	270lm	30°	700mA		60cm	38mm	55mm	50	Requires 700mA driver
10103M/B/W	Black	Warm white	3000K	3W	270lm	30°	700mA		60cm	38mm	55mm	50	Requires 700mA driver
10103M/AL/W	Aluminium	Warm white	3000K	3W	270lm	30°	700mA		60cm	38mm	55mm	50	Requires 700mA driver
10103P/AL/D	Aluminium	Daylight	6000K	1W/3W	210lm@3W	30°	350mA/700mA		60cm	37mm	60mm	100	Requires 350mA/700mA driver



The IP65 Project Range
Aluminium




10102H/W/W

10102H | 2W | LED | Aluminium


Driver can not pass through the cut-out hole.








10102H/B/W

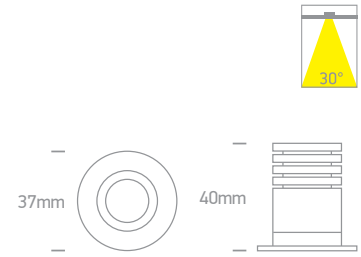




10107DL | 6,5W | COB LED | Aluminium







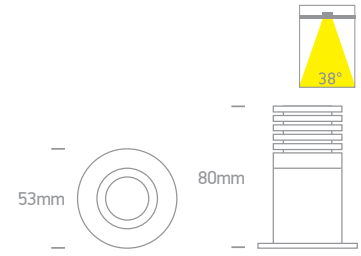




10107H/W/W


10107H | 6,5W | COB LED | Aluminium







10107H/W/C

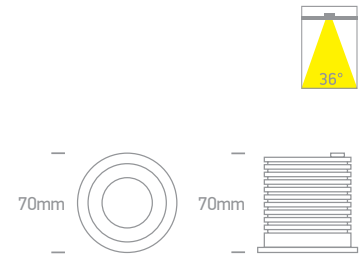

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10102H/W/C	White	Cool white	4000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/W/W	White	Warm white	3000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10107DL/W/W	White	Warm white	3000K	6,5W	550lm	38°	700mA	III	40cm	42mm	90mm	50	Requires 700mA driver
10107H/W/C	White	Cool white	4000K	6,5W	600lm	36°	700mA	III	40cm	60mm	90mm	50	Requires 700mA driver
10107H/W/W	White	Warm white	3000K	6,5W	600lm	36°	700mA	III	40cm	60mm	90mm	50	Requires 700mA driver




10107DB/W/W

10107DB | 6,5W | COB LED | Aluminium


LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP65
5 YEAR

new


10107DB/B/W









10107WP/W/W

10107WP | 6,5W | COB LED | Die cast

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP65
5 YEAR


10107WP/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107DB/W/W	White	Warm white	3000K	6,5W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver
10107DB/B/W	Black	Warm white	3000K	6,5W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver
10107WP/W/W	White	Warm white	3000K	6,5W	550lm	38°	700mA	III	40cm	56mm	90mm	50	Requires 700mA driver
10107WP/B/W	Black	Warm white	3000K	6,5W	550lm	38°	700mA	III	40cm	56mm	90mm	50	Requires 700mA driver



The 12W COB IP65 & IP64 Range




10112P/W/W

10112P | 12W | COB LED | Die cast

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP65
5 YEAR



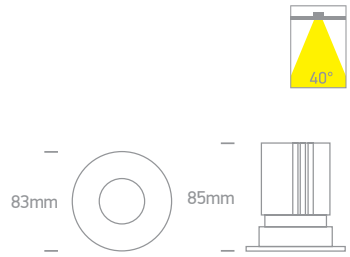




10112P/B/W

10112P | 12W | COB LED | Die cast

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP65
5 YEAR



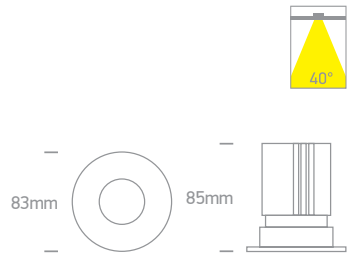




10112P/AL/W

10112P | 12W | COB LED | Natural aluminium

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP64
3 YEAR



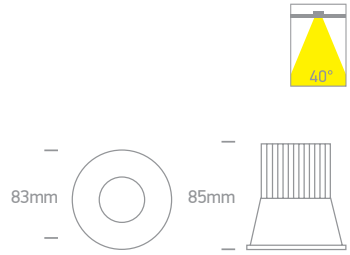

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112P/W/C	White	Cool white	4000K	12W	1100lm	40°	700mA		40cm	68mm	105mm	50	Requires 700mA driver
10112P/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA		40cm	68mm	105mm	50	Requires 700mA driver
10112P/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA		40cm	68mm	105mm	50	Requires 700mA driver
10112P/AL/W	Aluminium	Warm white	3000K	12W	1100lm	40°	700mA		40cm	68mm	105mm	50	Requires 700mA driver



The 12W COB IP65

10112C | 12W | COB LED | Die cast



10112C/W/W


LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR

new



10112C/B/W






10112TP | 12W | COB LED | Die cast



10112TP/W/W

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR






10112TP | 12W | COB LED | Die cast



10112TP/B/W

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR






10110P | 12W | COB LED | Die cast



LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112C/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA		40cm	75mm	120mm	50	Requires 700mA driver
10112C/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA		40cm	75mm	120mm	50	Requires 700mA driver
10112TP/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/EW	White	Extra warm white	2700K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10112TP/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10110P/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	48	Requires 700mA driver
10110P/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	48	Requires 700mA driver



Floating Ring Range




10112R | 12W | COB LED | Aluminium





10112R/W/W + 050162/B






10112R | 12W | COB LED | Aluminium





10112R/B/W + 050162/W





050162/W White



050162/B Black

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S			With ring		Notes
10112R/W/W	White	Warm white	3000K	12W	1100lm	50°	700mA	III	40cm	68mm	110mm	80mm	50	Requires 700mA driver
10112R/B/W	Black	Warm white	3000K	12W	1100lm	50°	700mA	III	40cm	68mm	110mm	80mm	50	Requires 700mA driver



The IP65 Range



10106V/W/W


10106V | 6W | COB LED | Die cast + glass

LED BUILT IN
80 CRI
IK08
CE
3 YEAR
IP65



10106V/B/W








10103NP/AL/W/35

10103NP | 3x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
CE
2 YEAR
IP65
offer



Suitable for 89004 driver.






10106P/W/C

10106P | 6W | SMD 2835 | Dimmable | Plastic

LED BUILT IN
80 CRI
TRIAC
DIMMABLE
CE
2 YEAR
IP65








10106P/W/W

10106P | 6W | SMD 2835 | Dimmable | Plastic

LED BUILT IN
80 CRI
TRIAC
DIMMABLE
CE
2 YEAR
IP65






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106V/W/W	White	Warm white	3000K	6W	460lm	25°	100-240V		-	94mm	100mm	12	Complete with 500mA driver
10106V/B/W	Black	Warm white	3000K	6W	460lm	25°	100-240V		-	94mm	100mm	12	Complete with 500mA driver
10103NP/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA		200cm	70mm	70mm	50	Requires 350mA driver
10106P/W/C	White	Cool white	4000K	6W	570lm	100°	230V		-	67mm	70mm	48	Complete with dimmable driver
10106P/W/W	White	Warm white	3000K	6W	570lm	100°	230V		-	67mm	70mm	48	Complete with dimmable driver

The IP65 CCT V



10107PV | 7W | SMD 2835 | Dimmable | Plastic





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107PV/W/V	White	CCT V	2700K-3000K-4000K	7W	600lm	38°	230V		30cm	72mm	40mm	48	AC LED



The Fire Rated IP65 Range



10106PF | 6W | COB LED | Fire Rated | Die cast

Ring must be ordered separately.

LED BUILT IN

80 CRI

DIMMABLE

QUICK FIX

FIRE RATED

CE

3 YEAR

IP65



Dimensions are complete with the ring.







050042/W White



050042/B Black



050042/C Chrome

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106PF/W	Warm white	3000K	6W	500lm	40°	350mA	III	40cm	68mm	90mm	20	Requires 350mA driver

The Fire Rated IP65 Range



10107DF/W + 050178/B

10106PF/W + 050042/C



10107DF | 7W | SMD LED | Fire Rated | Metal + plastic


Complete with white ring.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · FIRE RATED · IP65 · CE · 3 YEAR





Optional rings.
Order code
050178/B Black
050178/C Chrome





10107DFV | 7W | SMD LED | Fire Rated | Metal + plastic


Complete with white ring.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CCT V · FIRE RATED · IP65 · CE · 3 YEAR





Optional rings.
Order code
050178/B Black
050178/C Chrome



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107DF/W	White	Warm white	3000K	7W	500lm	60°	230V		65mm	80mm	36	Complete with dimmable driver
10107DFV/W/V	White	CCT V	2700K-3000K-4000K	7W	510lm	60°	230V		65mm	80mm	36	Complete with dimmable driver



10101C/C/D



50101/AL/D

LED Spots




10101C | 1W | LED | Cabinet light | Steel

LED BUILT IN

CE 2 YEAR

IP20 offer



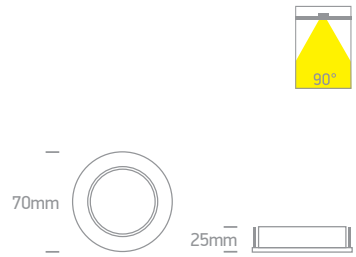



50101/AL/D


50101 | 9x0,2W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

IP20 offer



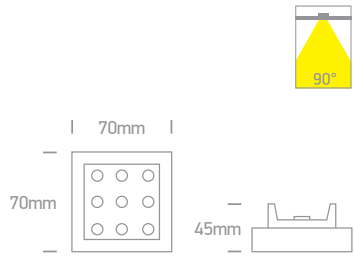



50101/AL/BL


50101 | 9x0,2W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

IP20 offer



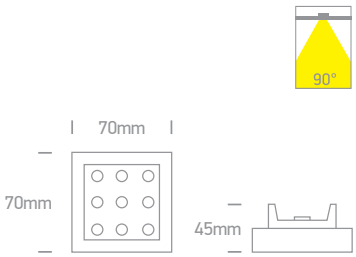

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10101C/C/D	Chrome	Daylight	6000K	1W	50lm	90°	12V AC		30cm	50mm	25mm	100	Requires 12V AC transformer
50101/AL/D	Aluminium	Daylight	6000K	9x0,2W	60lm	90°	230V		-	60mm	40mm	50	Complete with driver
50101/AL/BL	Aluminium	Blue	-	9x0,2W	-	90°	230V		-	60mm	40mm	50	Complete with driver

LED Spots



10106G | 6W | LED | Acrylic

IP20

offer

LED BUILT IN

DIMMABLE


QUICK FIX


CE

3 YEAR







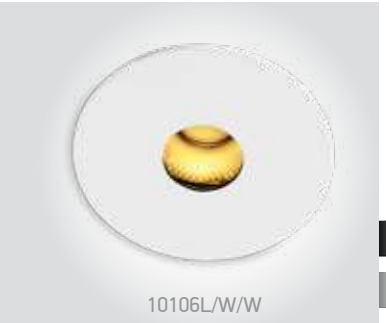

10106L/W/W

10106L | 6W | LED | Aluminium

Use driver 89006P.

LED BUILT IN

90 CRI

DIMMABLE


QUICK FIX

DARK LIGHT


IP20

CE


5 YEAR



10106L/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106G/D	Clear	Daylight	6000K	6W	295lm	-	350mA		40cm	100mm	60mm	32	Requires 350mA driver
10106L/W/W	White	Warm white	3000K	6W	360lm	40°	350mA		40cm	33mm	80mm	50	Requires 350mA driver
10106L/B/W	Black	Warm white	3000K	6W	360lm	40°	350mA		40cm	33mm	80mm	50	Requires 350mA driver

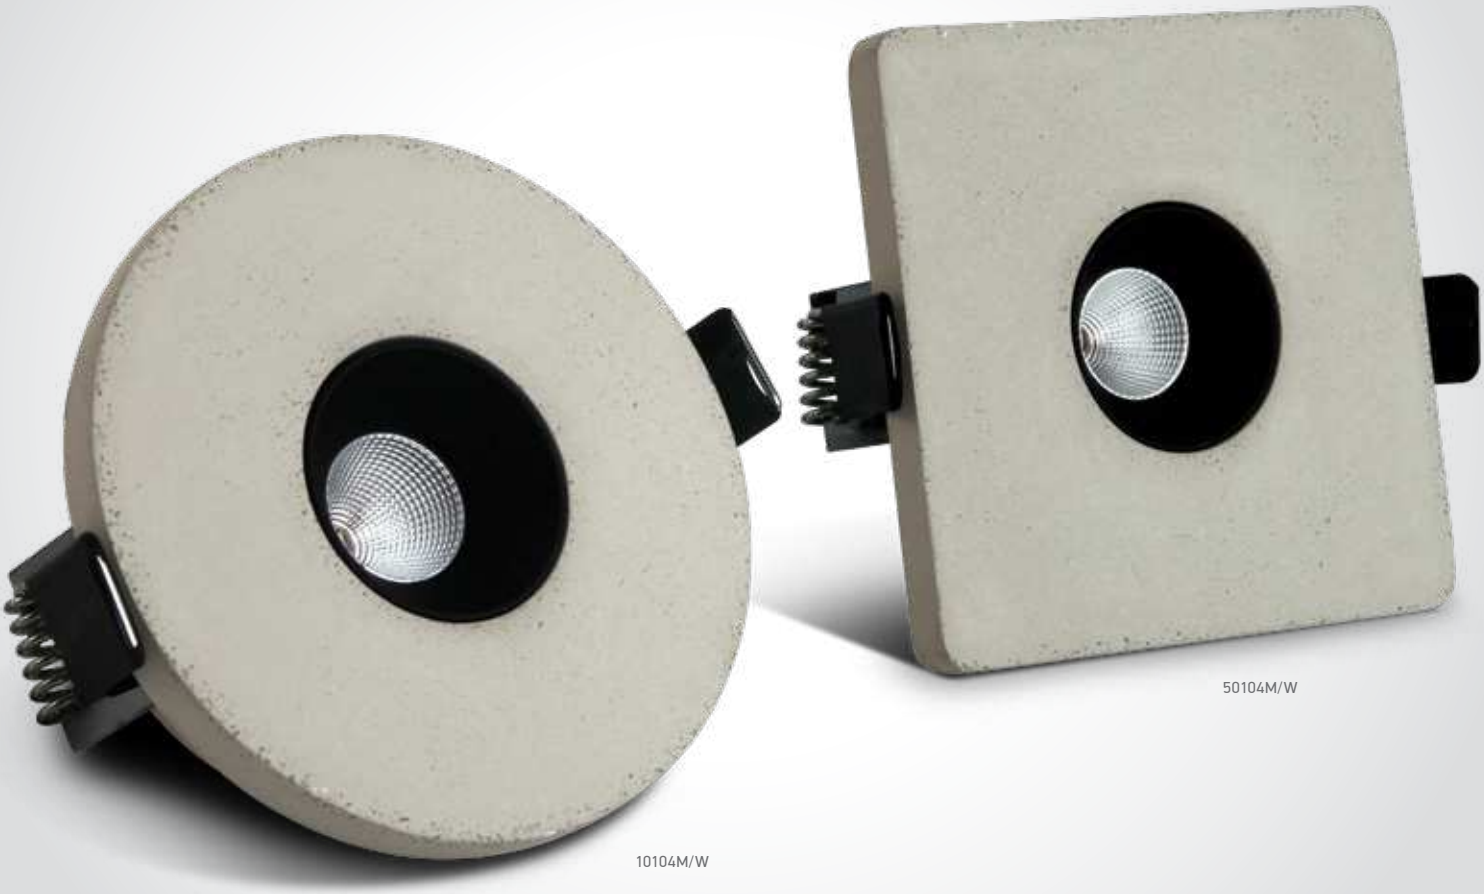


The Cement Look Recessed
Black Reflector



10104M | 4,5W | COB LED | Cement + black reflector




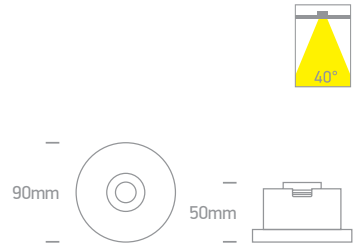



50104M | 4,5W | COB LED | Cement + black reflector



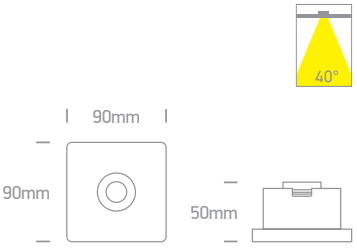

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10104M/W	Cement	Warm white	3000K	4,5W	350lm	40°	100-240V		72mm	70mm	18	Complete with 350mA driver
50104M/W	Cement	Warm white	3000K	4,5W	350lm	40°	100-240V		72mm	70mm	18	Complete with 350mA driver



The LED Decorative Range



Warm white + Daylight

10103A | 3x1W + 18 SMD LED Ring | LED | Natural aluminium + PC

Colours can be switched separately.


LED BUILT IN

DIMMABLE QUICK FIX CE

IP42 offer

2 YEAR







10108J | 8W | COB + SMD 4014 | Die cast


LED BUILT IN

80 CRI CE 3 YEAR

DARK LIGHT IP40







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103A/W/D	Aluminium	Warm white+Daylight	3000K+6000K	3/1,8W	-	-	350mA	III	40cm	77mm	50mm	100	Requires 2x350mA drivers
10108J/W/W	White	Warm white	3000K	8W	560lm	24°	230V		-	70mm	100mm	30	Complete with 200mA driver



The Trimless 3W Range
Aluminium



10103BTR/W/W

10103BTR | 3W | COB LED | Trimless | Aluminium


LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 5 YEAR



2-Step reflector.



Suitable for 89004 driver.





10103BTR/B/W

10103BTR | 3W | COB LED | Trimless | Aluminium


LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 5 YEAR



2-Step reflector.



Suitable for 89004 driver.





10103BTR/BS/W

10103BTR | 3W | COB LED | Trimless | Aluminium


LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 5 YEAR



2-Step reflector.



Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103BTR/W/W	White	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/B/W	Black	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/BS/W	Brass	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver



10107BT/W/W

10107BT/B/W

The Trimless 7W Range




10107BT/W/W

10107BT | 6,5W | COB LED | Trimless | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP54



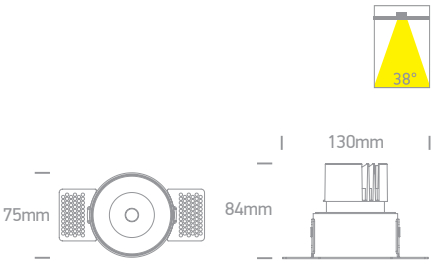




10107BT/B/W


10107BT | 6,5W | COB LED | Trimless | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP54



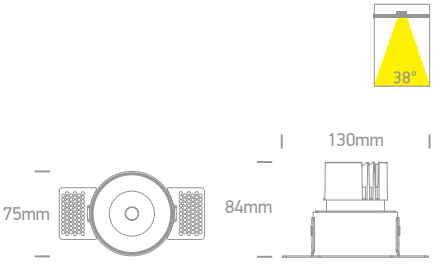

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107BT/W/W	White	Warm white	3000K	6,5W	500lm	38°	700mA	III	40cm	83mm	100mm	30	Requires 700mA driver
10107BT/B/W	Black	Warm white	3000K	6,5W	500lm	38°	700mA	III	40cm	83mm	100mm	30	Requires 700mA driver

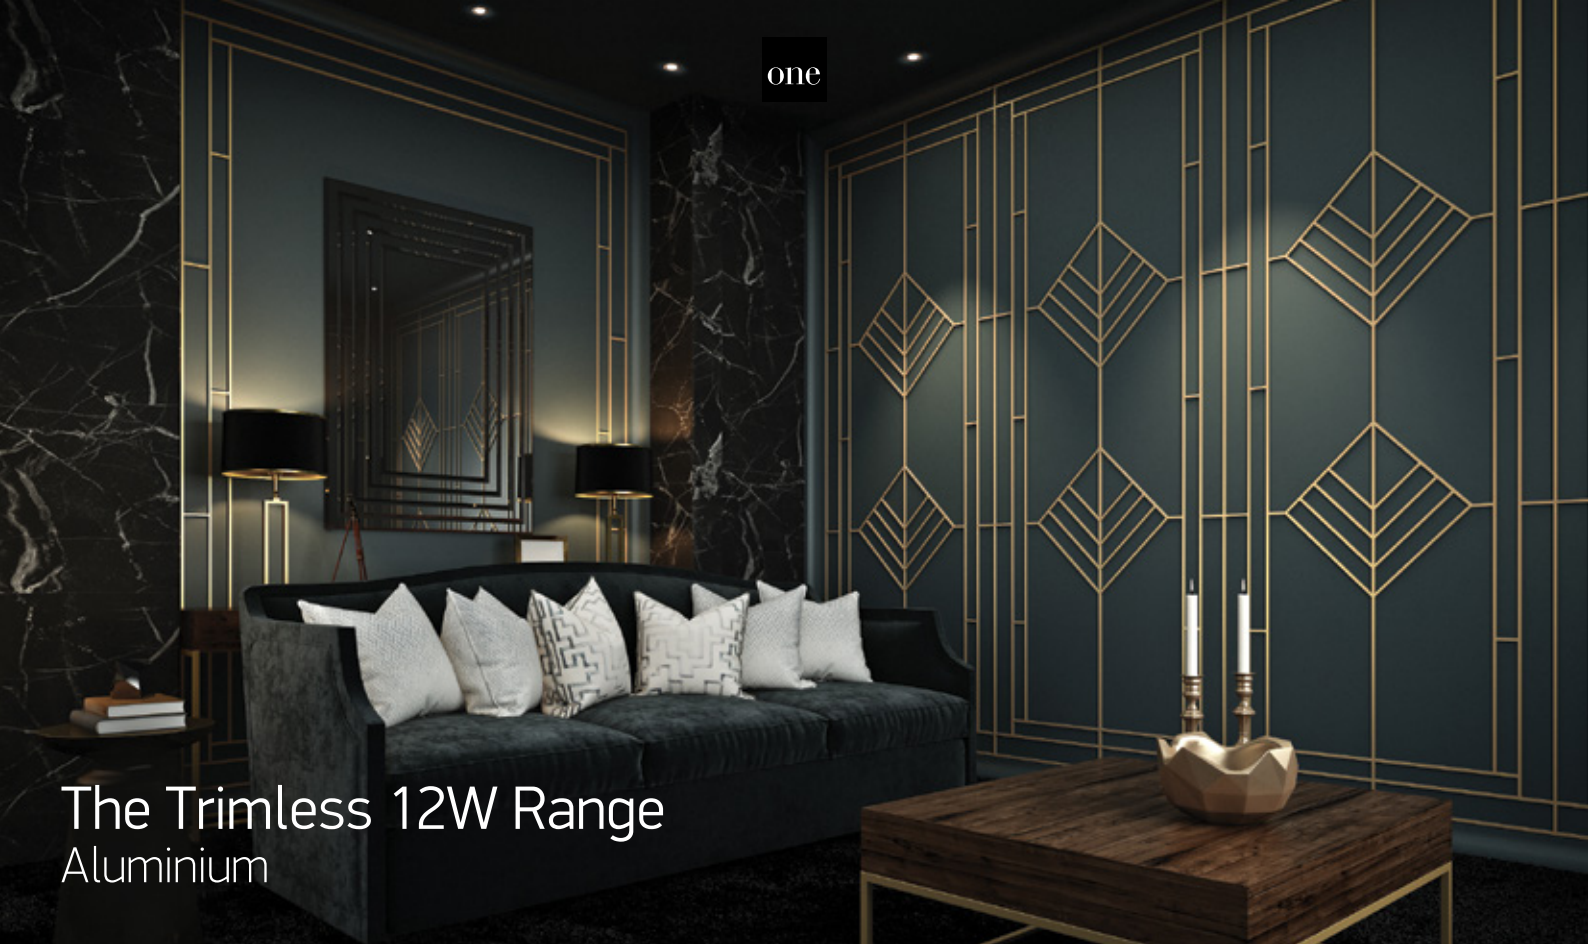

The Trimless 12W Range
Aluminium




10112BTR/W/W

10112BTR | 12W | COB LED | Trimless | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20



2-Step reflector.






10112BTR/B/W

10112BTR | 12W | COB LED | Trimless | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20



2-Step reflector.






10112BTR/BS/W

10112BTR | 12W | COB LED | Trimless | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20



2-Step reflector.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112BTR/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	110mm	48	Requires 700mA driver
10112BTR/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	110mm	48	Requires 700mA driver
10112BTR/BS/W	Brass	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	110mm	48	Requires 700mA driver





Trimless Dark Light Tubes



50103ATR | 3W | SMD 3535 | Trimless | Die cast

LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP20




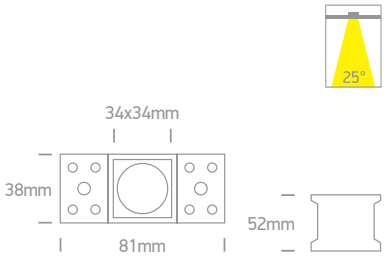




50203ATR | 6W | SMD 3535 | Trimless | Die cast

LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP20




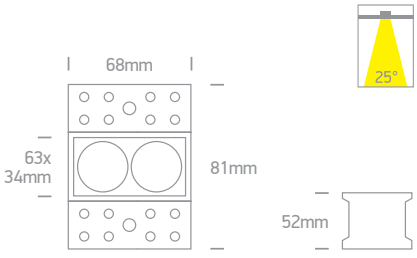





50403ATR | 10W | SMD 3535 | Trimless | Die cast

LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP20



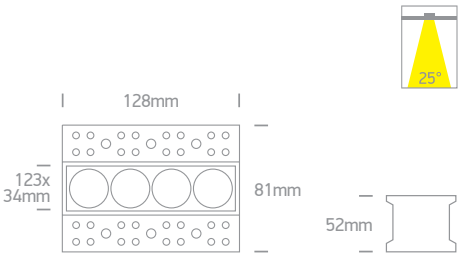

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50103ATR/B/W	Black	Warm white	3000K	3W	200lm	25°	230V	⧈	50x38mm	70mm	50	Complete with 700mA driver
50203ATR/B/W	Black	Warm white	3000K	6W	480lm	25°	230V	⧈	68x50mm	70mm	50	Complete with 700mA driver
50403ATR/B/W	Black	Warm white	3000K	10W	800lm	25°	230V	⧈	128x50mm	70mm	20	Complete with 700mA driver

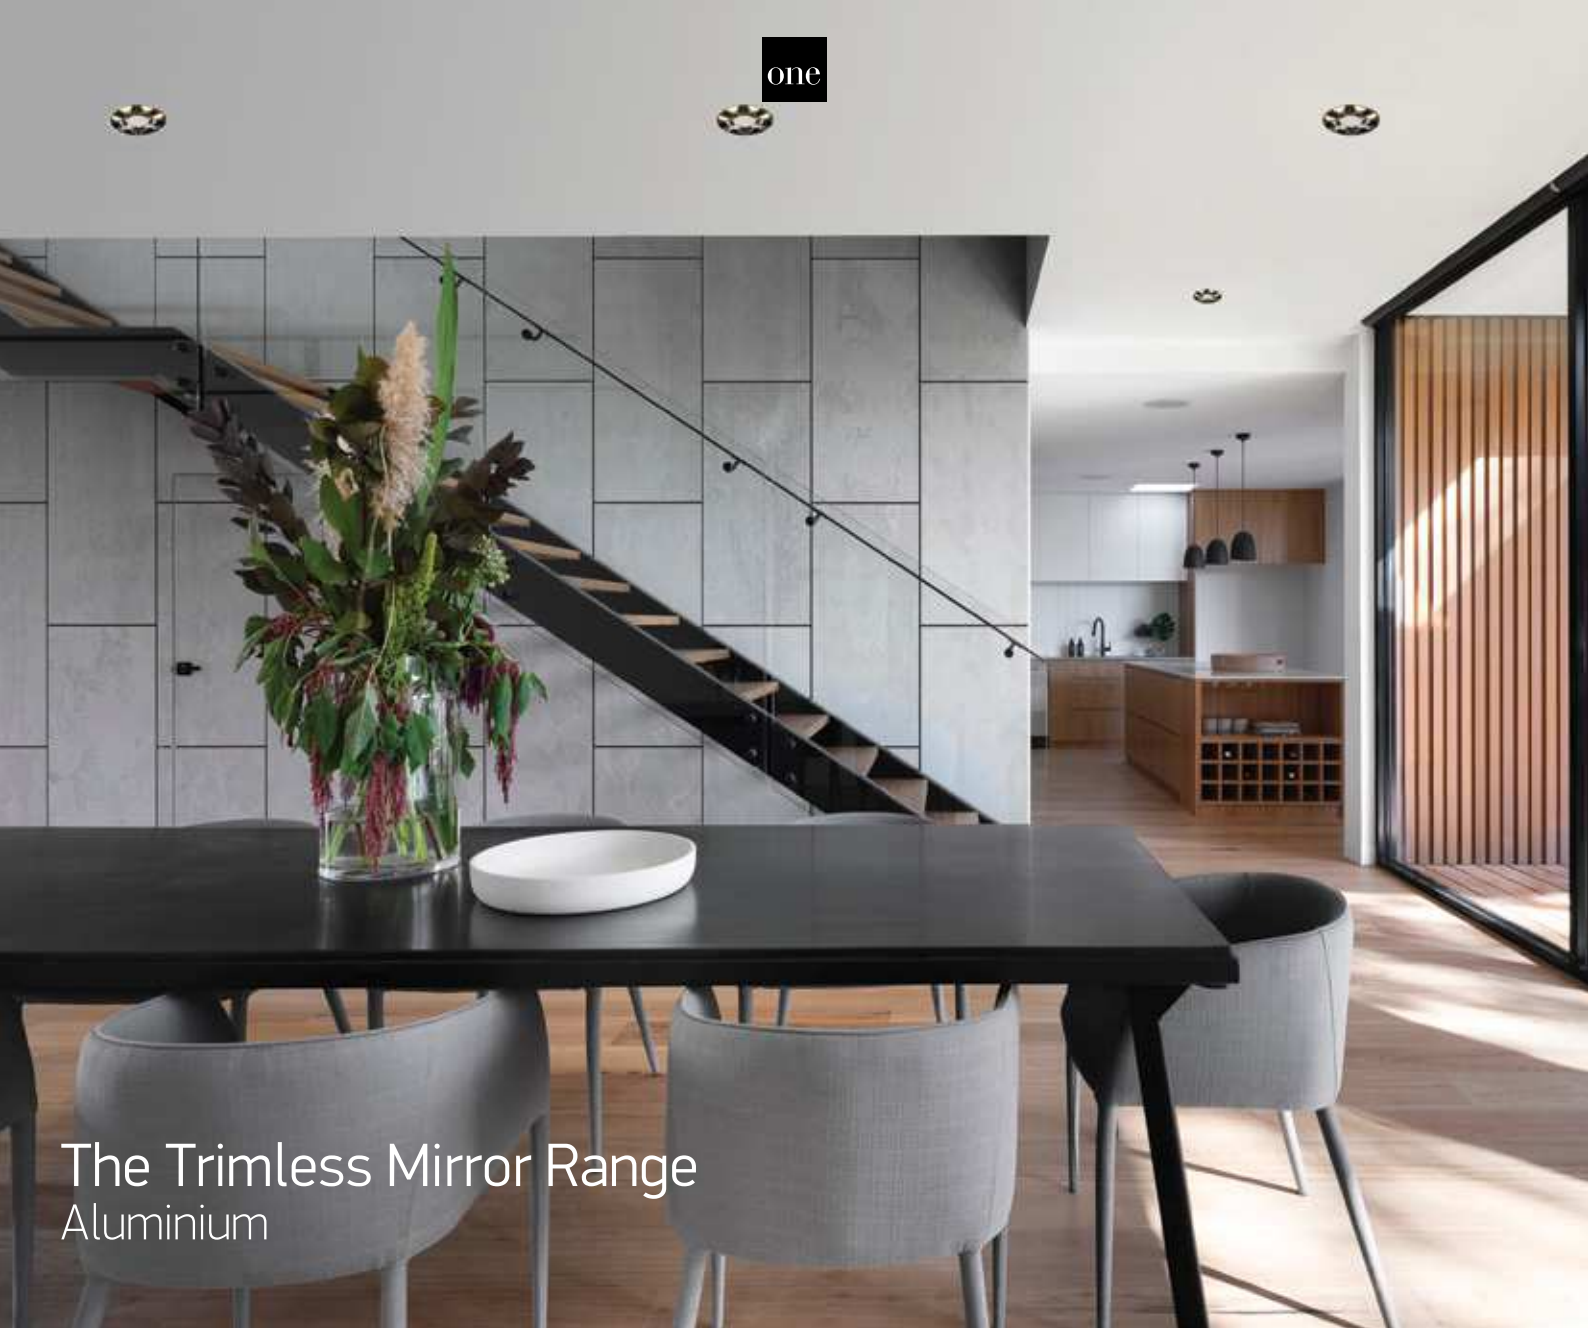


The Trimless Mirror Range
Aluminium



10106XTR | 6W | SMD 3030 | Trimless | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20



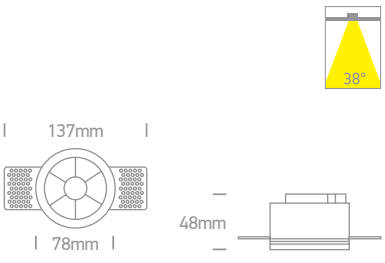




10112XTR | 12W | SMD 3030 | Trimless | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20



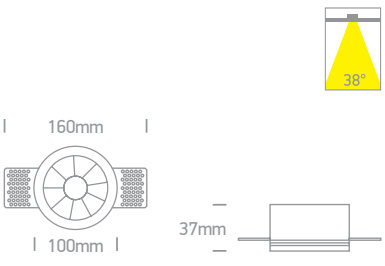

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10106XTR/W/W	White	Warm white	3000K	6W	480lm	38°	230V	⏚	78mm	70mm	40	Complete with 150mA driver
10112XTR/W/W	White	Warm white	3000K	12W	960lm	38°	230V	⏚	100mm	60mm	40	Complete with 300mA driver




The Trimless Mirror Range
Aluminium



10110HTR | 10W | SMD 3535 | Trimless | Aluminium

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20



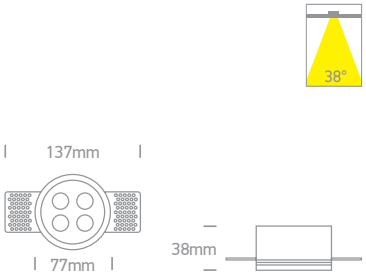




50110HTR | 10W | SMD 3535 | Trimless | Aluminium

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20



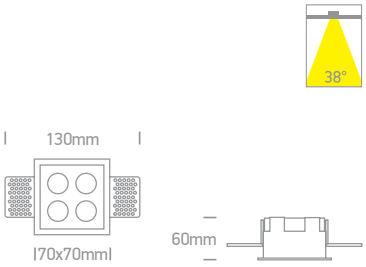




50012HTR | 12W | SMD 3535 | Trimless | Aluminium

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20








50024HTR | 24W | SMD 3535 | Trimless | Aluminium

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110HTR/W/W	White	Warm white	3000K	10W	700lm	38°	230V	☐	78mm	80mm	40	Complete with 700mA driver
50110HTR/W/W	White	Warm white	3000K	10W	700lm	38°	230V	☐	72x72mm	100mm	40	Complete with 700mA driver
50012HTR/W/W	White	Warm white	3000K	12W	840lm	38°	230V	☐	145x41mm	100mm	40	Complete with 700mA driver
50024HTR/W/W	White	Warm white	3000K	24W	1700lm	38°	230V	☐	278x41mm	100mm	20	Complete with 700mA driver






Recessed Spots Adjustable

Pages 93 - 114

03

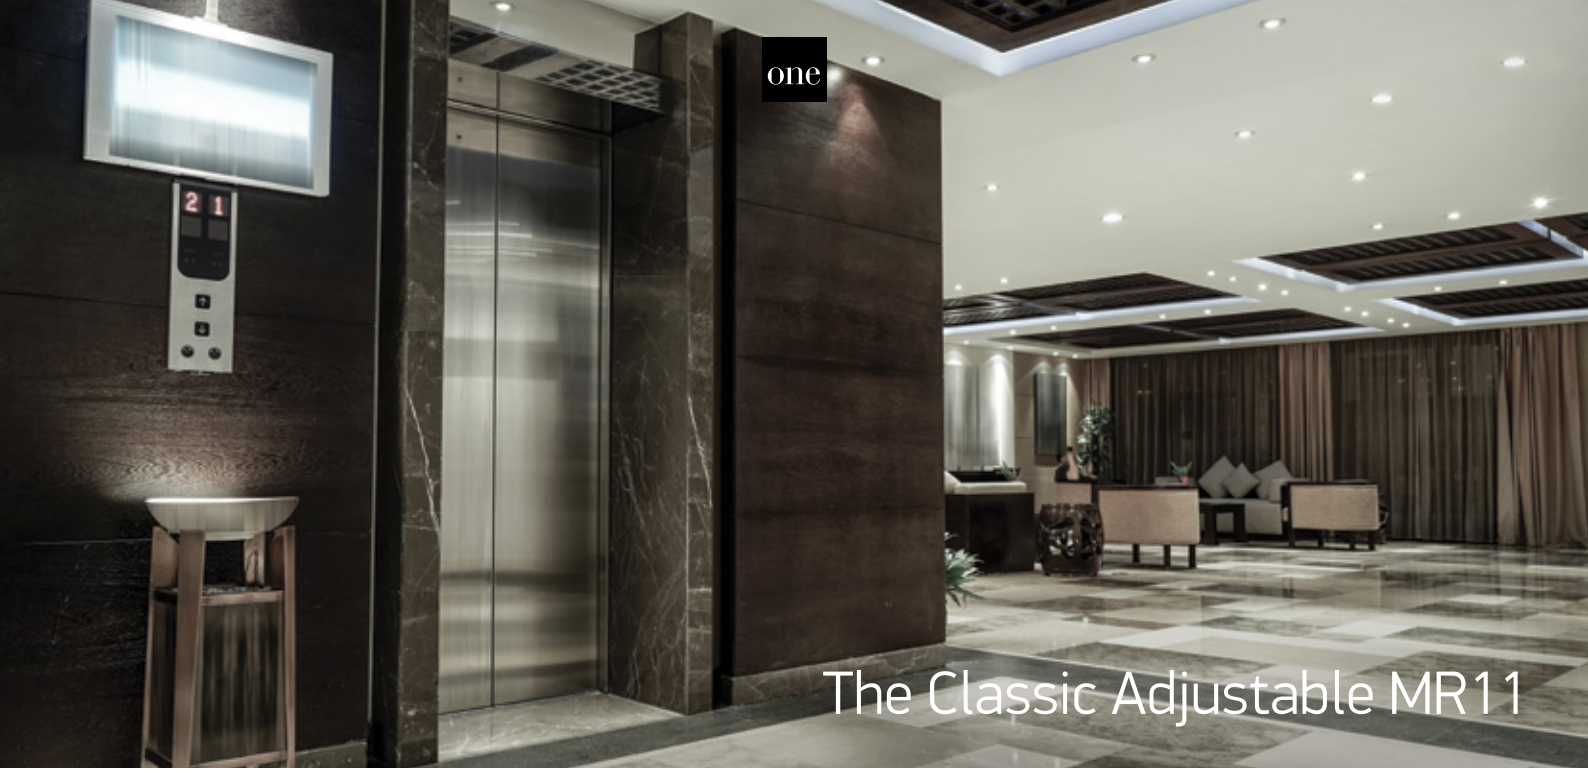



11103A | 35W | MR11 | GU4 | Die cast

ADJUSTABLE


5 YEAR

IP20

offer



Suitable for MR11 LED lamp.

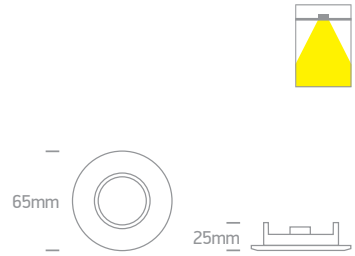



11103C | 35W | MR11 | GU4 | Die cast

ADJUSTABLE


5 YEAR

IP20

offer



Suitable for MR11 LED lamp.

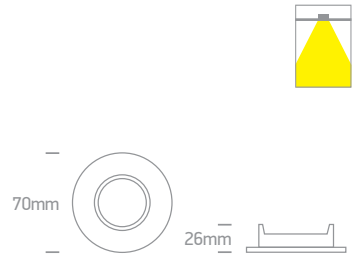

Order Code	Colour	Watts	Input	Class					Notes
11103A/MC	Brushed chrome	35W	12V	III	40cm	57mm	35mm	100	-
11103C/C	Chrome	35W	12V	III	40cm	63mm	40mm	100	-

The Classic Adjustable MR16



11105 | 50W | MR16 | GU5,3 | Die cast


ADJUSTABLE

5 YEAR

IP20

offer



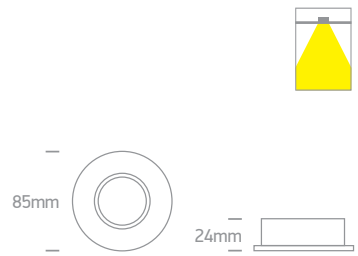

Order Code	Colour	Watts	Input	Class					Notes
11105/C	Chrome	50W	12V	III	40cm	75mm	55mm	100	-





11105GU/W

11105GU | 10W | MR16 | GU10 | Die cast


ADJUSTABLE

5 YEAR

IP20



Complete with 0950G.





11105GU/B



offer

11105GU/C



11105GU/MC

Order Code	Colour	Watts	Input	Class					Notes
11105GU/W	White	10W	100-240V		15cm	75mm	95mm	100	-
11105GU/B	Black	10W	100-240V		15cm	75mm	95mm	100	-
11105GU/C	Chrome	10W	100-240V		15cm	75mm	95mm	100	-
11105GU/MC	Brushed chrome	10W	100-240V		15cm	75mm	95mm	100	-



The Lock Ring Range
Die cast



11105C/W

11105C | 50W | MR16 | GU5,3 | Die cast


ADJUSTABLE

5 YEAR

IP20

offer







11105C/MC

11105C | 50W | MR16 | GU5,3 | Die cast


ADJUSTABLE

5 YEAR

IP20

offer







11105C/ABS

11105C | 50W | MR16 | GU5,3 | Die cast


ADJUSTABLE

5 YEAR

IP20

offer







11105C/N

11105C | 50W | MR16 | GU5,3 | Die cast


ADJUSTABLE

5 YEAR

IP20

offer





Order Code	Colour	Watts	Input	Class					Notes
11105C/W	White	50W	12V	III	40cm	82mm	60mm	100	-
11105C/MC	Brushed chrome	50W	12V	III	40cm	82mm	60mm	100	-
11105C/ABS	Antique brass	50W	12V	III	40cm	82mm	60mm	100	-
11105C/N	Natural	50W	12V	III	40cm	82mm	60mm	100	-




11105CGU/W


11105CGU | 10W | MR16 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20


Complete with 0950G.




11105CGU/G

11105CGU | 10W | MR16 | GU10 | Die cast


ADJUSTABLE

5 YEAR

IP20

offer


Complete with 0950G.




11105CGU/MC


11105CGU | 10W | MR16 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20


Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105CGU/W	White	10W	100-240V		15cm	82mm	95mm	100	-
11105CGU/G	Grey	10W	100-240V		15cm	82mm	95mm	100	-
11105CGU/MC	Brushed chrome	10W	100-240V		15cm	82mm	95mm	100	-



51105/C

51105/MC

The Classic Square



51105/C


51105 | 50W | MR16 | GU5,3 | Die cast

ADJUSTABLE

5 YEAR

IP20 offer



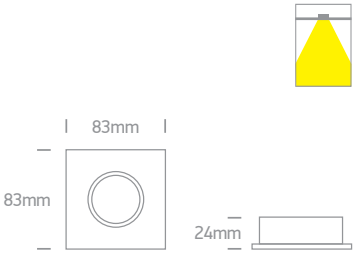



51105/MC


51105 | 50W | MR16 | GU5,3 | Die cast

ADJUSTABLE

5 YEAR

IP20 offer



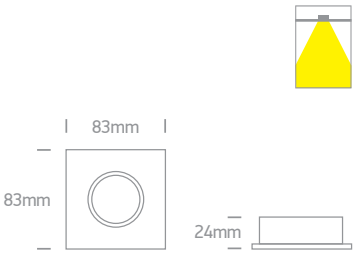

Order Code	Colour	Watts	Input	Class					Notes
51105/C	Chrome	50W	12V	III	40cm	75mm	65mm	100	-
51105/MC	Brushed chrome	50W	12V	III	40cm	75mm	65mm	100	-





51105GA/W

51105GA/MC





The Classic Square GU10
Halogen Lamp Included



51105GA/W

51105GA | 50W | MR16 | GU10 | Die cast


IP20 offer

ADJUSTABLE

CE 5 YEAR



Supplied with GU10 50W halogen lamp.

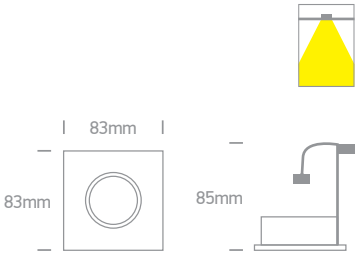



51105GA/MC

51105GA | 50W | MR16 | GU10 | Die cast


IP20 offer

ADJUSTABLE


CE 5 YEAR



Supplied with GU10 50W halogen lamp.

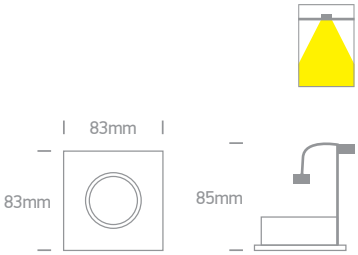

Order Code	Colour	Watts	Input	Class					Notes
51105GA/W	White	50W	230V	⏚	15cm	73mm	100mm	50	Supplied with GU10 lamp
51105GA/MC	Brushed chrome	50W	230V	⏚	15cm	73mm	100mm	50	Supplied with GU10 lamp

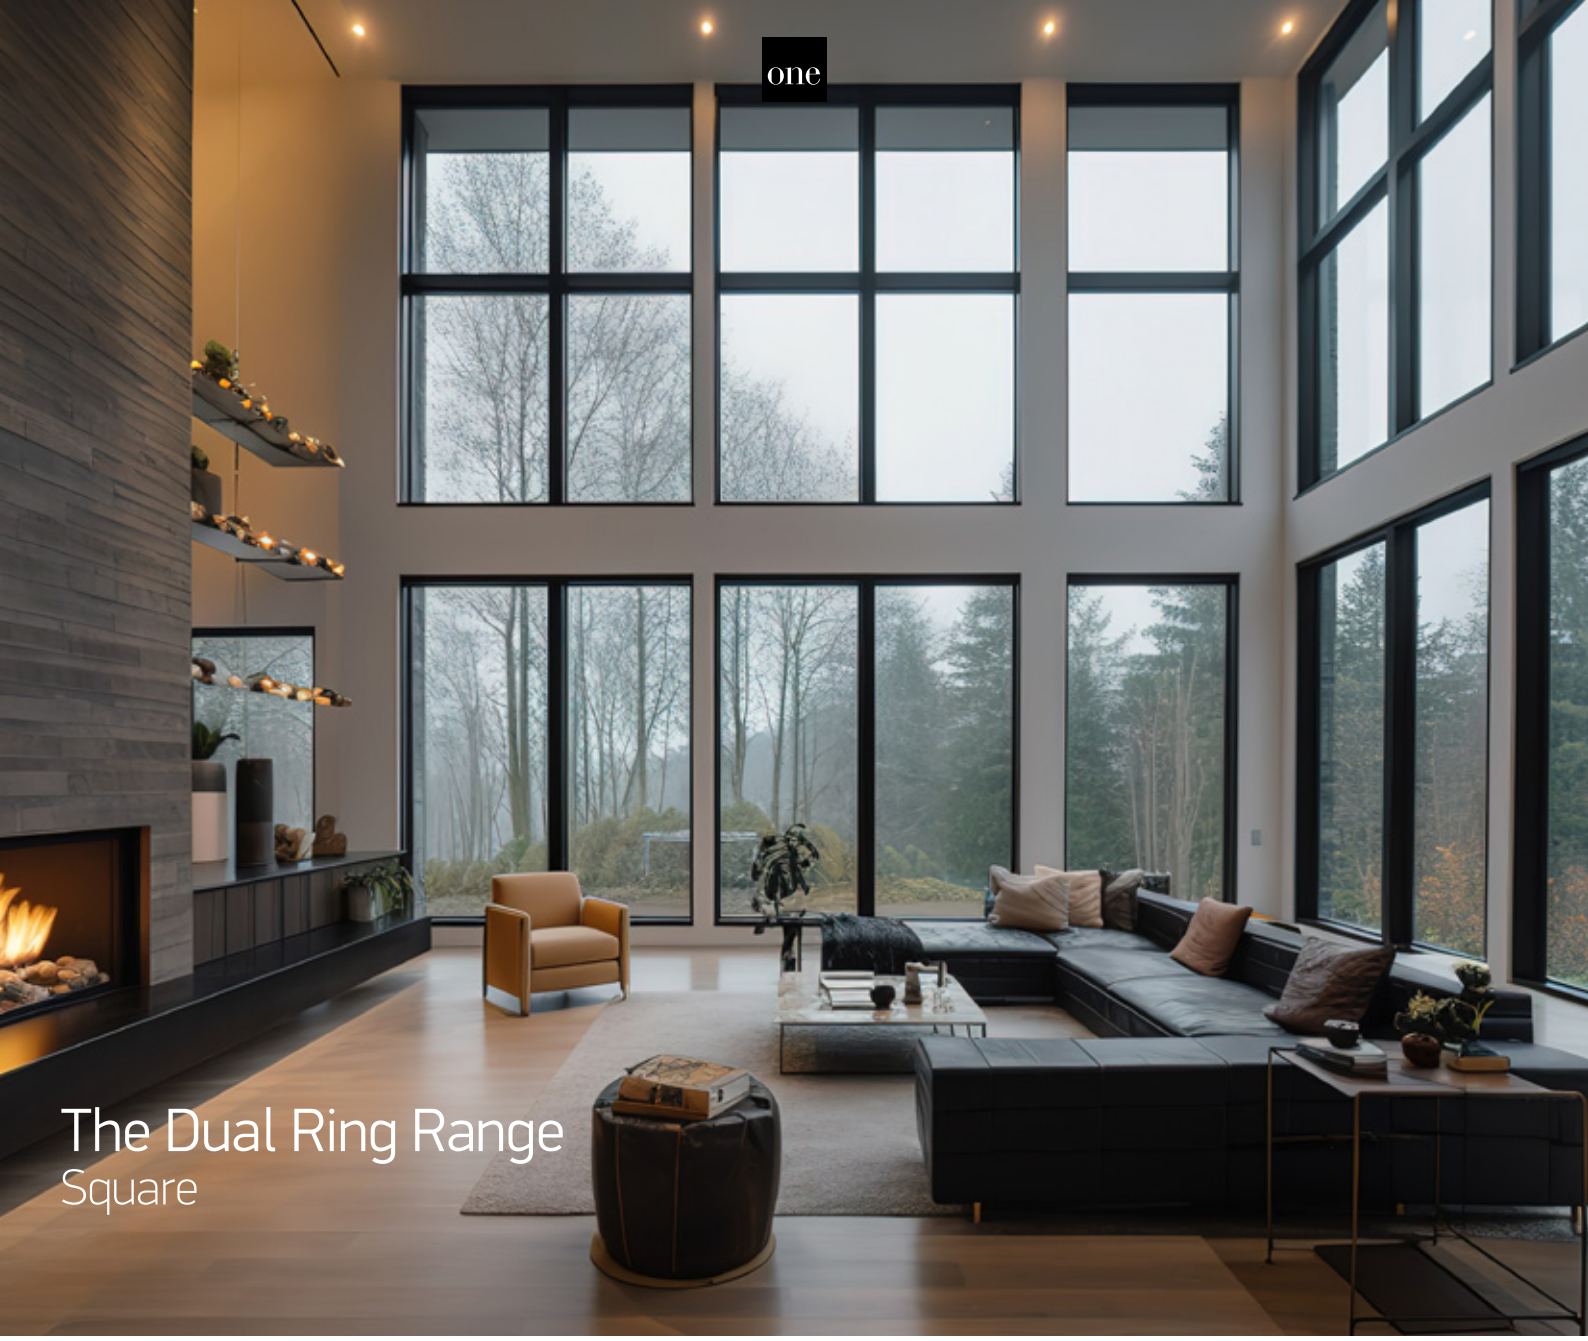

The Dual Ring Range
Square



51103AB | 35W | MR11 | GU4 | Natural aluminium

ADJUSTABLE


5 YEAR

IP20

offer



Suitable for MR11 LED lamp.

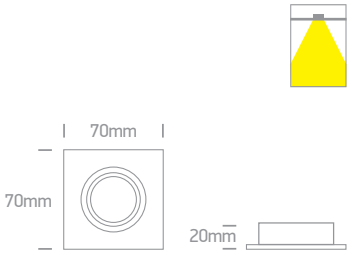




51105AB | 50W | MR16 | GU5,3 | Aluminium


ADJUSTABLE

5 YEAR

IP20

offer



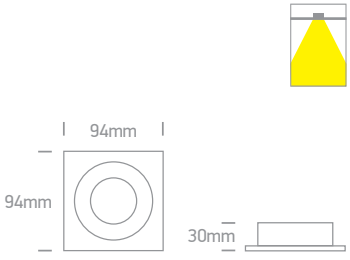

Order Code	Colour	Watts	Input	Class					Notes
51103AB/AL	Aluminium	35W	12V	III	40cm	60mm	60mm	50	-
51105AB/AL	Aluminium	50W	12V	III	40cm	80mm	75mm	50	-

The Dual Ring Range
Round



11105AL/AL

11105AC/AL



11105AL | 50W | MR16 | GU5,3 | Natural aluminium

ADJUSTABLE


CE 5 YEAR

IP20

offer



Leaf springs.





11105AC | 50W | MR16 | GU5,3 | Natural aluminium


ADJUSTABLE

CE 5 YEAR

IP20

offer





Order Code	Colour	Watts	Input	Class					Notes
11105AL/AL	Aluminium	50W	12V	III	40cm	68mm	70mm	50	-
11105AC/AL	Aluminium	50W	12V	III	40cm	75mm	60mm	50	-

The Natural Aluminium
Square






51105B | 50W | MR16 | GU5,3 | Natural aluminium

ADJUSTABLE

CE 5 YEAR

IP20 offer



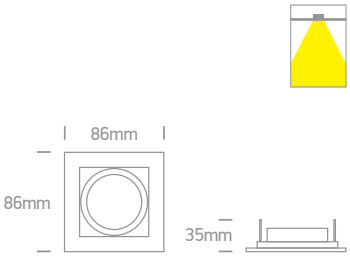




51205B | 2x50W | MR16 | GU5,3 | Natural aluminium

ADJUSTABLE

CE 5 YEAR

IP20 offer



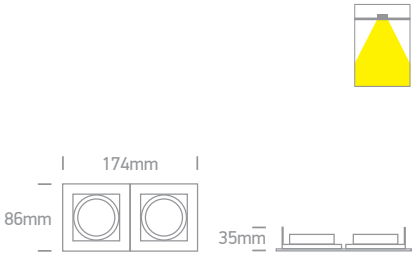

Order Code	Colour	Watts	Input	Class					Notes
51105B/AL	Aluminium	50W	12V	III	40cm	77x77mm	70mm	50	-
51205B/AL	Aluminium	2x50W	12V	III	40cm	167x77mm	70mm	25	-



The Round Retro GU10
Aluminium




11105U | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20








11105UA | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20








11105UB | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20





Order Code	Colour	Watts	Input	Class					Notes
11105U/W	White	10W	100-240V		15cm	72mm	120mm	50	-
11105UA/W	White	10W	100-240V		15cm	72mm	120mm	50	-
11105UB/W	White	10W	100-240V		15cm	72mm	120mm	50	-



The Dual Ring Range
Aluminium



11105ABGL/W

11105ABGL | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR


IP20



Leaf springs.



Complete with 0950G.





11105ABGL/B

11105ABGL | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR


IP20



Leaf springs.



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105ABGL/W	White	10W	100-240V		15cm	80mm	100mm	50	-
11105ABGL/B	Black	10W	100-240V		15cm	80mm	100mm	50	-



The Dual Ring Range
Aluminium


11105ABG/W

11105ABG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE


CE 5 YEAR

IP20


11105ABG/B


11105ABG/AL


Complete with 0950GB.




51105ABG/W

51105ABG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE


CE 5 YEAR

IP20


51105ABG/B


51105ABG/AL


Complete with 0950GB.




51205ABG/W

51205ABG | 2x10W | MR16 | GU10 | Aluminium


ADJUSTABLE

CE 5 YEAR

IP20


51205ABG/B


Complete with 0950GB.



Order Code	Colour	Watts	Input	Class	S	T / T			Notes
11105ABG/W	White	10W	100-240V		15cm	80mm	100mm	50	-
11105ABG/B	Black	10W	100-240V		15cm	80mm	100mm	50	-
11105ABG/AL	Aluminium	10W	100-240V		15cm	80mm	100mm	50	-
51105ABG/W	White	10W	100-240V		15cm	80mm	100mm	50	-
51105ABG/B	Black	10W	100-240V		15cm	80mm	100mm	50	-
51105ABG/AL	Aluminium	10W	100-240V		15cm	80mm	100mm	50	-
51205ABG/W	White	2x10W	100-240V		15cm	162x82mm	100mm	20	-
51205ABG/B	Black	2x10W	100-240V		15cm	162x82mm	100mm	20	-

The Chill Out Range





11105M/W/W

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE


5 YEAR


DARK LIGHT

IP20



Complete with 0950GB.



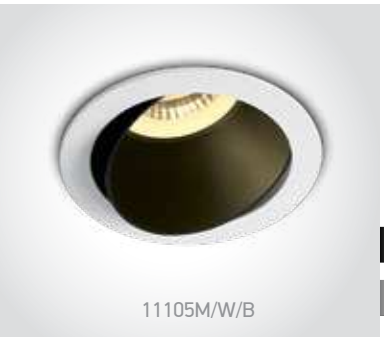

11105M/W/B

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE


5 YEAR


DARK LIGHT

IP20



Complete with 0950GB.



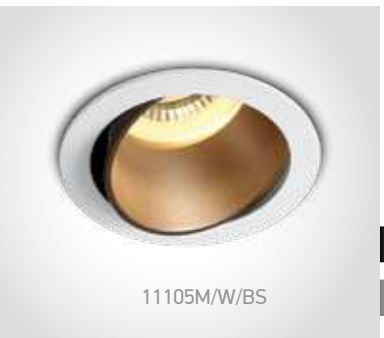

11105M/W/BS

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20




Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
11105M/W/W	White	White	10W	100-240V		15cm	72mm	120mm	50	-
11105M/W/B	White	Black	10W	100-240V		15cm	72mm	120mm	50	-
11105M/W/BS	White	Brass	10W	100-240V		15cm	72mm	120mm	50	-



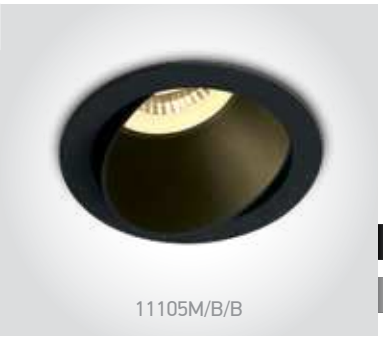

11105M/B/B

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE


5 YEAR


DARK LIGHT

IP20



Complete with 0950GB.



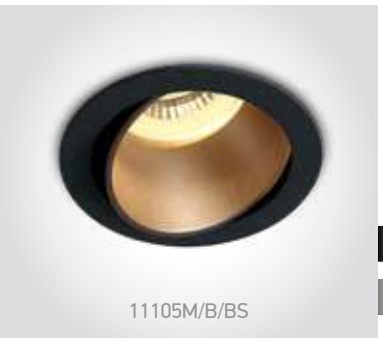

11105M/B/BS

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE


5 YEAR


DARK LIGHT

IP20



Complete with 0950GB.



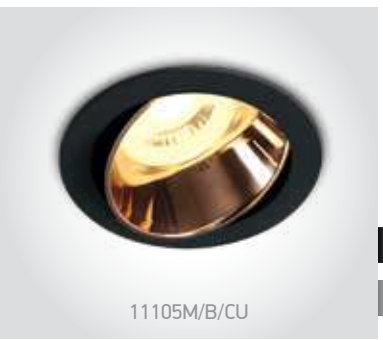

11105M/B/CU

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
11105M/B/B	Black	Black	10W	100-240V		15cm	72mm	120mm	50	-
11105M/B/BS	Black	Brass	10W	100-240V		15cm	72mm	120mm	50	-
11105M/B/CU	Black	Copper	10W	100-240V		15cm	72mm	120mm	50	-

The Round Clip In Range



11105A1 | 10W | MR16 | GU10 | Aluminium



11105A1/W

ADJUSTABLE

5 YEAR


IP20



11105A1/B



Complete with 0950G.



11105A1 | 10W | MR16 | GU10 | Aluminium



11105A1/BBS

ADJUSTABLE

5 YEAR


IP20



11105A1/AL



Complete with 0950G.



11105D8 | 10W | MR16 | GU10 | Aluminium



ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105A1/W	White	10W	100-240V		15cm	72mm	120mm	100	-
11105A1/B	Black	10W	100-240V		15cm	72mm	120mm	100	-
11105A1/AL	Aluminium	10W	100-240V		15cm	72mm	120mm	100	-
11105A1/BBS	Brushed brass	10W	100-240V		15cm	72mm	120mm	100	-
11105D8/W	White	10W	100-240V		15cm	76mm	130mm	60	-

The Dark Light Spots
Round





11105D4 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Complete with 0950G.

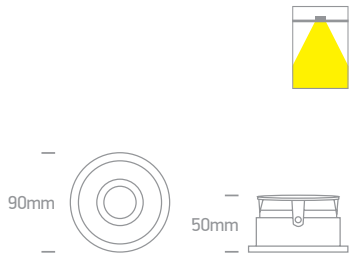



11105DT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Complete with 0950G.

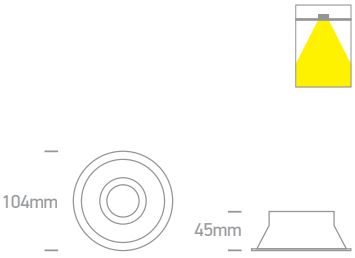



11105TG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20




Complete with 0950G.

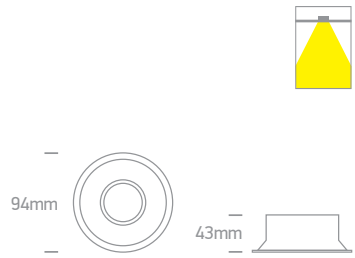

Order Code	Colour	Watts	Input	Class					Notes
11105D4/W	White	10W	100-240V		15cm	75mm	140mm	50	-
11105DT/W	White	10W	100-240V		15cm	95mm	140mm	50	-
11105TG/W	White	10W	100-240V		15cm	85mm	110mm	50	-

The Semi Dark Light GU10 Range
Die cast

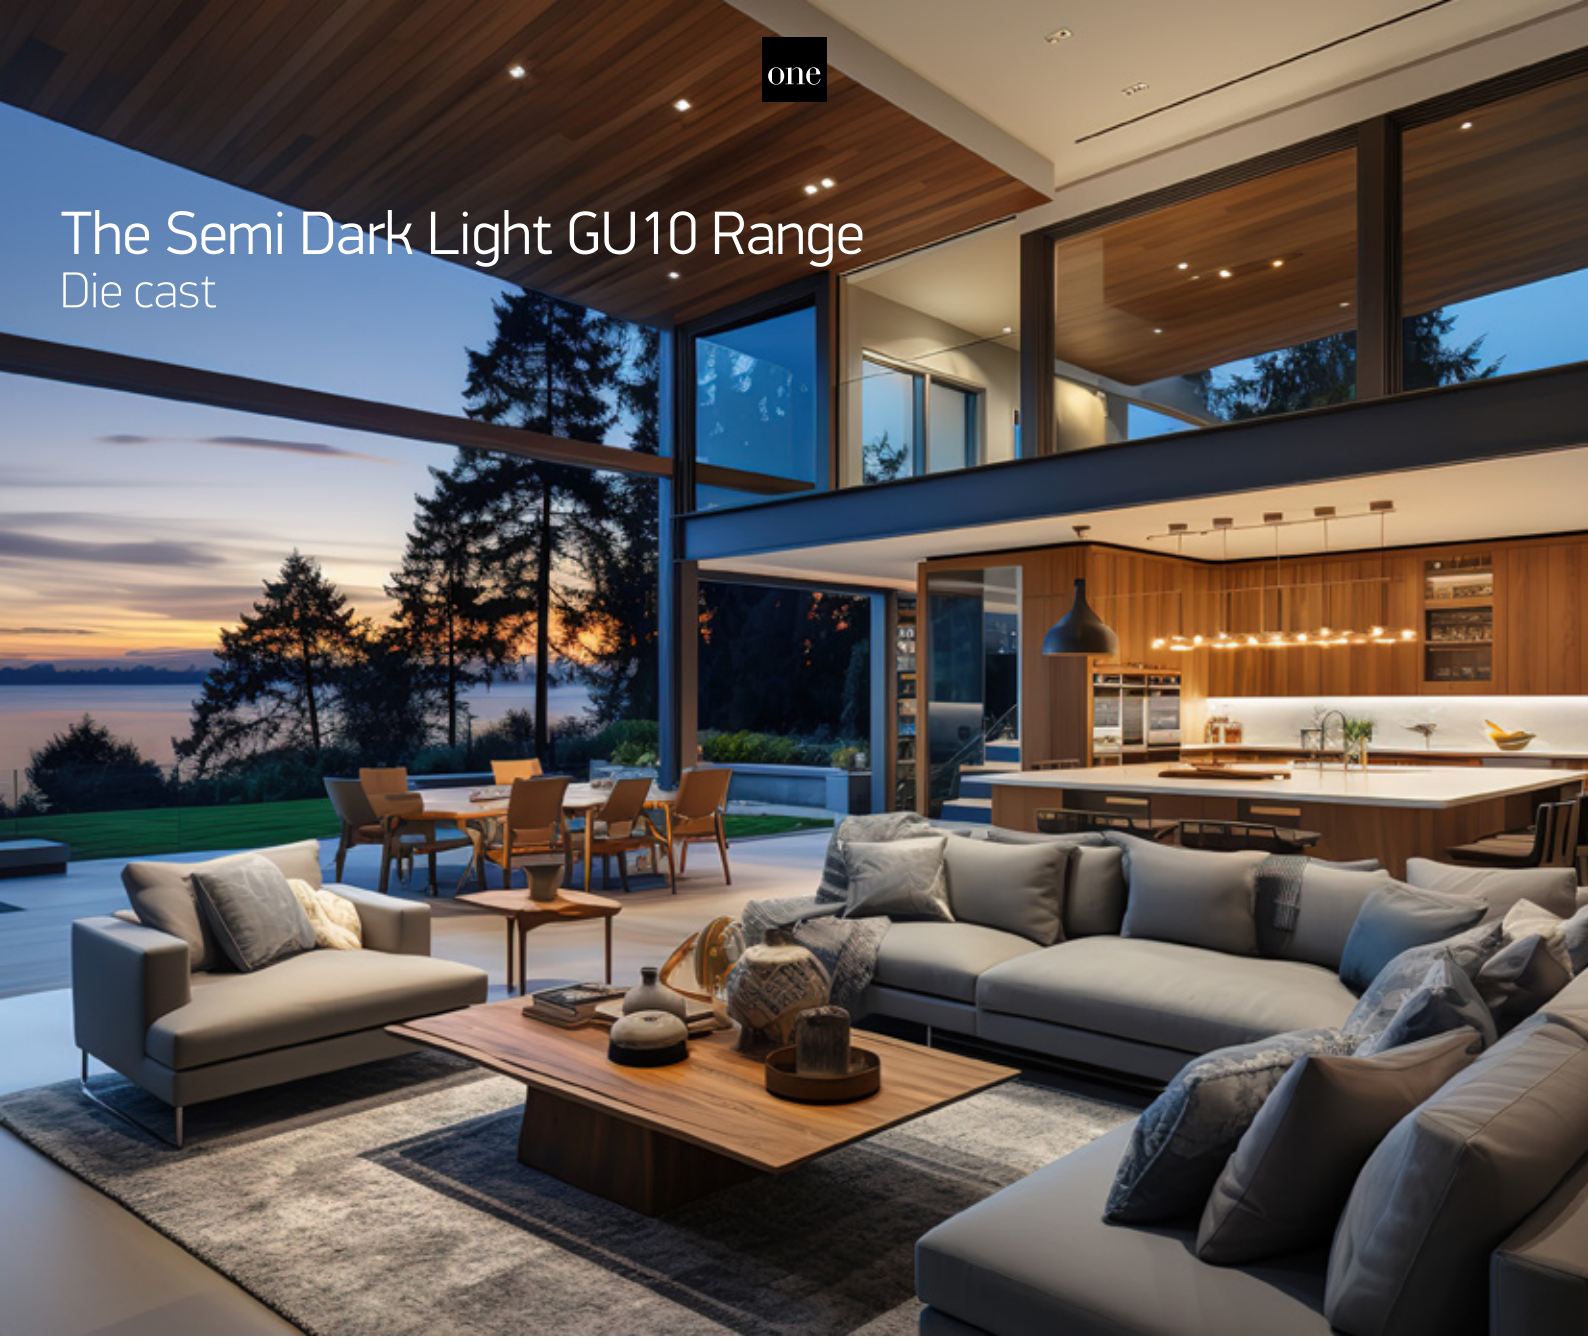



51105N | 10W | MR16 | GU10 | Die cast


ADJUSTABLE

CE 5 YEAR

IP20



Complete with 0950G.

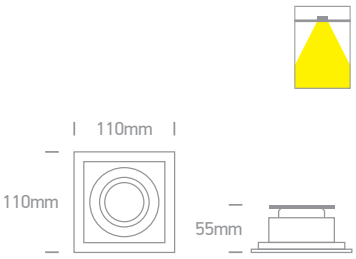



51205N | 2x10W | MR16 | GU10 | Die cast


ADJUSTABLE

CE 5 YEAR

IP20




Complete with 0950G.

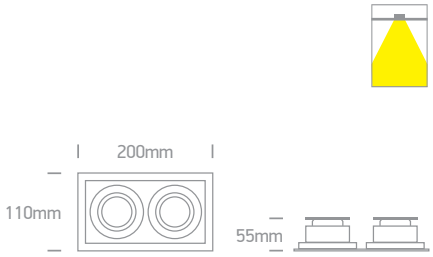

Order Code	Colour	Watts	Input	Class					Notes
51105N/W	White	10W	100-240V	⏚	15cm	97x97mm	130mm	50	-
51205N/W	White	2x10W	100-240V	⏚	15cm	187x97mm	130mm	25	-



The Dark Light Range
Metal

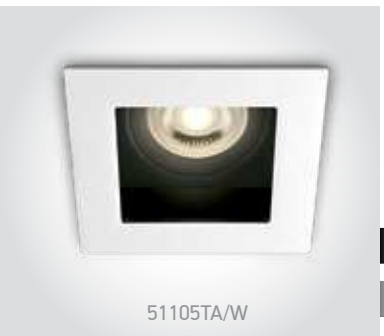

51105TA/W

51105TA | 10W | MR16 | GU10 | Metal

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Complete with 0950G.

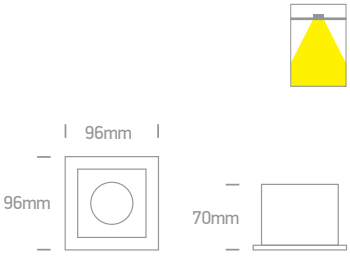



51105TA/B

51105TA | 10W | MR16 | GU10 | Metal

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Complete with 0950G.

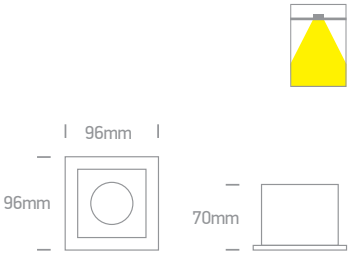

Order Code	Colour	Watts	Input	Class					Notes
51105TA/W	White	10W	100-240V	⏚	15cm	80x80mm	150mm	36	-
51105TA/B	Black	10W	100-240V	⏚	15cm	80x80mm	150mm	36	-



The Square MR16

51105TG | 10W | MR16 | GU10 | Die cast



ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Complete with 0950G.

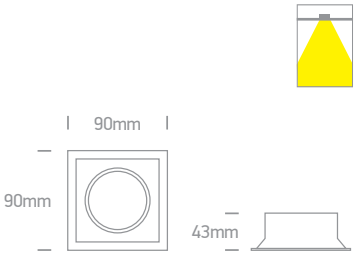

51105B1 | 10W | MR16 | GU10 | Aluminium



51105B1/AL

ADJUSTABLE

5 YEAR


IP20

offer





Complete with 0950G.

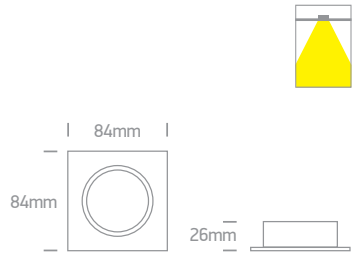

51105D | 50W | MR16 | GU5,3 | Die cast



ADJUSTABLE


5 YEAR

DARK LIGHT

IP20

offer



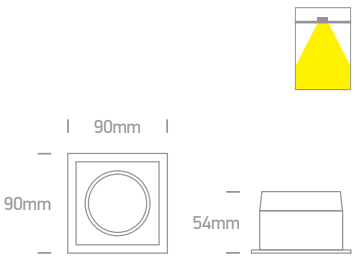

Order Code	Colour	Watts	Input	Class					Notes
51105TG/W	White	10W	100-240V		15cm	80x80mm	110mm	50	-
51105B1/AL	Aluminium	10W	100-240V		15cm	72mm	120mm	50	-
51105D/G	Grey	50W	12V		40cm	80x80mm	85mm	50	-



The Fire Rated GU10 Range



11109FA | 10W | MR16 | GU10 | Fire Rated | Die cast

FIRE RATED


ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



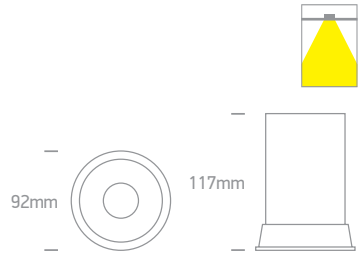



11105F | 10W | MR16 | GU10 | Fire Rated | Trimless | Die cast

FIRE RATED


ADJUSTABLE

5 YEAR


DARK LIGHT

IP20



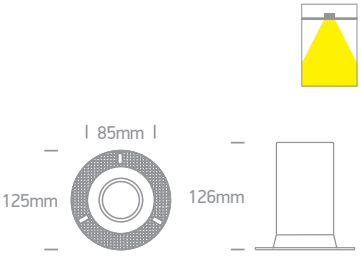

Order Code	Colour	Watts	Input	Class				Notes
11109FA/W	White	10W	100-240V	⏚	85mm	160mm	30	-
11105F/W	White	10W	100-240V	⏚	85mm	170mm	30	-

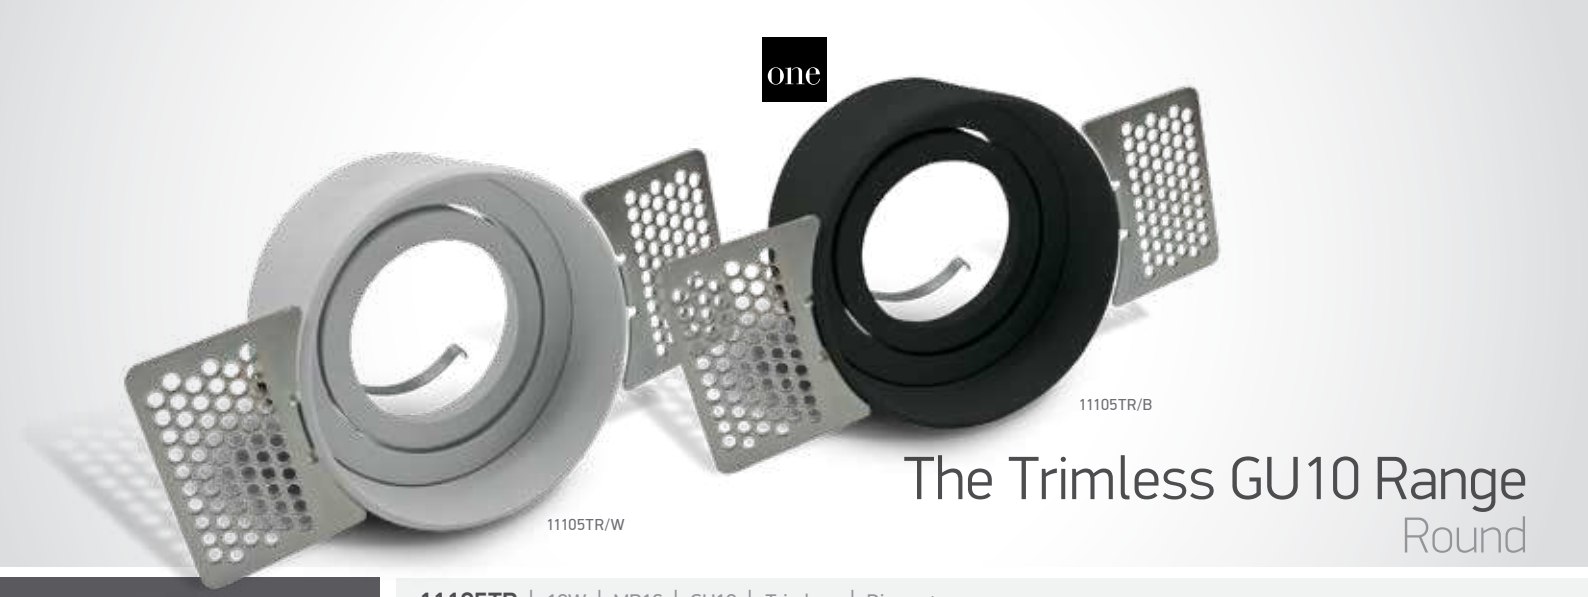

The Trimless GU10 Range
Round



11105TR/W

11105TR | 10W | MR16 | GU10 | Trimless | Die cast

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





11105TR/B

11105TR | 10W | MR16 | GU10 | Trimless | Die cast

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





11105UTR | 10W | MR16 | GU10 | Trimless | Die cast


ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



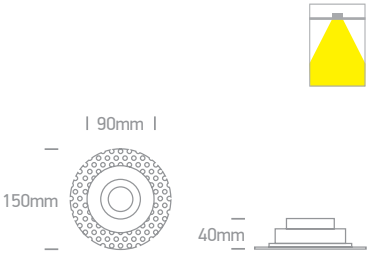



11105DTR | 10W | MR16 | GU10 | Trimless | Aluminium


ADJUSTABLE

5 YEAR

DARK LIGHT


IP20



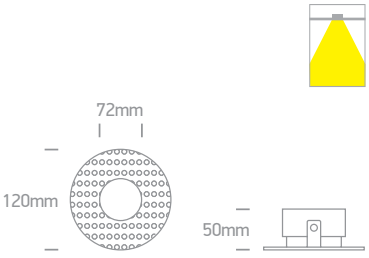

Order Code	Colour	Watts	Input	Class					Notes
11105TR/W	White	10W	100-240V		15cm	84mm	120mm	50	-
11105TR/B	Black	10W	100-240V		15cm	84mm	120mm	50	-
11105UTR/W	White	10W	100-240V		20cm	105mm	120mm	20	-
11105DTR/W	White	10W	100-240V		15cm	90mm	120mm	36	-

The Trimless GU10 Range
Square

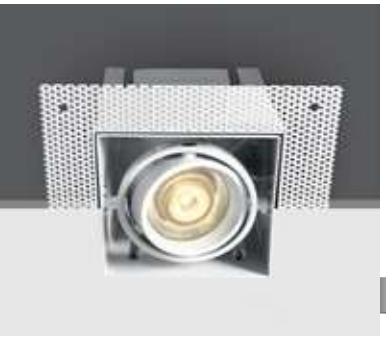

51010TR | 10W | MR16 | GU10 | Trimless | Die cast


ADJUSTABLE

CE 5 YEAR

IP20







Order Code	Colour	Watts	Input	Class				Notes
51010TR/W	White	10W	100-240V		97,5x97,5mm	150mm	16	-





Recessed Spots Adjustable LED

Pages 117-150

04



The 1W/2W Mini Series
Aluminium




11103B/W/W

11103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · IP20



Suitable for 89004A driver.






11103B/B/W

11103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · IP20



Suitable for 89004A driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103B/W/W	White	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA	III	40cm	45mm	60mm	100	Requires 350mA/700mA driver
11103B/B/W	Black	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA	III	40cm	45mm	60mm	100	Requires 350mA/700mA driver



The 3W Mini Lighter
Aluminium




11103K/W/W


11103K | 3W | COB LED | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
5 YEAR
DARK LIGHT
IP20



Suitable for 89004 driver.

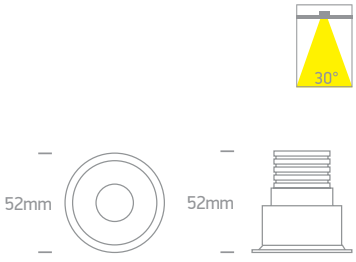

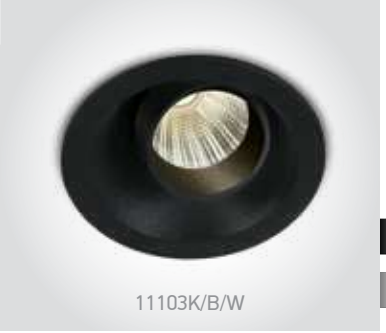


11103K/B/W

11103K | 3W | COB LED | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
5 YEAR
DARK LIGHT
IP20



Suitable for 89004 driver.

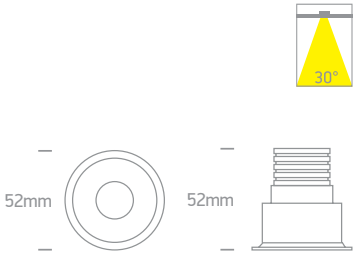

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103K/W/W	White	Warm white	3000K	3W	240lm	30°	350mA	III	40cm	42mm	60mm	100	Requires 350mA driver
11103K/B/W	Black	Warm white	3000K	3W	240lm	30°	350mA	III	40cm	42mm	60mm	100	Requires 350mA driver



The 1W Mini Series
Aluminium




11101B | 1W | LED | Aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer





Suitable for 89004 driver.






51101B | 1W | LED | Aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer





Suitable for 89004 driver.






51101AL | 1W | LED | Aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer





Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11101B/D/15	Black	Daylight	6000K	1W	60lm	15°	350mA		40cm	45mm	40mm	100	Requires 350mA driver
51101B/D/35	Black	Daylight	6000K	1W	60lm	35°	350mA		40cm	53mm	40mm	100	Requires 350mA driver
51101AL/D/15	Aluminium	Daylight	6000K	1W	60lm	15°	350mA		40cm	53mm	40mm	100	Requires 350mA driver
51101AL/BL/15	Aluminium	Blue	-	1W	-	15°	350mA		40cm	53mm	40mm	100	Requires 350mA driver




The 1W Mini Square
Natural Aluminium




51201AL | 2x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer











51301AL | 3x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer











51401AL | 4x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer





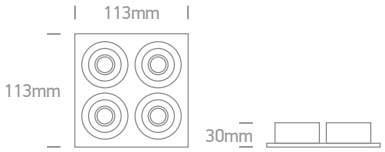

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
51201AL/D/15	Aluminium	Daylight	6000K	2x1W	2x60lm	15°	350mA		40cm	105x53mm	40mm	50	Requires 350mA driver
51201AL/D/35	Aluminium	Daylight	6000K	2x1W	2x60lm	35°	350mA		40cm	105x53mm	40mm	50	Requires 350mA driver
51301AL/D/15	Aluminium	Daylight	6000K	3x1W	3x60lm	15°	350mA		40cm	155x53mm	40mm	50	Requires 350mA driver
51301AL/D/35	Aluminium	Daylight	6000K	3x1W	3x60lm	35°	350mA		40cm	155x53mm	40mm	50	Requires 350mA driver
51301AL/W/15	Aluminium	Warm white	3000K	3x1W	3x45lm	15°	350mA		40cm	155x53mm	40mm	50	Requires 350mA driver
51301AL/W/35	Aluminium	Warm white	3000K	3x1W	3x45lm	35°	350mA		40cm	155x53mm	40mm	50	Requires 350mA driver
51401AL/D/15	Aluminium	Daylight	6000K	4x1W	4x60lm	15°	350mA		40cm	105x105mm	40mm	50	Requires 350mA driver
51401AL/D/35	Aluminium	Daylight	6000K	4x1W	4x60lm	35°	350mA		40cm	105x105mm	40mm	50	Requires 350mA driver
51401AL/W/15	Aluminium	Warm white	3000K	4x1W	4x45lm	15°	350mA		40cm	105x105mm	40mm	50	Requires 350mA driver
51401AL/W/35	Aluminium	Warm white	3000K	4x1W	4x45lm	35°	350mA		40cm	105x105mm	40mm	50	Requires 350mA driver

The 3W Mini Series
Aluminium



11103LC | 3W | LED | Aluminium

LED BUILT IN

DIMMABLE | QUICK FIX | ADJUSTABLE

IP20


offer


2 YEAR





Suitable for 89004A driver.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103LC/B/D/15	Black	Daylight	6000K	3W	120lm	15°	700mA	III	40cm	45mm	56mm	100	Requires 700mA driver
11103LC/B/D/35	Black	Daylight	6000K	3W	120lm	35°	700mA	III	40cm	45mm	56mm	100	Requires 700mA driver



11103N/B/D/35

11103N/W/D/35

11103N/AL/D/35

The 3x1W Glass Lens Spots



11103N/W/D/35

11103N | 3x1W | LED | Natural aluminium

LED BUILT IN

DIMMABLE QUICK FIX ADJUSTABLE


IP20 offer

CE 2 YEAR





Suitable for 89004 driver.





11103N/B/D/35

11103N | 3x1W | LED | Natural aluminium

LED BUILT IN

DIMMABLE QUICK FIX ADJUSTABLE


IP20 offer

CE 2 YEAR





Suitable for 89004 driver.





11103N/AL/D/35

11103N | 3x1W | LED | Natural aluminium

LED BUILT IN

DIMMABLE QUICK FIX ADJUSTABLE


IP20 offer

CE 2 YEAR





Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103N/W/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA		40cm	70mm	50mm	100	Requires 350mA driver
11103N/B/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA		40cm	70mm	50mm	100	Requires 350mA driver
11103N/B/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA		40cm	70mm	50mm	100	Requires 350mA driver
11103N/AL/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA		40cm	70mm	50mm	100	Requires 350mA driver
11103N/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA		40cm	70mm	50mm	100	Requires 350mA driver






11103L | 3x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
ADJUSTABLE
IP20
offer
CE
2 YEAR



Suitable for 89004 driver.






11103LB | 3x1W | LED | Aluminium


LED BUILT IN
DIMMABLE
QUICK FIX
ADJUSTABLE
IP20
offer
CE
2 YEAR



Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103L/D/15	Aluminium	Daylight	6000K	3x1W	180lm	15°	350mA		40cm	70mm	50mm	100	Requires 350mA driver
11103LB/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA		40cm	70mm	50mm	100	Requires 350mA driver
11103LB/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA		40cm	70mm	50mm	100	Requires 350mA driver

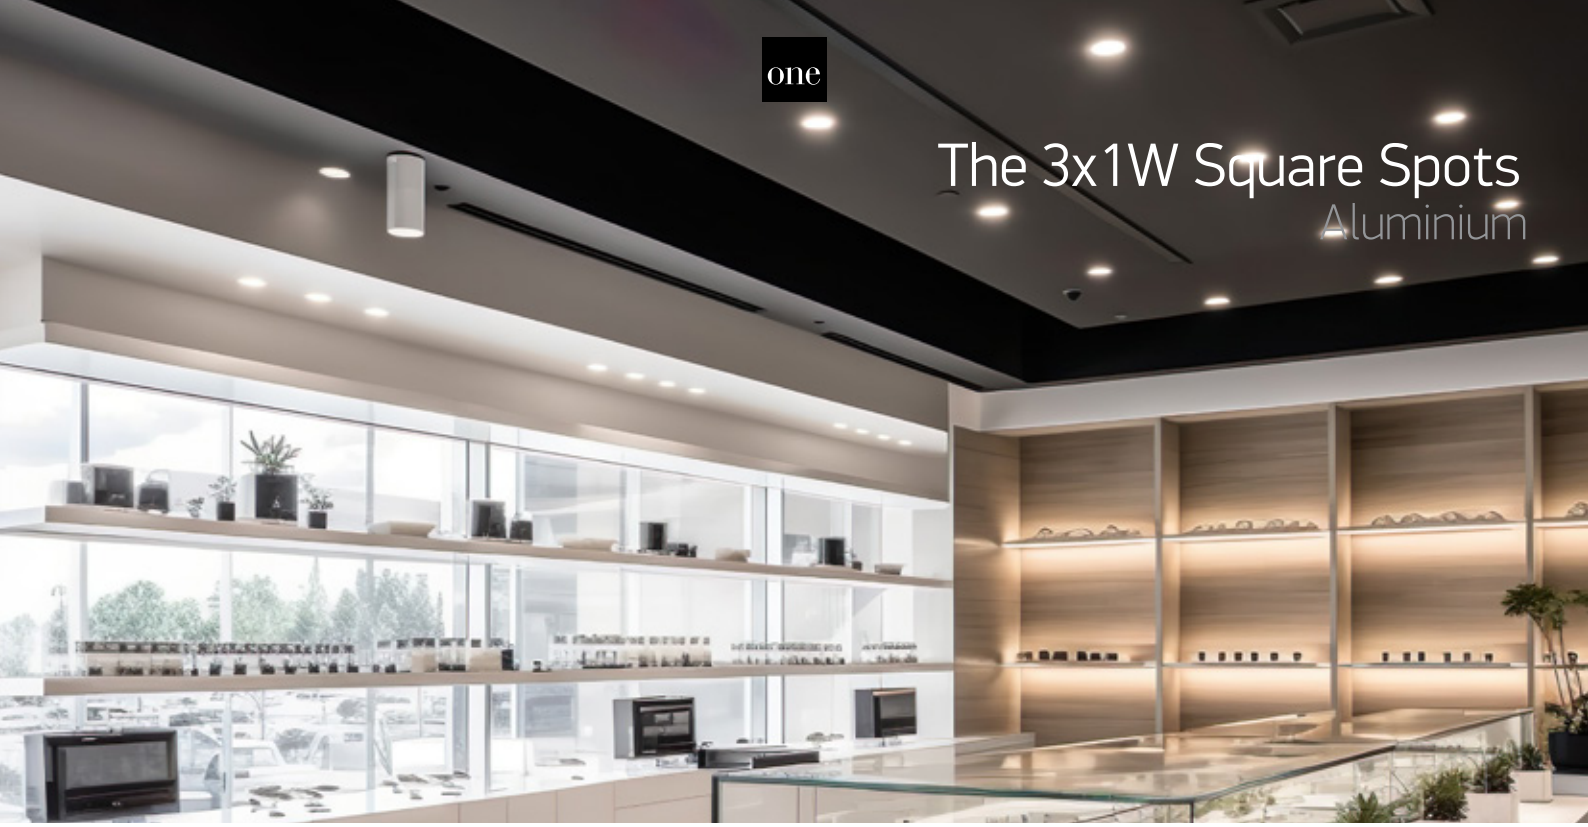


The 3x1W Square Spots
Aluminium



51103L/D/15

51103L | 3x1W | LED | Natural aluminium


LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer



51103L/W/15



Suitable for 89004 driver.






51103LW | 3x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer





Suitable for 89004 driver.






51103LB/D/35

51103LB | 3x1W | LED | Natural aluminium


LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer



51103LB/W/35



Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
51103L/D/15	Aluminium	Daylight	6000K	3x1W	180lm	15°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103L/W/15	Aluminium	Warm white	3000K	3x1W	135lm	15°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103LW/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103LB/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103LB/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver

The Dark Light Range






11103D/W/C

11103D | 3x1W | LED | Semi trimless | Aluminium





11103D/G/W

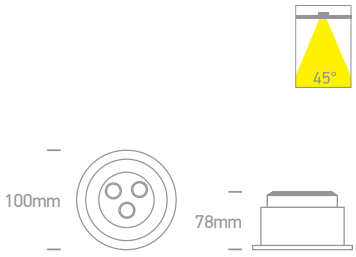

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103D/W/C	White	Cool white	4000K	3x1W	160lm	45°	350mA	III	40cm	90mm	90mm	50	Requires 350mA driver
11103D/G/C	Grey	Cool white	4000K	3x1W	160lm	45°	350mA	III	40cm	90mm	90mm	50	Requires 350mA driver
11103D/G/W	Grey	Warm white	3000K	3x1W	135lm	45°	350mA	III	40cm	90mm	90mm	50	Requires 350mA driver



11109KD/W/W

11106K/W + Grey ring

11106K/W + White ring



The Reflector Spots



11106K | 6W | LED | Plastic

LED BUILT IN

80 CRI

ADJUSTABLE

CE

IP20


offer

2 YEAR



Complete with White/Black/Grey rings.







11109KD | 9,2W | COB LED | Aluminium

LED BUILT IN

80 CRI

TRIAC DIMMABLE


ADJUSTABLE

IP20


offer

CE

2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11106K/W	White/Black/Grey	Warm white	3000K	6W	345lm	38°	100-240V	⧈	67mm	90mm	48	Complete with driver
11109KD/W/W	White	Warm white	3000K	9,2W	620lm	38°	230V	⧈	67mm	90mm	48	Complete with dimmable driver

The 7W COB Range





11107B/W/C

IP20

11107B | 7W | COB LED | Die cast

LED BUILT IN

90 CRI


ADJUSTABLE


CE

3 YEAR



11107B/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107B/W/C	White	Cool white	4000K	7W	560lm	60°	230V		-	75mm	75mm	50	Complete with 300mA driver
11107B/W/W	White	Warm white	3000K	7W	560lm	60°	230V		-	75mm	75mm	50	Complete with 300mA driver




51107/AL/W

11107B/W/W


The 7W COB Range



51107 | 7W | COB LED | Aluminium

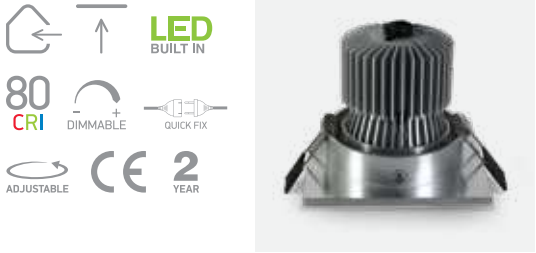






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
51107/AL/W	Aluminium	Warm white	3000K	7W	513lm	30°	700mA	III	40cm	70mm	90mm	30	Requires 700mA driver




The COB Adjustable Spots
Aluminium



51106A | 6W | LED | Aluminium






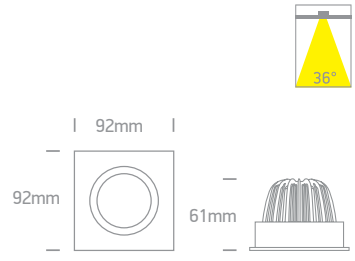




51110A | 10W | LED | Aluminium





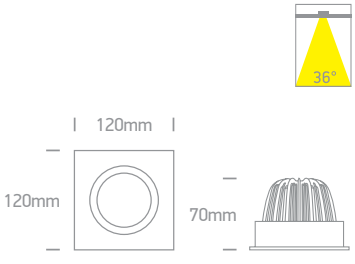

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51106A/AL/W	Aluminium	Warm white	3000K	6W	475lm	36°	100-240V		80mm	80mm	20	Complete with 500mA driver
51110A/AL/C	Aluminium	Cool white	4000K	10W	840lm	36°	100-240V		100mm	100mm	20	Complete with 250mA driver



11112/W/W

11112/AL/W


51112/AL/W


The 12W COB Range



11112/W/W

11112 | 12W | COB LED | Die cast

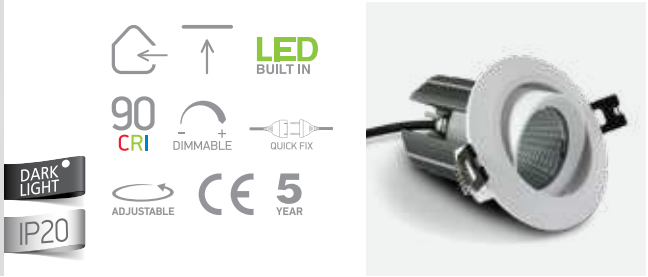







11112/AL/W


11112 | 12W | COB LED | Natural aluminium

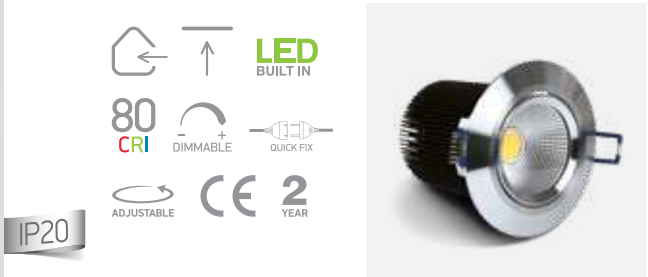






51112 | 12W | COB LED | Aluminium

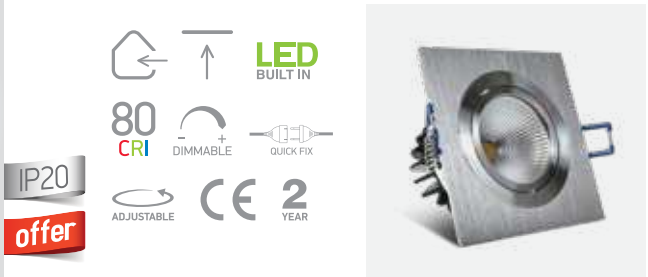




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	76mm	90mm	50	Requires 700mA driver
11112/AL/W	Aluminium	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	78mm	90mm	50	Requires 700mA driver
51112/AL/W	Aluminium	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	80mm	90mm	50	Requires 700mA driver



The Interchangable Rings Range
Aluminium

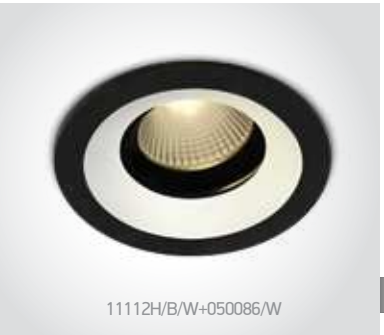

11112H/B/W+050086/W

11112H | 12W | COB LED | Aluminium

Ring must be ordered separately.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 5 YEAR · IP20






050086/W White


050086/B Black


050086/G Grey


050086/BS Brass


050086A/W White



51112H/W/W+050088/B

51112H | 12W | COB LED | Aluminium

Ring must be ordered separately.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 5 YEAR · IP20




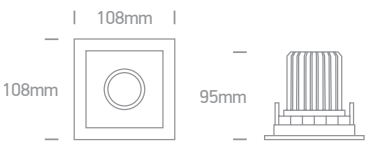


050088/W White


050088/B Black


050088/G Grey


050088/BS Brass


050088A/W White

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11112H/B/W	Black	Warm white	3000K	12W	940lm	60°	230V		90mm	120mm	30	Complete with 300mA driver
51112H/W/W	White	Warm white	3000K	12W	940lm	60°	230V		95x95mm	120mm	30	Complete with 300mA driver



The Interchangable Rings Range
Aluminium


11104K/W/W + 050100/B


11104K | 3W/5W | COB LED | Aluminium

3W@350mA/5W@500mA | Ring must be ordered separately.

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
5 YEAR
DARK LIGHT
IP20


11104K/B/W + 050100/BS






050100/W White


050100/B Black


050100/C Chrome


050100/BS Brass


050100/CU Copper


11107K/W/W + 050102/B


11107K | 6,5W | COB LED | Aluminium

Ring must be ordered separately.

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
5 YEAR
DARK LIGHT
IP20



11107K/B/W + 050102/BS







050102/W White


050102/B Black

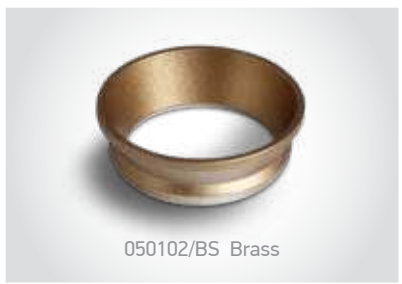
050102/BS Brass

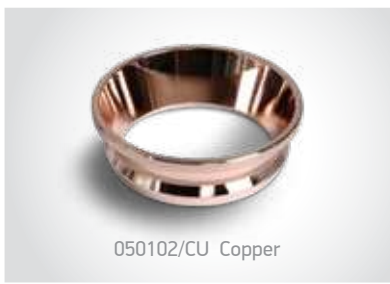
050102/CU Copper

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11104K/W/W	White	Warm white	3000K	3W/5W	400lm@5W	35°	350mA/500mA	III	40cm	60mm	80mm	50	Requires 350mA/500mA driver
11104K/B/W	Black	Warm white	3000K	3W/5W	400lm@5W	35°	350mA/500mA	III	40cm	60mm	80mm	50	Requires 350mA/500mA driver
11107K/W/W	White	Warm white	3000K	6,5W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
11107K/B/W	Black	Warm white	3000K	6,5W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver




The COB Dark Light



11107FD | 7W | COB LED | Die cast

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · DARK LIGHT · IP20



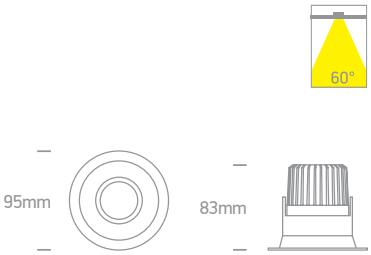




11112TA | 12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20



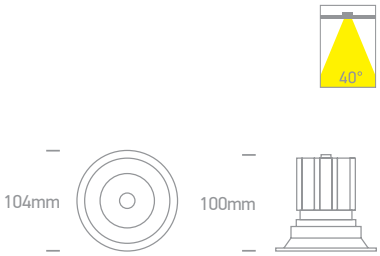

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
11107FD/W/C	White	Cool white	4000K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with 300mA driver
11107FD/W/W	White	Warm white	3000K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with 300mA driver
11107FD/W/EW	White	Extra warm white	2700K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with 300mA driver
11107FD/B/W	Black	Warm white	3000K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with 300mA driver
11112TA/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA		40cm	92mm	115mm	50	Requires 700mA driver




The IP44 COB Shop & Hotel Range



11112E | 12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP44



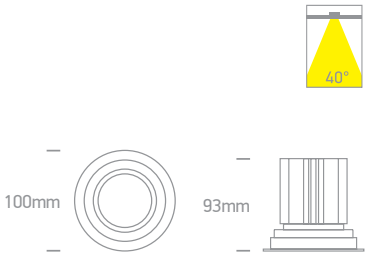




51112E | 12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP44




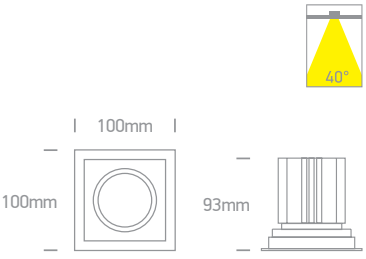




51212E | 2x12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP44



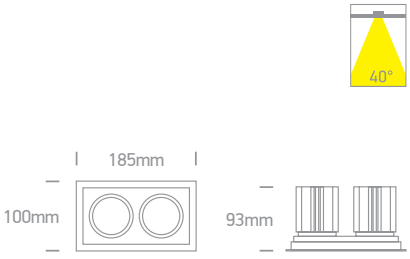

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
11112E/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	87mm	105mm	50	Requires 700mA driver
51112E/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	90x90mm	105mm	50	Requires 700mA driver
51212E/W/W	White	Warm white	3000K	2x12W	2x1100lm	40°	700mA	III	40cm	175x90mm	105mm	24	Requires 2x700mA drivers






11107WD | 6,5W | COB LED | Die cast

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
5 YEAR
DARK LIGHT
IP54










11207WD | 2x6,5W | COB LED | Die cast

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
5 YEAR
DARK LIGHT
IP54







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107WD/W/W	White	Warm white	3000K	6,5W	600lm	36°	700mA	III	40cm	83mm	100mm	36	Requires 700mA driver
11207WD/W/W	White	Warm white	3000K	2x6,5W	2x600lm	36°	700mA	III	40cm	160x83mm	100mm	16	Requires 2x700mA drivers






11107P | 6,5W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · IP54










11113D | 13W | COB LED | Die cast

LED BUILT IN · 92 CRI · DIMMABLE · ADJUSTABLE · QUICK FIX · CE · 3 YEAR · DARK LIGHT · IP54









11106PK/W/W

11106PK | 8W | SMD 2835 | Dimmable | Plastic

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · ADJUSTABLE · CE · 2 YEAR · DARK LIGHT · IP54



11106PK/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107P/W/W	White	Warm white	3000K	6,5W	600lm	36°	700mA	III	40cm	70mm	80mm	60	Requires 700mA driver
11113D/W/W	White	Warm white	3000K	13W	1100lm	38°	350mA	III	40cm	80mm	110mm	36	Requires 350mA driver
11106PK/W/W	White	Warm white	3000K	8W	850lm	60°	230V	II	-	92mm	120mm	30	Complete with 100mA dimmable driver
11106PK/B/W	Black	Warm white	3000K	8W	850lm	60°	230V	II	-	92mm	120mm	30	Complete with 100mA dimmable driver






11112P/W/W

11112P | 12W | COB LED | Aluminium



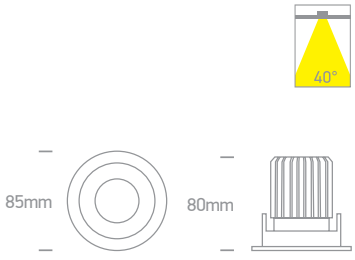




11112P/B/W

11112P | 12W | COB LED | Aluminium



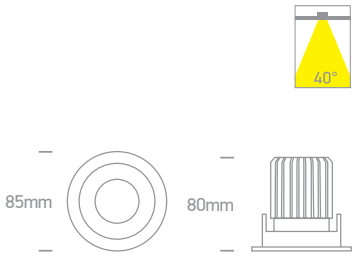


Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112P/W/W	White	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	72mm	100mm	48	Requires 700mA driver
11112P/B/W	Black	Brass	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	72mm	100mm	48	Requires 700mA driver



11107T/W/W

11106T/B/W

The Mirror Recessed Cylinders

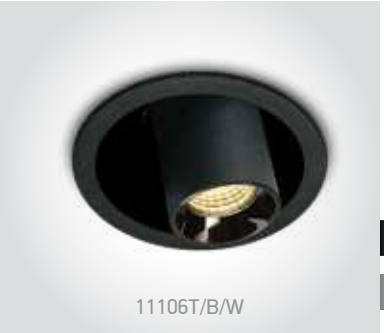

11106T/B/W

11106T | 6W | COB LED | Aluminium

LED BUILT IN

90 CRI

ADJUSTABLE

CE


5 YEAR


DARK LIGHT

IP20



11106T/W/W



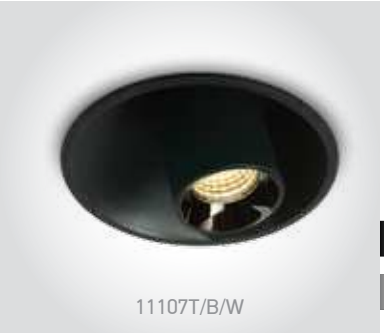

11107T/B/W

11107T | 7W | COB LED | Aluminium

LED BUILT IN

90 CRI

ADJUSTABLE

CE


5 YEAR

DARK LIGHT

IP20



11107T/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11106T/W/W	White	Warm white	3000K	6W	480lm	38°	230V		52mm	70mm	50	Complete with 135mA driver
11106T/B/W	Black	Warm white	3000K	6W	480lm	38°	230V		52mm	70mm	50	Complete with 135mA driver
11107T/W/W	White	Warm white	3000K	7W	560lm	38°	230V		74mm	80mm	30	Complete with 160mA driver
11107T/B/W	Black	Warm white	3000K	7W	560lm	38°	230V		74mm	80mm	30	Complete with 160mA driver



11111C/W/W



51211C/B/W

The COB Recessed Cylinders

11111C | 11W | COB LED | Die cast



11111C/W/W


LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20



11111C/B/W



Complete with Black & Brass reflectors.




050302 | Ring for 11111C | Aluminium



050302/B



050302/W



51111C | 11W | COB LED | Die cast



51111C/W/W


LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20



51111C/B/W



Complete with Black & Brass reflectors.



51211C | 2x11W | COB LED | Die cast




51211C/W/W

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20

51211C/B/W



Complete with Black & Brass reflectors.

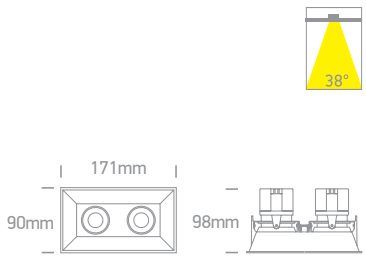

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11111C/W/W	White	Warm white	3000K	11W	820lm	38°	230V		85mm	110mm	20	Complete with 250mA driver
11111C/B/W	Black	Warm white	3000K	11W	820lm	38°	230V		85mm	110mm	20	Complete with 250mA driver
51111C/W/W	White	Warm white	3000K	11W	820lm	38°	230V		85x85mm	110mm	20	Complete with 250mA driver
51111C/B/W	Black	Warm white	3000K	11W	820lm	38°	230V		85x85mm	110mm	20	Complete with 250mA driver
51211C/W/W	White	Warm white	3000K	2x11W	2x820lm	38°	230V		165x85mm	110mm	20	Complete with 250mA drivers
51211C/B/W	Black	Warm white	3000K	2x11W	2x820lm	38°	230V		165x85mm	110mm	20	Complete with 250mA drivers





11109B/W/W

11109B | 9W | COB LED | Aluminium


LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20



11109B/B/W



Complete with Black & Brass reflectors.






11107C/W/W

11107C | 6,5W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20



11107C/B/W






11207C/W/W

11207C | 2x6,5W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20



11207C/B/W




Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11109B/W/W	White	Black/Brass	Warm white	3000K	9W	675lm	40°	500mA		40cm	120mm	90mm	12	Requires 500mA driver
11109B/B/W	Black	Black/Brass	Warm white	3000K	9W	675lm	40°	500mA		40cm	120mm	90mm	12	Requires 500mA driver
11107C/W/W	White	Black	Warm white	3000K	6,5W	550lm	36°	700mA		40cm	83mm	80mm	36	Requires 700mA driver
11107C/B/W	Black	Brass	Warm white	3000K	6,5W	550lm	36°	700mA		40cm	83mm	80mm	36	Requires 700mA driver
11207C/W/W	White	Black	Warm white	3000K	2x6,5W	2x550lm	36°	700mA		40cm	2x83mm	90mm	24	Requires 2x700mA drivers
11207C/B/W	Black	Brass	Warm white	3000K	2x6,5W	2x550lm	36°	700mA		40cm	2x83mm	90mm	24	Requires 2x700mA drivers




Extractable 12W Spot



11113E | 12W | COB LED | Aluminium





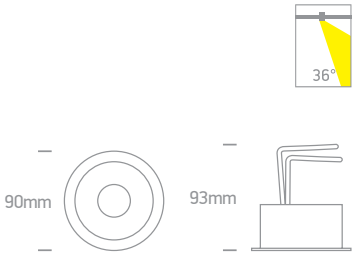

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11113E/W/W	White	Warm white	3000K	12W	1100lm	36°	350mA		40cm	80mm	120mm	36	Requires 350mA driver






11108LA/W/W

11108LA | 8W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
3 YEAR
IP20








11108LA/B/W

11108LA | 8W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
3 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11108LA/W/W	White	Warm white	3000K	8W	600lm	25°	230V		68mm	50mm	24	Complete with 200mA driver
11108LA/B/W	Black	Warm white	3000K	8W	600lm	25°	230V		68mm	50mm	24	Complete with 200mA driver




Moving Inner Cylinder Range

11103M | 3W | COB LED | Aluminium



LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
3 YEAR
DARK LIGHT
IP20






11106M | 6W | COB LED | Die cast



LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
3 YEAR
IP20



Suitable for 89008 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103M/W/W	White	Warm white	3000K	3W	280lm	36°	350mA	III	40cm	44mm	35mm	100	Requires 350mA driver
11106M/W/W	White	Warm white	3000K	6W	540lm	24°	350mA	III	40cm	55mm	95mm	60	Requires 350mA driver



51206M/W/W

11106M/W/W

Moving Inner Cylinder Range




51106M | 6W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 3 YEAR

IP20



Suitable for 89008 driver.

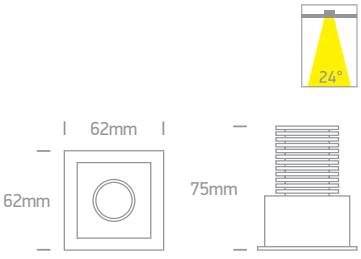




51206M | 2x6W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 3 YEAR

IP20



Suitable for 2x89008 drivers.

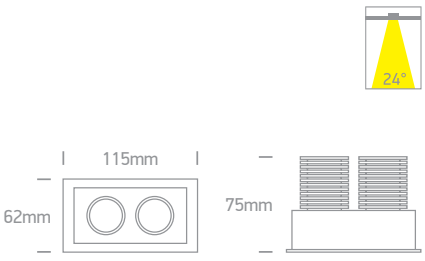

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
51106M/W/W	White	Warm white	3000K	6W	540lm	24°	350mA	III	40cm	58x58mm	95mm	60	Requires 350mA driver
51206M/W/W	White	Warm white	3000K	2x6W	2x540lm	24°	350mA	III	40cm	108x58mm	95mm	36	Requires 2x350mA drivers




The Mirror Adjustable Boxes


51406B/W/W

51406B | 16W | COB LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
3 YEAR
IP20







51406B/B/W

51406B | 16W | COB LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
3 YEAR
IP20







51506B/W/W

51506B | 20W | COB LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
3 YEAR
IP20



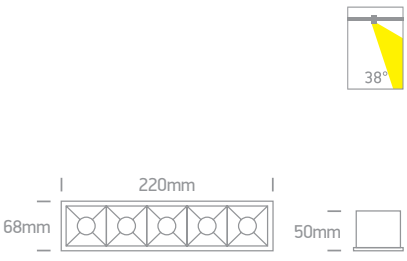



51506B/B/W

51506B | 20W | COB LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
3 YEAR
IP20



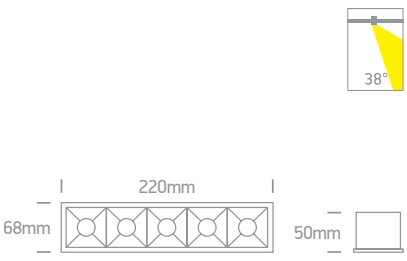

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51406B/W/W	White	Warm white	3000K	16W	1280lm	38°	230V		100x100mm	100mm	30	Complete with 400mA driver
51406B/B/W	Black	Warm white	3000K	16W	1280lm	38°	230V		100x100mm	100mm	30	Complete with 400mA driver
51506B/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		212x55mm	70mm	30	Complete with 500mA driver
51506B/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		212x55mm	70mm	30	Complete with 500mA driver



The Mirror Adjustable Boxes



51012H/B/W

51012H | 12W | SMD 3535 | Aluminium

LED BUILT IN

90 CRI

ADJUSTABLE

CE


5 YEAR

DARK LIGHT

IP20



51012H/W/W





51024H/B/W

51024H | 24W | SMD 3535 | Aluminium

LED BUILT IN

90 CRI

ADJUSTABLE

CE


5 YEAR

DARK LIGHT

IP20



51024H/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51012H/W/W	White	Warm white	3000K	12W	840lm	38°	230V		150x43mm	70mm	40	Complete with 700mA driver
51012H/B/W	Black	Warm white	3000K	12W	840lm	38°	230V		150x43mm	70mm	40	Complete with 700mA driver
51024H/W/W	White	Warm white	3000K	24W	1680lm	38°	230V		280x43mm	70mm	20	Complete with 700mA driver
51024H/B/W	Black	Warm white	3000K	24W	1680lm	38°	230V		280x43mm	70mm	20	Complete with 700mA driver

The COB Cylinders




11112RA/B/W

11107RA/W/W



11107RA/W/W

11107RA | 6,5W | COB LED | Aluminium

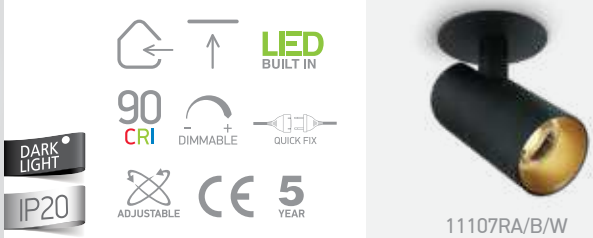




11107RA/B/W






11112RA/W/W

11112RA | 12W | COB LED | Aluminium

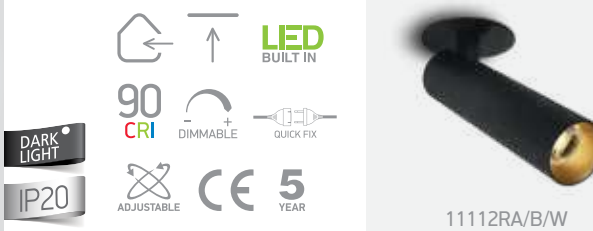




11112RA/B/W




Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107RA/W/W	White	Black	Warm white	3000K	6,5W	500lm	36°	700mA	III	40cm	45mm	40mm	36	Requires 700mA driver
11107RA/B/W	Black	Brass	Warm white	3000K	6,5W	500lm	36°	700mA	III	40cm	45mm	40mm	36	Requires 700mA driver
11112RA/W/W	White	Black	Warm white	3000K	12W	1020lm	36°	350mA	III	40cm	55mm	50mm	20	Requires 350mA driver
11112RA/B/W	Black	Brass	Warm white	3000K	12W	1020lm	36°	350mA	III	40cm	55mm	50mm	20	Requires 350mA driver

The COB Cylinder

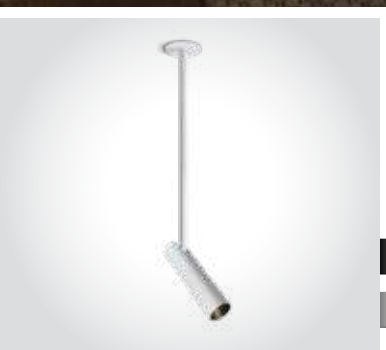

11112RB | 12W | COB LED | Aluminium





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112RB/W/W	White	Black	Warm white	3000K	12W	1020lm	36°	350mA		40cm	55mm	50mm	18	Requires 350mA driver



The COB Fire Rated



11106PF | 6W | COB LED | Fire rated | Die cast

Ring must be ordered separately.

LED BUILT IN · FIRE RATED · 80 CRI · DIMMABLE · QUICK FIX · IP20 · ADJUSTABLE · CE · 3 YEAR




050044/C Chrome




050044/MC
Brushed chrome



Dimensions are complete with the ring.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11106PF/C	-	Cool white	4000K	6W	530lm	40°	350mA	III	40cm	75mm	90mm	20	Requires 350mA driver

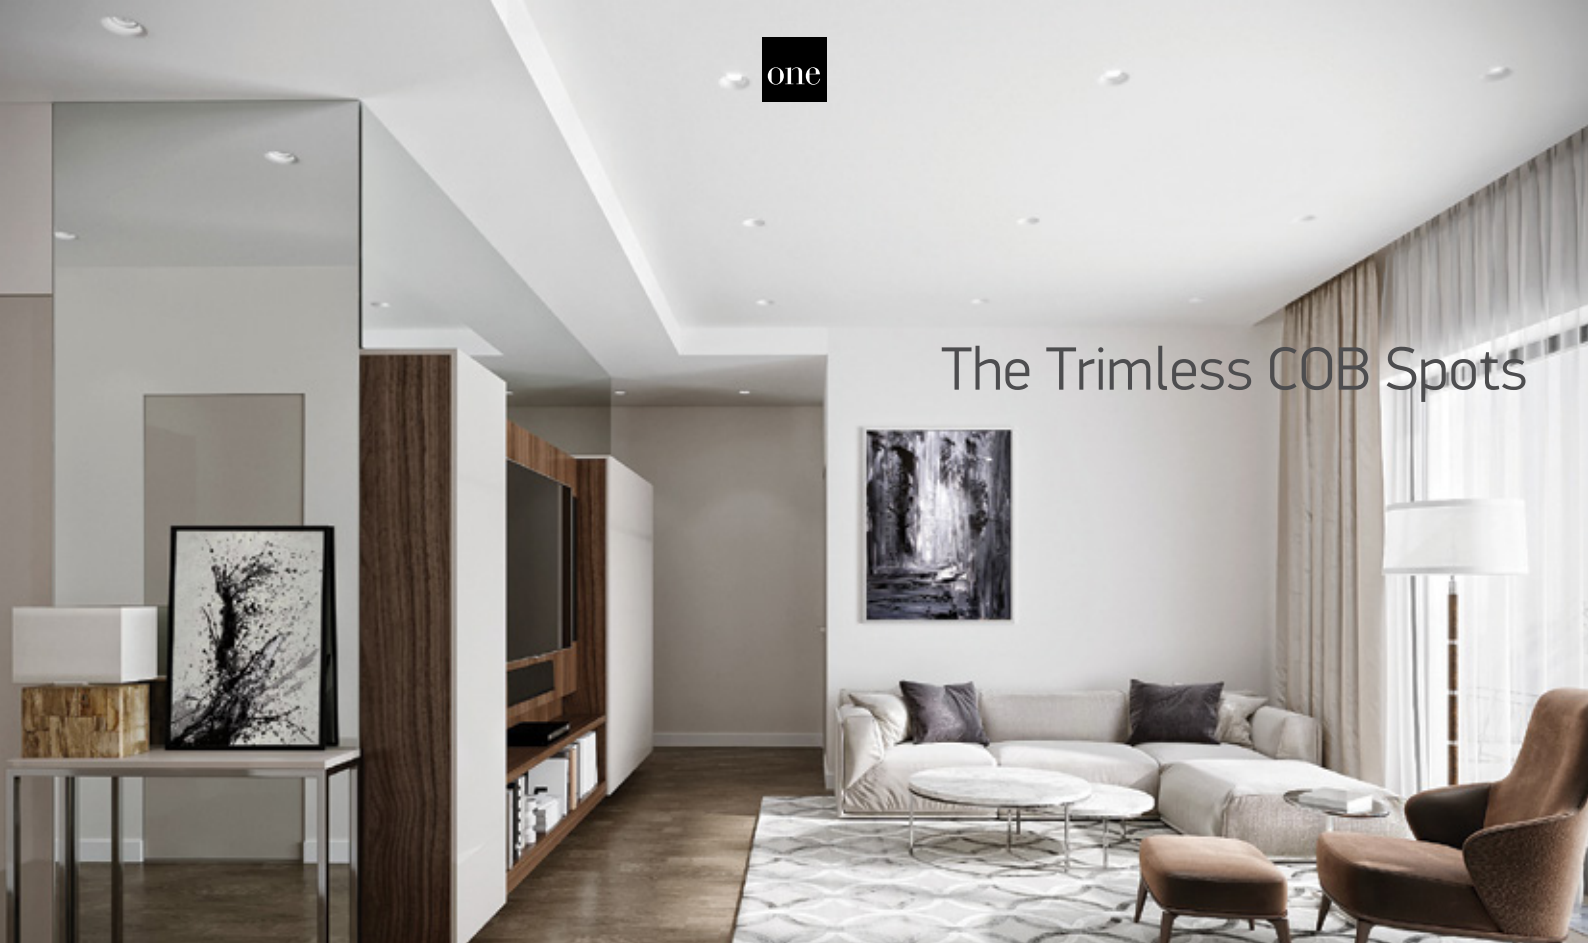



The Trimless COB Spots



11107BT | 6,5W | COB LED | Trimless | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP54



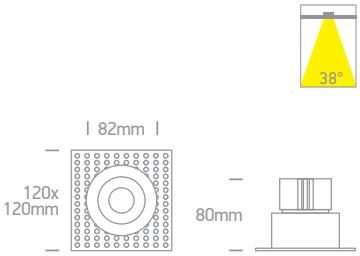




11112T | 12W | COB LED | Trimless | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20



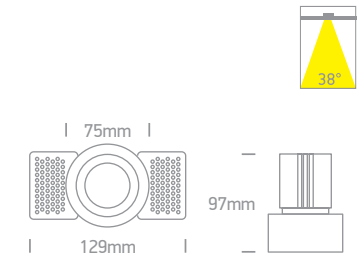




11107TTR | 7W | COB LED | Trimless | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20



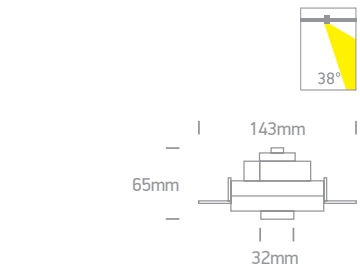

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107BT/W/W	White	Warm white	3000K	6,5W	500lm	38°	700mA	III	40cm	96mm	105mm	30	Requires 700mA driver
11112T/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	75mm	110mm	40	Requires 700mA driver
11107TTR/W/W	White	Warm white	3000K	7W	560lm	38°	230V	II	-	88mm	90mm	30	Complete with 160mA driver



Downlights

Pages 153-160

05





The GX53 Downlights



10004 | 9W | GX53 | Natural aluminium


5 YEAR

IP20

offer



Suitable for GX53 LED lamp.





10007/W

10007 | 9W | GX53 | Steel


5 YEAR

IP20

offer



Suitable for GX53 LED lamp.





10007/MC

10007 | 9W | GX53 | Steel


5 YEAR

IP20

offer



Suitable for GX53 LED lamp.



Order Code	Colour	Watts	Input	Class				Notes
10004/AL	Aluminium	9W	100-240V		86mm	35mm	50	-
10007/W	White	9W	100-240V		110mm	60mm	50	-
10007/MC	Brushed chrome	9W	100-240V		110mm	60mm	50	-



Adjustable R111 Shop Range



11110N | 75W | R111 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.

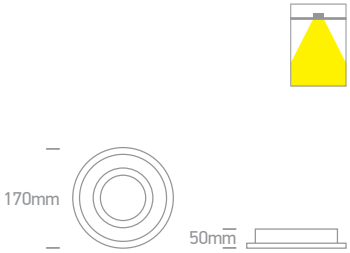



51110N | 75W | R111 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.

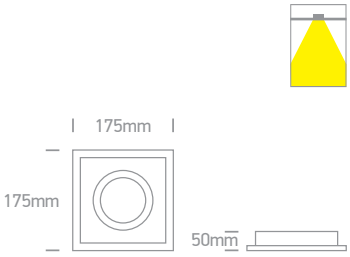

Order Code	Colour	Watts	Input	Class					Notes
11110N/W	White	75W	100-240V	⏚	15cm	165mm	160mm	30	-
51110N/W	White	75W	100-240V	⏚	15cm	165x165mm	160mm	30	-

Adjustable PAR30
Die cast

11070RD | 75W | PAR30 | E27 | Die cast



ADJUSTABLE

QUICK FIX

IP20

5 YEAR

offer



Suitable for PAR30 LED lamp.







Order Code	Colour	Watts	Input	Class					Notes
11070RD/G	Grey	75W	100-240V		30cm	155mm	180mm	12	-



Adjustable R111 Range



11110AB | 75W | R111 | G53 | Aluminium

ADJUSTABLE


CE 5 YEAR

IP20

offer



Suitable for R111 LED lamp.





51110 | 50W | R111 | G53 | Die cast

ADJUSTABLE


CE 5 YEAR

IP20

offer



Suitable for R111 LED lamp.

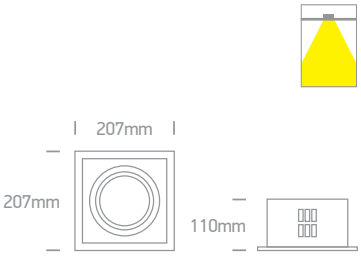

Order Code	Colour	Watts	Input	Class					Notes
11110AB/B	Black	75W	12V	III	40cm	150mm	75mm	20	-
51110/G	Grey	50W	12V	III	15cm	180x180mm	120mm	8	-

The R111 Shop Light
Die cast





51110AD | 75W | R111 | GU10 | Die cast


ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



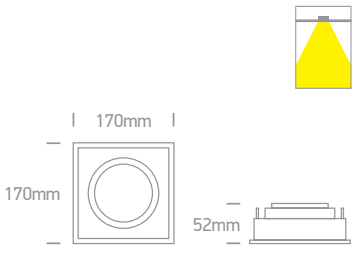

Order Code	Colour	Watts	Input	Class					Notes
51110AD/B	Black	75W	100-240V		20cm	155mm	150mm	20	-

The R111 Shop Light
Die cast




51110ATR/W

51110ATR | 75W | R111 | GU10 | Trimless | Die cast

ADJUSTABLE

5 YEAR

IP20



Order Code	Colour	Watts	Input	Class					Notes
51110ATR/W	White	75W	100-240V	⏚	20cm	170x170mm	150mm	10	-


Trimless Multi System Boxes

For Modules on page 160



51100TR | Trimless box | Metal




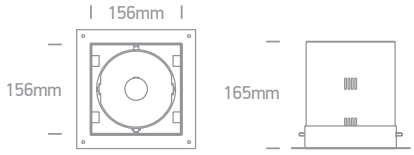



51100TR | Trimless box | Metal



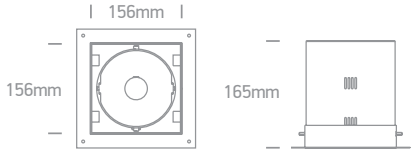

Order Code	Colour	Watts	Input	Class				Notes
51100TR/W	White	-	-	-	164x164mm	200mm	8	-
51100TR/B	Black	-	-	-	164x164mm	200mm	8	-

Trimless Multi System Modules

For Bases on page 159



51100TR/B + 11110TR/B



11110TR/B



11110TR | 75W | R111 | GU10 | Die cast

Base must be ordered separately on page 159.


ADJUSTABLE

CE 5 YEAR

IP20



Suitable for R111 LED lamp.





11070TR | 10W | PAR30 | E27 | Die cast

Base must be ordered separately on page 159.

ADJUSTABLE QUICK FIX


CE 5 YEAR

IP20

offer



Suitable for PAR30 LED lamp.

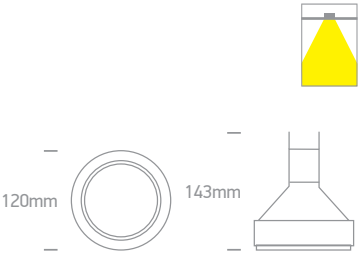

Order Code	Colour	Watts	Input	Class			Notes
11110TR/B	Black	75W	100-240V		10cm	2	-
11070TR/W	White	10W	100-240V		30cm	36	-



Downlights Fixed LED

Pages 163-204

06







The 3-12W Round Recessed Panels
Die cast



10103FA | 3W | SMD LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP40







10108FA/W/W


10108FA | 8W | SMD LED | Die cast

Optional dimmable driver code 89008UT.

LED BUILT IN
80 CRI
CE
2 YEAR
IP40



10108FA/B/W





10112FA/W/W


10112FA | 12W | SMD LED | Die cast

Optional dimmable driver code 89016UT.

LED BUILT IN
80 CRI
CE
2 YEAR
IP40



10112FA/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103FA/W/C	White	Cool white	4000K	3W	210lm	120°	230V		70mm	50mm	60	Complete with 300mA driver
10103FA/W/W	White	Warm white	3000K	3W	180lm	120°	230V		70mm	50mm	60	Complete with 300mA driver
10108FA/W/C	White	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/W/W	White	Warm white	3000K	8W	480lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/B/C	Black	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/B/W	Black	Warm white	3000K	8W	480lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10112FA/W/C	White	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/W/W	White	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/B/C	Black	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/B/W	Black	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with 250mA driver

The 18-30W Round Recessed Panels
Die cast



10112FA/W/W



10118FA/B/W



10118FA/W/W

10118FA | 18W | SMD LED | Die cast

Optional dimmable driver code 89024UT.

LED BUILT IN

80 CRI

CE

2 YEAR

IP40




10118FA/B/W

offer



10118FA/G/W





10130FA/W/C

10130FA | 30W | SMD LED | Die cast

Optional dimmable driver code 89030UT.

LED BUILT IN

80 CRI


CE

2 YEAR

IP40



10130FA/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118FA/W/D	White	Daylight	6000K	18W	1260lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10118FA/W/C	White	Cool white	4000K	18W	1260lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10118FA/W/W	White	Warm white	3000K	18W	1080lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10118FA/B/W	Black	Warm white	3000K	18W	1080lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10118FA/G/W	Grey	Warm white	3000K	18W	1080lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10130FA/W/C	White	Cool white	4000K	30W	2100lm	120°	230V	☐	285mm	50mm	15	Complete with 700mA driver
10130FA/W/W	White	Warm white	3000K	30W	1800lm	120°	230V	☐	285mm	50mm	15	Complete with 700mA driver



The 3-12W Round Recessed Panels
CCT V



10103FA/W/V

10103FA | 3W | SMD 2835 | Die cast

new
IP20
LED BUILT IN
80 CRI
3 YEAR


10103FA/B/V


CCT Variable





10108FA/W/V

10108FA | 8W | SMD 2835 | Die cast

new
IP20
LED BUILT IN
80 CRI
3 YEAR


10108FA/B/V


CCT Variable





10112FA/W/V

10112FA | 12W | SMD 2835 | Die cast

new
IP20
LED BUILT IN
80 CRI
3 YEAR


10112FA/B/V


CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103FA/W/V	White	CCT V	3000K-4000K-5700K	3W	240lm	120°	230V	☐	70mm	50mm	30	Complete with 300mA driver
10103FA/B/V	Black	CCT V	3000K-4000K-5700K	3W	240lm	120°	230V	☐	70mm	50mm	30	Complete with 300mA driver
10108FA/W/V	White	CCT V	3000K-4000K-5700K	8W	640lm	120°	230V	☐	108mm	50mm	20	Complete with 200mA driver
10108FA/B/V	Black	CCT V	3000K-4000K-5700K	8W	640lm	120°	230V	☐	108mm	50mm	20	Complete with 200mA driver
10112FA/W/V	White	CCT V	3000K-4000K-5700K	12W	1200lm	120°	230V	☐	155mm	50mm	20	Complete with 300mA driver
10112FA/B/V	Black	CCT V	3000K-4000K-5700K	12W	1200lm	120°	230V	☐	155mm	50mm	20	Complete with 300mA driver

The 18W-30W Round Recessed Panels
CCT V



10118FA/W/V



10118FA/B/V



10118FA/W/V

10118FA | 18W | SMD 2835 | Die cast

new

IP20

LED BUILT IN

80 CRI


3 YEAR



10118FA/B/V



CCT Variable





10130FA/W/V

10130FA | 30W | SMD 2835 | Die cast

new

IP20

LED BUILT IN

80 CRI


3 YEAR



10130FA/B/V



CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118FA/W/V	White	CCT V	3000K-4000K-5700K	18W	1800lm	120°	230V		210mm	50mm	16	Complete with 450mA driver
10118FA/B/V	Black	CCT V	3000K-4000K-5700K	18W	1800lm	120°	230V		210mm	50mm	16	Complete with 450mA driver
10130FA/W/V	White	CCT V	3000K-4000K-5700K	30W	3300lm	120°	230V		285mm	50mm	12	Complete with 800mA driver
10130FA/B/V	Black	CCT V	3000K-4000K-5700K	30W	3300lm	120°	230V		285mm	50mm	12	Complete with 800mA driver



50130FA/W/C

50130FA/G/W

The 16-30W Square Recessed Panels
Die cast



50116FA | 16W | SMD LED | Die cast


Optional dimmable driver code 89016UT.


LED BUILT IN

80 CRI CE 2 YEAR

IP40





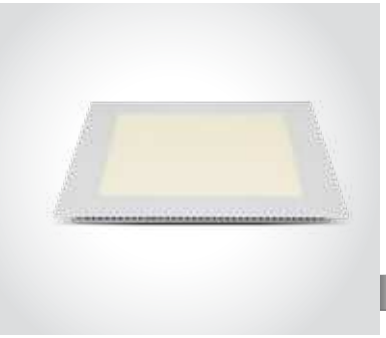

50122FA | 22W | SMD LED | Die cast

Optional dimmable driver code 89024UT.


LED BUILT IN

80 CRI CE 2 YEAR

IP40









50130FA/W/C

50130FA | 30W | SMD LED | Die cast

Optional dimmable driver code 89030UT.


LED BUILT IN

80 CRI CE 2 YEAR


IP40



50130FA/G/W







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50116FA/W/C	White	Cool white	4000K	16W	1120lm	120°	230V		155x155mm	50mm	30	Complete with 350mA driver
50116FA/W/W	White	Warm white	3000K	16W	960lm	120°	230V		155x155mm	50mm	30	Complete with 350mA driver
50122FA/W/W	White	Warm white	3000K	22W	1320lm	120°	230V		210x210mm	50mm	20	Complete with 500mA driver
50130FA/W/C	White	Cool white	4000K	30W	2100lm	120°	230V		280x280mm	50mm	15	Complete with 700mA driver
50130FA/G/W	Grey	Warm white	3000K	30W	1800lm	120°	230V		280x280mm	50mm	15	Complete with 700mA driver




The 16-30W Square Recessed Panels
CCT V




50116FA | 16W | SMD LED | Die cast

new
IP20
LED BUILT IN
80 CRI
CCT V
CE
3 YEAR





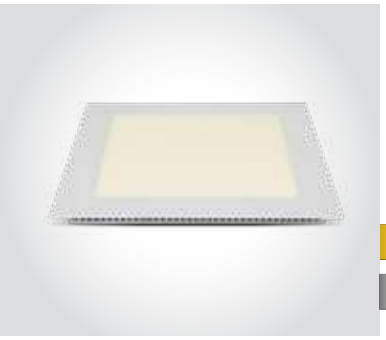


50122FA | 22W | SMD LED | Die cast

new
IP20
LED BUILT IN
80 CRI
CCT V
CE
3 YEAR










50130FA | 30W | SMD LED | Die cast

new
IP20
LED BUILT IN
80 CRI
CCT V
CE
3 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50116FA/W/V	White	CCT V	3000K-4000K-5700K	16W	1600lm	120°	230V		155X155mm	50mm	20	Complete with 400mA driver
50122FA/W/V	White	CCT V	3000K-4000K-5700K	22W	2200lm	120°	230V		210x210mm	50mm	16	Complete with 550mA driver
50130FA/W/V	White	CCT V	3000K-4000K-5700K	30W	3000lm	120°	230V		280x280mm	50mm	12	Complete with 800mA driver




The 40-48W Round Recessed Panels
Die cast





10140F | 40W | SMD LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40







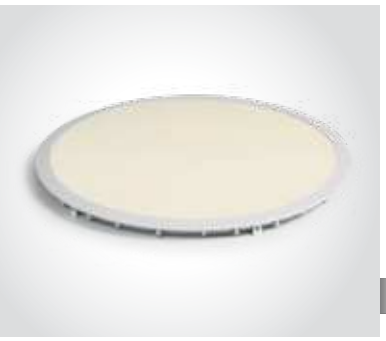

10148PE | 48W | SMD 2835 | 600mm | Die cast

Driver must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP20




Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.




Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.






10148P | 48W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · TRIAC · DIMMABLE · CE · 2 YEAR · IP20 · offer







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10140F/W/C	White	Cool white	4000K	40W	3400lm	120°	230V		408mm	40mm	5	Complete with 1000mA driver
10140F/W/W	White	Warm white	3000K	40W	3400lm	120°	230V		408mm	40mm	5	Complete with 1000mA driver
10148PE/W/W	White	Warm white	3000K	48W	3500lm	120°	1200mA		585mm	80mm	4	Requires 1200mA driver
10148P/W/D	White	Daylight	6000K	48W	3200lm	120°	230V		585mm	80mm	2	Complete with 1200mA driver



The 40W Backlit Panel
600x600mm



50140B | 40W | SMD LED | 595x595mm | Aluminium + Steel

Backlit.

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20




Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional DALI & Push to DIM driver. Order code 89044L.





50140BU | 40W | SMD LED | 595x595mm | Aluminium + Steel | Microprismatic

Backlit.

LED BUILT IN · 80 CRI · CE · 3 YEAR · UGR19 · IP20




Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional DALI & Push to DIM driver. Order code 89044L.





50140BU/W/V | 40W | SMD LED | 595x595mm | Aluminium + steel | Microprismatic

Backlit.

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · UGR19 · IP20




Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional DALI & Push to DIM driver. Order code 89044L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140B/W/D	White	Daylight	6000K	40W	4000lm	230V		50mm	4	Complete with 850mA driver
50140B/W/C	White	Cool white	4000K	40W	4000lm	230V		50mm	4	Complete with 850mA driver
50140B/W/W	White	Warm white	3000K	40W	4000lm	230V		50mm	4	Complete with 850mA driver
50140BU/W/C	White	Cool white	4000K	40W	4000lm	230V		60mm	6	Complete with 1000mA driver
50140BU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		60mm	4	Complete with 1000mA driver

Panels For Germany/Austria
620x620mm





Germany / Austria

D A

50148AU | 48W | SMD 2835 | 620x620mm | Aluminium | Microprismatic

Driver must be ordered separately.

LED BUILT IN

80 CRI

DIMMABLE

IP20

offer

2 YEAR UGR19



Optional suspension kit. Order code 050017.




Optional recessed kit (4pcs). Order code 050108.



Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.





Germany / Austria

D A

50140BAU | 40W | SMD 2835 | 620x620mm | Aluminium + Steel | Microprismatic

Backlit.

LED BUILT IN

80 CRI

CCT V

new

IP20

3 YEAR UGR19




Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional DALI & Push to DIM driver. Order code 89040L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50148AU/W/W	White	Warm white	3000K	48W	4000lm	1200mA	III	55mm	4	Requires 1200mA driver
50140BAU/W/V	White	CCT V	3000K-4000K-6000K	40W	3600lm-4000lm-3800lm	230V		60mm	4	Complete with 1000mA driver

The IP65 Recessed Panels
600X600mm



50140BW | 40W | SMD 2835 | 595x595mm | Aluminium + Steel

Backlit.

LED BUILT IN

80 CRI

CCT V

CE

new

IP65


3 YEAR



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140BW/W/V	White	CCT V	3000K-4000K-5700K	40W	4000lm	230V	⧈	60mm	4	Complete with IP65 950mA driver





50148RE | 48W | SMD LED | 1195x295mm | Aluminium

Driver must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP20



Optional suspension kit. Order code 050017.

Requires 2 sets.



Optional recessed kit (4pcs). Order code 050108.




Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.







50140BR | 40W | SMD LED | Aluminium + steel

Backlit.

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20



Optional suspension kit. Order code 050017.

Requires 2 sets.




Optional recessed kit (4pcs). Order code 050108.



Optional DALI & Push to DIM driver. Order code 89040L.







50140BRU | 40W | SMD LED | Aluminium + steel | Microprismatic

Backlit.

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · UGR19 · IP20



Optional suspension kit. Order code 050017.

Requires 2 sets.




Optional recessed kit (4pcs). Order code 050108.



Optional DALI & Push to DIM driver. Order code 89040L.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50148RE/W/D	White	Daylight	6000K	48W	4100lm	1200mA	◈	50mm	4	Requires 1200mA driver
50140BR/W/C	White	Cool white	4000K	40W	4000lm	230V	▢	50mm	4	Complete with 1000mA driver
50140BRU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V	▢	50mm	4	Complete with 1000mA driver


The Dark Light Downlights



10105E | 5W | LED | Natural aluminium

DARK LIGHT · IP40 · offer · LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR








10115E | 15W | LED | Natural aluminium

DARK LIGHT · IP40 · offer · LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR








10130A | 30W | SMD LED | Aluminium

DARK LIGHT · IP20 · offer · LED BUILT IN · 80 CRI · CE · 2 YEAR








10112KD | 12W | SMD LED | Plastic

DARK LIGHT · IP20 · offer · LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · CE · 2 YEAR







10108ED/W/BS/W


10108ED | 8W | SMD LED | Aluminium

DARK LIGHT · IP20 · LED BUILT IN · 80 CRI · CE · 2 YEAR



10108ED/W/B/W





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10105E/AL/C	Aluminium	-	Cool white	4000K	5W	375lm	-	500mA	III	40cm	85mm	110mm	20	Requires 500mA driver
10105E/AL/W	Aluminium	-	Warm white	3000K	5W	360lm	-	500mA	III	40cm	85mm	110mm	20	Requires 500mA driver
10115E/AL/C	Aluminium	-	Cool white	4000K	15W	1125lm	-	700mA	III	40cm	125mm	150mm	20	Requires 700mA driver
10115E/AL/W	Aluminium	-	Warm white	3000K	15W	1050lm	-	700mA	III	40cm	125mm	150mm	20	Requires 700mA driver
10130A/AL/W	Aluminium	-	Warm white	3000K	30W	2300lm	80°	100-240V	□	-	210mm	170mm	5	Complete with 350mA driver
10112KD/W/C	White	-	Cool white	4000K	12W	900lm	100°	350mA	III	30cm	168mm	160mm	12	Requires 350mA driver
10108ED/W/B/W	White	Black	Warm white	3000K	8W	480lm	60°	230V	□	-	75mm	80mm	50	Complete with 300mA driver
10108ED/W/BS/W	White	Brass	Warm white	3000K	8W	560lm	60°	230V	□	-	75mm	80mm	50	Complete with 300mA driver



Surface/Recessed Panels
Adjustable Cut Out Hole



62116F | 16W | SMD 2835 | Surface / Recessed Mounted | Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Adjustable cutout hole.







62116FA | 16W | SMD 2835 | Surface / Recessed Mounted | Plastic

LED BUILT IN

80 CRI

CE


2 YEAR

IP20



Adjustable cutout hole.






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
62116F/W/W	White	Warm white	3000K	16W	1500lm	100-240V		70-175mm	50mm	20	Complete with 210mA driver
62116FA/W/C	White	Cool white	4000K	16W	1500lm	100-240V		70-190mm	50mm	20	Complete with 230mA driver
62116FA/W/W	White	Warm white	3000K	16W	1500lm	100-240V		70-190mm	50mm	20	Complete with 230mA driver

The Chrome Bezel Range
Aluminium



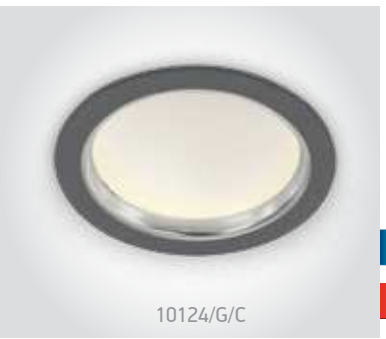

10124/G/C

10124 | 24W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP44

offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10124/G/C	Grey	Cool white	4000K	24W	1550lm	120°	230V		210mm	160mm	8	Complete with 600mA driver




The Budget Downlight Range
Aluminium



10103T | 3W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



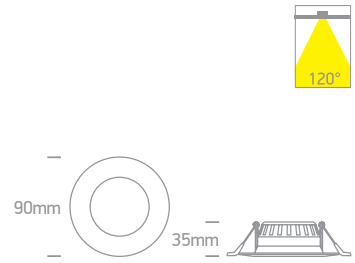




10107T | 7W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



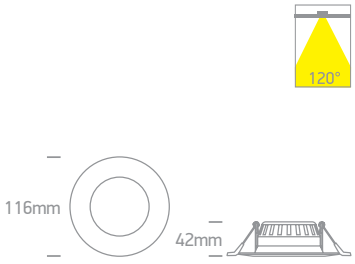




10115T | 15W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



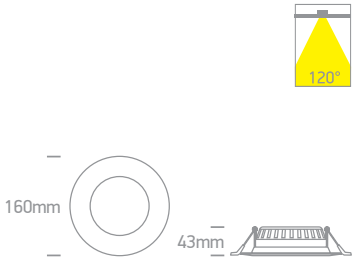

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103T/W/C	White	Cool white	4000K	3W	220lm	120°	230V	☐	68mm	50mm	100	Complete with 250mA driver
10103T/W/W	White	Warm white	3000K	3W	210lm	120°	230V	☐	68mm	50mm	100	Complete with 250mA driver
10107T/W/W	White	Warm white	3000K	7W	490lm	120°	230V	☐	85mm	60mm	60	Complete with 250mA driver
10115T/W/C	White	Cool white	4000K	15W	1100lm	120°	230V	☐	130mm	60mm	30	Complete with 300mA driver
10115T/W/W	White	Warm white	3000K	15W	1050lm	120°	230V	☐	130mm	60mm	30	Complete with 300mA driver

The Budget Downlight Range
Aluminium





10124T | 24W | SMD 2835 | Aluminium

LED BUILT IN


80 CRI

CE

2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10124T/W/C	White	Cool white	4000K	24W	1800lm	120°	230V	⧈	210mm	75mm	20	Complete with 600mA driver
10124T/W/W	White	Warm white	3000K	24W	1700lm	120°	230V	⧈	210mm	75mm	20	Complete with 600mA driver

Floating Round Panels Range
Adjustable Cut Out Hole






10110CE | 10W | SMD 4014 | Aluminium + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



Adjustable cutout hole.

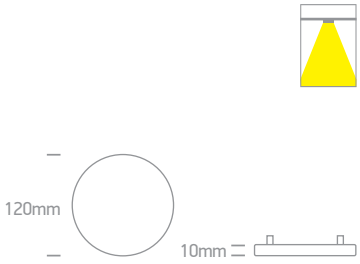




10114CE | 14W | SMD 4014 | Aluminium + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



Adjustable cutout hole.

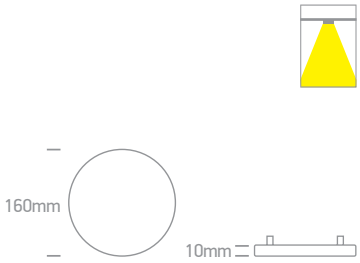




10120CE | 20W | SMD 4014 | Aluminium + PC


LED BUILT IN
80 CRI
CE
2 YEAR
IP20



Adjustable cutout hole.

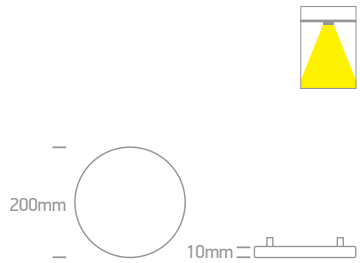

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110CE/C	White	Cool white	4000K	10W	1150lm	230V		60-100mm	40mm	40	Complete with 250mA driver
10110CE/W	White	Warm white	3000K	10W	1150lm	230V		60-100mm	40mm	40	Complete with 250mA driver
10114CE/C	White	Cool white	4000K	14W	1610lm	230V		60-140mm	40mm	40	Complete with 300mA driver
10114CE/W	White	Warm white	3000K	14W	1610lm	230V		60-140mm	40mm	40	Complete with 300mA driver
10120CE/C	White	Cool white	4000K	20W	2300lm	230V		70-180mm	40mm	40	Complete with 700mA driver
10120CE/W	White	Warm white	3000K	20W	2300lm	230V		70-180mm	40mm	40	Complete with 700mA driver

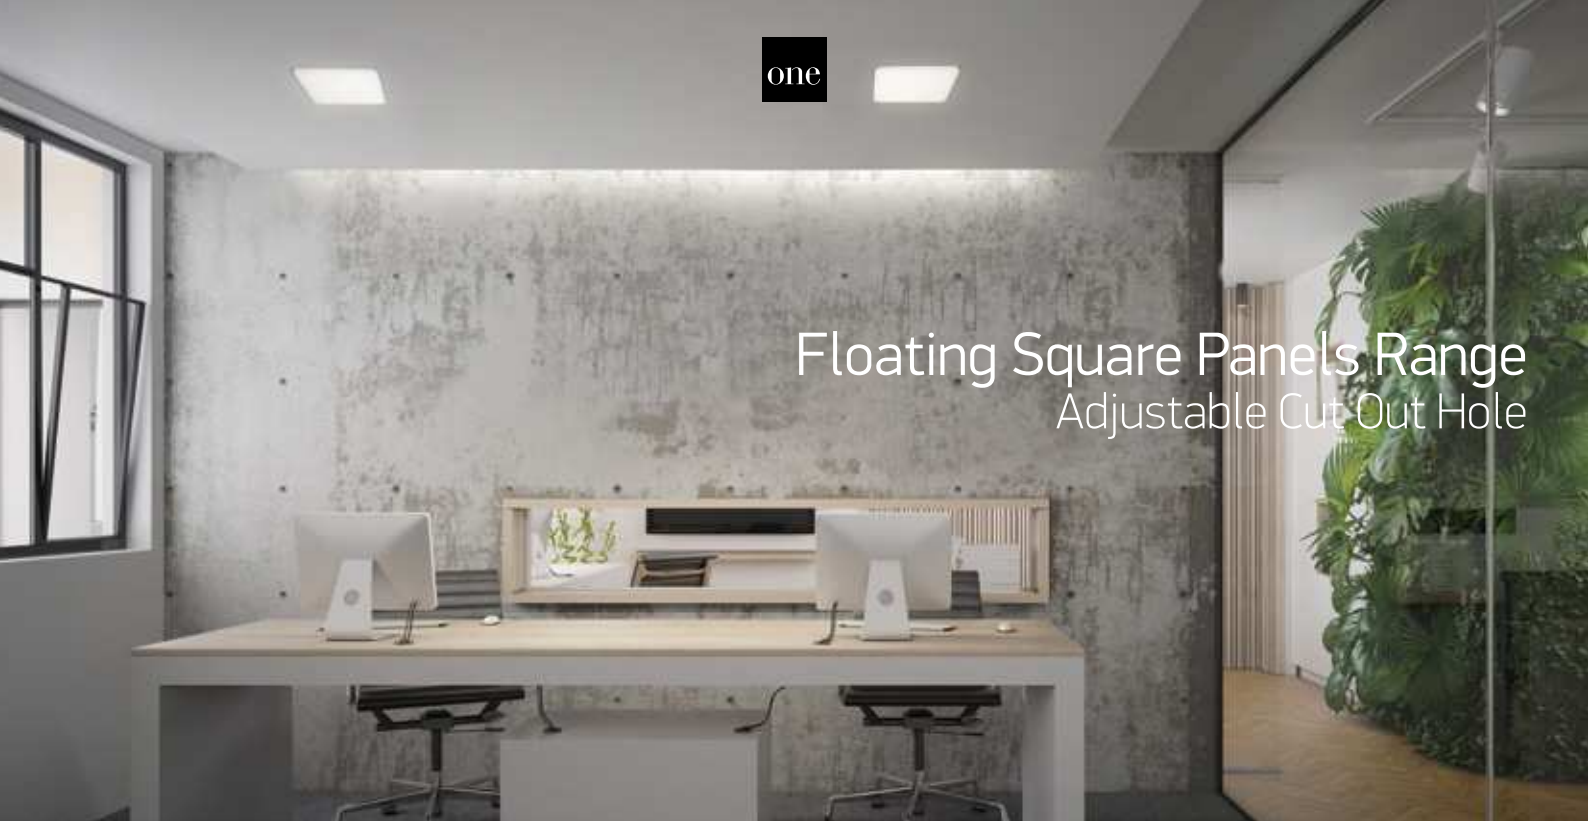

Floating Square Panels Range
Adjustable Cut Out Hole




50110CE | 10W | SMD 4014 | Aluminium + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



Adjustable cutout hole.

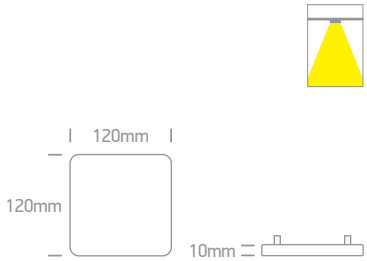




50114CE | 14W | SMD 4014 | Aluminium + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



Adjustable cutout hole.

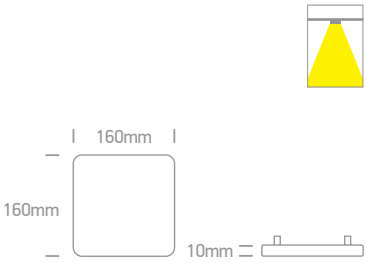




50120CE | 20W | SMD 4014 | Aluminium + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



Adjustable cutout hole.

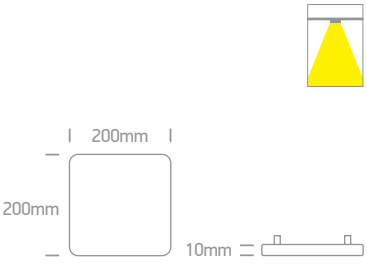

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
50110CE/C	White	Cool white	4000K	10W	1150lm	230V		50-100mm	50mm	40	Complete with 250mA driver
50110CE/W	White	Warm white	3000K	10W	1150lm	230V		50-100mm	50mm	40	Complete with 250mA driver
50114CE/C	White	Cool white	4000K	14W	1610lm	230V		70-140mm	50mm	40	Complete with 300mA driver
50114CE/W	White	Warm white	3000K	14W	1610lm	230V		70-140mm	50mm	40	Complete with 300mA driver
50120CE/C	White	Cool white	4000K	20W	2300lm	230V		70-180mm	50mm	40	Complete with 700mA driver
50120CE/W	White	Warm white	3000K	20W	2300lm	230V		70-180mm	50mm	40	Complete with 700mA driver




The COB Downlight Range
Die cast



10107CA | 7W | COB LED | Die cast

LED BUILT IN · 90 CRI · CE · 2 YEAR · IP20








10110CA | 10W | COB LED | Die cast

LED BUILT IN · 90 CRI · CE · 2 YEAR · IP20








10115CA | 15W | COB LED | Die cast

LED BUILT IN · 90 CRI · CE · 2 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CA/W/C	White	Cool white	4000K	7W	560lm	60°	230V	☐	75mm	70mm	50	Complete with 300mA driver
10107CA/W/W	White	Warm white	3000K	7W	560lm	60°	230V	☐	75mm	70mm	50	Complete with 300mA driver
10110CA/W/C	White	Cool white	4000K	10W	850lm	60°	230V	☐	95mm	100mm	50	Complete with 300mA driver
10110CA/W/W	White	Warm white	3000K	10W	850lm	60°	230V	☐	95mm	100mm	50	Complete with 300mA driver
10115CA/W/C	White	Cool white	4000K	15W	1275lm	60°	230V	☐	125mm	100mm	30	Complete with 350mA driver
10115CA/W/W	White	Warm white	3000K	15W	1275lm	60°	230V	☐	125mm	100mm	30	Complete with 350mA driver



The COB Downlight Range


Die cast



10120CA | 20W | COB LED | Die cast

LED BUILT IN · 90 CRI · CE · 2 YEAR · IP20



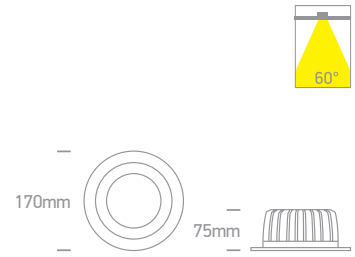




10130CA | 30W | COB LED | Die cast

LED BUILT IN · 90 CRI · CE · 2 YEAR · IP20



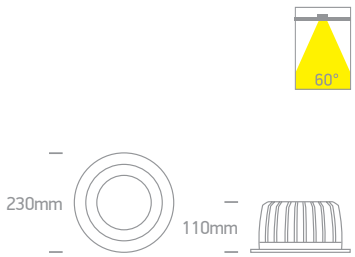




10160CA | 60W | COB LED | Die cast

LED BUILT IN · 90 CRI · CE · 2 YEAR · IP20



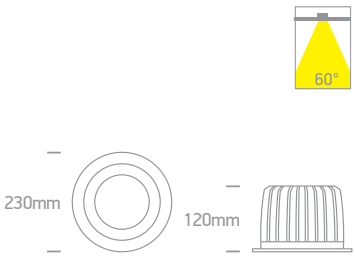

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120CA/W/C	White	Cool white	4000K	20W	1800lm	60°	230V	☐	145mm	100mm	20	Complete with 500mA driver
10120CA/W/W	White	Warm white	3000K	20W	1800lm	60°	230V	☐	145mm	100mm	20	Complete with 500mA driver
10130CA/W/C	White	Cool white	4000K	30W	2700lm	60°	230V	☐	210mm	140mm	10	Complete with 750mA driver
10130CA/W/W	White	Warm white	3000K	30W	2700lm	60°	230V	☐	210mm	140mm	10	Complete with 750mA driver
10160CA/W/C	White	Cool white	4000K	60W	5400lm	60°	230V	☐	210mm	160mm	10	Complete with 1500mA driver
10160CA/W/W	White	Warm white	3000K	60W	5400lm	60°	230V	☐	210mm	160mm	10	Complete with 1500mA driver



The Dark Light Dome Reflector
Die cast



10116FD/W/BS

10116FD | 16W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20







10116FD/B/BS

10116FD | 16W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10116FD/W/BS	White	Brass	Warm white	3000K	16W	800lm	230V	⧈	155mm	80mm	20	Complete with 300mA driver
10116FD/B/BS	Black	Brass	Warm white	3000K	16W	800lm	230V	⧈	155mm	80mm	20	Complete with 300mA driver



10122FD/W/C



10116FD/W/C



10108FD/W/W

The Dark Light Dome Reflector
Die cast



10108FD | 8W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20







10116FD | 16W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20







10122FD | 22W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10108FD/W/W	White	Warm white	3000K	8W	560lm	230V	⧈	94mm	60mm	45	Complete with 300mA driver
10116FD/W/C	White	Cool white	4000K	16W	1150lm	230V	⧈	155mm	80mm	20	Complete with 300mA driver
10116FD/W/W	White	Warm white	3000K	16W	1150lm	230V	⧈	155mm	80mm	20	Complete with 300mA driver
10122FD/W/C	White	Cool white	4000K	22W	1550lm	230V	⧈	210mm	90mm	20	Complete with 600mA driver




10112/G/D

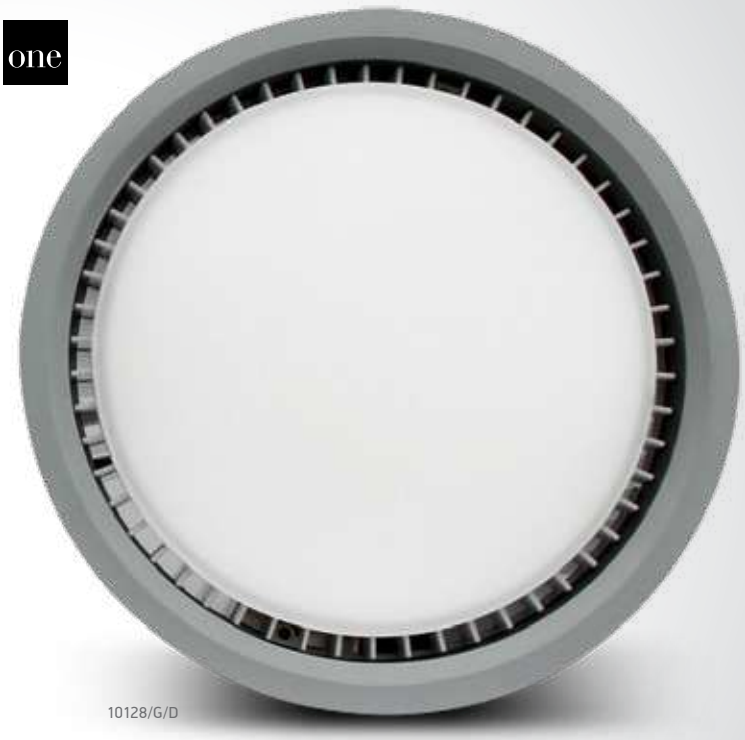

10128/G/D

Architectural Downlights


Die cast

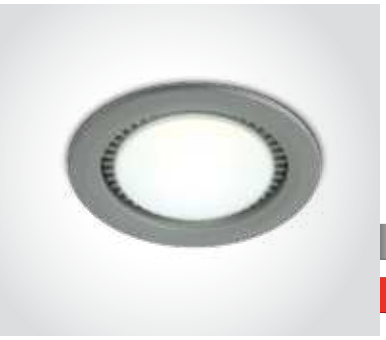

10112/G/D | 9W | LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20 · offer



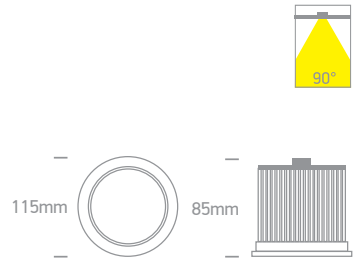




10112/G/W | 12W | LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20 · offer



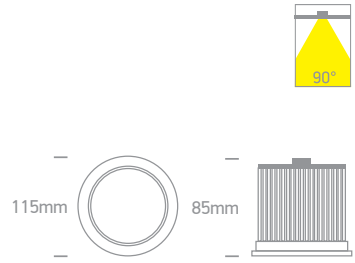




10128 | 28W | LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20 · offer



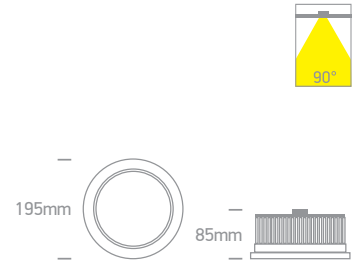

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112/G/D	Grey	Daylight	6000K	9W	400lm	90°	230V	⧈	89mm	110mm	10	Complete with driver
10112/G/W	Grey	Warm white	3000K	12W	400lm	90°	230V	⧈	89mm	110mm	10	Complete with driver
10128/G/D	Grey	Daylight	6000K	28W	1400lm	90°	230V	⧈	169mm	110mm	10	Complete with driver
10128/G/W	Grey	Warm white	3000K	28W	1150lm	90°	230V	⧈	169mm	110mm	10	Complete with driver




10120/W+10100/W

10120 | 20W | LED | Aluminium


Ring must be ordered separately.

LED BUILT IN
75 CRI
CE
2 YEAR
IP44
offer


offer
10120/W+10100/AL








10142/W+10100/W

10142 | 42W | COB LED | Aluminium


Ring must be ordered separately.

LED BUILT IN
80 CRI
CE
2 YEAR
IP20
offer


offer
10142/W+10100/AL








10100/AL / 10100/W / 10100/G

10100 | Rings for 10120 & 10142

CE
50
offer



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120/C	-	Cool white	4000K	20W	1800lm	110°	230V	☐	180mm	70mm	10	Complete with 320mA driver
10120/W	-	Warm white	3000K	20W	1800lm	110°	230V	☐	180mm	70mm	10	Complete with 500mA driver
10142/W	-	Warm white	3000K	42W	3225lm	60°	100-240V	☐	180mm	170mm	4	Complete with 1000mA driver





10105K/W/W

10105K | 5W | COB LED | Die cast

LED BUILT IN
80 CRI
TRIAC DIMMABLE
2 YEAR
IP53
offer


10105K/W/C







10105K/G/W

10105K | 5W | COB LED | Die cast

LED BUILT IN
80 CRI
2 YEAR
IP53
offer








10110K | 10W | COB LED | Die cast

LED BUILT IN
80 CRI
TRIAC DIMMABLE
2 YEAR
IP53
offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10105K/W/C	White	Cool white	4000K	5W	410lm	100°	230V	☐	107mm	130mm	24	Complete with 120mA dimmable driver
10105K/W/W	White	Warm white	3000K	5W	350lm	100°	230V	☐	107mm	130mm	24	Complete with 120mA dimmable driver
10105K/G/C	Grey	Cool white	4000K	5W	410lm	100°	230V	☐	107mm	130mm	24	Complete with 120mA dimmable driver
10105K/G/W	Grey	Warm white	3000K	5W	350lm	100°	230V	☐	107mm	130mm	24	Complete with 400mA driver
10110K/G/W	Grey	Warm white	3000K	10W	600lm	100°	230V	☐	122mm	150mm	24	Complete with 250mA dimmable driver



The COB Project Round Range
Dimmable




10120K | 20W | COB LED | Die cast

IP53 offer

LED BUILT IN | 80 CRI | TRIAC DIMMABLE | CE | 2 YEAR



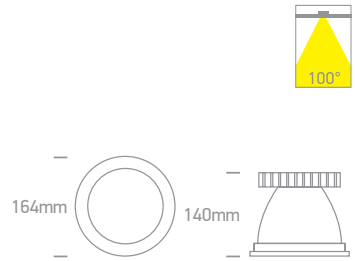




10130K | 30W | COB LED | Die cast

IP53 offer

LED BUILT IN | 80 CRI | TRIAC DIMMABLE | CE | 2 YEAR



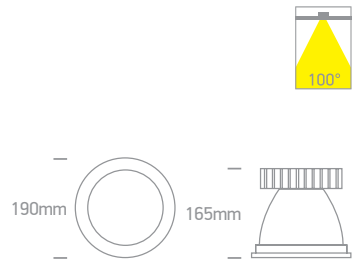




10130KA/G/W

10130KA | 30W | COB LED | Die cast

IP53 offer

LED BUILT IN | 80 CRI | TRIAC DIMMABLE | CE | 2 YEAR



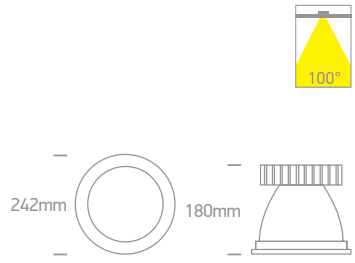

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120K/G/W	Grey	Warm white	3000K	20W	1500lm	100°	230V		150mm	170mm	24	Complete with 500mA dimmable driver
10130K/G/W	Grey	Warm white	3000K	30W	2000lm	100°	230V		175mm	195mm	12	Complete with 700mA dimmable driver
10130KA/G/W	Grey	Warm white	3000K	30W	2000lm	100°	230V		210mm	210mm	12	Complete with 700mA dimmable driver





50105K | 5W | COB LED | Die cast

LED BUILT IN

80 CRI

CE


2 YEAR

IP53

offer







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50105K/G/C	Grey	Cool white	4000K	5W	310lm	100°	230V		85x85mm	115mm	24	Complete with 400mA driver






50120B | 20W | COB LED | Aluminium + metal

LED BUILT IN
80 CRI
CE
3 YEAR
IP20








50130B | 30W | COB LED | Aluminium + metal

LED BUILT IN
80 CRI
CE
3 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50120B/W/W	White	Warm white	3000K	20W	1700lm	30°	230V		105x105mm	120mm	20	Complete with 500mA driver
50130B/W/C	White	Cool white	4000K	30W	2700lm	30°	230V		130x130mm	120mm	16	Complete with 750mA driver
50130B/W/W	White	Warm white	3000K	30W	2600lm	30°	230V		130x130mm	120mm	16	Complete with 750mA driver



10107CD/W/C

10115CD/W/W

The COB Pro Range



10107CD | 7W | COB LED | Die cast

LED BUILT IN

80 CRI

CE


2 YEAR

IP20

offer









10115CD | 15W | COB LED | Die cast

LED BUILT IN

80 CRI

CE


2 YEAR

IP20

offer







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CD/W/C	White	Cool white	4000K	7W	560lm	120°	230V	⧈	100mm	70mm	30	Complete with 300mA driver
10115CD/W/W	White	Warm white	3000K	15W	1095lm	120°	230V	⧈	160mm	90mm	18	Complete with 400mA driver



The SMD Dark Light Range

10109D | 9W | SMD 2835 | Die cast



10109D/W/C

DARK LIGHT

IP20

LED BUILT IN


90 CRI

CE

2 YEAR



10109D/B/W



10122D | 22W | SMD 2835 | Die cast



10122D/W/W

DARK LIGHT

IP20

LED BUILT IN


80 CRI

CE

2 YEAR



10122D/B/W



50122D | 22W | SMD 2835 | Die cast



50122D/W/W

DARK LIGHT

IP20

LED BUILT IN


80 CRI

CE

2 YEAR



50122D/W/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10109D/W/C	White	Cool white	4000K	9W	765lm	100°	230V		110mm	70mm	50	Complete with 300mA driver
10109D/B/W	Black	Warm white	3000K	9W	765lm	100°	230V		110mm	70mm	50	Complete with 300mA driver
10122D/W/C	White	Cool white	4000K	22W	1870lm	100°	230V		165mm	75mm	20	Complete with 500mA driver
10122D/W/W	White	Warm white	3000K	22W	1870lm	100°	230V		165mm	75mm	20	Complete with 500mA driver
10122D/B/C	Black	Cool white	4000K	22W	1870lm	100°	230V		165mm	75mm	20	Complete with 500mA driver
10122D/B/W	Black	Warm white	3000K	22W	1870lm	100°	230V		165mm	75mm	20	Complete with 500mA driver
50122D/W/C	White	Cool white	4000K	22W	1870lm	100°	230V		160x160mm	75mm	20	Complete with 500mA driver
50122D/W/W	White	Warm white	3000K	22W	1870lm	100°	230V		160x160mm	75mm	20	Complete with 500mA driver



10130UV/W/V

10113UV/W/V

UGR19 CCT V Range
White




10107UV | 7W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · IK04 · CCT V · CE · 3 YEAR · UGR19 · IP44



CCT Variable








10113UV | 13W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · IK04 · CCT V · CE · 3 YEAR · UGR19 · IP44



CCT Variable








10120UV | 20W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · IK04 · CCT V · CE · 3 YEAR · UGR19 · IP44



CCT Variable








10130UV | 30W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · IK04 · CCT V · CE · 3 YEAR · UGR19 · IP44




CCT Variable





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10107UV/W/V	White	CCT V	3000K-4000K-6000K	7W	525lm	230V		70mm	60mm	40	Complete with 180mA driver
10113UV/W/V	White	CCT V	3000K-4000K-6000K	13W	975lm	230V		120mm	70mm	20	Complete with 300mA driver
10120UV/W/V	White	CCT V	3000K-4000K-6000K	20W	1500lm	230V		170mm	75mm	20	Complete with 500mA driver
10130UV/W/V	White	CCT V	3000K-4000K-6000K	30W	2250lm	230V		210mm	80mm	20	Complete with 700mA driver

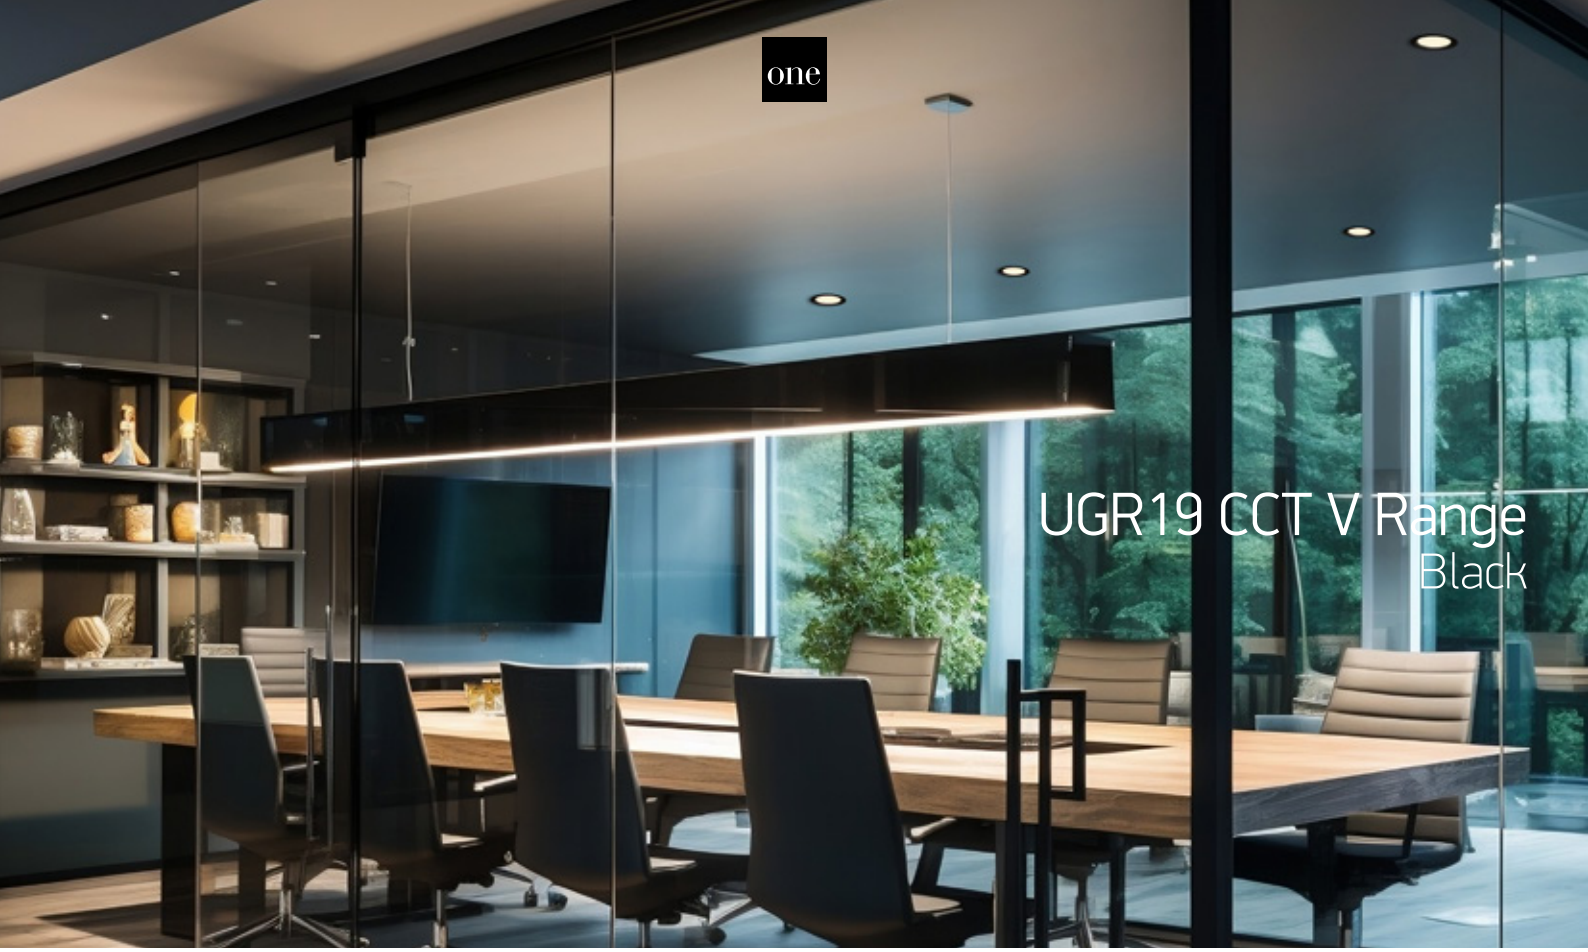


UGR19 CCT V Range
Black



10113UV | 13W | SMD 2835 | Die cast



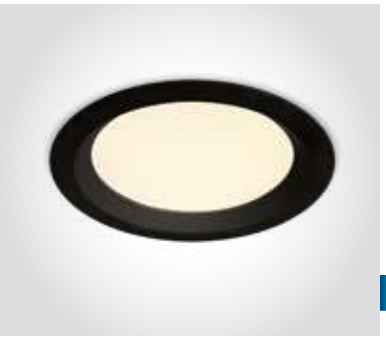

10120UV | 20W | SMD 2835 | Die cast





10130UV | 30W | SMD 2835 | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10113UV/B/V	Black	CCT V	3000K-4000K-6000K	13W	975lm	230V		120mm	70mm	20	Complete with 300mA driver
10120UV/B/V	Black	CCT V	3000K-4000K-6000K	20W	1500lm	230V		170mm	75mm	20	Complete with 500mA driver
10130UV/B/V	Black	CCT V	3000K-4000K-6000K	30W	2250lm	230V		210mm	80mm	20	Complete with 700mA driver



UGR19 CCT V Office Range
Round




10110U | 10W | SMD LED | Die cast

new IP44

LED BUILT IN · 80 CRI · IK04 · CCT V · CE · 3 YEAR · UGR19










10124U | 24W | SMD LED | Die cast

new IP44

LED BUILT IN · 80 CRI · IK04 · CCT V · CE · 3 YEAR · UGR19









10130U/W/V


10130U | 30W | SMD LED | Die cast

new IP44

LED BUILT IN · 80 CRI · IK04 · CCT V · CE · 3 YEAR · UGR19










10130U/W/C

10130U | 30W | SMD LED | Die cast

IP44

LED BUILT IN · 80 CRI · IK04 · CE · 3 YEAR · UGR19





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110U/W/V	White	CCT V	3000K-4000K-6000K	10W	850lm	230V		86mm	55mm	40	Complete with 200mA driver
10124U/W/V	White	CCT V	3000K-4000K-6000K	24W	2000lm	230V		160mm	55mm	20	Complete with 500mA driver
10130U/W/V	White	CCT V	3000K-4000K-6000K	30W	2500lm	230V		205mm	65mm	10	Complete with 750mA driver
10130U/W/C	White	Cool white	4000K	30W	2250lm	230V		205mm	65mm	10	Complete with 750mA driver



10110U/W/V



50110UV/V



10124U/W/V

UGR19 CCT V Office Range

Square





50110UV | 10W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · UGR19 · IP44



CCT Variable









50115UV | 15W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · UGR19 · IP44



CCT Variable









50125UV | 25W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · UGR19 · IP44



CCT Variable









50130UV | 30W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · UGR19 · IP44



CCT Variable





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
50110UV/W/V	White	CCT V	3000K-4000K-6000K	10W	1100lm	230V		85x85mm	70mm	40	Complete with 200mA driver
50115UV/W/V	White	CCT V	3000K-4000K-6000K	15W	1650lm	230V		130x130mm	70mm	20	Complete with 350mA driver
50125UV/W/V	White	CCT V	3000K-4000K-6000K	25W	2750lm	230V		160x160mm	70mm	20	Complete with 500mA driver
50130UV/W/V	White	CCT V	3000K-4000K-6000K	30W	3300lm	230V		205x205mm	80mm	10	Complete with 750mA driver





10107B | 7W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR

IP54









10113B | 13W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR


IP54







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107B/W/C	White	Cool white	4000K	7W	540lm	90°	230V	⧈	65mm	70mm	50	Complete with 180mA driver
10107B/W/W	White	Warm white	3000K	7W	500lm	90°	230V	⧈	65mm	70mm	50	Complete with 180mA driver
10113B/W/W	White	Warm white	3000K	13W	925lm	90°	230V	⧈	95mm	70mm	24	Complete with 300mA driver

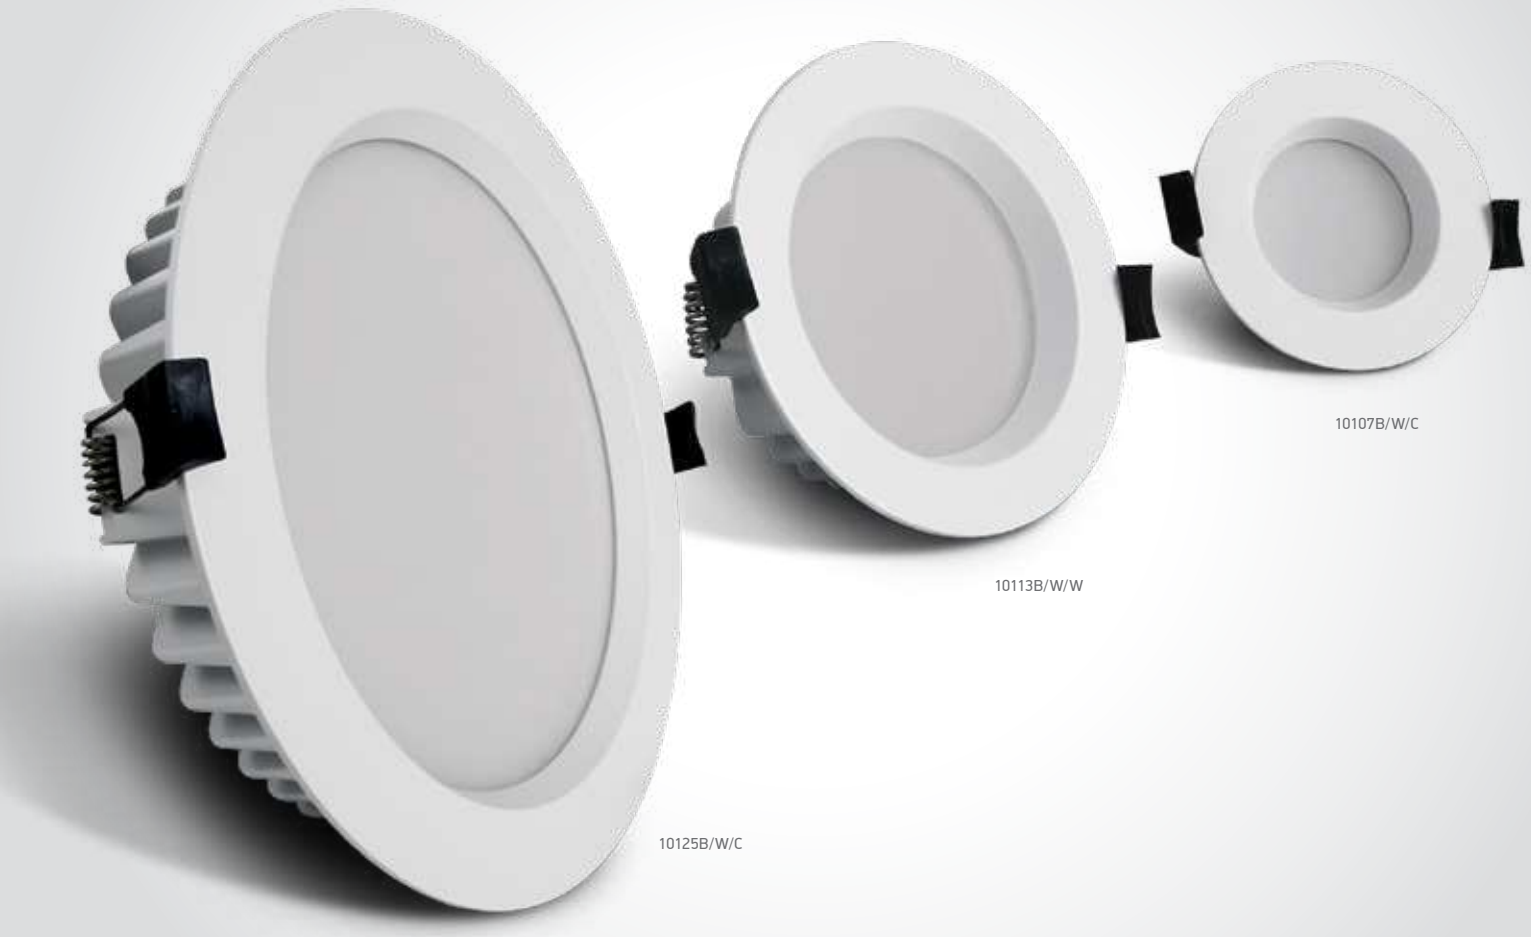


The IP54 Bathroom Downlights



10118B | 18W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54








10125B | 25W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118B/W/C	White	Cool white	4000K	18W	1400lm	90°	230V	⧈	140mm	70mm	30	Complete with 500mA driver
10118B/W/W	White	Warm white	3000K	18W	1300lm	90°	230V	⧈	140mm	70mm	30	Complete with 500mA driver
10125B/W/C	White	Cool white	4000K	25W	2000lm	90°	230V	⧈	210mm	80mm	10	Complete with 720mA driver

one

The Dark Light Project Range

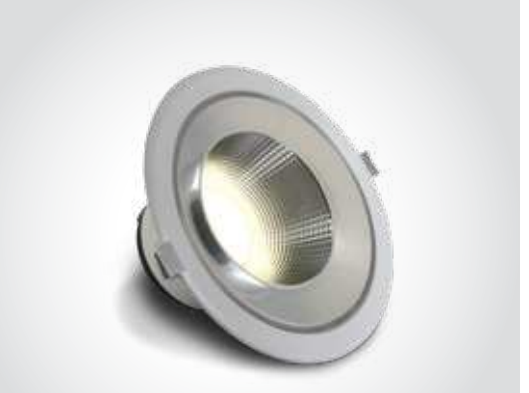

10110TD/W/C



10118TD/W/C



10125TD/W/C




The Dark Light Project Range



10110TD | 10W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP54



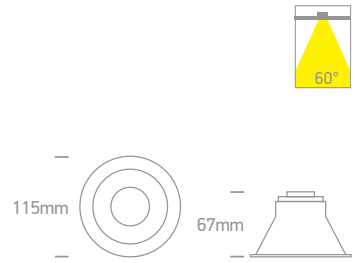




10118TD | 18W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP54



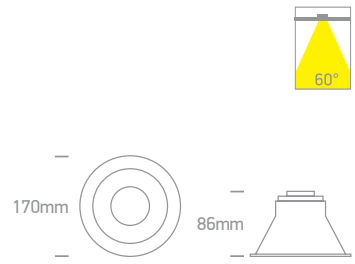




10125TD | 25W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP54



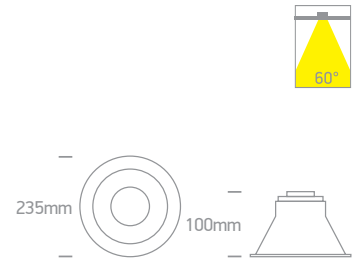

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110TD/W/C	White	Cool white	4000K	10W	950lm	60°	230V		95mm	110mm	30	Complete with 250mA driver
10118TD/W/C	White	Cool white	4000K	18W	1710lm	60°	230V		150mm	120mm	24	Complete with 450mA driver
10118TD/W/W	White	Warm white	3000K	18W	1710lm	60°	230V		150mm	120mm	24	Complete with 450mA driver
10125TD/W/C	White	Cool white	4000K	25W	2400lm	60°	230V		210mm	140mm	12	Complete with 600mA driver
10125TD/W/W	White	Warm white	3000K	25W	2400lm	60°	230V		210mm	140mm	12	Complete with 600mA driver




The IP54 Dark Light Bathroom Downlights
Die cast



10109FD | 9W | SMD 2835 | Die cast








10120FD | 20W | SMD 2835 | Die cast





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10109FD/W/C	White	Cool white	4000K	9W	765lm	100°	230V		111mm	70mm	40	Complete with 300mA driver
10109FD/W/W	White	Warm white	3000K	9W	765lm	100°	230V		111mm	70mm	40	Complete with 300mA driver
10120FD/W/W	White	Warm white	3000K	20W	1700lm	100°	230V		166mm	70mm	20	Complete with 300mA driver



The Frameless IP65 Range




10108CF | 8W | SMD 4014 | Die cast + PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP65



Frameless






10115CF | 15W | SMD 4014 | Die cast + PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP65



Frameless






10130CF | 30W | SMD 4014 | Die cast + PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP65



Frameless



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108CF/C	White	Cool white	4000K	8W	660lm	120°	230V	☐	80mm	50mm	40	Complete with 500mA driver
10108CF/W	White	Warm white	3000K	8W	660lm	120°	230V	☐	80mm	50mm	40	Complete with 500mA driver
10115CF/C	White	Cool white	4000K	15W	1250lm	120°	230V	☐	135mm	50mm	20	Complete with 500mA driver
10115CF/W	White	Warm white	3000K	15W	1250lm	120°	230V	☐	135mm	50mm	20	Complete with 500mA driver
10130CF/C	White	Cool white	4000K	30W	2500lm	120°	230V	☐	195mm	50mm	20	Complete with 700mA driver
10130CF/W	White	Warm white	3000K	30W	2500lm	120°	230V	☐	195mm	50mm	20	Complete with 700mA driver



The Outdoor/Bathroom IP65 Range

Die cast



10110G | 10W | COB LED | Die cast

LED BUILT IN


80 CRI

CE

3 YEAR

IP65







10115G | 15W | COB LED | Die cast

LED BUILT IN


80 CRI

CE

3 YEAR

IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10110G/W/C	White	Cool white	4000K	10W	800lm	60°	230V	⧈	200cm	82mm	90mm	30	Complete with 250mA driver
10110G/W/W	White	Warm white	3000K	10W	750lm	60°	230V	⧈	200cm	82mm	90mm	30	Complete with 250mA driver
10115G/W/W	White	Warm white	3000K	15W	1125lm	60°	230V	⧈	200cm	100mm	95mm	20	Complete with 350mA driver



The Outdoor/Bathroom IP65 Range

Die cast



10120G | 20W | COB LED | Die cast

LED BUILT IN


80 CRI

CE

3 YEAR

IP65







10150G | 50W | COB LED | Die cast

LED BUILT IN


80 CRI

CE

3 YEAR

IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10120G/W/C	White	Cool white	4000K	20W	1880lm	60°	230V	⧈	200cm	120mm	105mm	10	Complete with 500mA driver
10120G/W/W	White	Warm white	3000K	20W	1880lm	60°	230V	⧈	200cm	120mm	105mm	10	Complete with 500mA driver
10150G/W/W	White	Warm white	3000K	50W	4000lm	60°	230V	⧈	200cm	210mm	140mm	4	Complete with 1200mA driver





Downlights Adjustable LED

Pages 207-216

07





11130BT | 30W | COB LED | Trimless | Aluminium

IP20

offer

LED BUILT IN

80 CRI


DIMMABLE

QUICK FIX

ADJUSTABLE

3 YEAR



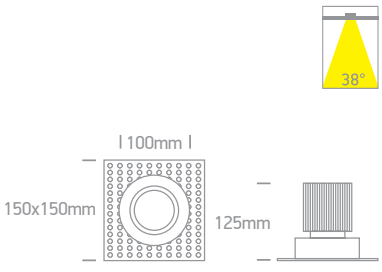

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11130BT/W/C	White	Cool white	4000K	30W	2200lm	38°	700mA		40cm	110mm	160mm	12	Requires 700mA driver

Adjustable Multi LED
Aluminium




11106LB | 6x1W | LED | Aluminium



LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer






11109L | 9x1W | LED | Natural aluminium



LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer






11112L | 12x1W | LED | Natural aluminium



LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11106LB/W/35	Black	Warm white	3000K	6x1W	270lm	35°	350mA	III	40cm	90mm	50mm	50	Requires 350mA driver
11109L/W/35	Aluminium	Warm white	3000K	9x1W	405lm	35°	350mA	III	40cm	110mm	80mm	30	Requires 350mA driver
11112L/D/15	Aluminium	Daylight	6000K	12x1W	720lm	15°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver
11112L/D/35	Aluminium	Daylight	6000K	12x1W	720lm	35°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver
11112L/W/15	Aluminium	Warm white	3000K	12x1W	540lm	15°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver
11112L/W/35	Aluminium	Warm white	3000K	12x1W	540lm	35°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver



The COB Box Type Shop Range





51125 | 25W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
2 YEAR
IP20
offer








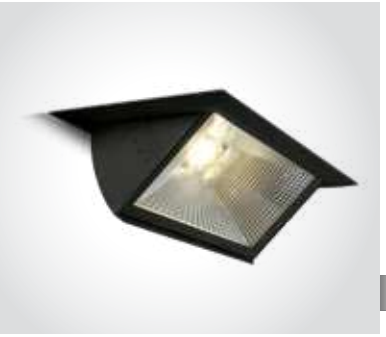

51140 | 40W | COB LED | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
3 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51125/G/C	Grey	Cool white	4000K	25W	1750lm	38°	100-240V		130x130mm	160mm	12	Complete with 600mA driver
51140/B/W	Black	Warm white	3000K	40W	3400lm	70°	230V		220x130mm	140mm	9	Complete with 1050mA driver



51130/W/W

51130/B/C


The COB Box Type Shop Range



51120 | 20W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP20 · offer







51130/W/W


51130 | 30W | COB LED | Aluminium + metal

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20



51130/B/W







51230/W/W


51230 | 2x30W | COB LED | Aluminium + metal

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20




51230/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51120/G/W	Grey	Warm white	3000K	20W	1400lm	36°	230V	□	165x165mm	140mm	12	Complete with 500mA driver
51130/W/C	White	Cool white	4000K	30W	2700lm	38°	230V	□	160x160mm	125mm	12	Complete with 750mA driver
51130/W/W	White	Warm white	3000K	30W	2700lm	38°	230V	□	160x160mm	125mm	12	Complete with 750mA driver
51130/B/C	Black	Cool white	4000K	30W	2700lm	38°	230V	□	160x160mm	125mm	12	Complete with 750mA driver
51130/B/W	Black	Warm white	3000K	30W	2700lm	38°	230V	□	160x160mm	125mm	12	Complete with 750mA driver
51230/W/C	White	Cool white	4000K	2x30W	2x2700lm	38°	230V	□	320x160mm	125mm	6	Complete with 2x750mA drivers
51230/W/W	White	Warm white	3000K	2x30W	2x2700lm	38°	230V	□	320x160mm	125mm	6	Complete with 2x750mA drivers
51230/B/C	Black	Cool white	4000K	2x30W	2x2700lm	38°	230V	□	320x160mm	125mm	6	Complete with 2x750mA drivers
51230/B/W	Black	Warm white	3000K	2x30W	2x2700lm	38°	230V	□	320x160mm	125mm	6	Complete with 2x750mA drivers

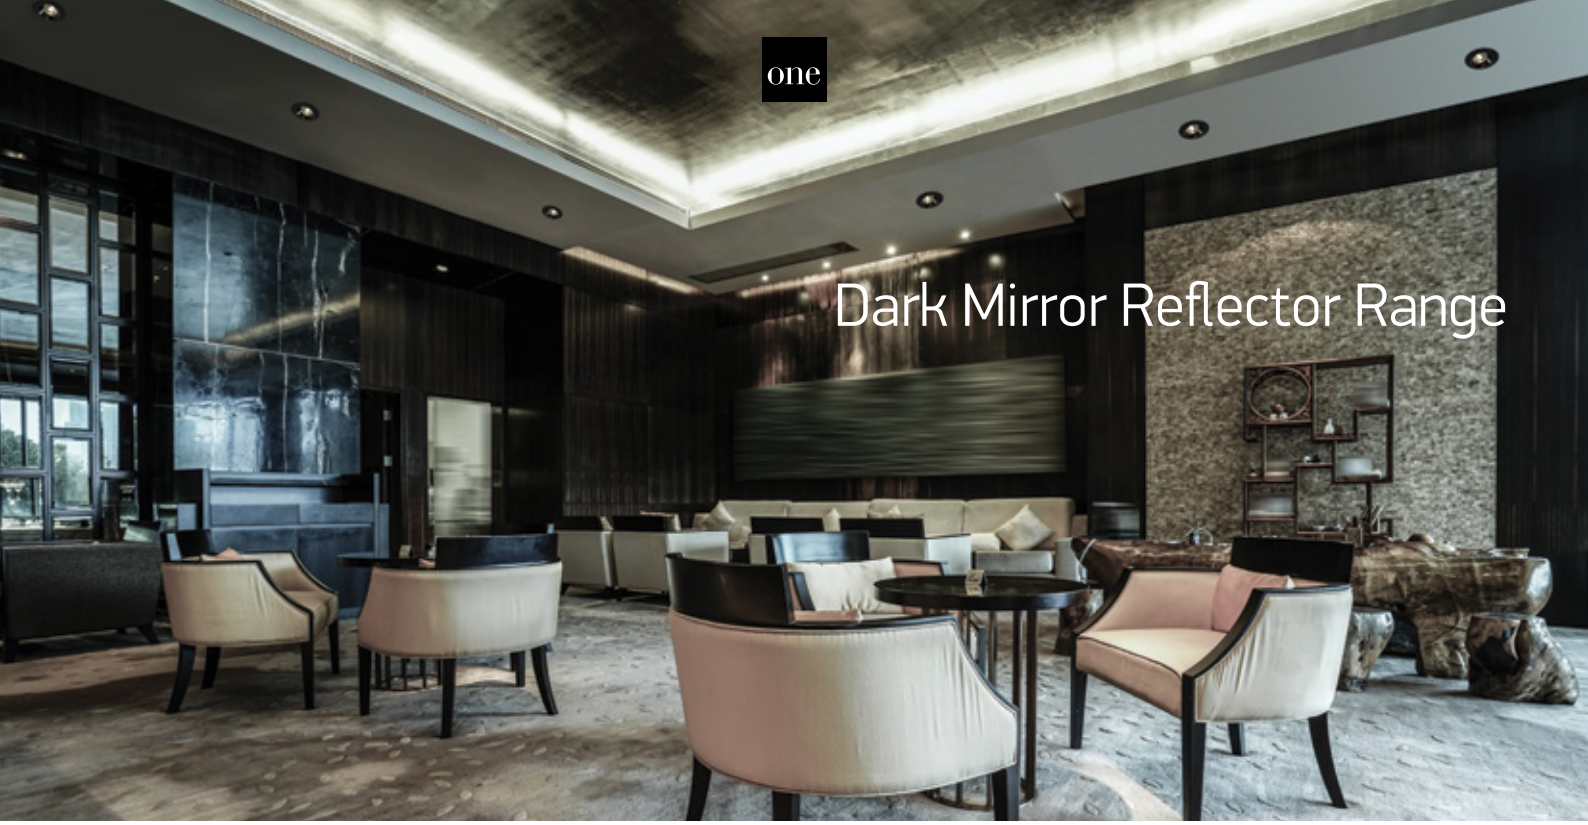


Dark Mirror Reflector Range

11110E | 10W | COB LED | Die cast




11110E/W/W

LED BUILT IN
80 CRI
ADJUSTABLE
3 YEAR
DARK LIGHT
IP20



11110E/B/W




11120E | 20W | COB LED | Die cast




11120E/W/W


LED BUILT IN
80 CRI
ADJUSTABLE
3 YEAR
DARK LIGHT
IP20



11120E/B/W




11130E | 30W | COB LED | Die cast

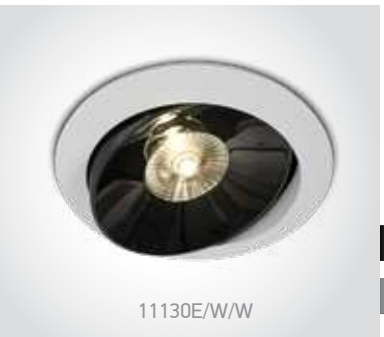


11130E/W/W

LED BUILT IN
80 CRI
ADJUSTABLE
3 YEAR
DARK LIGHT
IP20



11130E/B/W




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11110E/W/W	White	Warm white	3000K	10W	850lm	30°	230V	☐	85mm	80mm	40	Complete with 250mA driver
11110E/B/W	Black	Warm white	3000K	10W	850lm	30°	230V	☐	85mm	80mm	40	Complete with 250mA driver
11120E/W/W	White	Warm white	3000K	20W	1700lm	30°	230V	☐	140mm	110mm	20	Complete with 500mA driver
11120E/B/W	Black	Warm white	3000K	20W	1700lm	30°	230V	☐	140mm	110mm	20	Complete with 500mA driver
11130E/W/W	White	Warm white	3000K	30W	2550lm	30°	230V	☐	200mm	95mm	10	Complete with 750mA driver
11130E/B/W	Black	Warm white	3000K	30W	2550lm	30°	230V	☐	200mm	95mm	10	Complete with 750mA driver



The COB Pop Up
Die cast



11126F | 26W | COB LED | Die cast



IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11126F/W/W	White	Warm white	3000K	26W	2210lm	36°	700mA		116mm	150mm	18	Requires 700mA driver

The COB Square Downlights
Die cast




51120B/W/C



51120B | 20W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
3 YEAR
IP20



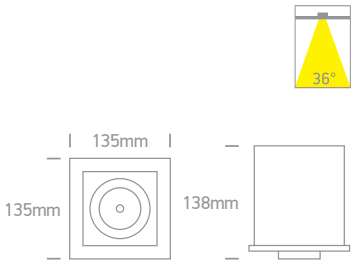




51240B | 2x40W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
3 YEAR
IP20



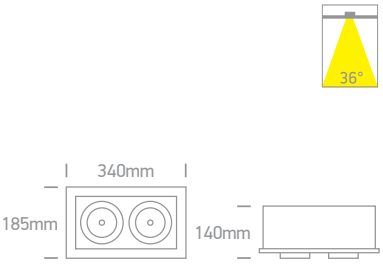

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51120B/W/C	White	Cool white	4000K	20W	1600lm	36°	230V	⧈	125x125mm	160mm	12	Complete with 500mA driver
51240B/W/W	White	Warm white	3000K	2x40W	2x3200lm	36°	230V	⧈	320x165mm	170mm	4	Complete with 2x1000mA drivers






11150B | 50W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
3 YEAR
IP20








51140TR | 40W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
3 YEAR
IP20



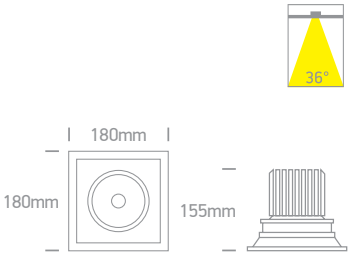

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11150B/W/W	White	Warm white	3000K	50W	3750lm	40°	230V	⧈	120mm	250mm	12	Complete with 1200mA driver
51140TR/W/W	White	Warm white	3000K	40W	3200lm	36°	230V	⧈	160x160mm	180mm	8	Complete with 1000mA driver



The Pop Up Range
White




11115G | 15W | COB LED | Adjustable beam 15°- 45° | Aluminium — Complete with honeycomb.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20


Zoomable


Removable Honeycomb








11128G | 25W | COB LED | Adjustable beam 15°- 45° | Aluminium — Complete with honeycomb.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20


Zoomable


Removable Honeycomb





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11115G/W/W	White	Warm white	3000K	15W	1500lm	15°- 45°	230V	⧈	98mm	70mm	27	Complete with 350mA driver
11128G/W/W	White	Warm white	3000K	25W	2500lm	15°- 45°	230V	⧈	120mm	70mm	18	Complete with 600mA driver



11128G/B/W

11115G/B/W

The Pop Up Range
Black



11115G | 15W | COB LED | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20




Zoomable



Removable Honeycomb







11128G | 25W | COB LED | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20




Zoomable



Removable Honeycomb





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11115G/B/W	Black	Warm white	3000K	15W	1500lm	15°- 45°	230V	⧈	98mm	70mm	27	Complete with 350mA driver
11128G/B/W	Black	Warm white	3000K	25W	2500lm	15°- 45°	230V	⧈	120mm	70mm	18	Complete with 600mA driver






Strips & Profiles

Pages 219-274

08

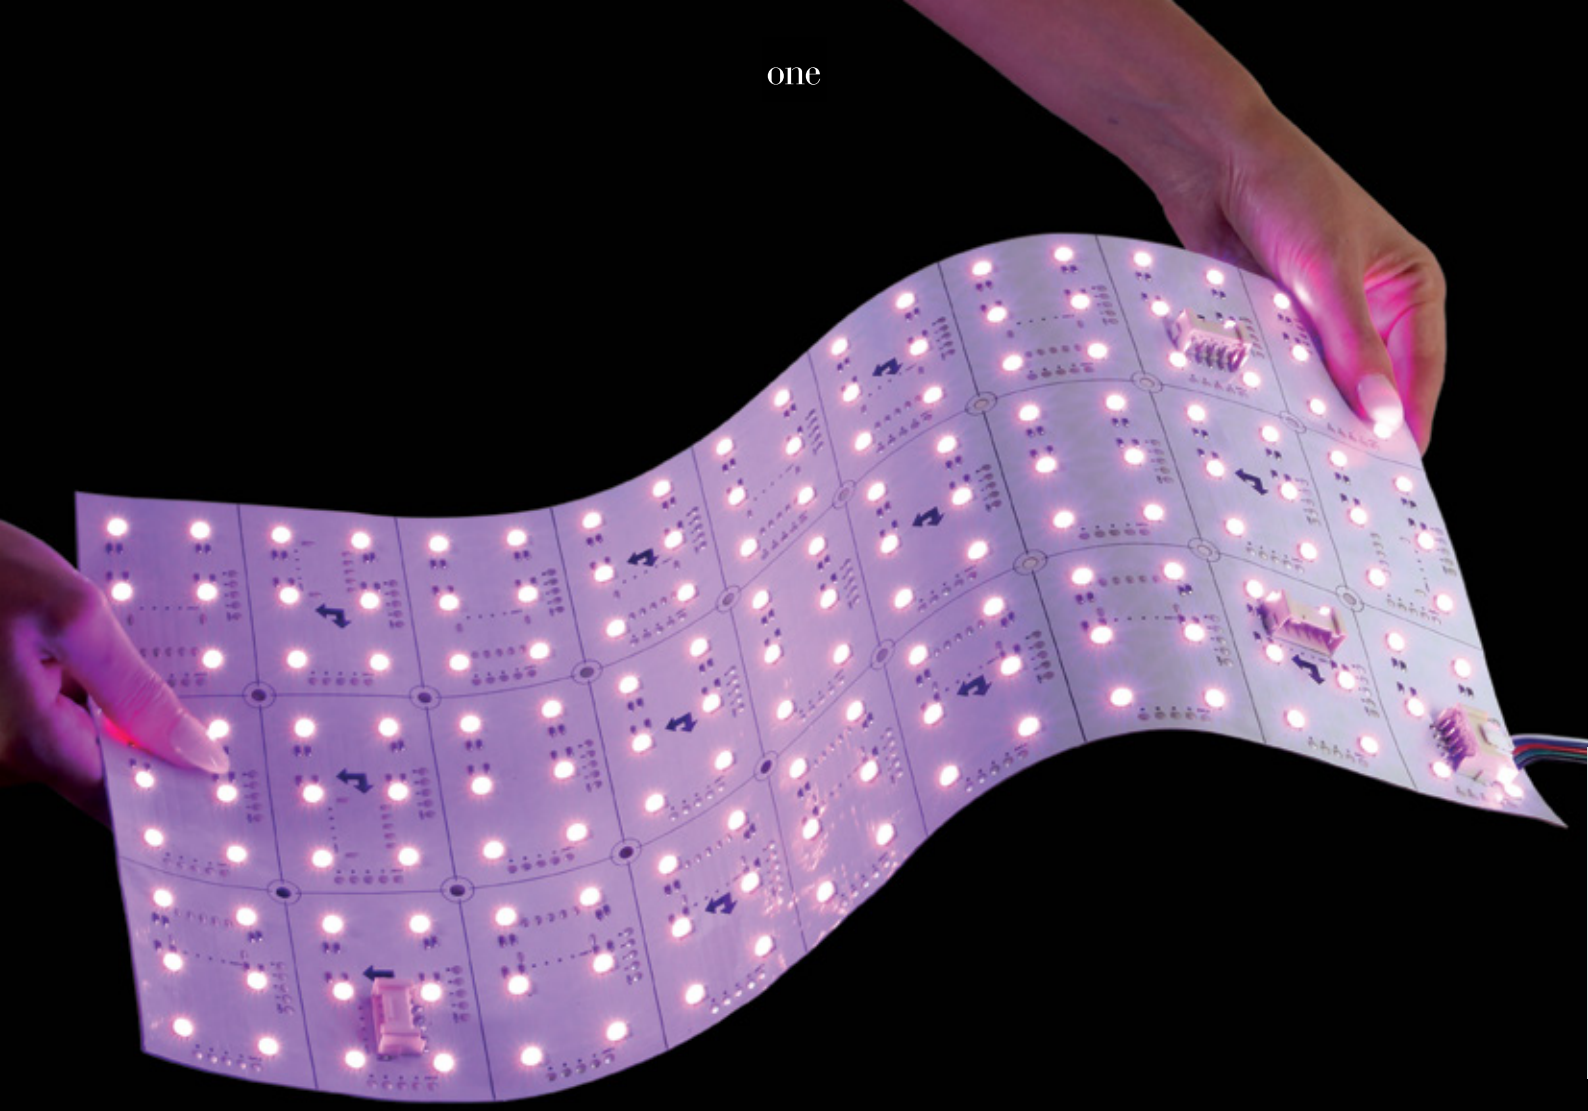

The Flex Tiles



7848 | 10W | SMD 2835 | 288LEDs/pc | Flex tile

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20




Connect up to 10pcs.



Complete with 2pcs power supply & 2pcs connectors.



Dimming remote control. Order code 20030.





7848/RGBW | 24W | SMD 5050 | 162LEDs/pc | Flex tile

3M Double face adhesive.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 5 YEAR · IP20




Connect up to 10pcs.



Complete with 2pcs power supply & 2pcs connectors.



Dimming remote control. Order code 20036.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7848/C	Cool white	4000K	10W	900lm	24V DC	III	2	Requires 24V DC driver
7848/W	Warm white	3000K	10W	850lm	24V DC	III	2	Requires 24V DC driver
7848/RGBW	RGB + Warm white	RGB + 3000K	RGB 18W + WW 6W	480lm (3000K)	24V DC	III	2	Requires 24V DC driver



The Ultra Slim Range 24V



7843 | 4W/m | COB LED | 480LEDs/m | Ultra slim

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20



Supplied in 5m roll.



Dimming remote control.
Order code 20030.







7823 | 9,6W/m | SMD 2216 | 140LEDs/m | Ultra slim

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20




Supplied in 5m roll.



Dimming remote control.
Order code 20030.







7833 | 14,4W/m | SMD 2110 | 196LEDs/m | Ultra slim

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20




Supplied in 5m roll.



Dimming remote control.
Order code 20030.





Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7843/C	Cool white	4000K	4W/m	440lm/m	24V DC	III	50	Requires 24V DC driver
7843/W	Warm white	3000K	4W/m	410lm/m	24V DC	III	50	Requires 24V DC driver
7823/C	Cool white	4000K	9,6W/m	970lm/m	24V DC	III	40	Requires 24V DC driver
7823/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	40	Requires 24V DC driver
7823/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	40	Requires 24V DC driver
7833/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7833/W	Warm white	3000K	14,4W/m	1200lm/m	24V DC	III	40	Requires 24V DC driver
7833/EW	Extra warm white	2700K	14,4W/m	1160lm/m	24V DC	III	40	Requires 24V DC driver



The 4,8W/m Indoor 24V



7820 | 4,8W/m | SMD 2216 | 70LEDs/m


3M Double face adhesive.




Supplied in 5m roll.



Dimming remote control.
Order code 20030.



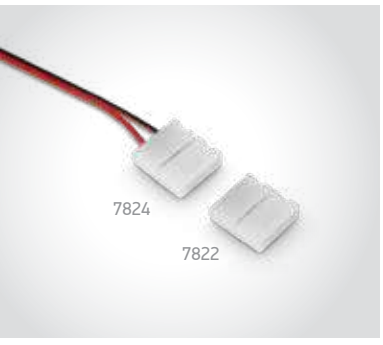

Accessories for 7820

50cm

7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820/D	Daylight	6000K	4,8W/m	490lm/m	24V DC	III	40	Requires 24V DC driver
7820/C	Cool white	4000K	4,8W/m	490lm/m	24V DC	III	40	Requires 24V DC driver
7820/W	Warm white	3000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver
7820/EW	Extra warm white	2700K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver
7820/UW	Ultra warm white	2200K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver



The 4,8W/m Outdoor 24V



7820W | 4,8W/m | SMD 2216 | 70LEDs/m | Silicone

3M Double face adhesive.

IP68

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR



Supplied in 5m roll.




Dimming remote control.
Order code 20030.



Cut every 10cm
(7-LED segment)



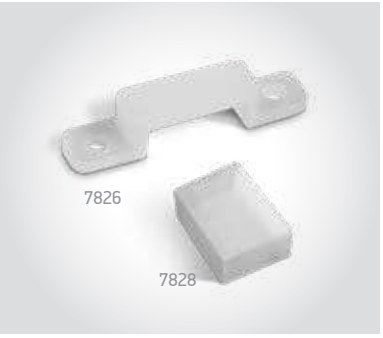


Accessories for 7820W

CE

7826 Mounting clip
7828 End cap

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820W/D	Daylight	6000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/C	Cool white	4000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/W	Warm white	3000K	4,8W/m	390lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/EW	Extra warm white	2700K	4,8W/m	375lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

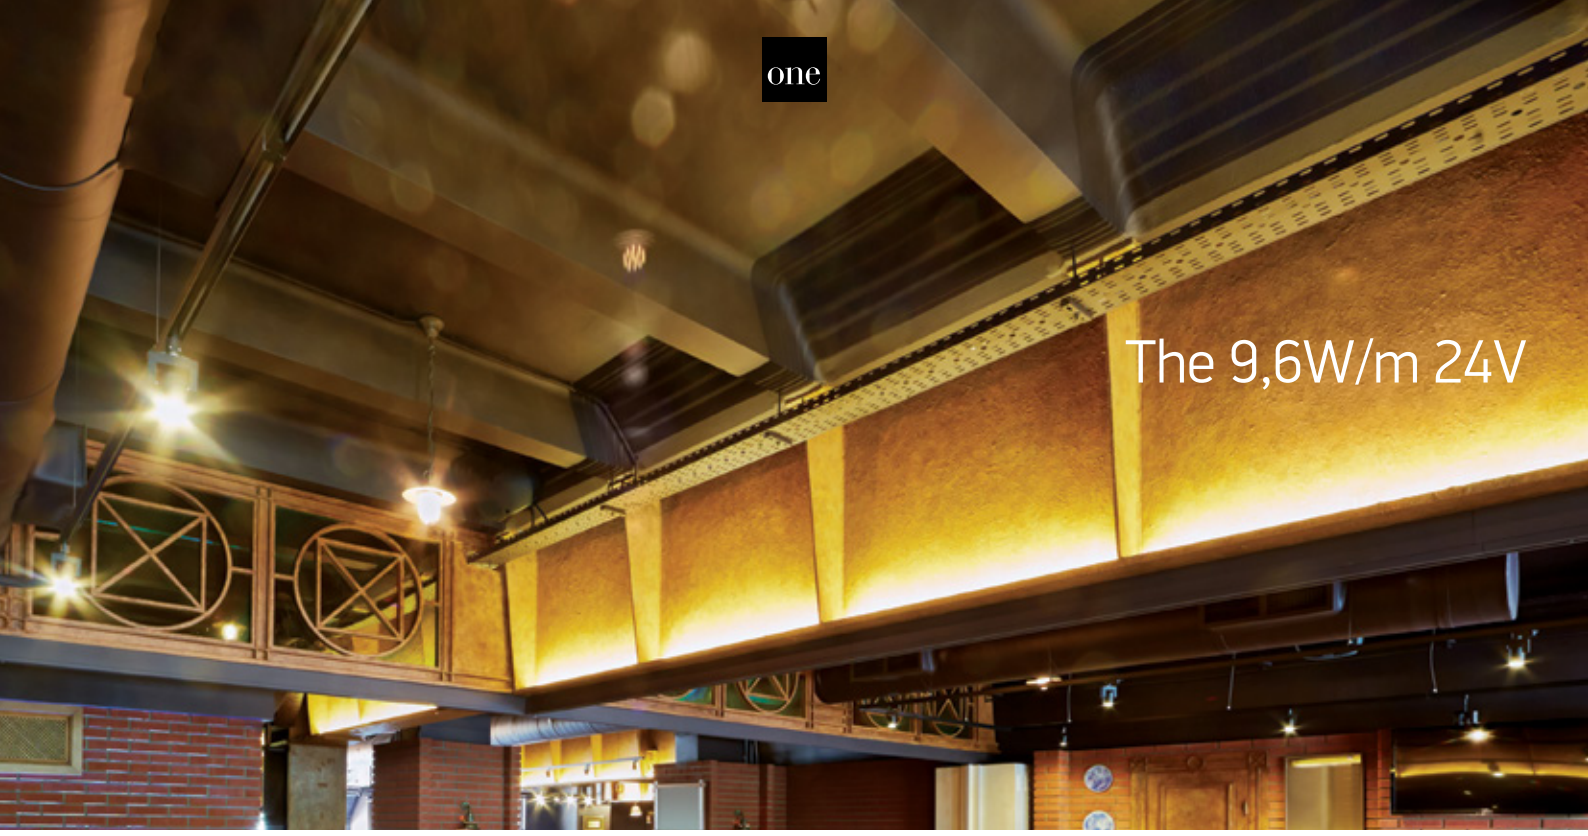



7829A | 9,6W/m | SMD 2835 | 70LEDs/m

3M Double face adhesive.

new

IP20

LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(7-LED segment)





7829 | 9,6W/m | SMD 2216 | 140LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR



Supplied in 5m roll.




Dimming remote control.
Order code 20030.



Cut every 5cm
(7-LED segment)



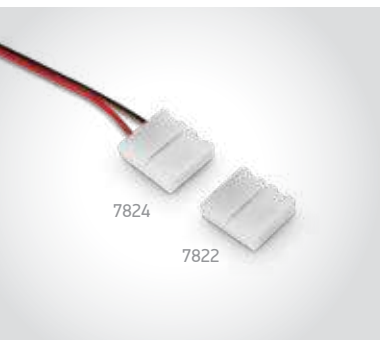

Accessories for 7829A & 7829

III

50cm

CE

7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7829A/C	Cool white	4000K	9,6W/m	970lm/m	24V DC	III	40	Requires 24V DC driver
7829A/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	40	Requires 24V DC driver
7829A/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	40	Requires 24V DC driver
7829/C	Cool white	4000K	9,6W/m	970lm/m	24V DC	III	40	Requires 24V DC driver
7829/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	40	Requires 24V DC driver
7829/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	40	Requires 24V DC driver



The 14,4W/m CRI97 Indoor 24V
Full spectrum



7835C | 14,4W/m | SMD 2835 | 80LEDs/m

3M Double face adhesive.

LED BUILT IN · 97 CRI · DIMMABLE · CE · 5 YEAR





Supplied in 5m roll.



Dimming remote control.
Order code 20030.





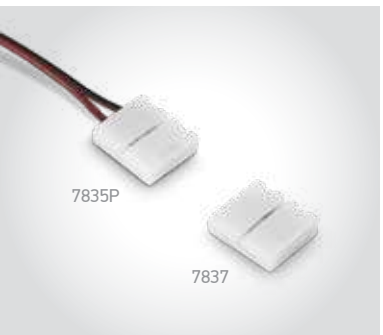

Accessories for 7835C

III · 50cm · CE

7835P Power supply cable
7837 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835C/W	Warm white	3000K	14,4W/m	1512lm/m	24V DC	III	40	Requires 24V DC driver



The 14,4W/m Indoor 24V



7835 | 14,4W/m | SMD 2835 | 70LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR





Supplied in 5m roll.



Dimming remote control.
Order code 20030.





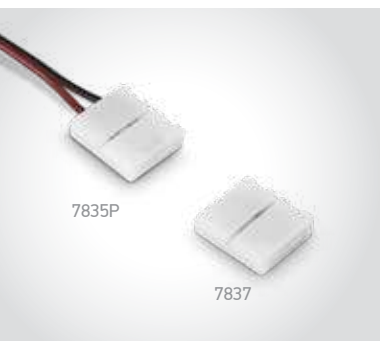

Accessories for 7835

III · 50cm · CE

7835P Power supply cable
7837 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835/D	Daylight	6000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7835/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7835/W	Warm white	3000K	14,4W/m	1200lm/m	24V DC	III	40	Requires 24V DC driver
7835/EW	Extra warm white	2700K	14,4W/m	1125lm/m	24V DC	III	40	Requires 24V DC driver
7835/UW	Ultra warm white	2200K	14,4W/m	1125lm/m	24V DC	III	40	Requires 24V DC driver





7835W | 14,4W/m | SMD 2835 | 70LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(7-LED segment)





7827 | Mounting clip for 7835W

CE

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835W/D	Daylight	6000K	14,4W/m	1170lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/C	Cool white	4000K	14,4W/m	1170lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/W	Warm white	3000K	14,4W/m	1050lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/EW	Extra warm white	2700K	14,4W/m	1050lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight





7839 | 4W/m | COB LED | 320LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20



Supplied in 5m roll.



Dimming remote control.
Order code 20030.







7844 | 8W/m | COB LED | 320LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20



Supplied in 5m roll.



Dimming remote control.
Order code 20030.







7846 | 14W/m | COB LED | 512LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20



Supplied in 5m roll.



Dimming remote control.
Order code 20030.







7844B Corner connector for 7839 and 7844
7846B Corner connector for 7846





7844C Connector for 7839 and 7844
7846C Connector for 7846



7844P Power supply for 7839 and 7844
7846P Power supply for 7846

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7839/C	Cool white	4000K	4W/m	400lm/m	24V DC	III	40	Requires 24V DC driver
7839/W	Warm white	3000K	4W/m	380lm/m	24V DC	III	40	Requires 24V DC driver
7839/EW	Extra warm white	2700K	4W/m	360lm/m	24V DC	III	40	Requires 24V DC driver
7844/C	Cool white	4000K	8W/m	810lm/m	24V DC	III	40	Requires 24V DC driver
7844/W	Warm white	3000K	8W/m	730lm/m	24V DC	III	40	Requires 24V DC driver
7844/EW	Extra warm white	2700K	8W/m	680lm/m	24V DC	III	40	Requires 24V DC driver
7846/C	Cool white	4000K	14W/m	1470lm/m	24V DC	III	50	Requires 24V DC driver
7846/W	Warm white	3000K	14W/m	1420lm/m	24V DC	III	50	Requires 24V DC driver
7846/EW	Extra warm white	2700K	14W/m	1200lm/m	24V DC	III	50	Requires 24V DC driver

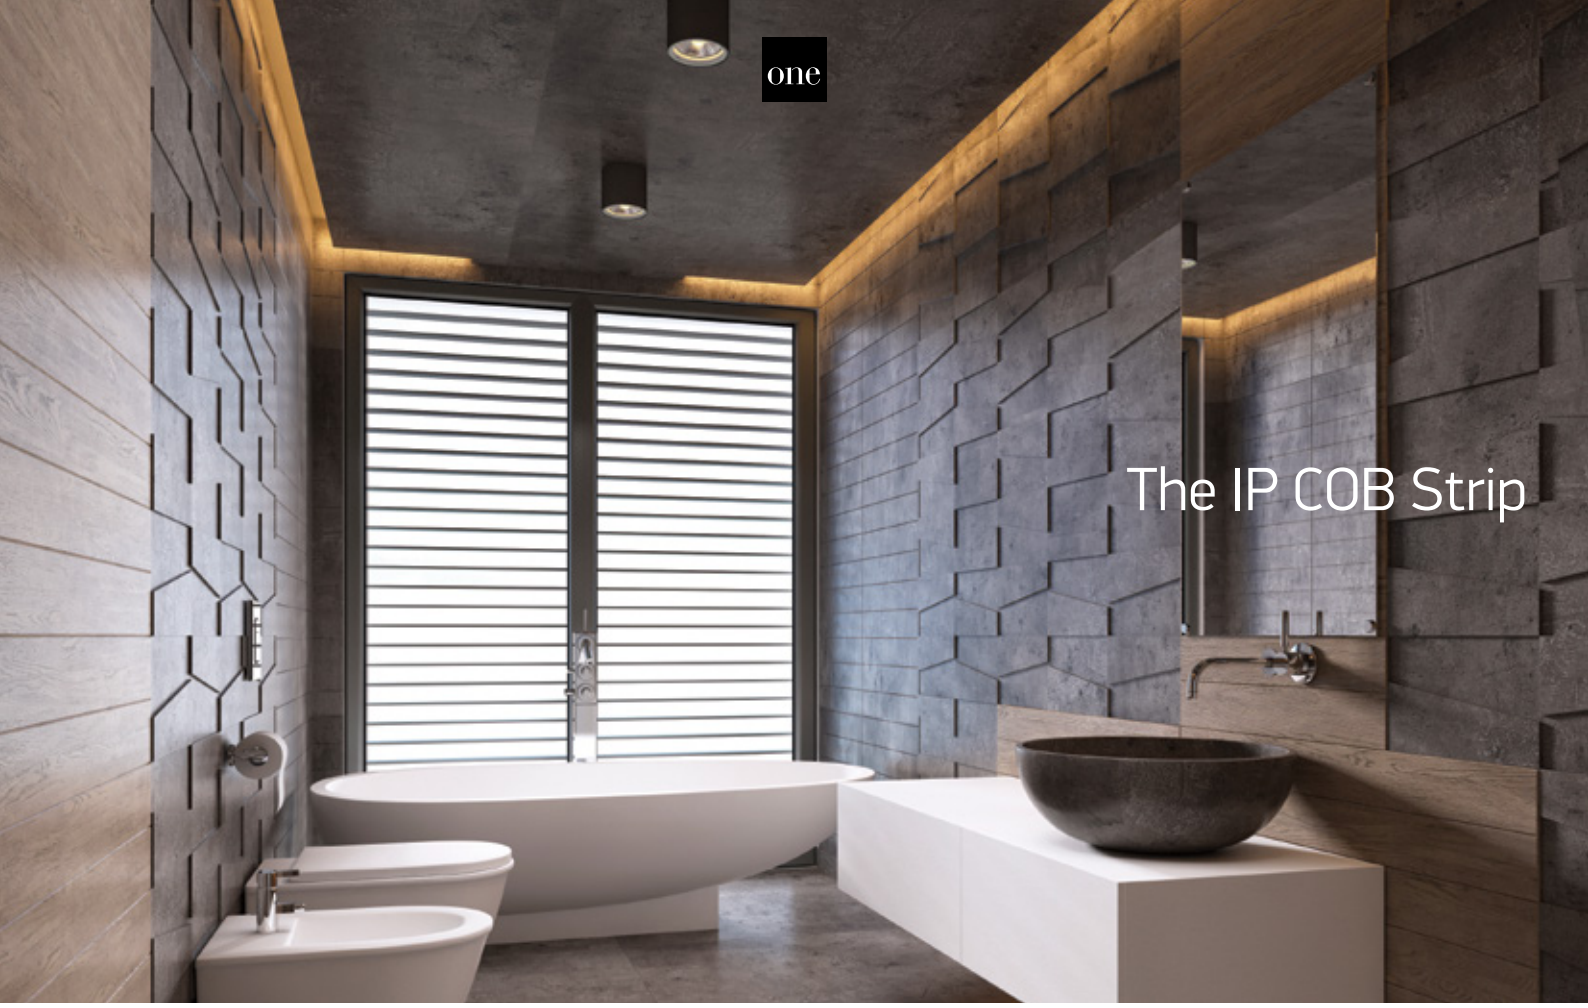

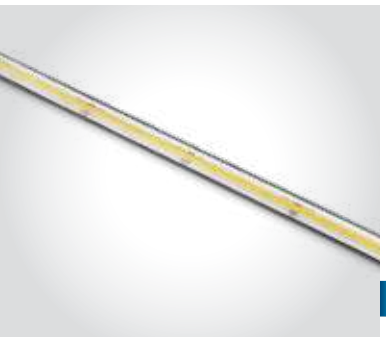

7846W | 14W/m | COB LED | 512LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR · IP67



Supplied in 5m roll.



Dimming remote control.
Order code 20030.







7846WA | 10W/m | COB LED | 512LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR · IP68



Supplied in 5m roll.



Dimming remote control.
Order code 20030.







7846WP 24V Power supply
for 7846WA



7846WC Connector
for 7846WA




7846WB Corner connector
for 7846WA



7827A Mounting clip
for 7846W and 7846WA

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846W/C	Cool white	4000K	14W/m	1350lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7846W/W	Warm white	3000K	14W/m	1220lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7846WA/C	Cool white	4000K	10W/m	700lm/m	24V DC	III	50	Requires 24V DC driver / Avoid direct sunlight
7846WA/W	Warm white	3000K	10W/m	650lm/m	24V DC	III	50	Requires 24V DC driver / Avoid direct sunlight

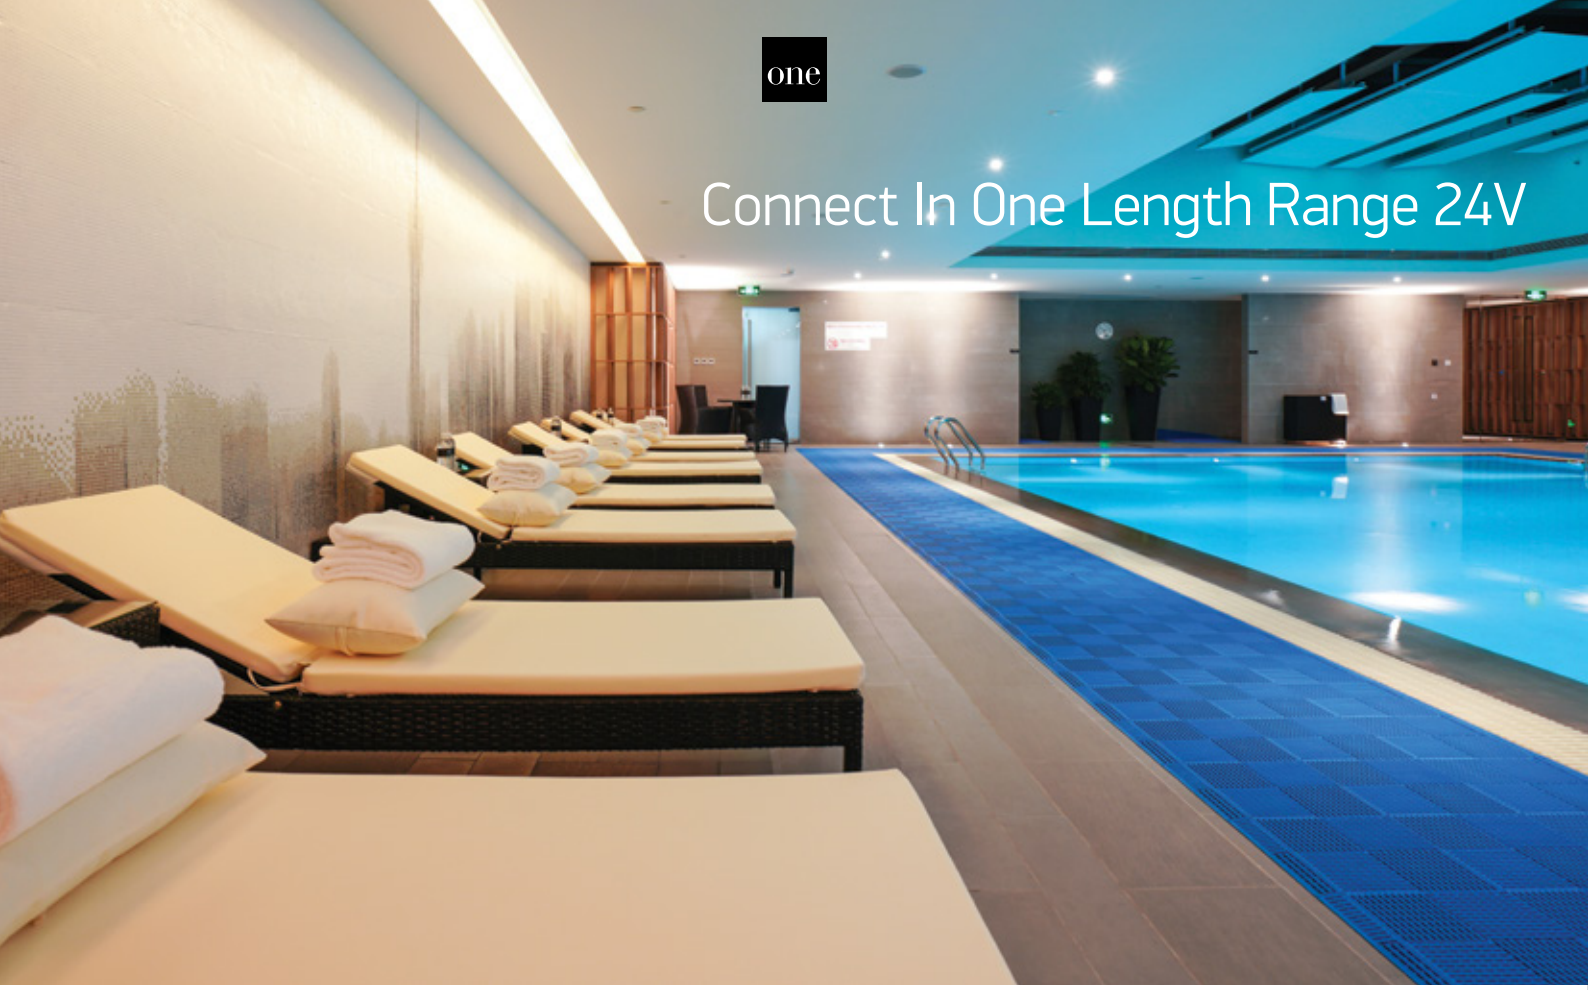

Connect In One Length Range 24V



7820L | 4,8W/m | SMD 2216 | 60LEDs/m

Can be connected in 15m full length / 3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR




Supplied in 15m roll.



Dimming remote control.
Order code 20030.







7820WL | 4,8W/m | SMD 2216 | 60LEDs/m | Silicone

Can be connected in 15m full length / 3M Double face adhesive.

IP68

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR





Supplied in 15m roll.



Dimming remote control.
Order code 20030.





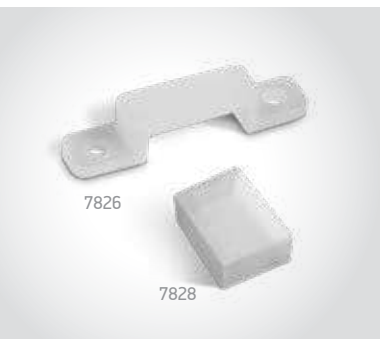


Accessories for 7820WL

CE

7826 Mounting clip
7828 End cap

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820L/EW	Extra warm white	2700K	4,8W/m	312lm/m	24V DC	III	40	Requires 24V DC driver
7820WL/W	Warm white	3000K	4,8W/m	302lm/m	24V DC	III	20	Requires 24V DC driver / Avoid direct sunlight

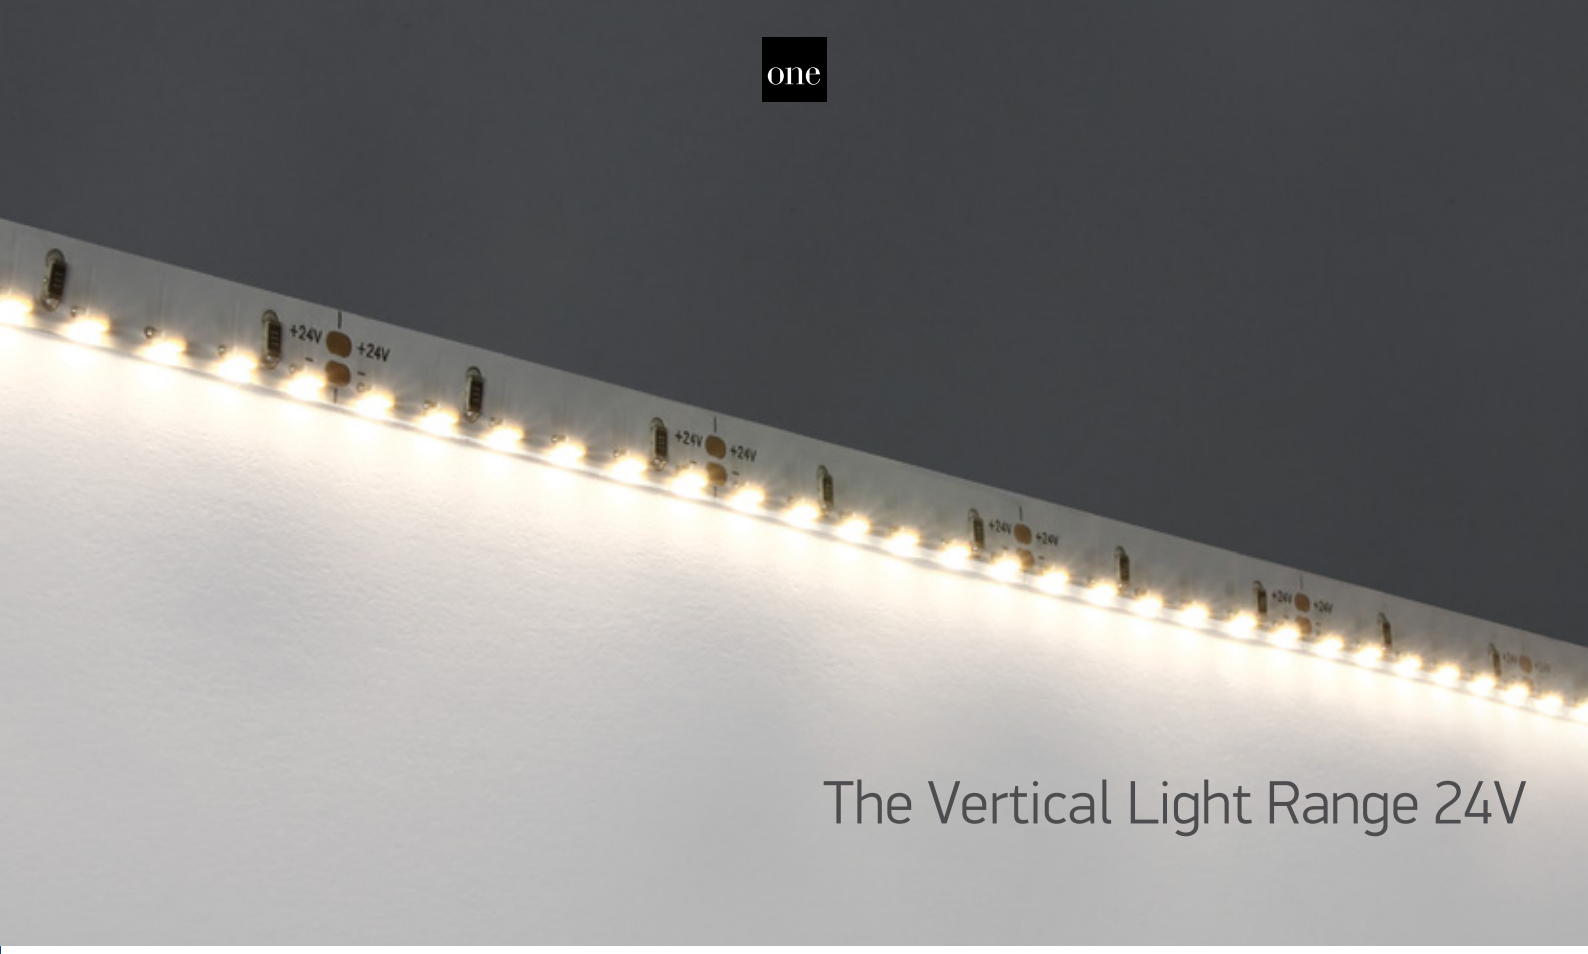

The Vertical Light Range 24V



7820V | 4,8W/m | SMD 3014 | 60LEDs/m | Vertical light

3M Double face adhesive.





Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(6-LED segment)





7835V | 14,4W/m | SMD 3014 | 120LEDs/m | Vertical light

3M Double face adhesive.





Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 5cm
(6-LED segment)





Accessories for 7820V & 7835V



7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820V/C	Cool white	4000K	4,8W/m	500lm/m	24V DC	III	40	Requires 24V DC driver
7820V/W	Warm white	3000K	4,8W/m	450lm/m	24V DC	III	40	Requires 24V DC driver
7835V/W	Warm white	3000K	14,4W/m	1152lm/m	24V DC	III	40	Requires 24V DC driver

The 19,2W/m Indoor 24V





7825 | 19,2W/m | SMD 2835 | 140LEDs/m

3M Double face adhesive.


LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Accessories
7835P Power supply cable & 7837 Connector.





7870 | 19,2W/m | SMD 2216 | 238LEDs/m

3M Double face adhesive.


LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Accessories
7835P Power supply cable & 7837 Connector.






7875 | 19,2W/m | SMD 2216 | 240LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7825/C	Cool white	4000K	19,2W/m	1728lm/m	24V DC		40	Requires 24V DC driver
7825/W	Warm white	3000K	19,2W/m	1536lm/m	24V DC		40	Requires 24V DC driver
7825/EW	Extra warm white	2700K	19,2W/m	1536lm/m	24V DC		40	Requires 24V DC driver
7870/C	Cool white	4000K	19,2W/m	1940lm/m	24V DC		40	Requires 24V DC driver
7870/W	Warm white	3000K	19,2W/m	1728lm/m	24V DC		40	Requires 24V DC driver
7875/C	Cool white	4000K	19,2W/m	1750lm/m	24V DC		40	Requires 24V DC driver
7875/W	Warm white	3000K	19,2W/m	1700lm/m	24V DC		40	Requires 24V DC driver






7845 | 24W/m | SMD 2216 | 280LEDs/m

3M Double face adhesive.




Supplied in 5m roll.






7887 | 24W/m | SMD 2110 | 700LEDs/m

3M Double face adhesive.

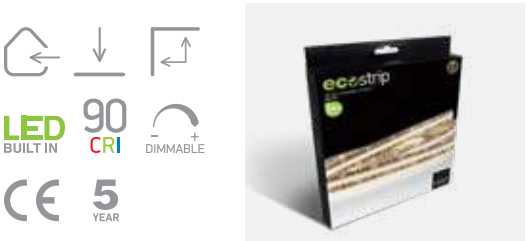

Supplied in 5m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7845/C	Cool white	4000K	24W/m	2450lm/m	24V DC		40	Requires 24V DC driver
7845/W	Warm white	3000K	24W/m	2200lm/m	24V DC		40	Requires 24V DC driver
7887/W	Warm white	3000K	24W/m	2050lm/m	24V DC		40	Requires 24V DC driver



The High Power Strips 24V



7880 | 28,8W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Cut every 10cm
(12-LED segment)





7882 | 42W/m | SMD 2835 | 240LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 2m roll.



Cut every 3,33cm
(8-LED segment)





7884 | 33W/m | SMD 2835 | 320LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Cut every 2,5m
(8-LED segment)





7885 | 48W/m | SMD 2835 | 294LEDs/m

3M Double face adhesive.

IP20


LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 2m roll.



Cut every 7,14m
(21-LED segment)



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7880/C	Cool white	4000K	28,8W/m	2304lm/m	24V DC		40	Requires 24V DC driver
7880/W	Warm white	3000K	28,8W/m	2260lm/m	24V DC		40	Requires 24V DC driver
7882/W	Warm white	3000K	42W/m	6100lm/m	24V DC		40	Requires 24V DC driver
7884/C	Cool white	4000K	33W/m	4700lm/m	24V DC		20	Requires 24V DC driver
7884/W	Warm white	3000K	33W/m	4100lm/m	24V DC		20	Requires 24V DC driver
7885/C	Cool white	4000K	48W/m	4850lm/m	24V DC		20	Requires 24V DC driver
7885/W	Warm white	3000K	48W/m	4400lm/m	24V DC		20	Requires 24V DC driver





7835/DEW | 20W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · 5 YEAR




Supplied in 5m roll.



Variable colour temperature.









20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A

DIMMABLE · 2 YEAR

Remote controller for changing colour temperature from extra warm white to daylight. Suitable for use with LED strips 7835/DEW. 50 meters range, includes dimmer control and programme mode.

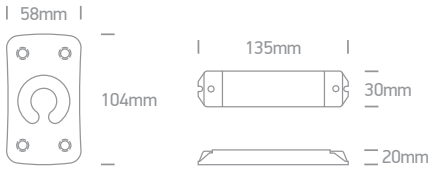

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835/DEW	Extra warm white - Daylight	2700K-6500K	20W/m	700lm/m (EW) + 900lm/m (D)	24V DC	III	40	Requires 24V DC driver

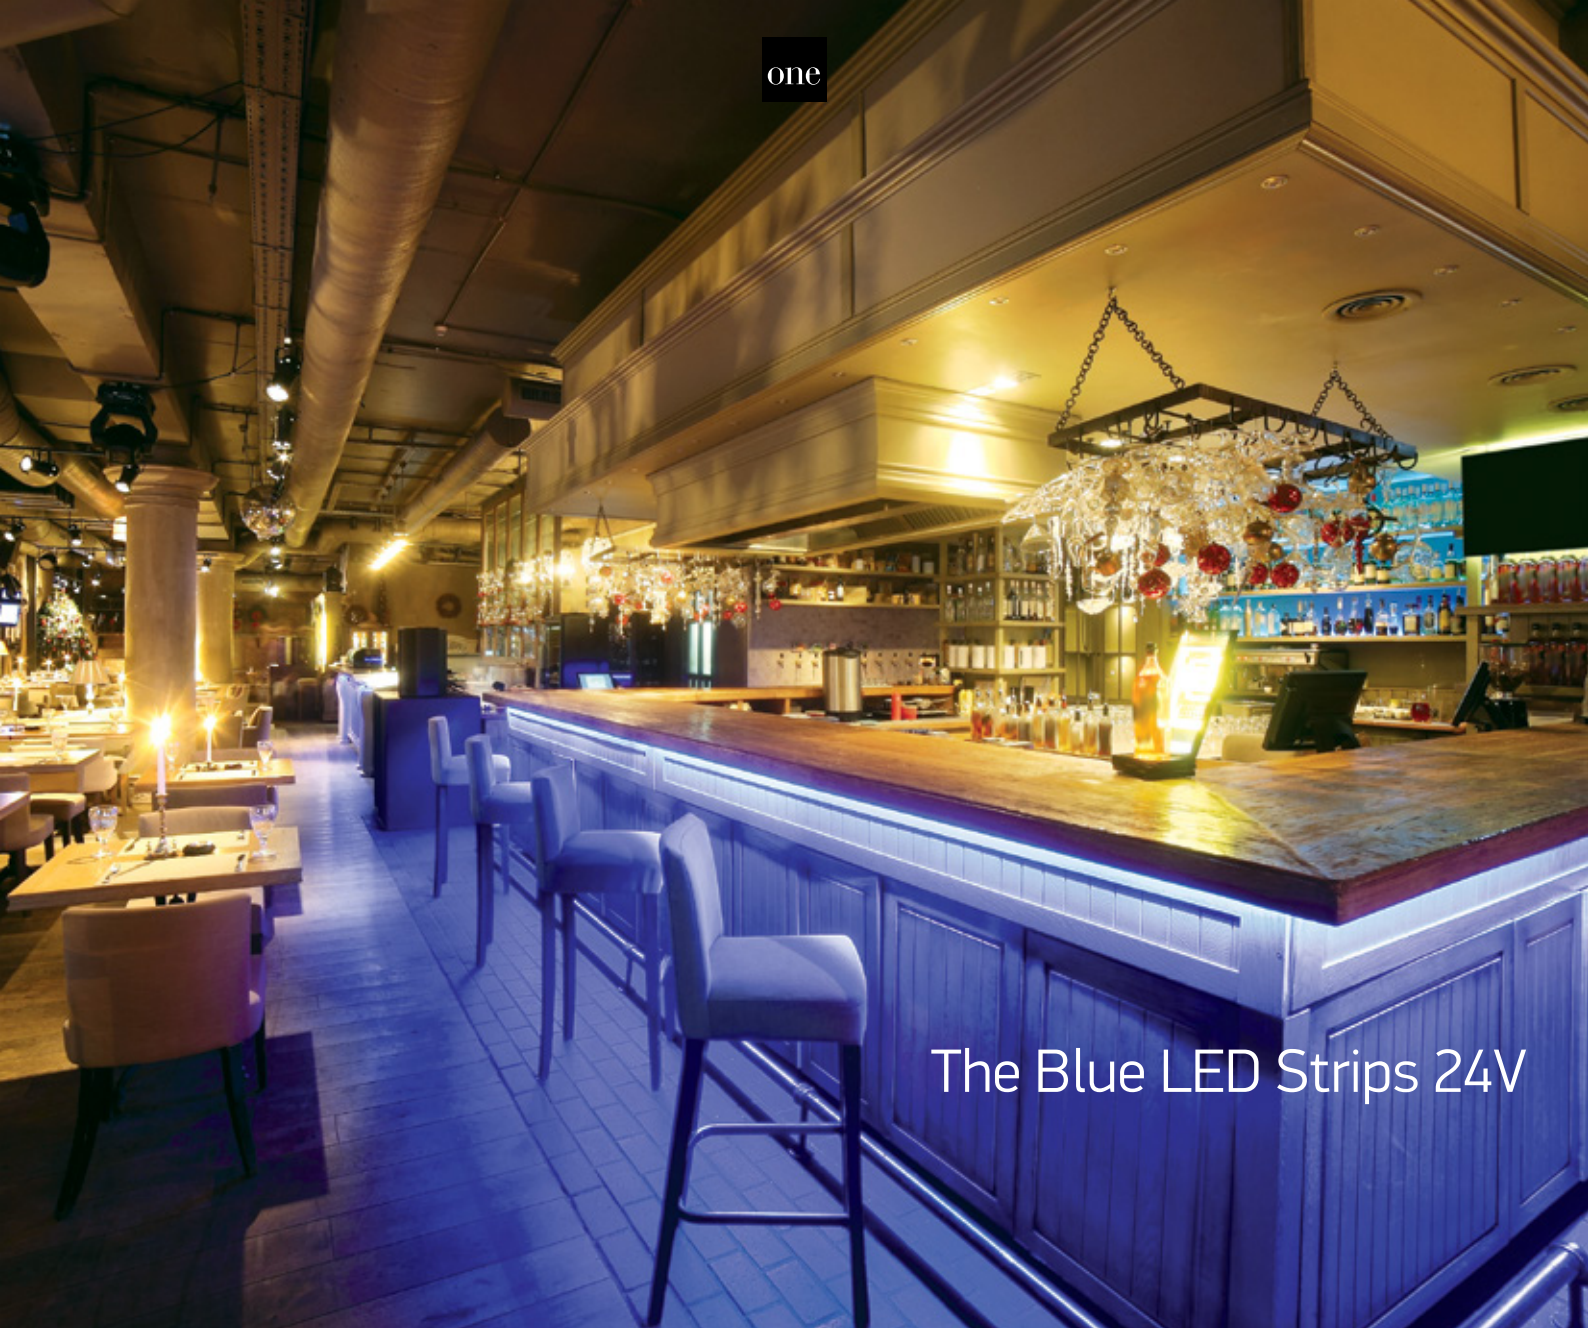



7820/BL | 4,8W/m | SMD 3528 | 60LEDs/m

3M Double face adhesive.

LED BUILT IN | DIMMABLE | CE | 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(6-LED segment)

8mm



7820W/BL | 4,8W/m | SMD 3528 | 60LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN | DIMMABLE | CE | 3 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(6-LED segment)

12mm

Order Code	Light Colour	Input	Input	Class		Notes
7820/BL	Blue	4,8W/m	24V DC	III	40	Requires 24V DC driver
7820W/BL	Blue	4,8W/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

RGB Set



7820A/RGB | 2W/m/color | SMD 5050 | 30LEDs/m

IP20

LED BUILT IN

DIMMABLE

3 YEAR



10mm

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7820A/RGB	RGB	-	2W/m/color	230V / 12V DC		10	Set of LED strip + remote



The RGB & RGBW Strips 24V

7830/RGB | 14,4W/m | SMD 5050 | 60LEDs/m

Supplied in 5m roll / 3M Double face adhesive.



LED BUILT IN · DIMMABLE · CE · 5 YEAR



Dimming remote control.
Order code 20034.



DALI & Push to DIM controller.
Order code 89100LP.



Cut every 10cm
(6-LED segment)



Accessories for 7830/RGB



50cm · CE

7834/RGB Power supply cable
7832/RGB Connector

7830/RGBW | 19,2W/m | SMD 5050 | 60LEDs/m

Supplied in 5m roll / 3M Double face adhesive.



LED BUILT IN · DIMMABLE · CE · 5 YEAR



Dimming remote control.
Order code 20036.



DALI & Push to DIM controller.
Order code 89100LP.



Cut every 10cm
(6-LED segment)



7846/RGB | 15W/m | COB LED | 840LEDs/m | RGB

Supplied in 5m roll / 3M Double face adhesive.



LED BUILT IN · DIMMABLE · CE · 5 YEAR



Dimming remote control.
Order code 20034.



DALI & Push to DIM controller.
Order code 89100LP.



Cut every 2,5cm
(21-LED segment)





7846RB Corner connector for 7846/RGB



7846RC Connector for 7846/RGB




7846RP Power supply for 7846/RGB

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830/RGB	RGB	-	14,4W/m	-	24V DC	III	40	Requires 24V DC driver
7830/RGBW	RGB + Warm white	RGB + 3000K	RGB 14,4W/m + WW 4,8W/m	408lm/m (3000K)	24V DC	III	40	Requires 24V DC driver
7846/RGB	RGB	-	15W/m	-	24V DC	III	50	Requires 24V DC driver



The Outdoor RGB & RGBW Strip 24V

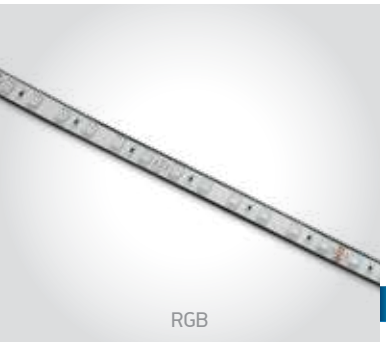

7830W/RGB | 14,4W/m | SMD 5050 | 60LEDs/m | Silicone

Supplied in 5m roll / 3M Double face adhesive.

IP68

LED BUILT IN · DIMMABLE · CE · 3 YEAR



Dimming remote control.
Order code 20034.



DALI & Push to DIM controller.
Order code 89100LP.



Cut every 10cm
(6-LED segment)

12mm



7827 | Mounting clip for 7830W

CE



7830W/RGBW | 19,2W/m | SMD 5050 | 60LEDs/m | Silicone

Supplied in 5m roll / 3M Double face adhesive.

IP68

LED BUILT IN · DIMMABLE · CE · 3 YEAR



Dimming remote control.
Order code 20036.



DALI & Push to DIM controller.
Order code 89100LP.



Cut every 10cm
(6-LED segment)

14mm



7827A | Mounting clip for 7830W/RGBW

CE

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830W/RGB	RGB	-	14,4W/m	-	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7830W/RGBW	RGB + Warm white	RGB + 3000K	RGB 14,4W/m + WW 4,8W/m	367lm/m (3000K)	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight





7903/W | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7829A, 7839 & 7843 LED Strips 12mm

30

5 YEAR


DARK LIGHT



Complete with 2 pairs end caps & 6pcs fixing clips.



Optional black diffuser. Order code 030248/B.





7903/B | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7829A, 7839 & 7843 LED Strips 12mm

30

5 YEAR


DARK LIGHT



Complete with 2 pairs end caps & 6pcs fixing clips.




Optional black diffuser. Order code 030248/B.



The Dark Light Profiles



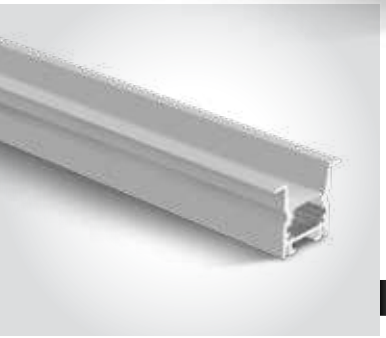


7903R/W | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7829A, 7839 & 7843 LED Strips 12mm

20

5 YEAR

DARK LIGHT




Complete with 2 pairs end caps & 6pcs fixing clips.




Optional black diffuser. Order code 030248/B.

24x2000mm

27mm



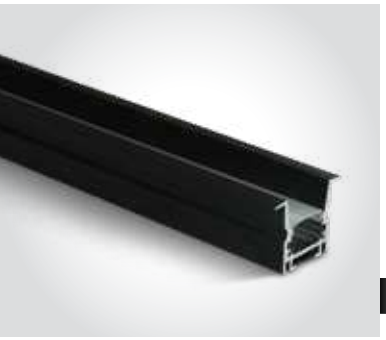

7903R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7829A, 7839 & 7843 LED Strips 12mm

20

5 YEAR

DARK LIGHT




Complete with 2 pairs end caps & 6pcs fixing clips.




Optional black diffuser. Order code 030248/B.

24x2000mm

27mm



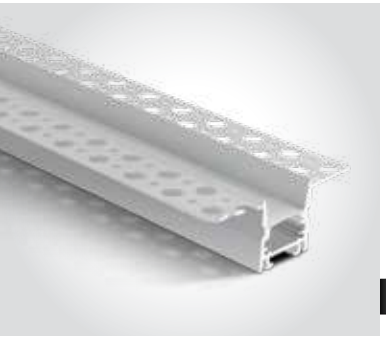

7903TR/W | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7829A, 7839 & 7843 LED Strips 12mm

16

5 YEAR

DARK LIGHT




Complete with 2 pairs end caps.



Optional black diffuser. Order code 030248/B.

24x2000mm

25mm





7903TR/B | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7829A, 7839 & 7843 LED Strips 12mm

16

5 YEAR

DARK LIGHT




Complete with 2 pairs end caps.




Optional black diffuser. Order code 030248/B.

24x2000mm

25mm



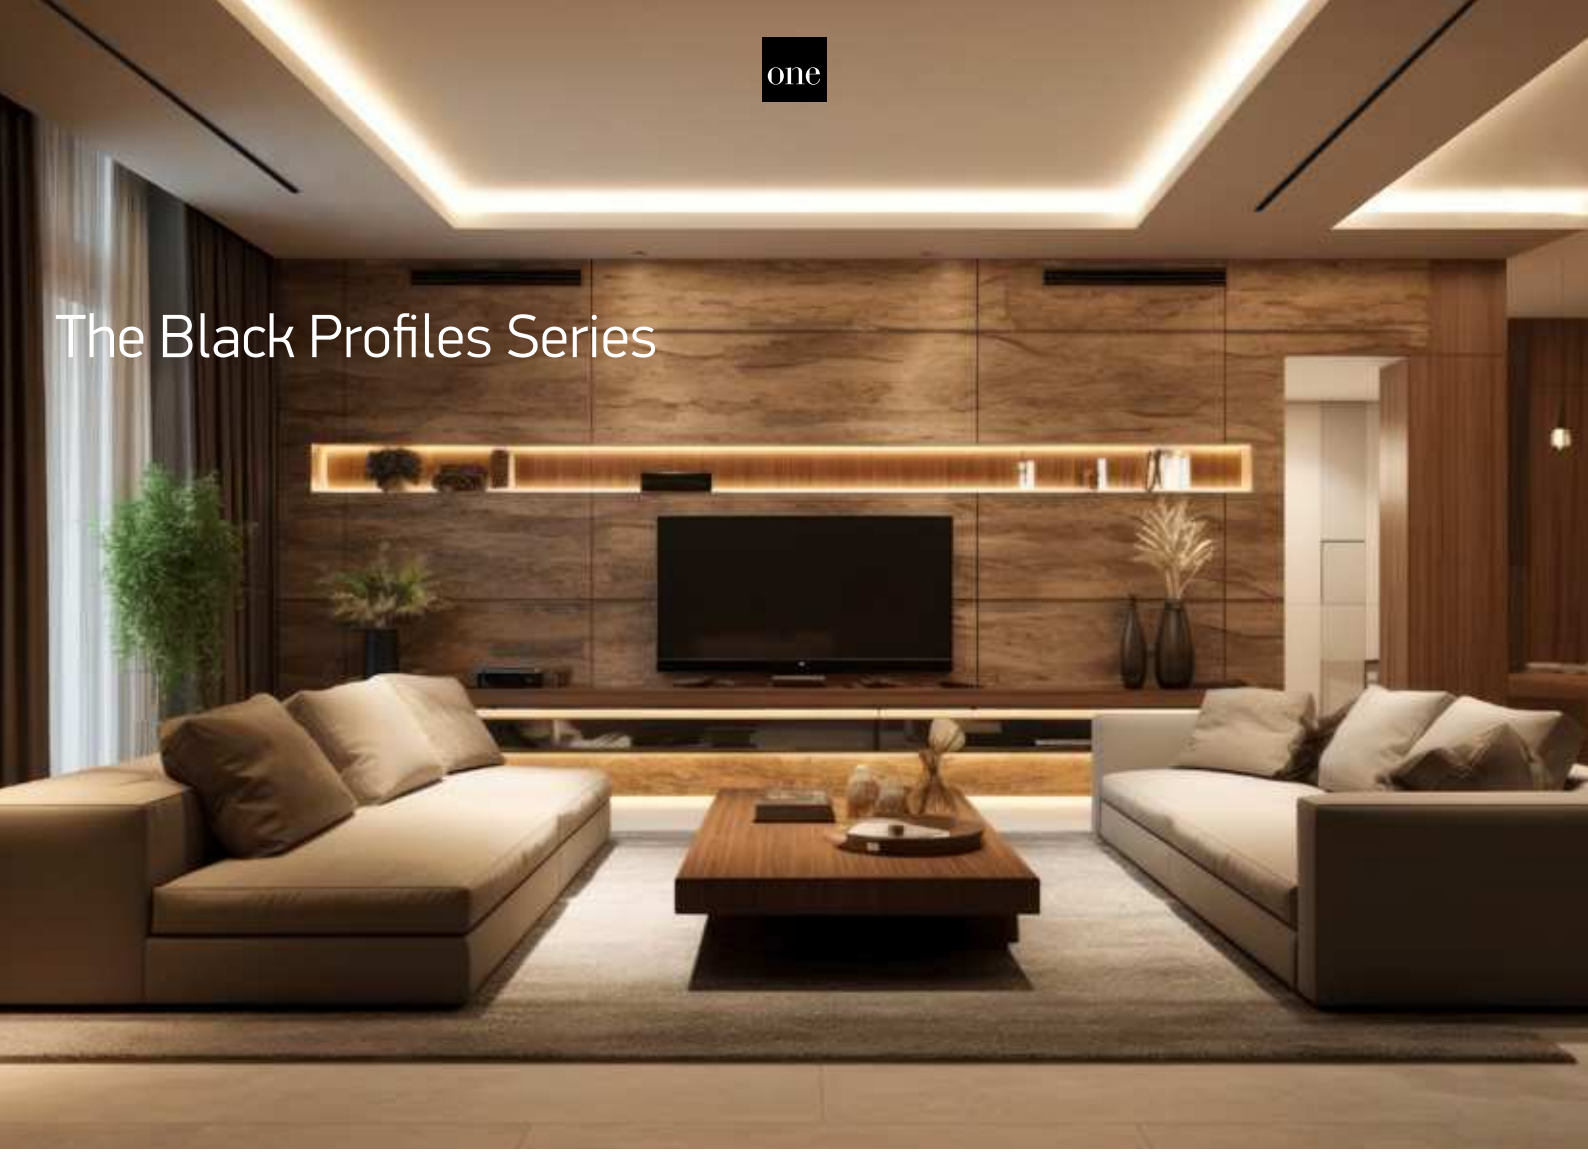

The Black Profiles Series




7902/B/B | 2m Surface profile + PC black diffuser | Aluminium | Suitable for 7820, 7839, 7843, 7844 & 7844E LED Strip 12mm


25

5 YEAR



Complete with 2 pairs end caps & 6pcs fixing clips.



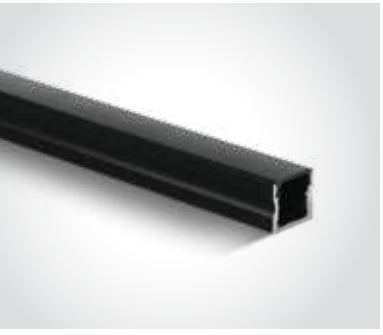


7904/B/B | 2m Surface profile + PC black diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E & 7846 LED Strips 12mm

20

5 YEAR



Complete with 2 pairs end caps & 6pcs fixing clips.






7912/B/B | 2m Surface / Suspended profile + PC black diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882 & 7887 LED Strips 25mm

12

5 YEAR



Complete with 2 pairs end caps.



Optional Trimless kit (10pcs). Order code 7838M.




Optional suspension wire (1pc). Order code 7900P.



Optional 180° connector. Order code 7900C.




Optional 90° connector. Order code 7900R.





The Black Profiles Series

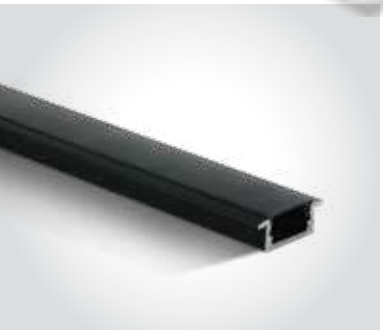

7902R/B/B | 2m Recessed profile + PC black diffuser | Aluminium | Suitable for 7820, 7839, 7843, 7844 & 7844E LED Strip 12mm

25


5 YEAR



Complete with 2 pairs end caps.

18x2000mm

10mm





7912R/B/B | 2m Recessed profile + PC black diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880 & 7887 LED Strips 20mm

16


5 YEAR



Complete with 2 pairs end caps & 6pcs fixing clips.

25x2000mm

30mm





7910R/B/B | 2m Recessed profile + PC black diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882, 7884 & 7887 LED Strips 30mm

12


5 YEAR



Complete with 2 pairs end caps & 4pcs fixing clips with screws.

40x2000mm

40mm






7901TR/B | 2m Trimless profile + PC black diffuser | Aluminium
Suitable for 7820, 7823, 7829, 7829A, 7839, 7843, 7843E, 7844 & 7844E LED Strips 10mm


2

5 YEAR



Complete with 2 pairs end caps.

13x2000mm





7904TR/B | 2m Trimless profile + PC black diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7846 & 7875 LED Strips 20mm


2


5 YEAR



Complete with 2 pairs end caps.

30x2000mm



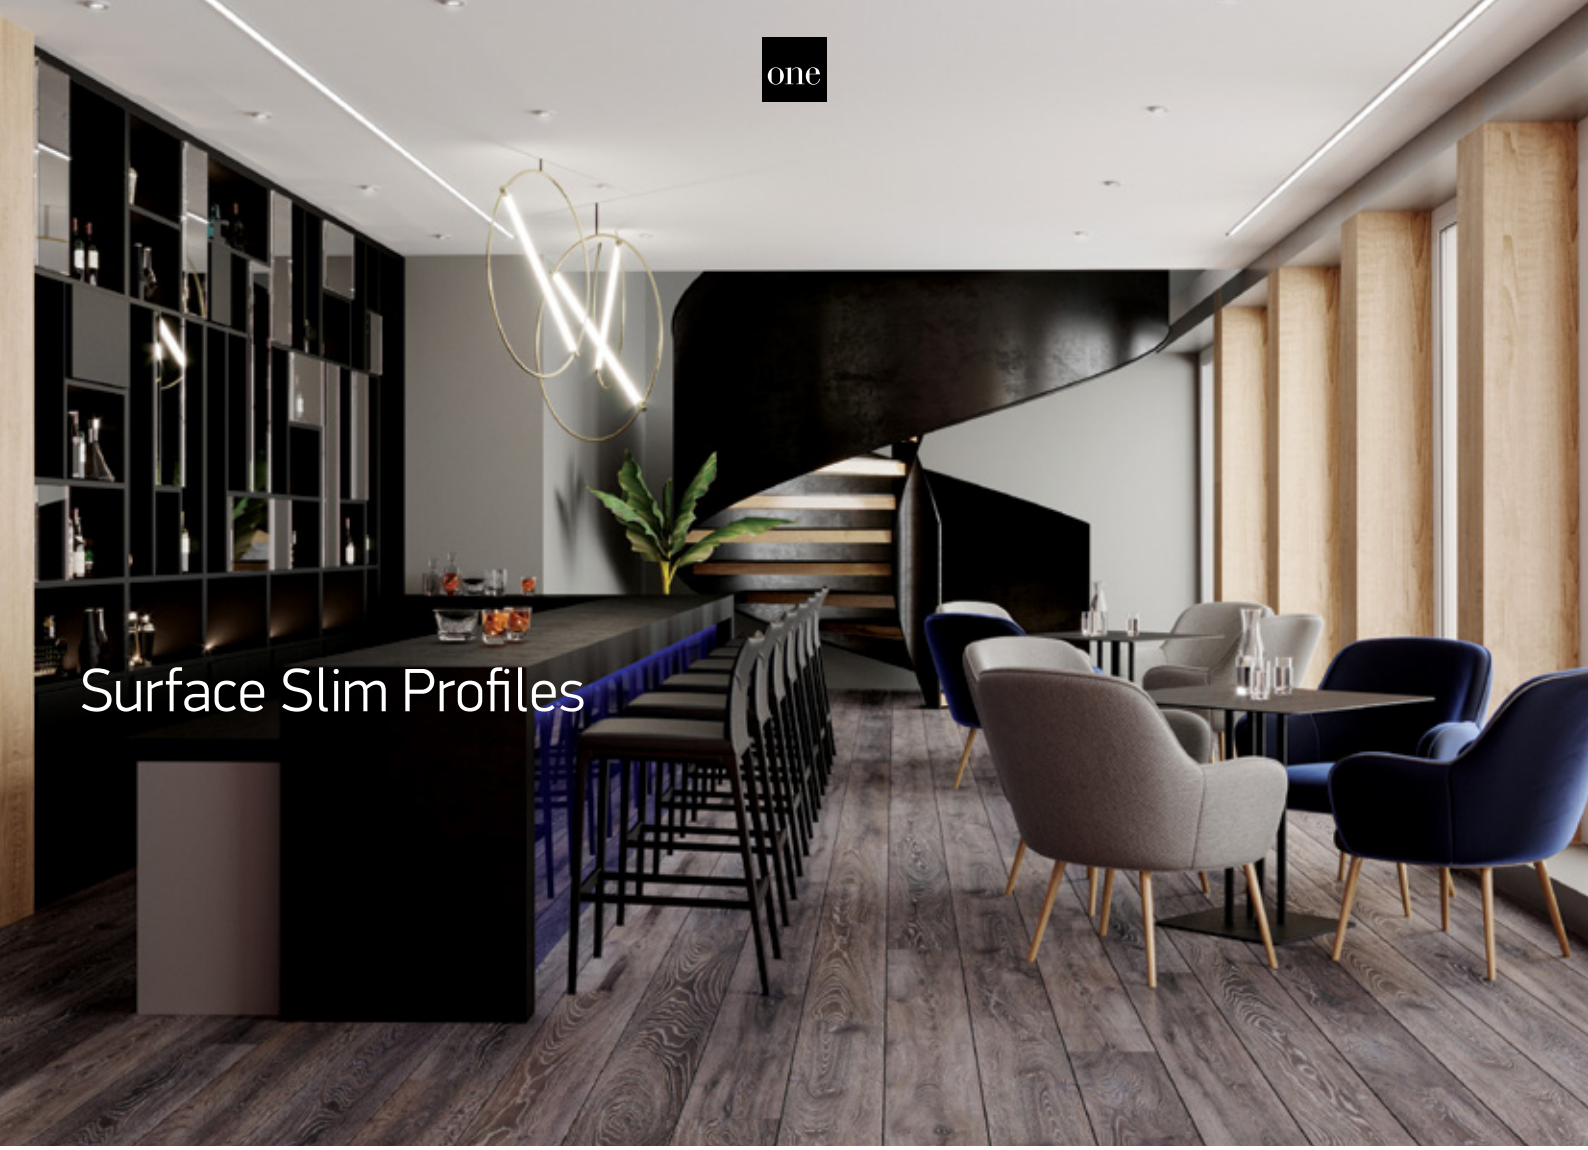

Surface Slim Profiles



7900/AL | 2m Profile for heat dissipation | Aluminium | Suitable for LED Strips up to 12mm

200

5 YEAR





7901/W

7901 | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7823, 7833 & 7843 LED Strips 5mm

2

5 YEAR




7901/B



7901/AL



Complete with 2 pairs end caps & 6pcs metal fixing clips.





7902/W

7902 | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820, 7839, 7843, 7844 & 7844E LED Strip 12mm

2

5 YEAR




7902/B



7902/AL



Complete with 2 pairs end caps & 6pcs fixing clips.






7904/W

7904 | 2m Surface profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E & 7846 LED Strips 12mm


2

5 YEAR


7904/B


7904/AL


Complete with 2 pairs end caps & 6pcs fixing clips.




7905/W

7905 | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7835, 7844, 7844E, 7846 & 7875 LED Strips 16mm


40

5 YEAR


7905/B


7905/AL


Complete with 2 pairs end caps & 6pcs fixing clips.






Surface/Suspended Wide Profiles
External driver



7912/W | 2m Surface/Suspended profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882 & 7887 LED Strips 25mm

12
5 YEAR



Complete with 2 pairs end caps.


Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.







7912/B | 2m Surface/Suspended profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882 & 7887 LED Strips 25mm

12
5 YEAR



Complete with 2 pairs end caps.


Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.






7912/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882 & 7887 LED Strips 25mm

12
5 YEAR



Complete with 2 pairs end caps.


Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.






7912A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7880, 7884 & 7885 LED Strips 40mm

6
5 YEAR



Complete with 2 pairs end caps.



Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.



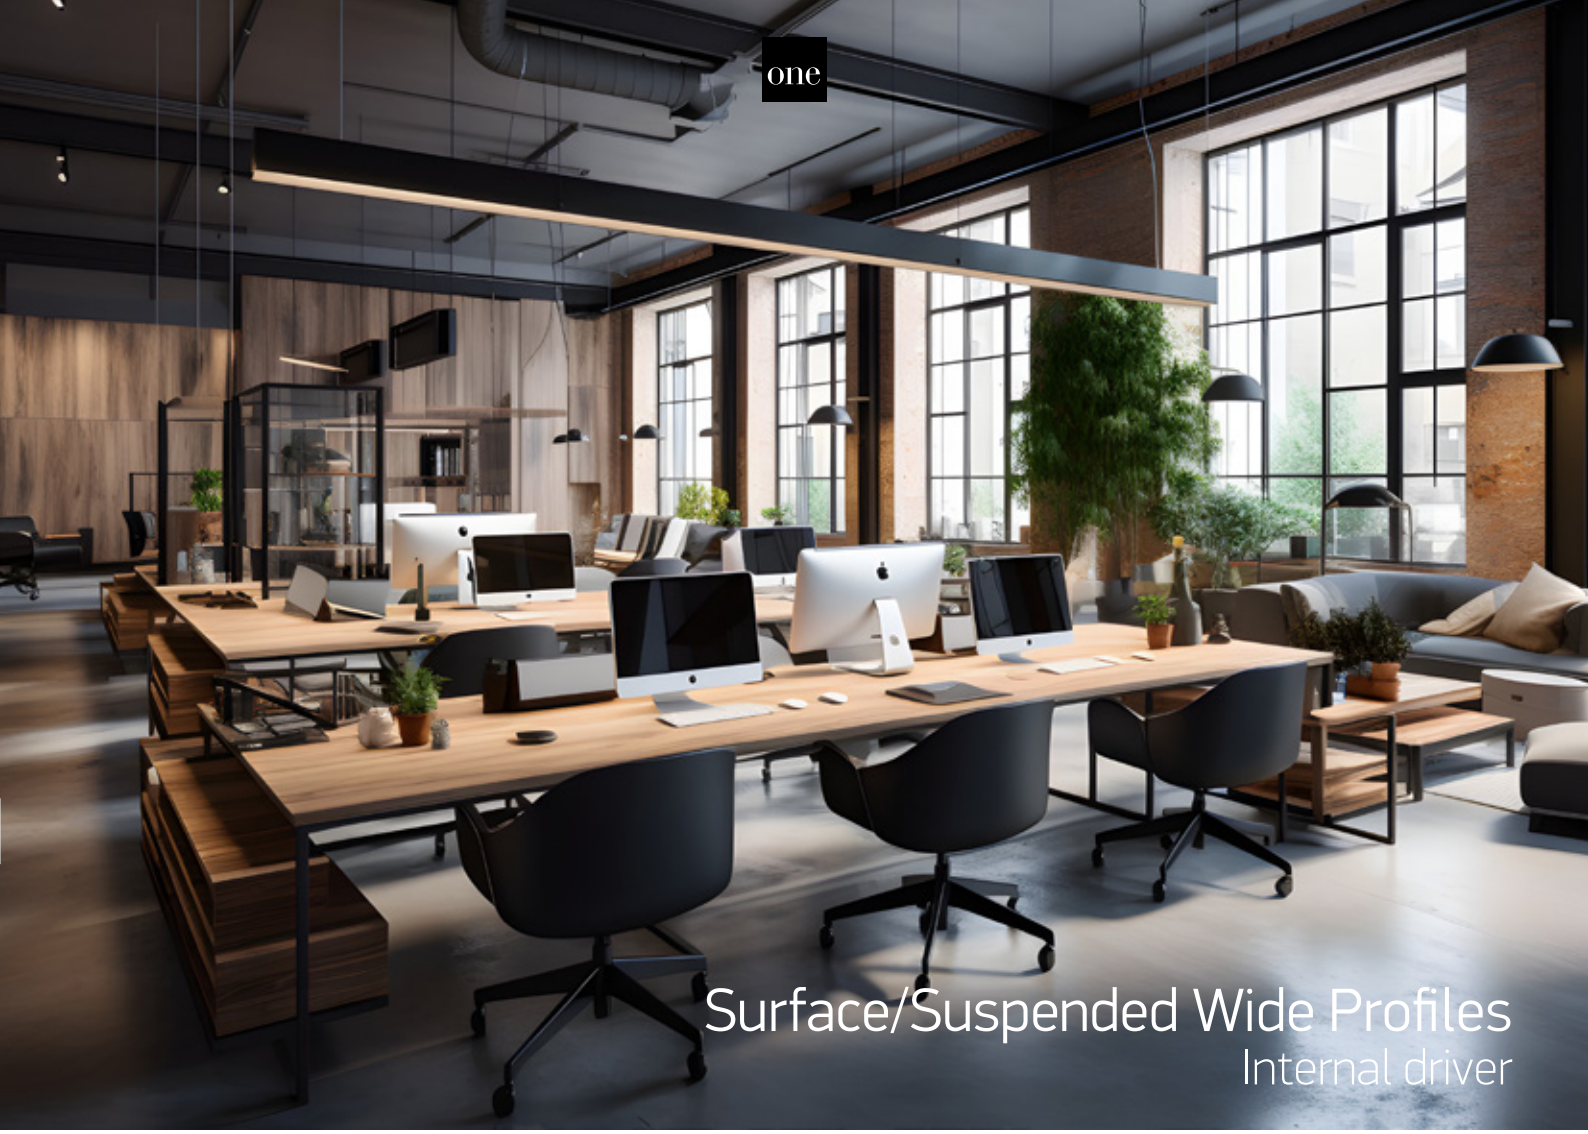

Surface/Suspended Wide Profiles
Internal driver



7910/W | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7845, 7875, 7880, 7882, 7884 & 7887 LED Strips 30mm | Use drivers on pages 755, 756 & 757

8

5 YEAR



Complete with 2 pairs end caps.



Optional Trimless kit (10pcs). Order code 7838M.




Optional suspension wire (1pc). Order code 7900P.



Optional 180° connector. Order code 7900C.



Optional 90° connector. Order code 7900R.





7910/B | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7845, 7875, 7880, 7882, 7884 & 7887 LED Strips 30mm | Use drivers on pages 755, 756 & 757

8

5 YEAR



Complete with 2 pairs end caps.



Optional Trimless kit (10pcs). Order code 7838M.




Optional suspension wire (1pc). Order code 7900P.




Optional 180° connector. Order code 7900C.



Optional 90° connector. Order code 7900R.



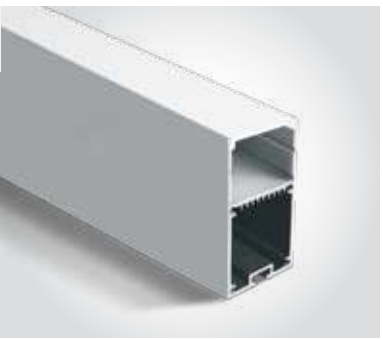

7910/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7845, 7875, 7880, 7882, 7884 & 7887 LED Strips 30mm | Use drivers on pages 755, 756 & 757

8

5 YEAR



Complete with 2 pairs end caps.



Optional Trimless kit (10pcs). Order code 7838M.




Optional suspension wire (1pc). Order code 7900P.



Optional 180° connector. Order code 7900C.



Optional 90° connector. Order code 7900R.





Surface/Suspended Wide Profiles
Internal driver



7910A/W | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7884 & 7885 LED Strips 45mm | Use drivers on pages 755, 756 & 757


6
CE 5 YEAR


Complete with 2 pairs end caps.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.





7910A/B | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7884 & 7885 LED Strips 45mm | Use drivers on pages 755, 756 & 757


6
CE 5 YEAR


Complete with 2 pairs end caps.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.





7910A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7884 & 7885 LED Strips 45mm | Use drivers on pages 755, 756 & 757


6
CE 5 YEAR


Complete with 2 pairs end caps.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.






050122 | Profile power supply base | With power cable | Aluminium

30
CE 5 YEAR

IP20









Side Light Surface & Suspended Profiles




7906/AL | 2m Surface profile + PMMA opal square diffuser | Aluminium
Suitable for 7820, 7825, 7829, 7829A, 7835, 7839, 7844, 7844E, 7846 & 7870 LED Strips 15mm

64

5 YEAR



Complete with 2 pairs end caps.





7906D/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7880, 7884 & 7885 LED Strips 40mm | Use drivers on pages 755, 756 & 757

6


5 YEAR



Complete with 2 pairs end caps.



Optional suspension wire (1pc). Order code 7900P.





Recessed Profiles



7901R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7823, 7833, 7843 & 7843E LED Strips 5mm

30


5 YEAR



Complete with 2 pairs end caps.

8x2000mm

13mm





7902R/W | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7839, 7843, 7844 & 7844E LED Strip 12mm

2


5 YEAR



Complete with 2 pairs end caps.

18x2000mm

10mm





7902R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7839, 7843, 7844 & 7844E LED Strip 12mm

2


5 YEAR



Complete with 2 pairs end caps.

18x2000mm

10mm





7902R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7839, 7843, 7844 & 7844E LED Strip 12mm

2


5 YEAR




Complete with 2 pairs end caps.

18x2000mm

10mm



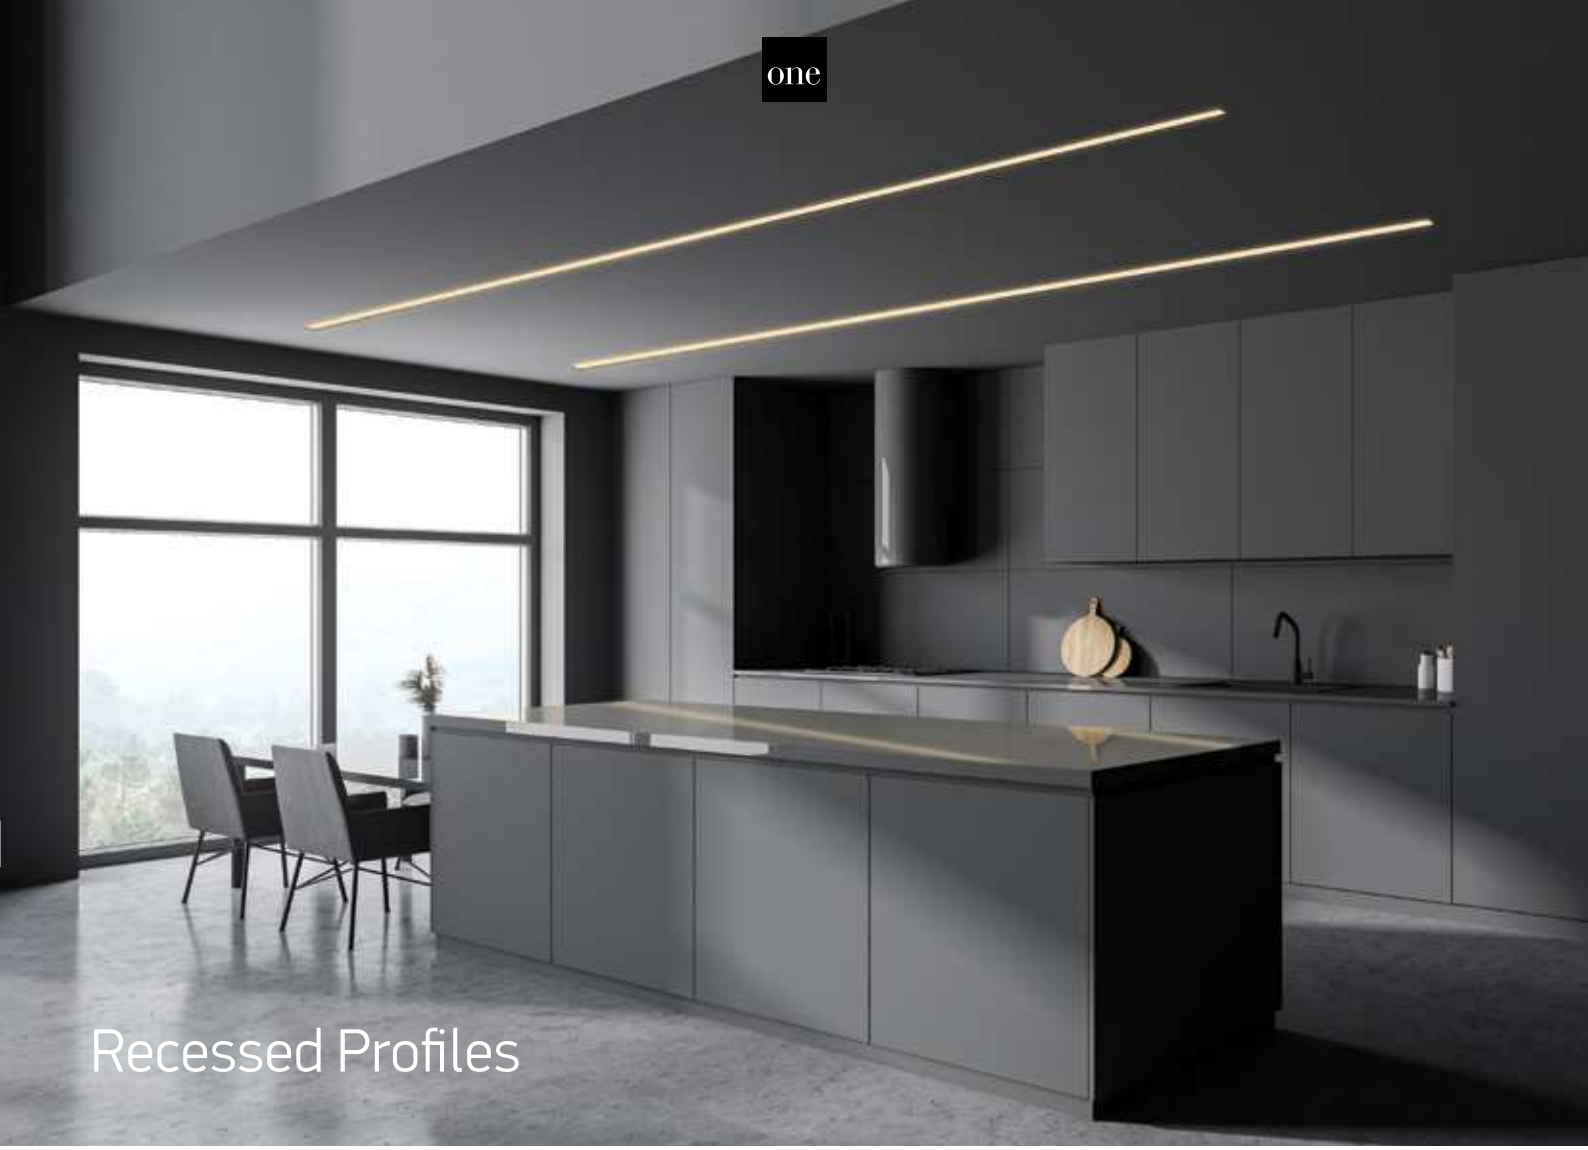

Recessed Profiles



7904R/W | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E & 7846 LED Strips 12mm

40


5 YEAR



Complete with 2 pairs end caps.

18x2000mm

16mm





7904R/B | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E & 7846 LED Strips 12mm

40


5 YEAR



Complete with 2 pairs end caps.

18x2000mm

16mm





7904R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E & 7846 LED Strips 12mm

40


5 YEAR



Complete with 2 pairs end caps.

18x2000mm

16mm





Recessed Profiles



7906R/W | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E & 7846 LED Strips 20mm

2


5 YEAR



Complete with 2 pairs end caps.

25x2000mm

12mm





7906R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E & 7846 LED Strips 20mm

2


5 YEAR



Complete with 2 pairs end caps.

25x2000mm

12mm





7912R/W | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880 & 7887 LED Strips 20mm

16


5 YEAR



Complete with 2 pairs end caps & 6pcs fixing clips.

25x2000mm

30mm





7912R/B | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880 & 7887 LED Strips 20mm

16


5 YEAR



Complete with 2 pairs end caps & 6pcs fixing clips.

25x2000mm

30mm





7912R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880 & 7887 LED Strips 20mm

16


5 YEAR




Complete with 2 pairs end caps & 6pcs fixing clips.


25x2000mm

30mm



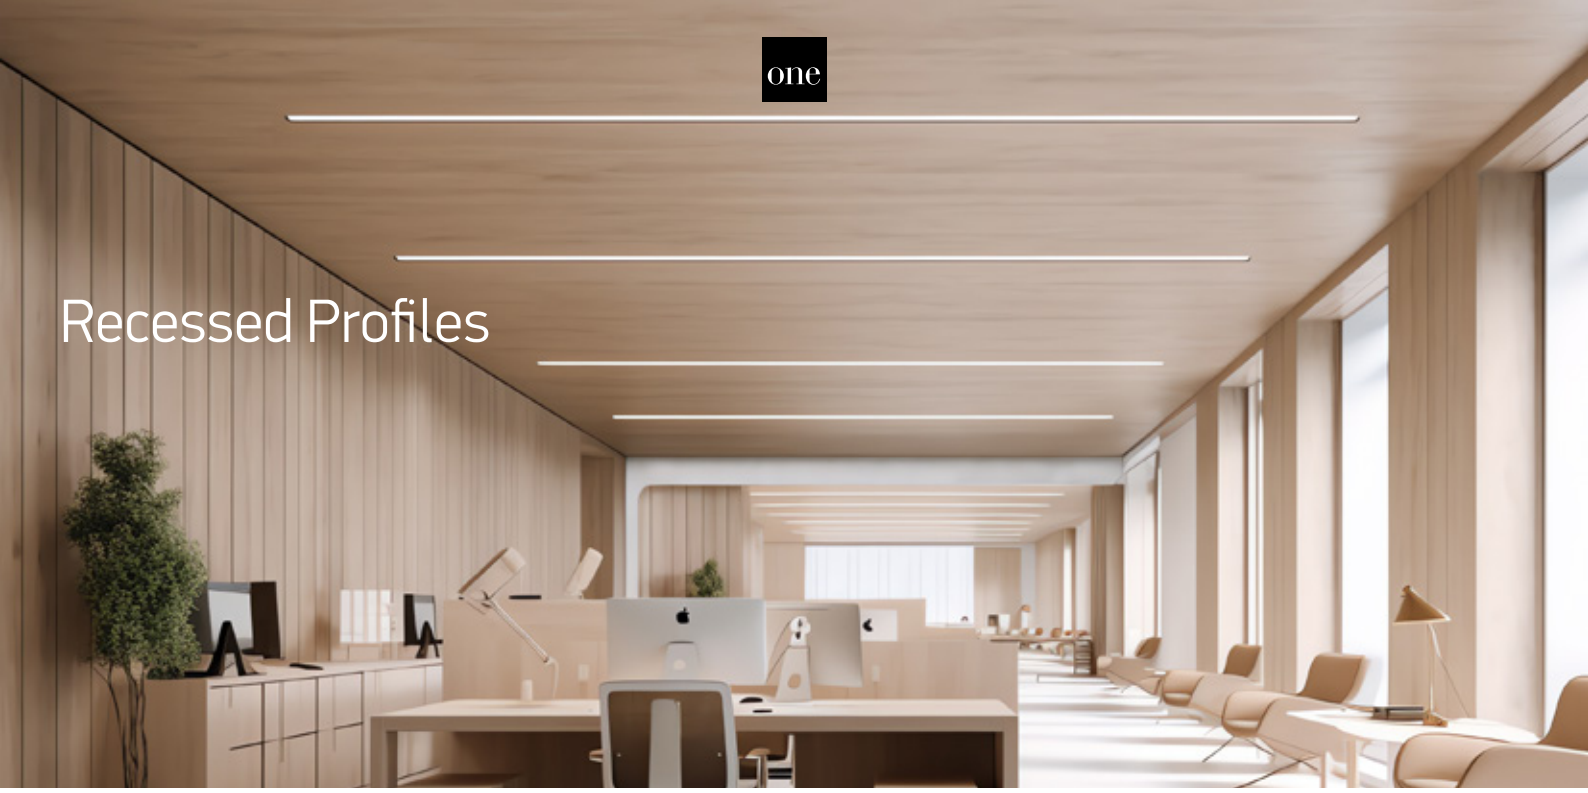

Recessed Profiles

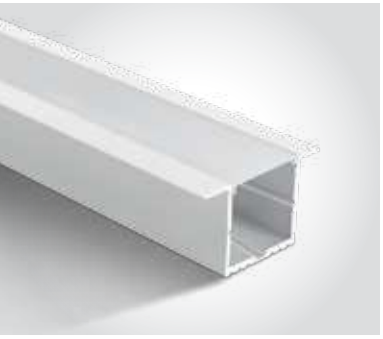

7910R/W | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882, 7884 & 7887 LED Strips 30mm

12


5 YEAR



Complete with 2 pairs end caps & 4pcs fixing clips with screws.

40x2000mm

40mm





7910R/B | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882, 7884 & 7887 LED Strips 30mm

12


5 YEAR



Complete with 2 pairs end caps & 4pcs fixing clips with screws.

40x2000mm

40mm





7910R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882, 7884 & 7887 LED Strips 30mm

12


5 YEAR



Complete with 2 pairs end caps & 4pcs fixing clips with screws.

40x2000mm

40mm





7910AR/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7875, 7880, 7884 & 7885 LED Strips 40mm

6


5 YEAR



Complete with 2 pairs end caps & 4pcs metal fixing clips.

52x2000mm

35mm





Trimless Recessed Profiles



7900TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7823, 7843 & 7843E LED Strips 5mm


40

5 YEAR



Complete with 2 pairs end caps.

9x2000mm





7901TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7820, 7823, 7829, 7829A, 7839, 7843, 7843E, 7844 & 7844E LED Strips 10mm


2

5 YEAR



Complete with 2 pairs end caps.

13x2000mm





7904TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E, 7846 & 7875 LED Strips 20mm


4

5 YEAR



Complete with 2 pairs end caps.

30x2000mm





7906TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7875 & 7880 LED Strips 37mm


2

5 YEAR



Complete with 2 pairs end caps.

50x2000mm





7904ATR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E, 7845, 7846, 7875 & 7887 LED Strips 20mm


12

5 YEAR




Complete with 2 pairs end caps.

26x2000mm



Trimless Edge Recessed Profiles

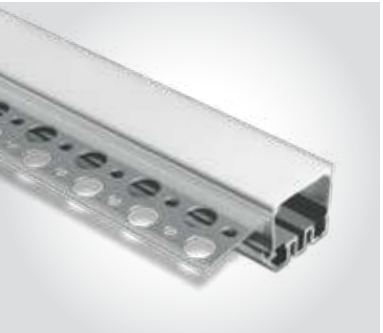

7909TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E, 7846 & 7875 LED Strips 20mm


36

5 YEAR



Complete with 2 pairs end caps.

25mm








7908A/AL | 2m Triangle profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E & 7846 LED Strips 10mm

4


5 YEAR



Complete with 2 pairs end caps & 6pcs surface mounting clips.



Shelf illumination

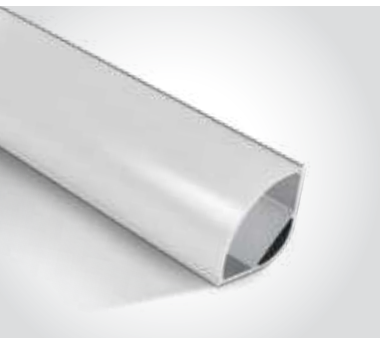


7908/AL | 2m Triangle profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7835, 7839, 7844, 7844E, 7846 & 7875 LED Strips 16mm

40

5 YEAR



Complete with 2 pairs end caps & 1pc 180° connector.



Shelf illumination




7937T/AL | 2m Surface profile + PC semi-opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7839, 7843, 7844 & 7844E LED Strips 12mm

10

5 YEAR




Complete with 2 pairs end caps.



Shelf illumination

Skirting Profiles

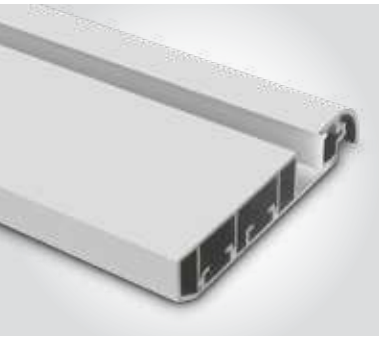


7922/W | 2m Wall profile + PC opal diffuser | Aluminium | Suitable for 7820, 7839, 7843, 7844 & 7844E LED Strip 8mm

12

5 YEAR



Complete with 2 pairs end caps.






7922/B | 2m Wall profile + PC opal diffuser | Aluminium | Suitable for 7820, 7839, 7843, 7844 & 7844E LED Strip 8mm

12

5 YEAR



Complete with 2 pairs end caps.



Special Applications Profiles




7920/B | 2m Step profile + PC opal diffuser | Aluminium | Suitable for 7820, 7839, 7843, 7844 & 7844E LED Strips 8mm

10

CE 5 YEAR



Complete with 4pcs end caps.

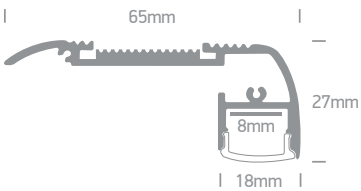



IP67 & IP68 Profiles



7918/W | 2m White profile + PMMA opal diffuser | Plastic
Suitable for 7820, 7829, 7829A, 7839, 7844 & 7844E LED Strips 8mm


100

5 YEAR

IP68



Complete with 2 pairs end caps & 6pcs fixing clips.





7914R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7839, 7843, 7844 & 7844E LED Strips 8mm

20

5 YEAR


IP67



Complete with 2 pairs end caps.

23x2000mm

12mm





7915R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7829A, 7839, 7843, 7844 & 7844E LED Strips 10mm

80

5 YEAR


IP67



Complete with 2 pairs end caps.

22x2000mm

14mm





Modules For Signs



7840 | 0,72W (3LEDs x 0,24W)


Double face adhesive.

IP65 offer

LED BUILT IN · DIMMABLE · CE · 3 YEAR



Supplied in 10pcs chain.
Total length 1,7m.





7842 | 1,44W (4LEDs x 0,36W)


Double face adhesive.

IP65 offer

LED BUILT IN · DIMMABLE · CE · 3 YEAR



Supplied in 10pcs chain.
Total length 1,25m.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840/Y	Yellow	-	0,72W	-	12V DC	III	100	Requires 12V DC driver
7842/BL	Blue	-	1,44W	-	12V DC	III	100	Requires 12V DC driver
7842/GR	Green	-	1,44W	-	12V DC	III	100	Requires 12V DC driver
7842/Y	Yellow	-	1,44W	-	12V DC	III	100	Requires 12V DC driver



Modules for Signs & Backlit Applications




7840A | 0,5W | 2,5W/m | SMD 2835 | Plastic


Modules for signs.

LED BUILT IN · DIMMABLE · CE · 3 YEAR · IP65



Supplied in 50pcs chain.
Total length 10m.



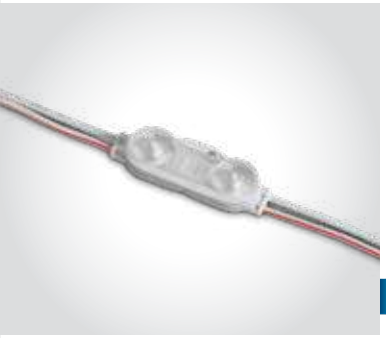


7840B | 2x0,5W | 5W/m | SMD 2835 | Plastic


Modules for signs.

LED BUILT IN · DIMMABLE · CE · 3 YEAR · IP65



Supplied in 50pcs chain.
Total length 10m.



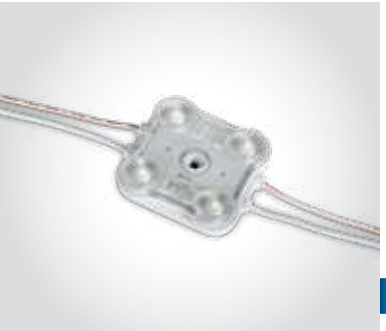


7840D | 4x0,5W | 10W/m | SMD 2835 | Plastic

Modules for signs.

LED BUILT IN · DIMMABLE · CE · 3 YEAR · IP65



Supplied in 50pcs chain.
Total length 10m.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840A/D	Daylight	6000K	0,5W	45lm	12V DC	III	50	Requires 12V DC driver
7840B/D	Daylight	6000K	1W	90lm	12V DC	III	30	Requires 12V DC driver
7840D/D	Daylight	6000K	2W	180lm	12V DC	III	20	Requires 12V DC driver

The 230V Solid LED Strip
Aluminium + PC





38104L | 4W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

LED BUILT IN

75 CRI

QUICK FIX


CE

2 YEAR

IP20

offer







38115L | 15W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

LED BUILT IN

75 CRI

QUICK FIX


CE

2 YEAR


IP20

offer





Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38104L/W	Warm white	3000K	4W	280lm	100-240V		50	Includes power supply cable, corner cable, connector
38115L/C	Cool white	4000K	15W	1095lm	100-240V		30	Includes power supply cable, corner cable, connector

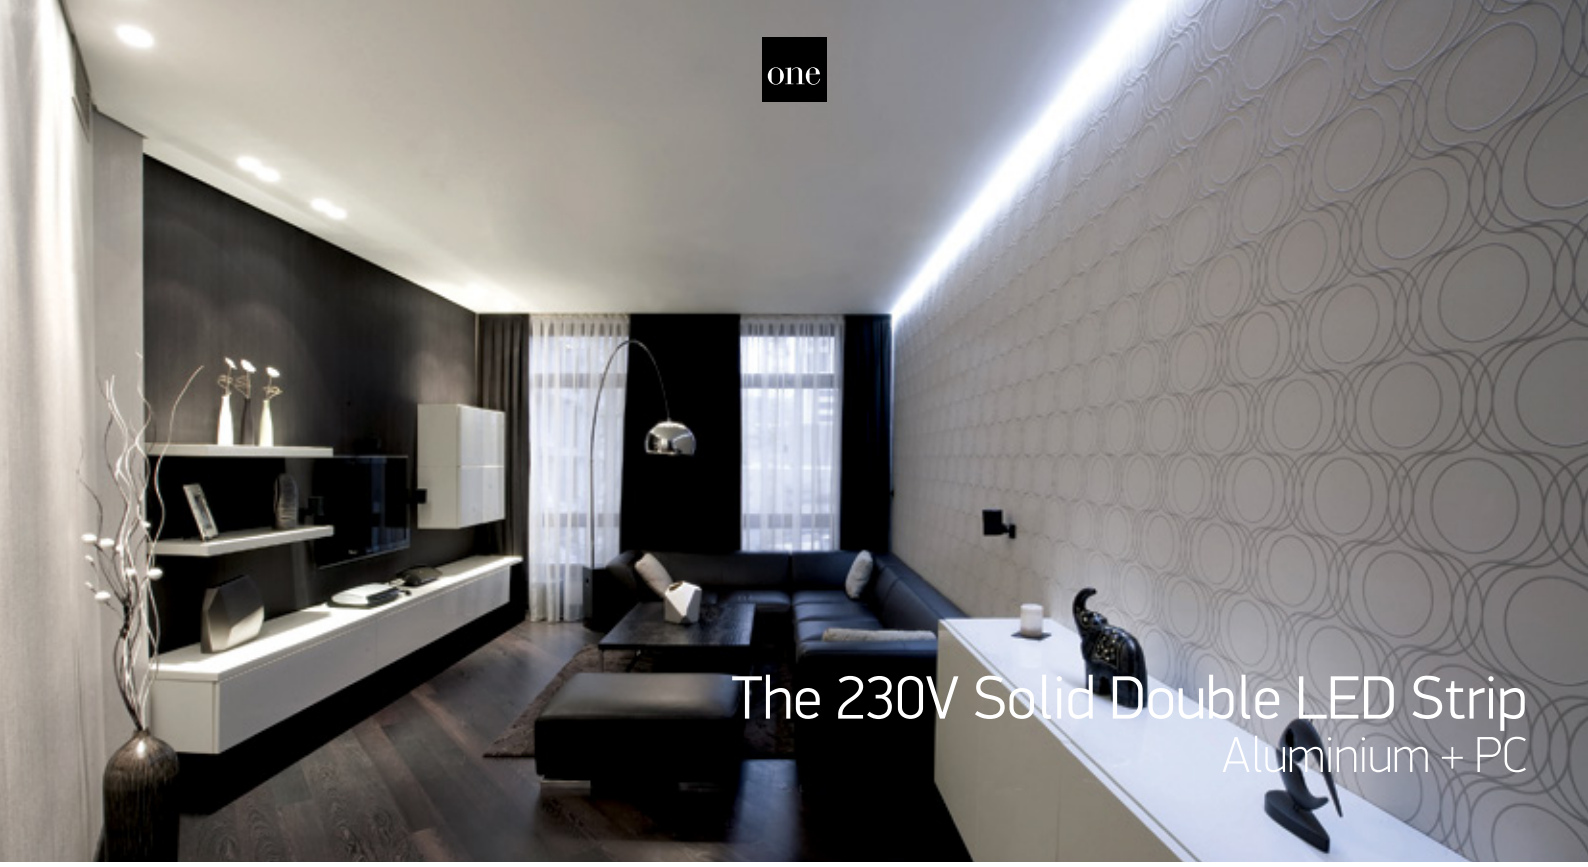




38207L | 7W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

LED BUILT IN
75 CRI
QUICK FIX
CE
2 YEAR
IP20
offer








38215L | 15W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

LED BUILT IN
75 CRI
QUICK FIX
CE
2 YEAR
IP20
offer








38230L | 30W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

LED BUILT IN
75 CRI
QUICK FIX
CE
2 YEAR
IP20
offer





Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38207L/D	Daylight	6000K	7W	530lm	100-240V		30	Includes power supply cable, corner cable, connector
38207L/C	Cool white	4000K	7W	510lm	100-240V		30	Includes power supply cable, corner cable, connector
38207L/W	Warm white	3000K	7W	490lm	100-240V		30	Includes power supply cable, corner cable, connector
38215L/W	Warm white	3000K	15W	1050lm	100-240V		25	Includes power supply cable, corner cable, connector
38230L/W	Warm white	3000K	30W	2100lm	100-240V		20	Includes power supply cable, corner cable, connector

24V Linkable Modules
Aluminium




38001A | 1W | LED | Aluminium

IP20 offer

LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR








38002A | 3W | LED | Aluminium

IP20 offer

LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR








38005A | 6W | LED | Aluminium

IP20 offer

LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR








38006 & 38007 | Power supply cable and corner cable for 38001A, 38002A & 38005A

III · QUICK FIX · CE


offer

Power supply cable
38006A For DL and WW
38006B For BL
38006C For RGB

Corner cable
38007A For DL and WW
38007B For BL
38007C For RGB



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38001A/D	Daylight	6000K	1W	64lm	24V DC	III	100	Requires 24V DC driver
38001A/W	Warm white	3000K	1W	60lm	24V DC	III	100	Requires 24V DC driver
38001A/BL	Blue	-	1W	-	24V DC	III	100	Requires 24V DC driver
38001A/RGB	RGB	-	1W	-	24V DC	III	100	Requires 24V DC driver
38002A/D	Daylight	6000K	3W	144lm	24V DC	III	100	Requires 24V DC driver
38002A/BL	Blue	-	3W	-	24V DC	III	100	Requires 24V DC driver
38002A/RGB	RGB	-	3W	-	24V DC	III	100	Requires 24V DC driver
38005A/D	Daylight	6000K	6W	384lm	24V DC	III	100	Requires 24V DC driver
38005A/BL	Blue	-	6W	-	24V DC	III	100	Requires 24V DC driver

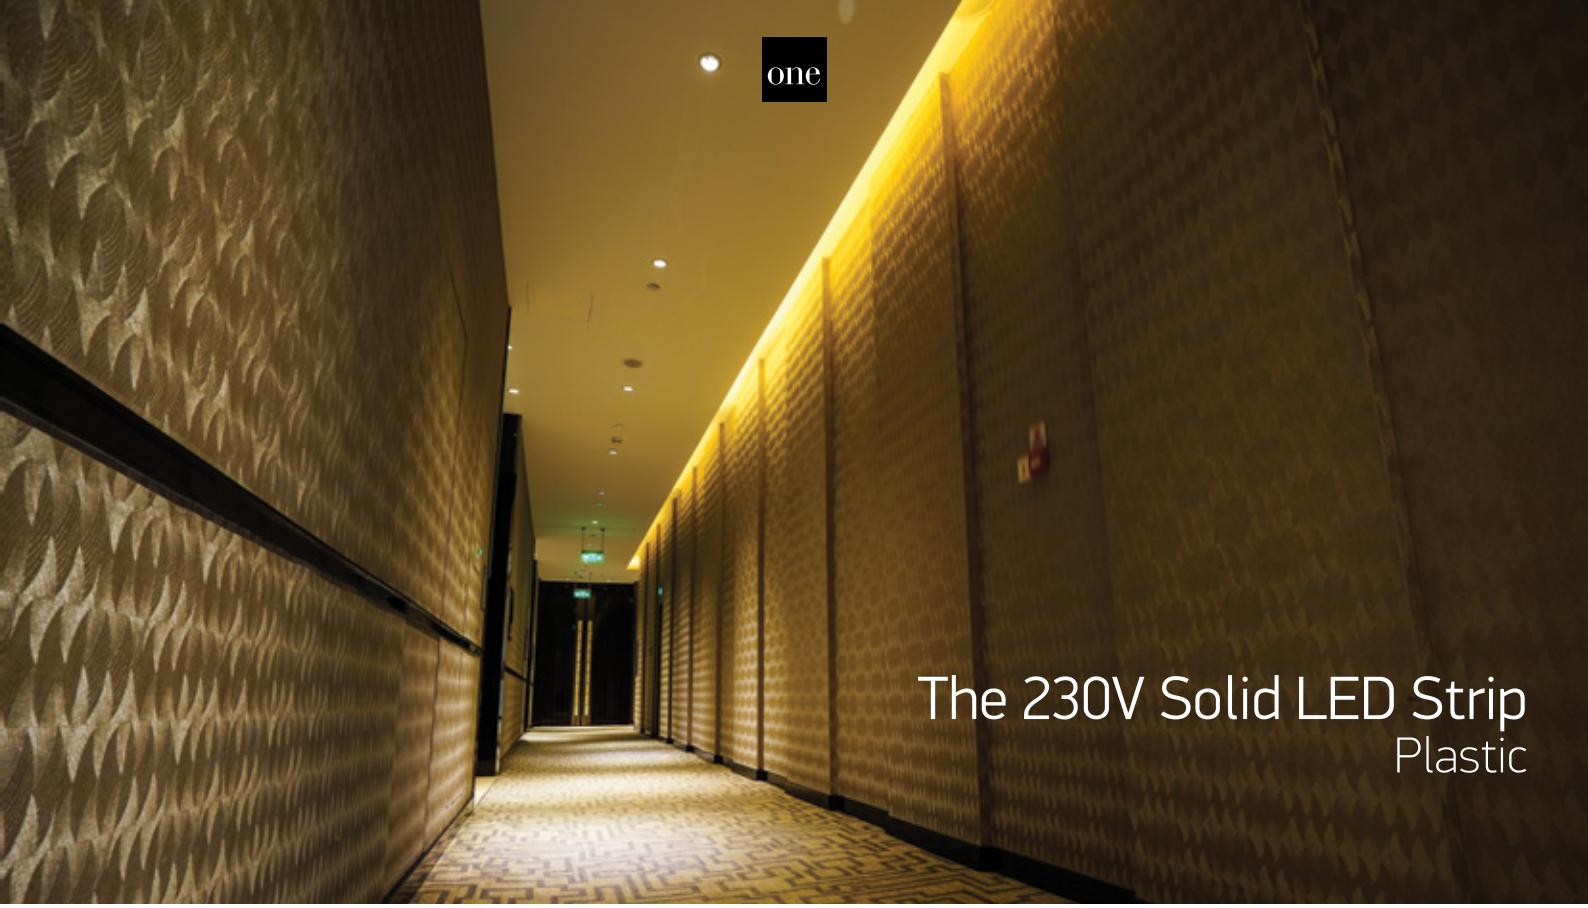

The 230V Solid LED Strip
Plastic



38104B | 4W | SMD 2835 | Plastic

Connect 25 fittings maximum.

LED BUILT IN · 80 CRI · QUICK FIX · CE · 2 YEAR · IP20








38108B | 8W | SMD 2835 | Plastic

Connect 12 fittings maximum.

LED BUILT IN · 80 CRI · QUICK FIX · CE · 2 YEAR · IP20



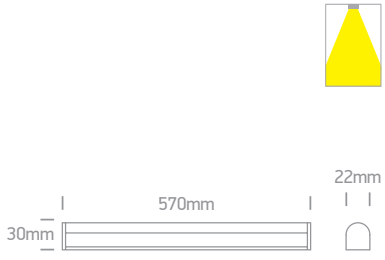




38114B | 14W | SMD 2835 | Plastic

Connect 7 fittings maximum.

LED BUILT IN · 80 CRI · QUICK FIX · CE · 2 YEAR · IP20



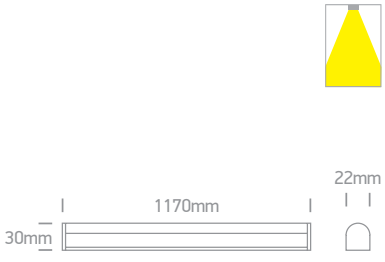

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38104B/W	Warm white	3000K	4W	440lm	230V	☐	30	Complete with driver
38108B/W	Warm white	3000K	8W	880lm	230V	☐	30	Complete with driver
38114B/C	Cool white	4000K	14W	1540lm	230V	☐	30	Complete with driver
38114B/W	Warm white	3000K	14W	1540lm	230V	☐	30	Complete with driver



The LED Shelf System
Aluminium + PC




38103 | 3W | SMD 3014 | Aluminium + PC

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · 2 YEAR · IP20



2m maximum each line.






38105 | 5W | SMD 3014 | Aluminium + PC

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · 2 YEAR · IP20



2m maximum each line.






38110 | 10W | SMD 3014 | Aluminium + PC

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · 2 YEAR · IP20



2m maximum each line.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38103/W	Warm white	3000K	3W	225lm	24V DC	III	100	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38105/W	Warm white	3000K	5W	375lm	24V DC	III	50	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38110/W	Warm white	3000K	10W	750lm	24V DC	III	25	Requires 24V DC driver / Includes mounting clips (3pcs), screws (3pcs)

The LED Shelf System Accessories



38102A | Touch ON/OFF and dimmer | Max. 60W | 24V DC

10

2 YEAR


IP20



Touch ON/OFF



Hold to DIM





38102B | Wave hand | Door ON/OFF | Max. 60W | 24V DC


10

2 YEAR


IP20



Lights OFF



Lights ON





38102C | PIR Sensor | Max. 60W | 24V DC

Adjustable 1min / 5min.


10

2 YEAR

IP20




Move hand to switch ON/OFF the lights.





38101A | Connector for 38103, 38105 & 38110


IP20





38101B | Corner for 38103, 38105 & 38110

IP20





38101C | Power supply cable connector for 38103, 38105 & 38110


100cm



38101D | 8 - Way connection box | 24V DC

100cm

IP20



The 230V IP65 Range





7850 | 6W/m | SMD 2835 | 60LEDs/m | PVC

Cut every 1m.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 2 YEAR · IP65



Supplied in 100m roll.

11mm



7850C Connector



7850P
230V Power supply
for 100m



7850F Fixing clip



7850L Corner connector



7850E End cap



7860R
Shrinking sleeve



7860 | 9W/m | SMD 5730 | 60LEDs/m | PVC

Cut every 1m.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 2 YEAR · IP65



Supplied in 50m roll.

16mm



7860C Connector



7860P
230V Power supply
for 50m



7860F Fixing clip



7860L Corner connector



7860E End cap



7860R
Shrinking sleeve

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7850/W	Warm white	3000K	6W/m	440lm/m	230V	☐	100m roll	Requires 7850P power supply / Avoid direct sunlight
7860/D	Daylight	6000K	9W/m	750lm/m	230V	☐	50m roll	Requires 7860P power supply / Avoid direct sunlight
7860/C	Cool white	4000K	9W/m	750lm/m	230V	☐	50m roll	Requires 7860P power supply / Avoid direct sunlight
7860/W	Warm white	3000K	9W/m	750lm/m	230V	☐	50m roll	Requires 7860P power supply / Avoid direct sunlight






7862 | 13W/m | SMD 5730 | 120LEDs/m | PVC

Cut every 1m.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 2 YEAR





18mm





7862C Connector



7862P
230V Power supply
for 30m



7862F Fixing clip



7862L Corner connector



7862E End cap

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7862/C	Cool white	4000K	13W/m	1050lm/m	230V	☐	30m roll	Requires 7862P power supply / Avoid direct sunlight
7862/W	Warm white	3000K	13W/m	1000lm/m	230V	☐	30m roll	Requires 7862P power supply / Avoid direct sunlight

230V Neon Flex Lightline



7864 | 9W/m | SMD 2835 | 120LEDs/m | PVC

Cut every 1m.



7864/C



IP65



7864/W





7864C
Connector + shrinking sleeve.



7864P
230V Power supply 50m max.




7864F Fixing clip.



7864E End cap.

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7864/C	Cool white	4000K	9W/m	270lm/m	230V	☐	50m roll	Requires 7864P power supply / Avoid direct sunlight
7864/W	Warm white	3000K	9W/m	270lm/m	230V	☐	50m roll	Requires 7864P power supply / Avoid direct sunlight

230V COB Flex Lightline

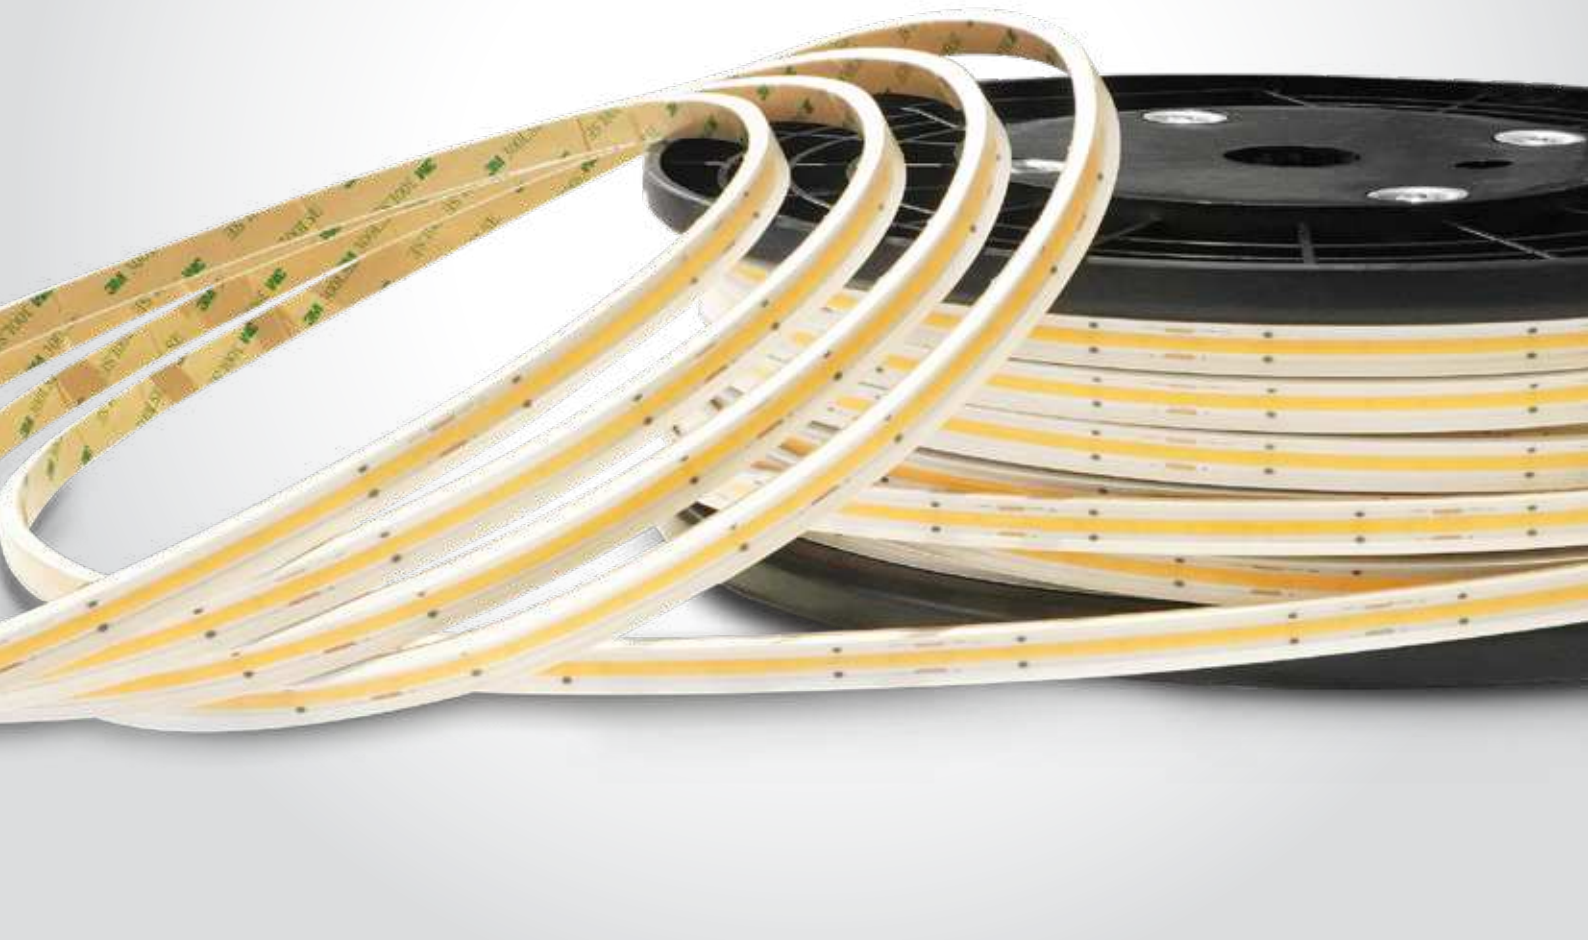



7872 | 12W/m | COB LED | 480LEDs/m | Silicone

Supplied in 50m roll with 3M double face adhesive.


new

IP66

LED BUILT IN | 90 CRI | TRIAC DIMMABLE | CE | 3 YEAR



Supplied in 50m roll.

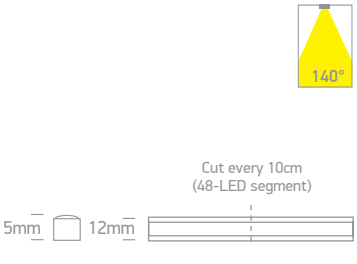



7872C
Connector for 7872.



7872P
Power supply cable for 7872.



7872E
End cap for 7872.


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7872/C	Cool white	4000K	12W/m	840lm/m	140°	230V	☐	100cm	50m roll	Supplied with power supply EU plug / Avoid direct sunlight
7872/W	Warm white	3000K	12W/m	800lm/m	140°	230V	☐	100cm	50m roll	Supplied with power supply EU plug / Avoid direct sunlight

Neon Flex Lightlines



7901AR/AL

7901A/AL

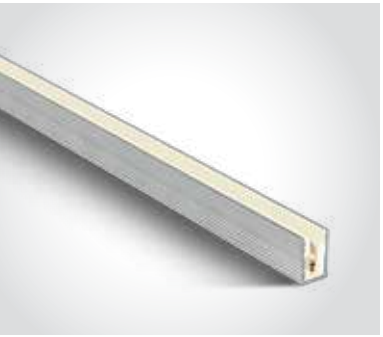


7901A/AL | 2m Surface profile | Aluminium | Suitable for 7841 LED Strip

100



Complete with 2 pairs end caps & 6pcs metal fixing clips.





7901AR/AL | 2m Recessed profile | Aluminium | Suitable for 7841 LED Strip


100



Complete with 2 pairs end caps.

9x2000mm

13mm





7811 | 10W/m | SMD 2216 | 192 LEDs | Silicone

LED BUILT IN

90 CRI

DIMMABLE

3 YEAR

IP67



Supplied in 5m roll.



7811F Fixing clip
7811E End cap






Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7811/W	Warm white	3000K	10W/m	550lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight



Neon Flex Lightlines

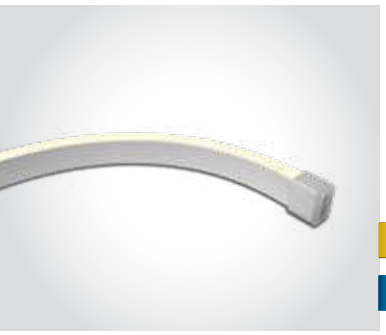

7841A | 10W/m | SMD 2835 | 180LEDs/m | Silicone

Supplied in 5m roll.


new

IP66

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR



Fixing clips.
Order code 7841AF.





7841 | 14,4W/m | SMD 2835 | 140LEDs/m | Silicone

IP66


LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Fixing clips.
Order code 7841F.





7841B | 12W/m | SMD 2835 | 140LEDs/m | Silicone

Supplied in 5m roll.


new

IP66

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR



Fixing clips.
Order code 7841BF.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7841A/C	Cool white	4000K	10W/m	280lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7841A/W	Warm white	3000K	10W/m	280lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7841/C	Cool white	4000K	14,4W/m	360lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7841/W	Warm white	3000K	14,4W/m	320lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7841B/C	Cool white	4000K	12W/m	600lm/m	24V DC		10	Requires 24V DC driver / Avoid direct sunlight
7841B/W	Warm white	3000K	12W/m	550lm/m	24V DC		10	Requires 24V DC driver / Avoid direct sunlight



Decorative Light Tubes



7868 | 3,4W/m | LED | 30LEDs/m | Festive lighting | PVC

Connect maximum 100m / Cut every 1m.

LED BUILT IN

2 YEAR

IP65



Supplied in 50m roll.

13mm



7868P
230V Power supply for 50m.



7868F Fixing clip.



7868E End cap.

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7868/D	Daylight	6000K	3,4W/m	230V		50m roll	Complete with 7868P power supply



7866 | 7W | LED | 100LEDs | Festive lighting | PVC


Connect maximum 100m.



7866/EW
Supplied in 10m roll.

IP54

LED BUILT IN CE 2 YEAR



7866/BL
Supplied in 10m roll.



Optional 5m waterproof extension cable.
Order code 7866E.

7866F | 7W | LED | 100LEDs | Flashing lights | Festive lighting | PVC


Connect maximum 100m.




7866F/D
Supplied in 10m roll.

IP54

LED BUILT IN CE 2 YEAR



7866F/BL
Supplied in 10m roll.



Optional 5m waterproof extension cable.
Order code 7866E.

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7866/EW	Extra warm white	2700K	7W	230V	⧈	10	Complete with power supply
7866/BL	Blue	-	7W	230V	⧈	10	Complete with power supply
7866F/D	Daylight	6000K	7W	230V	⧈	10	Complete with power supply
7866F/BL	Blue	-	7W	230V	⧈	10	Complete with power supply



Track Lights

Pages 277-312

09








65610AT | 10W | COB LED | Aluminium








65610AT | 10W | COB LED | Aluminium





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65610AT/W/C	White	Cool white	4000K	10W	800lm	38°	230V		20	Complete with 300mA driver
65610AT/W/W	White	Warm white	3000K	10W	800lm	38°	230V		20	Complete with 300mA driver
65610AT/B/W	Black	Warm white	3000K	10W	800lm	38°	230V		20	Complete with 300mA driver




The COB Dark Light Range



65620AT | 20W | COB LED | Aluminium

DARK LIGHT
IP20
offer

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR






65620AT | 20W | COB LED | Aluminium

DARK LIGHT
IP20
offer

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65620AT/W/C	White	Cool white	4000K	20W	1500lm	38°	230V		10	Complete with 500mA driver
65620AT/W/W	White	Warm white	3000K	20W	1500lm	38°	230V		10	Complete with 500mA driver






The COB Track Light Range
Aluminium



65611NT | 15W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20








65612NT | 30W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20








65614NT | 42W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65611NT/W/C	White	Cool white	4000K	15W	1300lm	38°	230V		10	Complete with 400mA driver
65611NT/W/W	White	Warm white	3000K	15W	1200lm	38°	230V		10	Complete with 400mA driver
65612NT/W/C	White	Cool white	4000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65612NT/W/W	White	Warm white	3000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65614NT/W/C	White	Cool white	4000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver
65614NT/W/W	White	Warm white	3000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver




The COB Track Light Range
Aluminium


65611NT/B/C

65611NT | 15W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20


65611NT/B/W





65612NT/B/C

65612NT | 30W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20


65612NT/B/W





65614NT/B/C

65614NT | 42W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20


65614NT/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65611NT/B/C	Black	Cool white	4000K	15W	1300lm	38°	230V		10	Complete with 400mA driver
65611NT/B/W	Black	Warm white	3000K	15W	1200lm	38°	230V		10	Complete with 400mA driver
65612NT/B/C	Black	Cool white	4000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65612NT/B/W	Black	Warm white	3000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65614NT/B/C	Black	Cool white	4000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver
65614NT/B/W	Black	Warm white	3000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver



65660BT/W/W + 050300B/BS

The COB Shop Range
White




65660AT | 10W / 15W / 20W | COB LED | Aluminium

Adjustable power.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20







050300A/W White



050300A/BS Brass



050300AH/B Black with honeycomb



0750A/15 (15°) 0750A/24 (24°)




65660BT | 20W / 25W / 30W / 35W | COB LED | Aluminium

Adjustable power.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20







050300B/W White



050300B/BS Brass




050300BH/B Black with honeycomb



0750B/15 (15°) 0750B/24 (24°)

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65660AT/W/C	White	Cool white	4000K	10W-15W-20W	1200lm-1800lm-2400lm	38°	230V	☐	20	Complete with driver
65660AT/W/W	White	Warm white	3000K	10W-15W-20W	1200lm-1800lm-2400lm	38°	230V	☐	20	Complete with driver
65660BT/W/C	White	Cool white	4000K	20W-25W-30W-35W	2400lm-3000lm-3600lm-4200lm	38°	230V	☐	10	Complete with driver
65660BT/W/W	White	Warm white	3000K	20W-25W-30W-35W	2400lm-3000lm-3600lm-4200lm	38°	230V	☐	10	Complete with driver

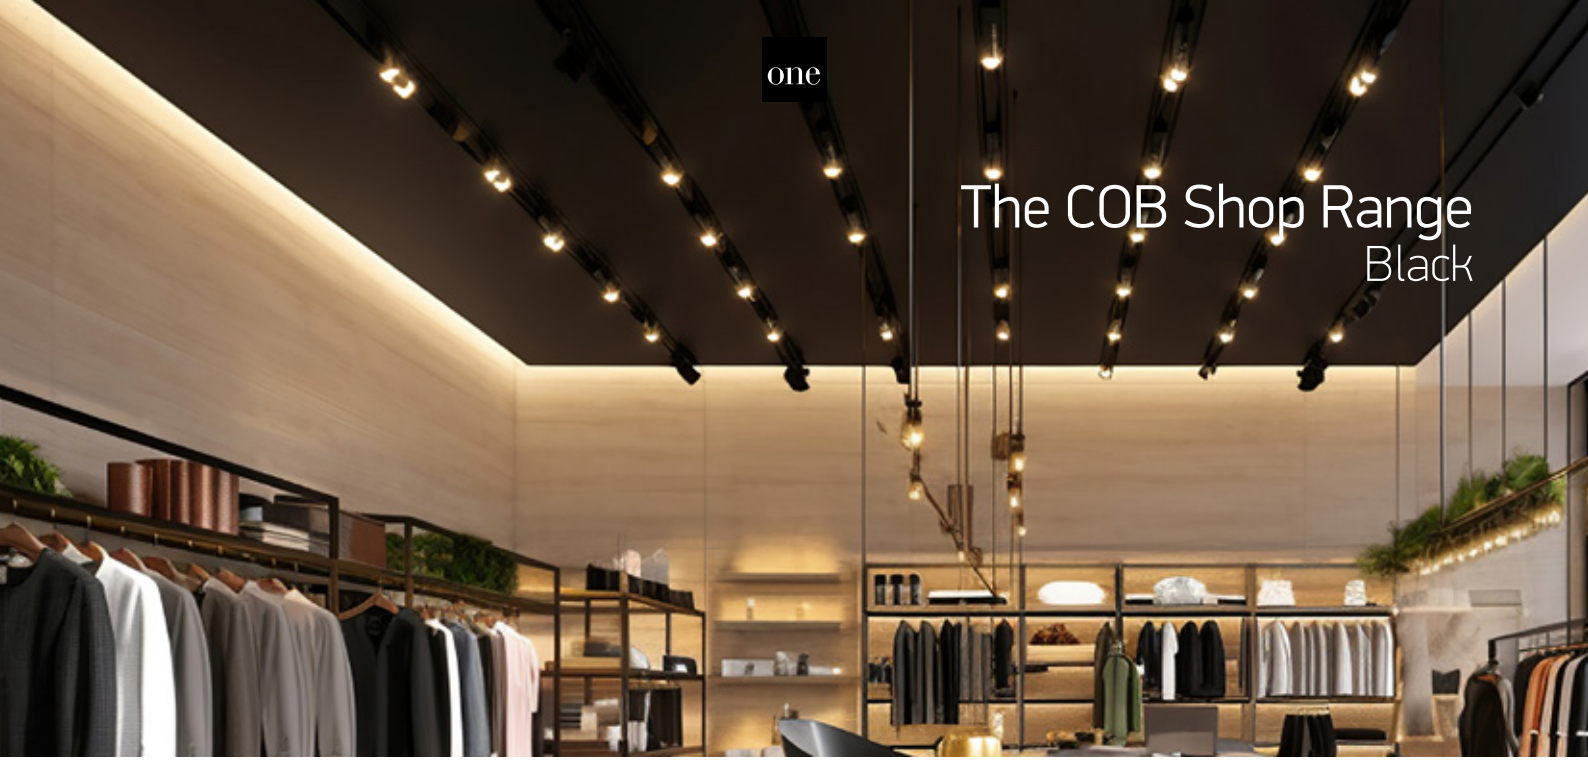


The COB Shop Range
Black



65660AT | 10W / 15W / 20W | COB LED | Aluminium — Adjustable power.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20







050300A/W White



050300A/BS Brass



050300AH/B Black with honeycomb




0750A/15 (15°) 0750A/24 (24°)



65660BT | 20W / 25W / 30W / 35W | COB LED | Aluminium — Adjustable power.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20







050300B/W White



050300B/BS Brass



050300BH/B Black with honeycomb



0750B/15 (15°) 0750B/24 (24°)

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65660AT/B/C	Black	Cool white	4000K	10W-15W-20W	1200lm-1800lm-2400lm	38°	230V	☐	20	Complete with driver
65660AT/B/W	Black	Warm white	3000K	10W-15W-20W	1200lm-1800lm-2400lm	38°	230V	☐	20	Complete with driver
65660BT/B/C	Black	Cool white	4000K	20W-25W-30W-35W	2400lm-3000lm-3600lm-4200lm	38°	230V	☐	10	Complete with driver
65660BT/B/W	Black	Warm white	3000K	20W-25W-30W-35W	2400lm-3000lm-3600lm-4200lm	38°	230V	☐	10	Complete with driver



65660BTT/B/W

The COB Shop Range
Dimmable




65660BTT/W/W

65660BTT | 35W | COB LED | TRIAC Dimmable | Aluminium









050300B/W White



050300B/BS Brass



050300BH/B Black with honeycomb




0750B/15 (15°) 0750B/24 (24°)




65660BTT/B/W

65660BTT | 35W | COB LED | TRIAC Dimmable | Aluminium









050300B/W White



050300B/BS Brass



050300BH/B Black with honeycomb



0750B/15 (15°) 0750B/24 (24°)

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65660BTT/W/C	White	Cool white	4000K	35W	4200lm	38°	230V	☐	10	Complete with dimmable driver
65660BTT/W/W	White	Warm white	3000K	35W	4200lm	38°	230V	☐	10	Complete with dimmable driver
65660BTT/B/C	Black	Cool white	4000K	35W	4200lm	38°	230V	☐	10	Complete with dimmable driver
65660BTT/B/W	Black	Warm white	3000K	35W	4200lm	38°	230V	☐	10	Complete with dimmable driver



The COB Shop Range Dimmable
DALI




65660BTL/W/W

65660BTL | 35W | COB LED | Push to DIM | DALI | Aluminium


Use standard 3 phase track.


LED BUILT IN | 90 CRI | DALI DIMMABLE | PUSH TO DIM | ADJUSTABLE | CE | 5 YEAR | IP20

DALI WIRING DIAGRAM



PUSH TO DIM WIRING DIAGRAM







050300B/W White



050300B/BS Brass



050300BH/B Black with honeycomb



0750B/15 (15°) 0750B/24 (24°)




65660BTL/B/W

65660BTL | 35W | COB LED | Push to DIM | DALI | Aluminium


Use standard 3 phase track.


LED BUILT IN | 90 CRI | DALI DIMMABLE | PUSH TO DIM | ADJUSTABLE | CE | 5 YEAR | IP20

DALI WIRING DIAGRAM



PUSH TO DIM WIRING DIAGRAM







050300B/W White



050300B/BS Brass



050300BH/B Black with honeycomb



0750B/15 (15°) 0750B/24 (24°)

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65660BTL/W/C	White	Cool white	4000K	35W	4200lm	38°	230V	☐	10	Complete with DALI driver
65660BTL/W/W	White	Warm white	3000K	35W	4200lm	38°	230V	☐	10	Complete with DALI driver
65660BTL/B/C	Black	Cool white	4000K	35W	4200lm	38°	230V	☐	10	Complete with DALI driver
65660BTL/B/W	Black	Warm white	3000K	35W	4200lm	38°	230V	☐	10	Complete with DALI driver




The COB Cylinder Track Light
White



65642AT | 10W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20








65642BT | 20W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20








65642CT | 30W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65642AT/W/C	White	Cool white	4000K	10W	900lm	38°	230V		24	Complete with 250mA driver
65642AT/W/W	White	Warm white	3000K	10W	900lm	38°	230V		24	Complete with 250mA driver
65642BT/W/C	White	Cool white	4000K	20W	1800lm	38°	230V		18	Complete with 500mA driver
65642BT/W/W	White	Warm white	3000K	20W	1800lm	38°	230V		18	Complete with 500mA driver
65642CT/W/C	White	Cool white	4000K	30W	2700lm	38°	230V		15	Complete with 750mA driver
65642CT/W/W	White	Warm white	3000K	30W	2700lm	38°	230V		15	Complete with 750mA driver




The COB Cylinder Track Light
Black



65642AT | 10W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
5 YEAR
IP20








65642BT | 20W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
5 YEAR
IP20








65642CT | 30W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
5 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65642AT/B/C	Black	Cool white	4000K	10W	900lm	38°	230V		24	Complete with 250mA driver
65642AT/B/W	Black	Warm white	3000K	10W	900lm	38°	230V		24	Complete with 250mA driver
65642BT/B/C	Black	Cool white	4000K	20W	1800lm	38°	230V		18	Complete with 500mA driver
65642BT/B/W	Black	Warm white	3000K	20W	1800lm	38°	230V		18	Complete with 500mA driver
65642CT/B/C	Black	Cool white	4000K	30W	2700lm	38°	230V		15	Complete with 750mA driver
65642CT/B/W	Black	Warm white	3000K	30W	2700lm	38°	230V		15	Complete with 750mA driver





Dark Light Tubes Track Lights
White



65656AT | 6W | SMD 5050 | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20









65656BT | 12W | SMD 5050 | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20









65656CT | 24W | SMD 5050 | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20









65656DT | 36W | SMD 5050 | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65656AT/W/W	White	Warm white	3000K	6W	480lm	40°	230V		28	Complete with 150mA driver
65656BT/W/W	White	Warm white	3000K	12W	960lm	40°	230V		20	Complete with 300mA driver
65656CT/W/W	White	Warm white	3000K	24W	1920lm	40°	230V		20	Complete with 700mA driver
65656DT/W/W	White	Warm white	3000K	36W	2880lm	40°	230V		15	Complete with 850mA driver




Dark Light Tubes Track Lights
Black




65656AT | 6W | SMD 5050 | Aluminium









65656BT | 12W | SMD 5050 | Aluminium









65656CT | 24W | SMD 5050 | Aluminium








65656DT | 36W | SMD 5050 | Aluminium





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65656AT/B/W	Black	Warm white	3000K	6W	480lm	40°	230V		28	Complete with 150mA driver
65656BT/B/W	Black	Warm white	3000K	12W	960lm	40°	230V		20	Complete with 300mA driver
65656CT/B/W	Black	Warm white	3000K	24W	1920lm	40°	230V		20	Complete with 700mA driver
65656DT/B/W	Black	Warm white	3000K	36W	2880lm	40°	230V		15	Complete with 850mA driver



65506BT/B/W



65406BT/B/W

Mirror Square Track Lights
Die cast




65306BT/W/W

65306BT | 12W | COB LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65306BT/B/W






65506BT/W/W

65506BT | 20W | COB LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65506BT/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65306BT/W/W	White	Warm white	3000K	12W	960lm	38°	230V	⏚	30	Complete with 300mA driver
65306BT/B/W	Black	Warm white	3000K	12W	960lm	38°	230V	⏚	30	Complete with 300mA driver
65506BT/W/W	White	Warm white	3000K	20W	1600lm	38°	230V	⏚	20	Complete with 500mA driver
65506BT/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V	⏚	20	Complete with 500mA driver




Mirror Square Track Lights
Die cast



65406BT | 15W | LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20






65906BT/W/W

65906BT | 30W | LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65906BT/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65406BT/W/W	White	Warm white	3000K	15W	1200lm	38°	230V		24	Complete with 350mA driver
65906BT/W/W	White	Warm white	3000K	30W	2400lm	38°	230V		16	Complete with 700mA driver
65906BT/B/W	Black	Warm white	3000K	30W	2400lm	38°	230V		16	Complete with 700mA driver



65644T/W/W

65652T/W/W

The Honeycomb Range



65644T/W/W


65644T | 8W | COB LED | Dimmable | Aluminium

Complete with honeycomb.

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · ADJUSTABLE · CE · 2 YEAR · IP20



65644T/B/W





65652T/W/W


65652T | 30W | COB LED | Die cast

Complete with honeycomb.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65652T/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65644T/W/W	White	Warm white	3000K	8W	600lm	36°	230V		24	AC LED
65644T/B/W	Black	Warm white	3000K	8W	600lm	36°	230V		24	AC LED
65652T/W/C	White	Cool white	4000K	30W	1800lm	24°	230V		12	Complete with 700mA driver
65652T/W/W	White	Warm white	3000K	30W	1700lm	24°	230V		12	Complete with 700mA driver
65652T/B/C	Black	Cool white	4000K	30W	1800lm	24°	230V		12	Complete with 700mA driver
65652T/B/W	Black	Warm white	3000K	30W	1700lm	24°	230V		12	Complete with 700mA driver




The COB Compact Cylinder Range



65646T | 8W | COB LED | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · ADJUSTABLE · CE · 2 YEAR · IP20








65108AT | 9W | COB LED | Aluminium

new · DARK LIGHT · IP20 · LED BUILT IN · 90 CRI · TRIAC DIMMABLE · ADJUSTABLE · CE · 5 YEAR








65108T | 8W | COB LED | Aluminium

DARK LIGHT · IP20 · LED BUILT IN · 90 CRI · TRIAC DIMMABLE · ADJUSTABLE · CE · 3 YEAR








65524T | 12W | COB LED | Aluminium

Honeycomb.


DARK LIGHT · IP20 · LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR








Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65646T/W/W	White	Black	Warm white	3000K	8W	650lm	36°	230V		24	AC LED
65646T/B/W	Black	Black	Warm white	3000K	8W	650lm	36°	230V		24	AC LED
65108AT/W/W	White	Black	Warm white	3000K	9W	750lm	36°	230V		30	Complete with 200mA dimmable driver
65108AT/B/W	Black	Black	Warm white	3000K	9W	750lm	36°	230V		30	Complete with 200mA dimmable driver
65108T/W/W	White	Black	Warm white	3000K	8W	560lm	36°	230V		24	Complete with 300mA dimmable driver
65108T/B/W	Black	Brass	Warm white	3000K	8W	560lm	36°	230V		24	Complete with 300mA dimmable driver
65524T/W/W	White	Black	Warm white	3000K	12W	1080lm	36°	230V		24	Complete with 250mA driver
65524T/B/W	Black	Black	Warm white	3000K	12W	1080lm	36°	230V		24	Complete with 250mA driver
65524T/BBS/W	Brushed brass	Black	Warm white	3000K	12W	1080lm	36°	230V		24	Complete with 250mA driver

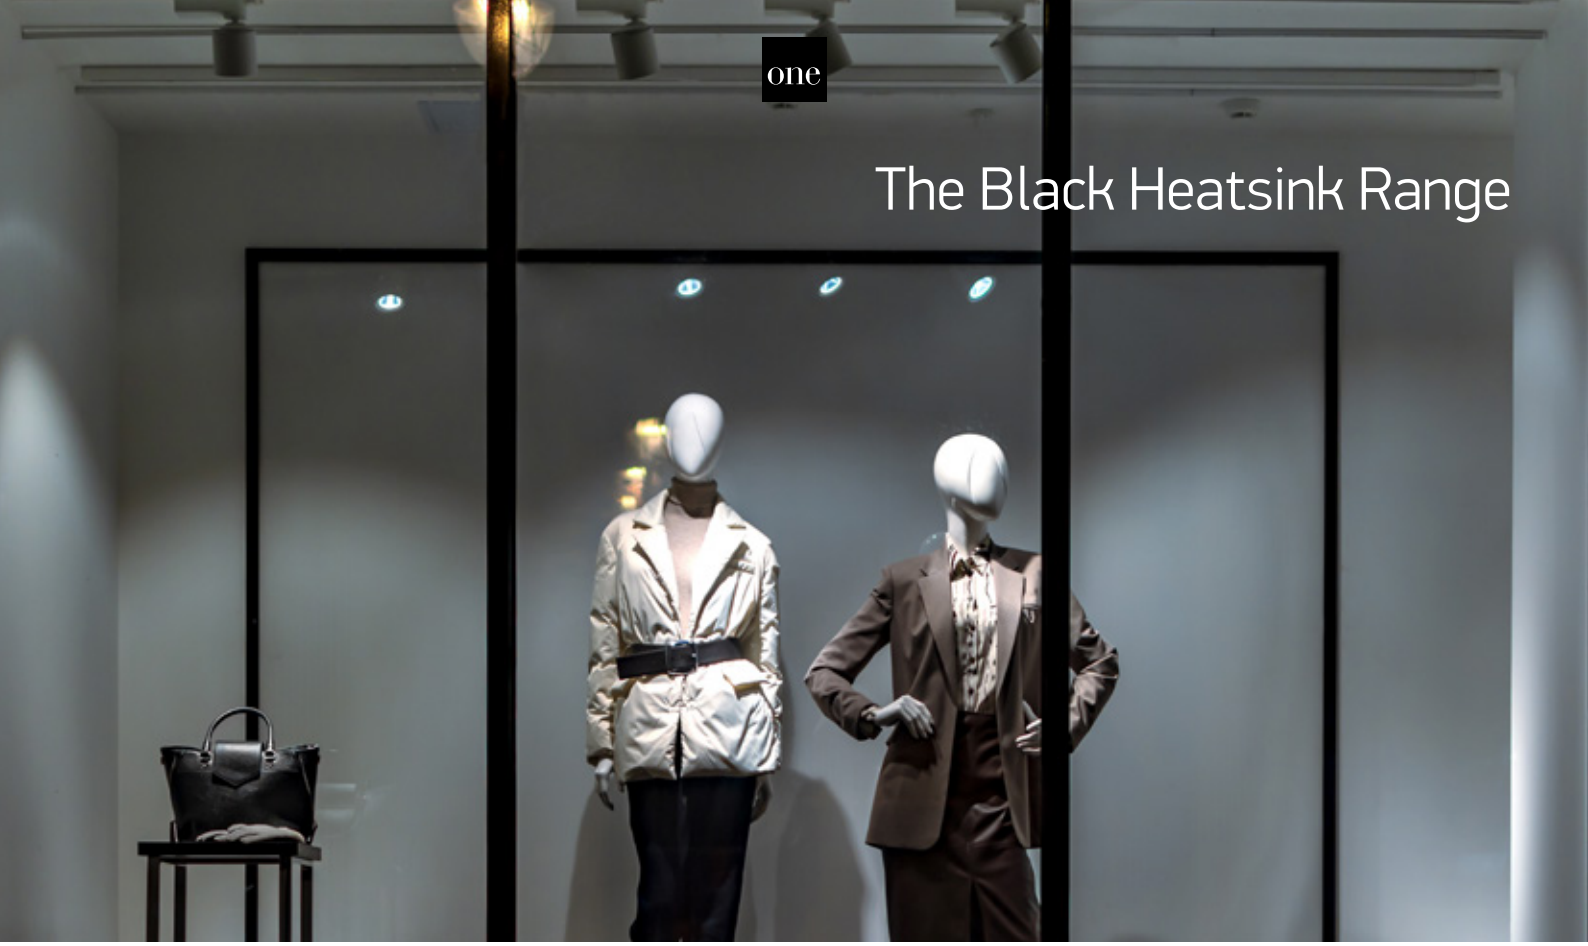



65628T | 15W | COB LED | Aluminium


LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20 offer





65620TA | 15W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20 offer






65620T | 20W | COB LED | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20 offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65628T/W/W	White	Warm white	3000K	15W	1095lm	45°	230V		12	Complete with 400mA driver
65620TA/W/W	White	Warm white	3000K	15W	1095lm	45°	230V		12	Complete with 400mA driver
65620T/W/W	White	Warm white	3000K	20W	1460lm	45°	230V		12	Complete with 500mA driver



65619T/B/C

The COB Track Spots




65626T | 25W | COB LED | Die cast

IP20 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR








65226T | 26W | COB LED | Die cast

IP20 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR








65619T | 38W | COB LED | Aluminium

IP20

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR



15° Reflector for 65619T.
Order code 0742/15.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65626T/W/W	White	Warm white	3000K	25W	1900lm	45°	100-240V	⏚	12	Complete with 580mA driver
65226T/W/W	White	Warm white	3000K	26W	1960lm	30°	100-240V	⏚	8	Complete with driver
65619T/B/C	Black	Cool white	4000K	38W	3200lm	36°	230V	⏚	16	Complete with 900mA driver



The COB Zoomable Range
White



65662AT | 15W | COB LED | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.


LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Zoomable



Removable Honeycomb





65662BT | 25W | COB LED | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.


LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Zoomable



Removable Honeycomb



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65662AT/W/W	White	Warm white	3000K	15W	1500lm	15°- 45°	230V		30	Complete with 350mA driver
65662BT/W/W	White	Warm white	3000K	25W	2500lm	15°- 45°	230V		20	Complete with 600mA driver

The COB Zoomable Range
Black






65662AT | 15W | COB LED | Adjustable beam 15°- 45° | Aluminium


Complete with honeycomb.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20


Zoomable


Removable Honeycomb








65662BT | 25W | COB LED | Adjustable beam 15°- 45° | Aluminium


Complete with honeycomb.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20


Zoomable


Removable Honeycomb





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65662AT/B/W	Black	Warm white	3000K	15W	1500lm	15°- 45°	230V	⧈	30	Complete with 350mA driver
65662BT/B/W	Black	Warm white	3000K	25W	2500lm	15°- 45°	230V	⧈	20	Complete with 600mA driver



The COB Zoomable Cylinders
White




65650AT | 15W | COB LED | Adjustable beam 20°- 60° | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Zoomable






65650BT | 20W | COB LED | Adjustable beam 20°- 60° | Aluminium

new · LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Zoomable






65650CT | 30W | COB LED | Adjustable beam 20°- 60° | Aluminium

new · LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Zoomable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65650AT/W/W	White	Warm white	3000K	15W	1500lm	20°-60°	230V	☐	15	Complete with 350mA driver
65650BT/W/C	White	Cool white	4000K	20W	2000lm	20°-60°	230V	☐	15	Complete with 500mA driver
65650BT/W/W	White	Warm white	3000K	20W	2000lm	20°-60°	230V	☐	15	Complete with 500mA driver
65650CT/W/C	White	Cool white	4000K	30W	3000lm	20°-60°	230V	☐	15	Complete with 700mA driver
65650CT/W/W	White	Warm white	3000K	30W	3000lm	20°-60°	230V	☐	15	Complete with 700mA driver



The COB Zoomable Cylinders
Black




65650AT | 15W | COB LED | Adjustable beam 20°- 60° | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Zoomable






65650BT | 20W | COB LED | Adjustable beam 20°- 60° | Aluminium

new · LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Zoomable






65650CT | 30W | COB LED | Adjustable beam 20°- 60° | Aluminium

new · LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Zoomable






65650T | 30W | COB LED | Adjustable beam 20°- 60° | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



Zoomable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65650AT/B/W	Black	Warm white	3000K	15W	1500lm	20°-60°	230V		15	Complete with 350mA driver
65650BT/B/C	Black	Cool white	4000K	20W	2000lm	20°-60°	230V		15	Complete with 500mA driver
65650BT/B/W	Black	Warm white	3000K	20W	2000lm	20°-60°	230V		15	Complete with 500mA driver
65650CT/B/C	Black	Cool white	4000K	30W	3000lm	20°-60°	230V		15	Complete with 700mA driver
65650CT/B/W	Black	Warm white	3000K	30W	3000lm	20°-60°	230V		15	Complete with 700mA driver
65650T/B/W	Black	Warm white	3000K	30W	2300lm	20°-60°	230V		15	Complete with 750mA driver



Adjustable LED Linear Track Light



65024T/W/W

65024T | 10x5W | COB LED | Linear track light | Aluminium + plastic

LED BUILT IN

80 CRI


±45° ADJUSTABLE

3 YEAR

IP20



65024T/B/C

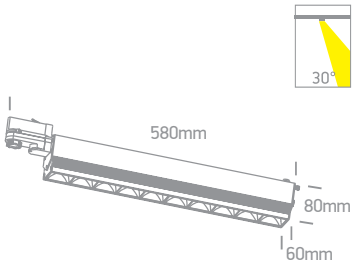



65026T/W/C

65026T | 40W | SMD 2835 | Linear track light | Aluminium + plastic

LED BUILT IN

80 CRI


±45° ADJUSTABLE

3 YEAR

IP20



65026T/B/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65024T/W/W	White	Warm white	3000K	10x5W	5800lm	30°	230V		10	Complete with 1200mA driver
65024T/B/C	Black	Cool white	4000K	10x5W	5800lm	30°	230V		10	Complete with 1200mA driver
65024T/B/W	Black	Warm white	3000K	10x5W	5800lm	30°	230V		10	Complete with 1200mA driver
65026T/W/C	White	Cool white	4000K	40W	3400lm	100°	230V		10	Complete with 1000mA driver
65026T/W/W	White	Warm white	3000K	40W	3200lm	100°	230V		10	Complete with 1000mA driver
65026T/B/C	Black	Cool white	4000K	40W	3400lm	100°	230V		10	Complete with 1000mA driver
65026T/B/W	Black	Warm white	3000K	40W	3200lm	100°	230V		10	Complete with 1000mA driver




LED Linear Track Light

65024TA | 15x1W | LED | Linear track light | Aluminium



LED BUILT IN
80 CRI
±45° ADJUSTABLE
CE
3 YEAR
IP20






65018T | 16W | SMD 2835 | Linear track light | Aluminium + PC



LED BUILT IN
80 CRI
CE
3 YEAR
IP20



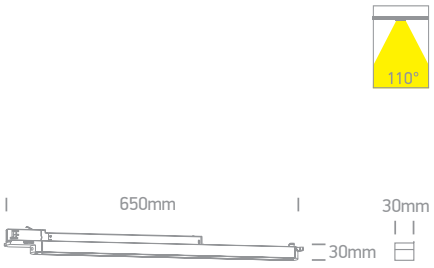


65025T | 25W | SMD 2835 | Linear track light | Aluminium + PC




LED BUILT IN
80 CRI
CE
3 YEAR
IP20



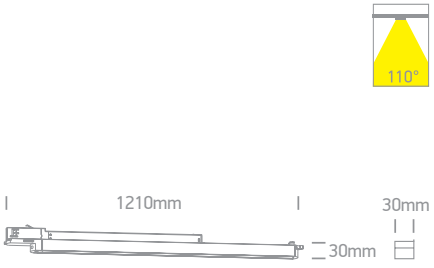

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65024TA/W/W	White	Warm white	3000K	15x1W	1200lm	30°	230V		10	AC LED
65024TA/B/W	Black	Warm white	3000K	15x1W	1200lm	30°	230V		10	AC LED
65018T/W/C	White	Cool white	4000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65018T/W/W	White	Warm white	3000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65018T/B/C	Black	Cool white	4000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65018T/B/W	Black	Warm white	3000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65025T/W/C	White	Cool white	4000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver
65025T/W/W	White	Warm white	3000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver
65025T/B/C	Black	Cool white	4000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver
65025T/B/W	Black	Warm white	3000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver

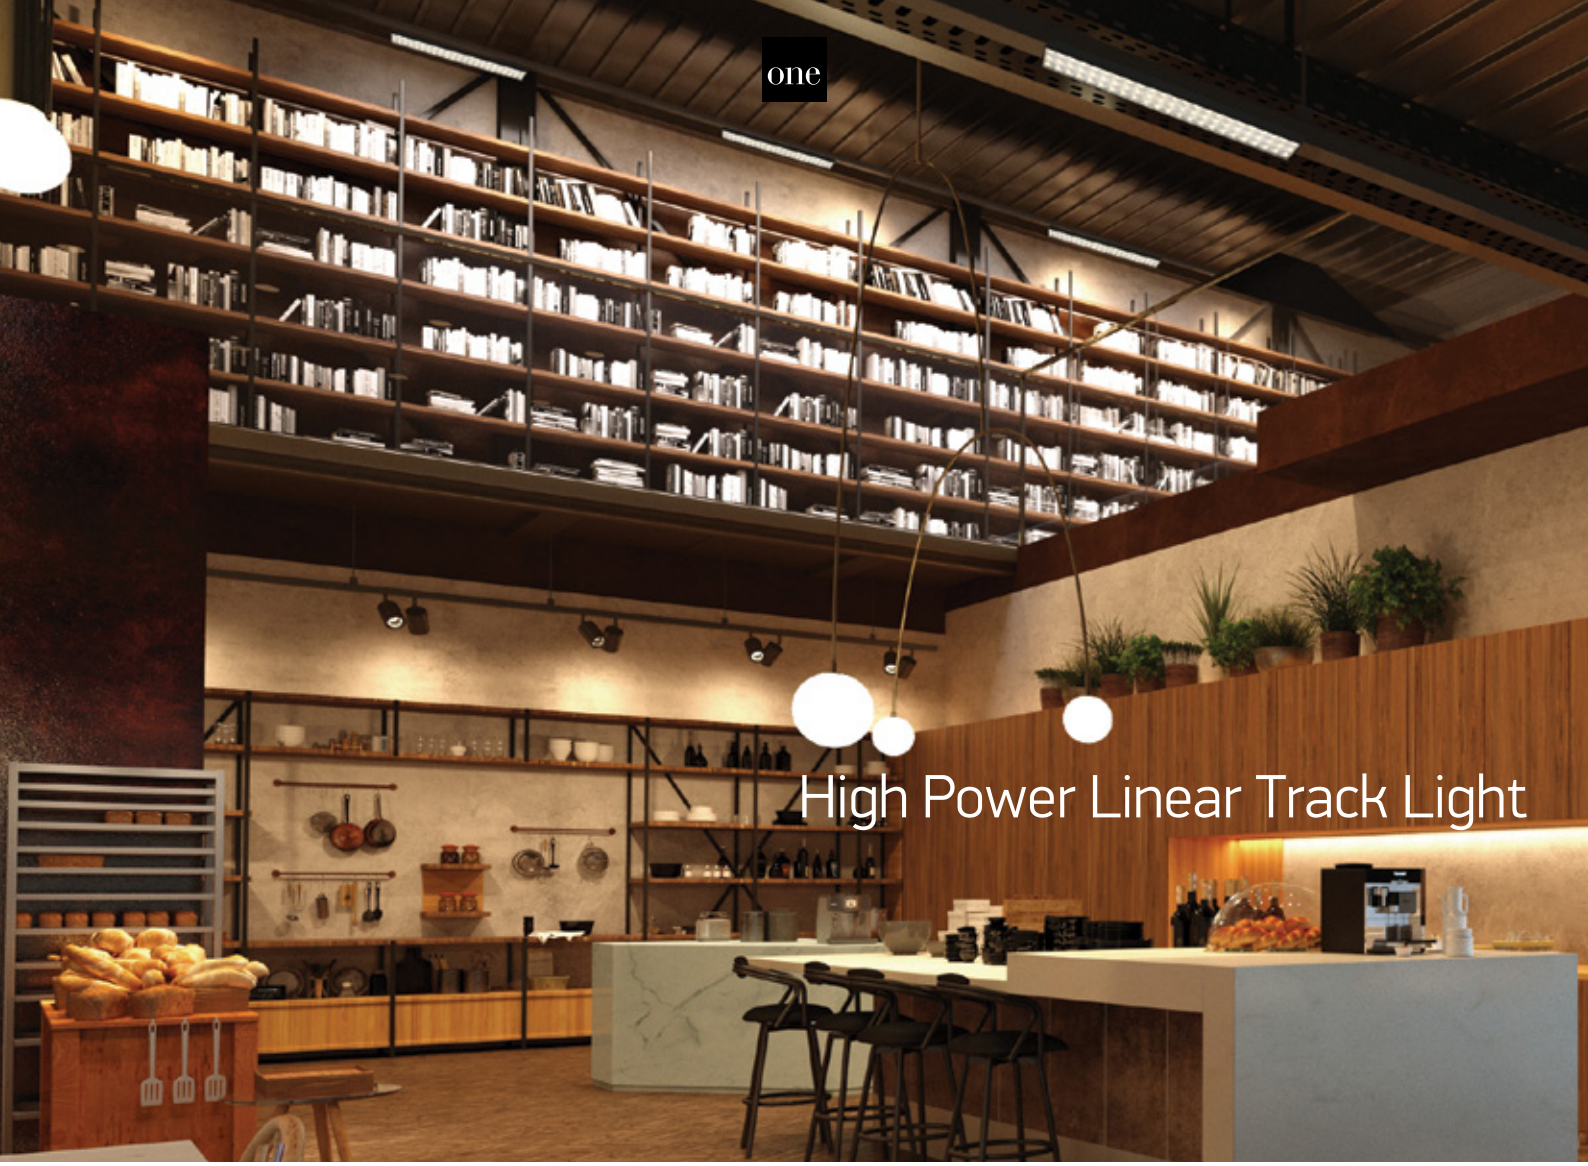

High Power Linear Track Light



65170AT | 30W | SMD 3030 | Linear track light | Aluminium

LED BUILT IN


90 CRI

CE

3 YEAR

IP20



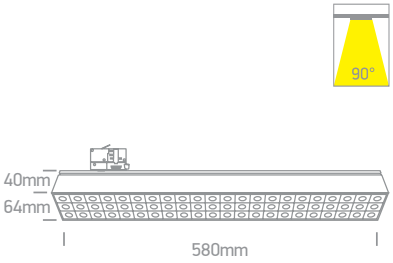



65170BT | 60W | SMD 3030 | Linear track light | Aluminium

LED BUILT IN


90 CRI

CE

3 YEAR

IP20



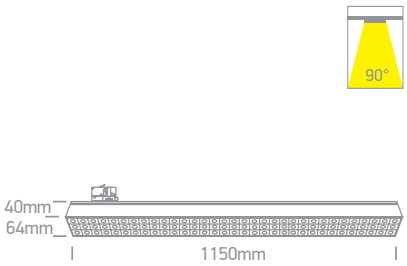

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65170AT/W/C	White	Cool white	4000K	30W	2700lm	90°	230V		12	Complete with 700mA driver
65170AT/W/W	White	Warm white	3000K	30W	2700lm	90°	230V		12	Complete with 700mA driver
65170AT/B/W	Black	Warm white	3000K	30W	2700lm	90°	230V		12	Complete with 700mA driver
65170BT/W/C	White	Cool white	4000K	60W	5400lm	90°	230V		12	Complete with 1500mA driver
65170BT/B/C	Black	Cool white	4000K	60W	5400lm	90°	230V		12	Complete with 1500mA driver
65170BT/B/W	Black	Warm white	3000K	60W	5400lm	90°	230V		12	Complete with 1500mA driver

High Power Linear Track Light



65168T | 50W | SMD 2835 | Linear track light | Aluminium

LED BUILT IN


80 CRI

ADJUSTABLE


5 YEAR

IP20



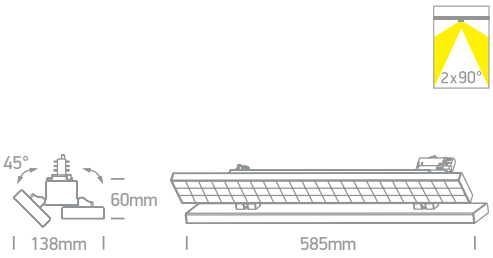

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65168T/W/W	White	Warm white	3000K	50W	6250lm	230V	⏚	6	Complete with 1400mA driver
65168T/B/W	Black	Warm white	3000K	50W	6250lm	230V	⏚	6	Complete with 1400mA driver

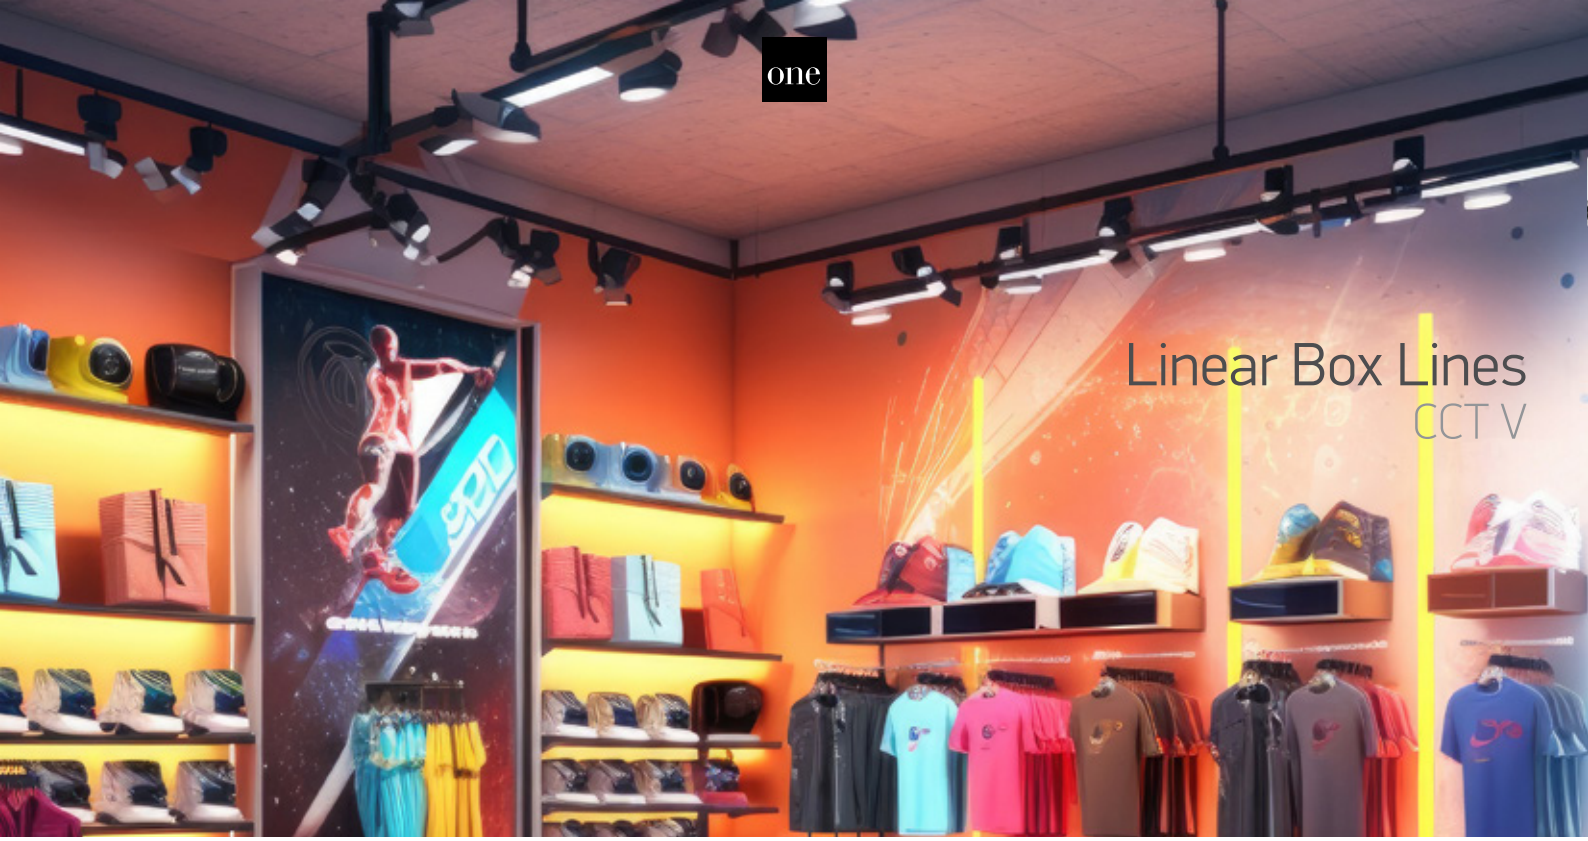

Linear Box Lines
CCT V


65028AT | 24W | LED | Linear track light | Aluminium + PC



new
IP20

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR






65028BT | 36W | LED | Linear track light | Aluminium + PC



new
IP20

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR



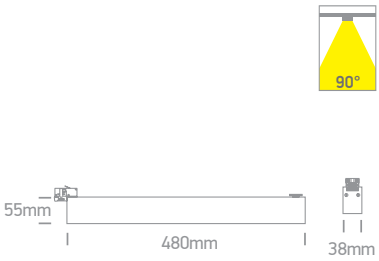


65028CT | 48W | LED | Linear track light | Aluminium + PC




new
IP20

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR



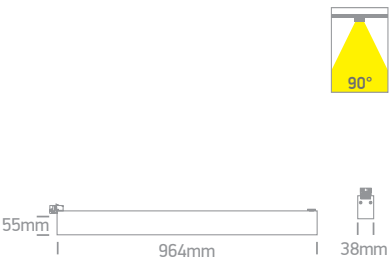

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65028AT/W/V	White	CCT V	3000K-4200K-6500K	24W	2400lm	90°	230V	⏚	20	Complete with 600mA driver
65028AT/B/V	Black	CCT V	3000K-4200K-6500K	24W	2400lm	90°	230V	⏚	20	Complete with 600mA driver
65028BT/W/V	White	CCT V	3000K-4200K-6500K	36W	3600lm	90°	230V	⏚	15	Complete with 800mA driver
65028BT/B/V	Black	CCT V	3000K-4200K-6500K	36W	3600lm	90°	230V	⏚	15	Complete with 800mA driver
65028CT/W/V	White	CCT V	3000K-4200K-6500K	48W	4800lm	90°	230V	⏚	12	Complete with 800mA driver
65028CT/B/V	Black	CCT V	3000K-4200K-6500K	48W	4800lm	90°	230V	⏚	12	Complete with 800mA driver

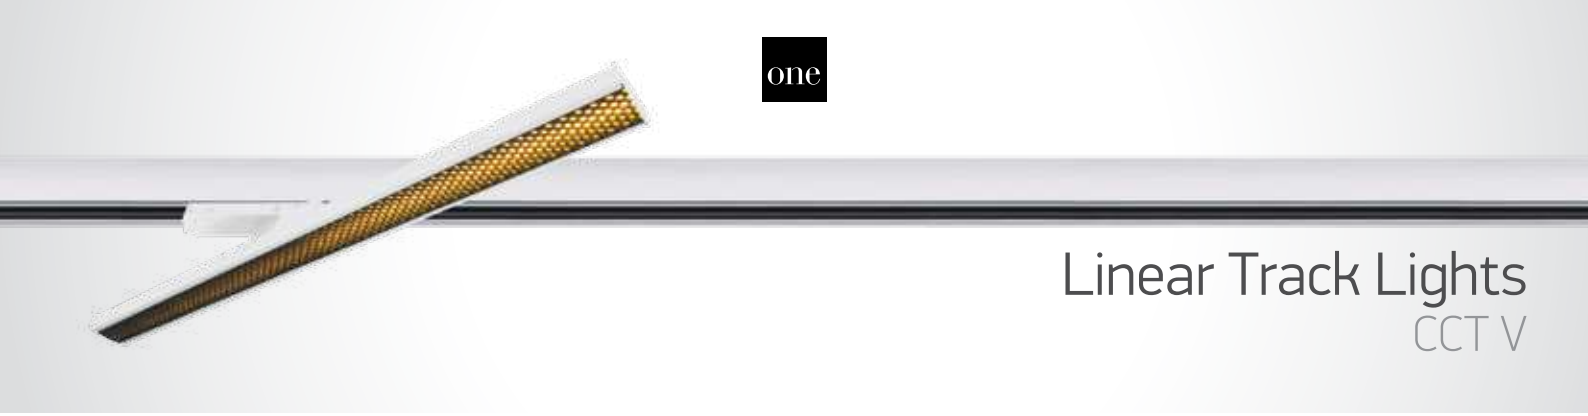

Linear Track Lights
CCT V




65172AT | 30W | SMD 2835 | Linear track light | Aluminium


new


IP20

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · UGR19







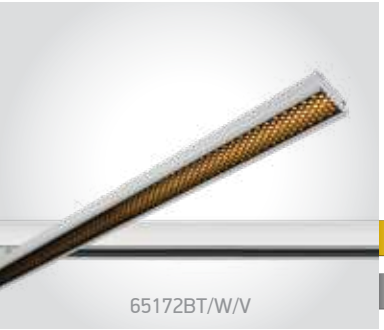


65172BT | 40W | SMD 2835 | Linear track light | Aluminium


new

IP20

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · UGR19











65664AT | 30W | SMD 2835 | Linear track light | Aluminium + PC

IP20

LED BUILT IN · 90 CRI · IK06 · CCT V · CE · 3 YEAR



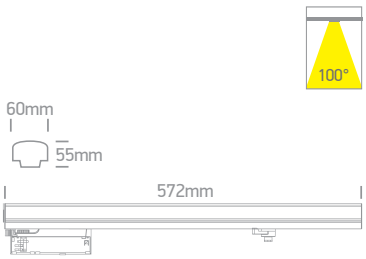




65664BT | 40W | SMD 2835 | Linear track light | Aluminium + PC

IP20

LED BUILT IN · 90 CRI · IK06 · CCT V · CE · 3 YEAR



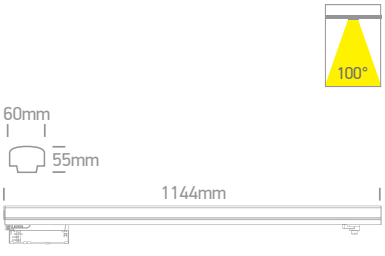

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65172AT/W/V	White	CCT V	2700K-3200K-4000K	30W	3600lm (w/o honeycomb)	120°	230V	⊡	20	Complete with 750mA driver
65172AT/B/V	Black	CCT V	2700K-3200K-4000K	30W	3600lm (w/o honeycomb)	120°	230V	⊡	20	Complete with 750mA driver
65172BT/W/V	White	CCT V	2700K-3200K-4000K	40W	4800lm (w/o honeycomb)	120°	230V	⊡	10	Complete with 950mA driver
65172BT/B/V	Black	CCT V	2700K-3200K-4000K	40W	4800lm (w/o honeycomb)	120°	230V	⊡	10	Complete with 950mA driver
65664AT/W/V	White	CCT V	3000K-3500K-4000K	30W	3600lm	100°	230V	⏚	20	Complete with 700mA driver
65664AT/B/V	Black	CCT V	3000K-3500K-4000K	30W	3600lm	100°	230V	⏚	20	Complete with 700mA driver
65664BT/W/V	White	CCT V	3000K-3500K-4000K	40W	4800lm	100°	230V	⏚	12	Complete with 1000mA driver
65664BT/B/V	Black	CCT V	3000K-3500K-4000K	40W	4800lm	100°	230V	⏚	12	Complete with 1000mA driver



The Dark Light GU10 Range
Square



65105NAT/W

65105NAT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Suitable for GU10 LED lamp.





65105NAT/B

65105NAT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Suitable for GU10 LED lamp.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NAT/W	White	Black	10W	100-240V		12	-
65105NAT/B	Black	Brass	10W	100-240V		12	-

The Dark Light GU10 Range
Round




65105NT/W

65105NT | 10W | MR16 | GU10 | Aluminium






DARK LIGHT

IP20


Suitable for GU10 LED lamp.




65105NT/B

65105NT | 10W | MR16 | GU10 | Aluminium







DARK LIGHT

IP20


Suitable for GU10 LED lamp.



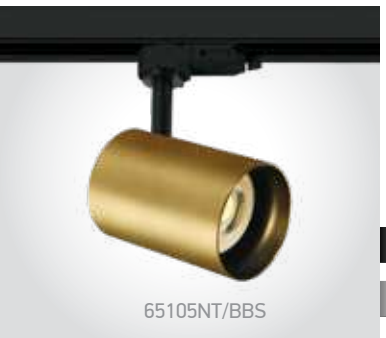
65105NT/BBS

65105NT | 10W | MR16 | GU10 | Aluminium






DARK LIGHT

IP20


Suitable for GU10 LED lamp.




65105NT/MG

65105NT | 10W | MR16 | GU10 | Aluminium







DARK LIGHT

IP20


Suitable for GU10 LED lamp.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NT/W	White	Black	10W	100-240V		12	-
65105NT/B	Black	Brass	10W	100-240V		12	-
65105NT/BBS	Brushed brass	Black	10W	100-240V		12	-
65105NT/MG	Metal grey	Black	10W	100-240V		12	-

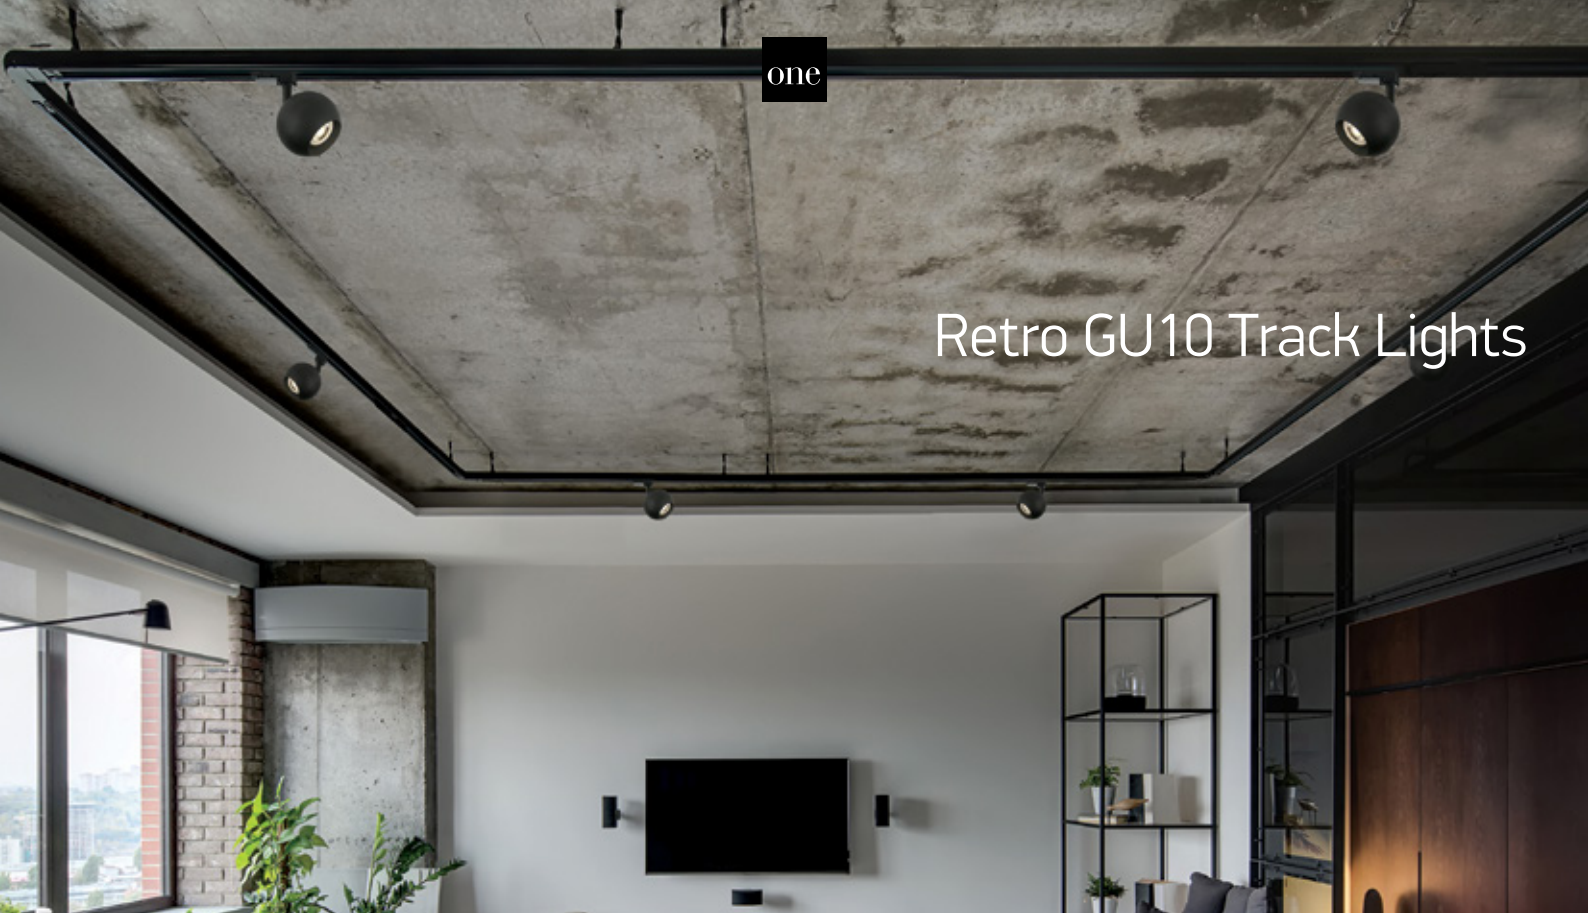

Retro GU10 Track Lights



65105BT/W

65105BT | 10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

IP20



65105BT/B






65105WT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20





65019T | 50W | MR16 | GU10 | Die cast


ADJUSTABLE

5 YEAR

IP20

offer





Order Code	Colour	Watts	Input	Class		Notes
65105BT/W	White	10W	100-240V		30	-
65105BT/B	Black	10W	100-240V		30	-
65105WT/B	Black	10W	100-240V		30	-
65019T/G	Grey	50W	100-240V		16	-



Cone GU10 Track Lights



65105CT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT


IP20



Complete with Black & Brass reflectors.



Use 7306CG GU10 LED lamp.





65105CT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT


IP20



Complete with Black & Brass reflectors.



Use 7306CG GU10 LED lamp.





65105CT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT


IP20



65105CT/MG



Use 7306CG GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65105CT/W	White	10W	100-240V		40	-
65105CT/B	Black	10W	100-240V		40	-
65105CT/BBS	Brushed brass	10W	100-240V		40	-
65105CT/MG	Metal grey	10W	100-240V		40	-



GU10 R111 Track Light



IP20


65518T | 50W | R111 | GU10 | Aluminium

ADJUSTABLE

5 YEAR



Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65518T/W	White	50W	100-240V	⏚	12	-



MR16 GU10 Track Lights



65520T | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE


CE 5 YEAR

IP20





Suitable for GU10 LED lamp.





65522T | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR


DARK LIGHT

IP20





Removable honeycomb.





65519T | 10W | MR16 | GU10 | Aluminium


ADJUSTABLE

CE 5 YEAR

IP20



Suitable for GU10 LED lamp.





65105GT | 10W | MR16 | GU10 | Polycarbonate

ADJUSTABLE


CE 5 YEAR

IP20






Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65520T/W	White	10W	100-240V		20	-
65520T/B	Black	10W	100-240V		20	-
65522T/W	White	10W	100-240V		24	-
65522T/B	Black	10W	100-240V		24	-
65519T/W	White	10W	100-240V		12	-
65105GT	Clear	10W	100-240V		40	-

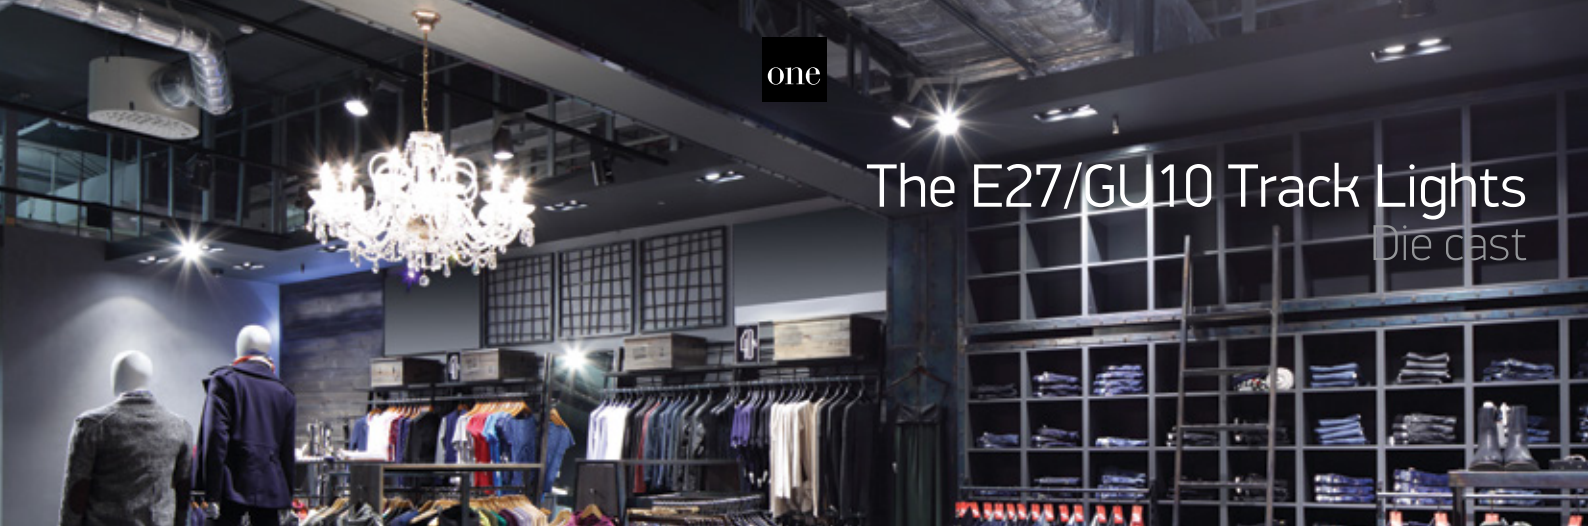

The E27/GU10 Track Lights
Die cast



65111AT/W

65111AT | 75W | PAR30 | E27 | Die cast


ADJUSTABLE


5 YEAR

IP20



Suitable for PAR30 LED lamp.



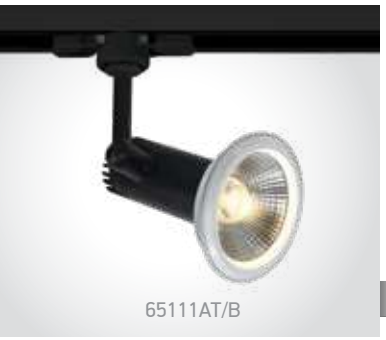

65111AT/B

65111AT | 75W | PAR30 | E27 | Die cast


ADJUSTABLE

5 YEAR

IP20



Suitable for PAR30 LED lamp.





65111AT/G

65111AT | 75W | PAR30 | E27 | Die cast


ADJUSTABLE

5 YEAR

IP20



Suitable for PAR30 LED lamp.





65118AT/W

65118AT | 50W | R111 | GU10 | Die cast

ADJUSTABLE

5 YEAR


IP20



65118AT/G



Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65111AT/W	White	75W	100-240V		40	-
65111AT/B	Black	75W	100-240V		40	-
65111AT/G	Grey	75W	100-240V		40	-
65118AT/W	White	50W	100-240V		40	-
65118AT/G	Grey	50W	100-240V		40	-

Adjustable Shape Beam
Zoomable



65668T | 12W | COB LED | Adjustable shape beam | Aluminium


LED BUILT IN

90 CRI

ADJUSTABLE

3 YEAR


IP20





Distance from wall for smallest diameter has ratio x0,4 and for the largest x0,6.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65668T/B/W	Black	Warm white	3000K	12W	350lm	230V		10	Complete with 300mA driver



Tracks & Magnetic


Pages 315-342

10






Square Track Surface

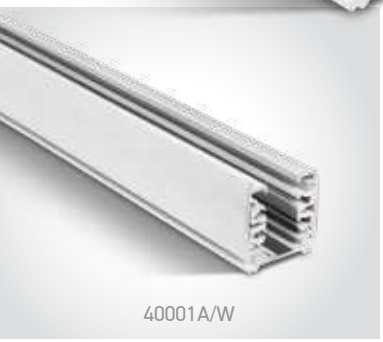
40001A/W

40001A | 16A | 1m Square track | 3-phase | Aluminium



40001A/B




40002A/W

40002A | 16A | 2m Square track | 3-phase | Aluminium


40002A/B





40003A/W

40003A | 16A | 3m Square track | 3-phase | Aluminium


40003A/B


40003A/G





40002C/W

40002C | 2m Plastic cover for square tracks


40002C/B


40002A/B + 40002C/B



Order Code	Colour	Input	Ampere	Class		Notes
40001A/W	White	100-240V	16A		10	-
40001A/B	Black	100-240V	16A		10	-
40002A/W	White	100-240V	16A		10	-
40002A/B	Black	100-240V	16A		10	-
40003A/W	White	100-240V	16A		10	-
40003A/B	Black	100-240V	16A		10	-
40003A/G	Grey	100-240V	16A		10	-



Square Track Accessories



40020/B | 2m Profile for square tracks 40001A, 40002A & 40003A | Aluminium

Track must be ordered separately.

5 YEAR

10



Complete with
4 Fixing clips
& 4 end caps.





41026R/W | Adjustable wire 2m for square track | Metal

5 YEAR

100





41032/W


41032 | Connector for suspending square track

5 YEAR

100



41032/B



Square Track Accessories



41020/W

41020 | Heavy items mechanical adaptor for square track | Die cast

5 YEAR

50



41020/G





41004A/W/..

41004A | 16A | Live end for square track | Plastic


5 YEAR



41004A/B/..



41004A/G/..





41010A/W

41010A | 16A | Live connector for square track | Plastic


5 YEAR



41010A/B



41010A/G





41008A/W

41008A | 16A | Connector for square track | Plastic


5 YEAR



41008A/B



41008A/G



Order Code	Colour	Direction	Input	Ampere	Class		Notes
41004A/W/L	White	Left	100-240V	16A		50	-
41004A/W/R	White	Right	100-240V	16A		50	-
41004A/B/L	Black	Left	100-240V	16A		50	-
41004A/B/R	Black	Right	100-240V	16A		50	-
41004A/G/L	Grey	Left	100-240V	16A		50	-
41004A/G/R	Grey	Right	100-240V	16A		50	-
41010A/W	White	-	100-240V	16A		50	-
41010A/B	Black	-	100-240V	16A		50	-
41010A/G	Grey	-	100-240V	16A		50	-
41008A/W	White	-	100-240V	16A		100	-
41008A/B	Black	-	100-240V	16A		100	-
41008A/G	Grey	-	100-240V	16A		100	-

Square Track Accessories



41012A/W/..

41012A | 16A | Corner for square track | Plastic




41012A/B/..


41012A/G/..





41016A/W/..

41016A | 16A | T connector for square track | Plastic




41016A/B/..


41016A/G/..





41018A/W

41018A | 16A | X Connector for square track | Plastic




41018A/B




41024A/W

41024A | 16A | Flexible connector for square track | Plastic




41024A/B


41024A/G





41022A/W

41022A | End cap for square track | Plastic





41022A/B


41022A/G



Order Code	Colour	Direction	Input	Ampere	Class		Notes
41012A/W/L	White	Left	100-240V	16A		25	-
41012A/W/R	White	Right	100-240V	16A		25	-
41012A/B/L	Black	Left	100-240V	16A		25	-
41012A/B/R	Black	Right	100-240V	16A		25	-
41012A/G/L	Grey	Left	100-240V	16A		25	-
41012A/G/R	Grey	Right	100-240V	16A		25	-
41016A/W/L	White	Left	100-240V	16A		25	-
41016A/W/R	White	Right	100-240V	16A		25	-
41016A/B/L	Black	Left	100-240V	16A		25	-
41016A/B/R	Black	Right	100-240V	16A		25	-
41016A/G/R	Grey	Right	100-240V	16A		25	-
41018A/W	White	-	100-240V	16A		10	-
41018A/B	Black	-	100-240V	16A		10	-
41024A/W	White	-	100-240V	16A		10	-
41024A/B	Black	-	100-240V	16A		10	-
41024A/G	Grey	-	100-240V	16A		10	-

Rounded Track & Accessories

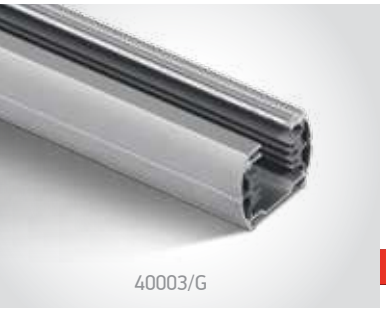

40003/G


40003 | 16A | 3m track | 3-phase | Aluminium

offer

CE 5 YEAR



40003/W





41020/G

41020 | Heavy items mechanical adaptor for rounded track | Die cast

CE 5 YEAR 50



41020/W





41004/G/L

41004 | 16A | Live end for rounded track | Plastic

offer

CE 5 YEAR

offer



41004/W/L





41010/G

41010 | 16A | Live connector for rounded track | Plastic


offer

CE 5 YEAR

offer



41010/W





41008 | 16A | Connector for rounded track | Plastic

CE 5 YEAR

offer



Order Code	Colour	Direction	Input	Ampere	Class		Notes
40003/W	White	-	100-240V	16A		10	-
40003/G	Grey	-	100-240V	16A		10	-
41004/W/L	White	Left	100-240V	16A		50	-
41004/G/L	Grey	Left	100-240V	16A		50	-
41010/W	White	-	100-240V	16A		40	-
41010/G	Grey	-	100-240V	16A		40	-
41008/W	White	-	100-240V	16A		50	-



41016/W

Rounded Track Accessories

41012 | 16A | Corner for rounded track | Plastic



41012/G/..

offer

offer




41012/W/..

offer



41012/B/..



41016 | 16A | T connector for rounded track | Plastic




41016/G

offer

offer



41016/W



41018 | 16A | X connector for rounded track | Plastic




41018/G

offer

offer



41018/W



41022 | End cover for rounded track | Plastic



41022/G

offer

offer



41022/W



Order Code	Colour	Direction	Input	Ampere	Class		Notes
41012/W/L	White	Left	100-240V	16A		20	-
41012/W/R	White	Right	100-240V	16A		20	-
41012/B/L	Black	Left	100-240V	16A		20	-
41012/B/R	Black	Right	100-240V	16A		20	-
41012/G/L	Grey	Left	100-240V	16A		20	-
41012/G/R	Grey	Right	100-240V	16A		20	-
41016/W	White	-	100-240V	16A		10	-
41016/G	Grey	-	100-240V	16A		10	-
41018/W	White	-	100-240V	16A		10	-
41018/G	Grey	-	100-240V	16A		10	-



40003R/W

Square Track Recessed




40003R | 16A | 3m Recessed track | 3-phase | Aluminium

Use accessories on pages 317 & 318.

5 YEAR



Recessed fixing clip.
Order code 41034R.






40003R | 16A | 3m Recessed track | 3-phase | Aluminium

Use accessories on pages 317 & 318.

5 YEAR



Recessed fixing clip.
Order code 41034R.






41004B/W | Cover for 41004A

5 YEAR


10



41008B/W | Cover for 41010A



10






41012B/W | Cover for corner 41012A

5 YEAR


10



41016B/W | Cover for T connector 41016A



10



Order Code	Colour	Input	Ampere	Class				Notes
40003R/W	White	100-240V	16A	⏚	40x3000mm	35mm	6	-
40003R/B	Black	100-240V	16A	⏚	40x3000mm	35mm	6	-



Track Adaptors & Accessories



41002/W

41002 | 16A | Track adaptor | Plastic

offer

5 YEAR


41002/G





41002A/W

41002A | 6A | Track adaptor | Plastic

5 YEAR


41002A/B




41030/W


41030 | 6A | Surface mount base for track lights | Plastic

5 YEAR

IP20


41030/B


41030/G



Order Code	Colour	Input	Ampere	Class		Notes
41002/W	White	100-240V	16A		150	-
41002/G	Grey	100-240V	16A		150	-
41002A/W	White	100-240V	6A		50	-
41002A/B	Black	100-240V	6A		50	-
41030/W	White	100-240V	6A		40	-
41030/B	Black	100-240V	6A		40	-
41030/G	Grey	100-240V	6A		40	-



Magnetic Surface Profiles
MINI



42001A | **42002A** | 48V | Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

CE 5 YEAR

new




Optional suspension kit. Order code 42026A.



Complete with 2pcs end caps.

MINI





42012AA/B | Corner for 42001A & 42002A | Aluminium


CE 5 YEAR 1


new



Complete with 2pcs mechanical connectors.

MINI



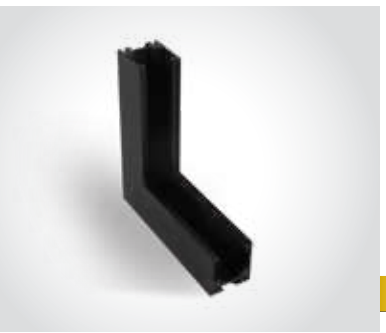

42012BA/B | Corner wall to wall (IN) for 42001A & 42002A | Aluminium


CE 5 YEAR 1

new




Complete with 2pcs mechanical connectors.


MINI



Order Code	Colour	Length	Input	Class		Notes
42001A/B	Black	1m	48V	III	1	-
42002A/B	Black	2m	48V	III	1	-

Magnetic Surface Profiles
MIDI

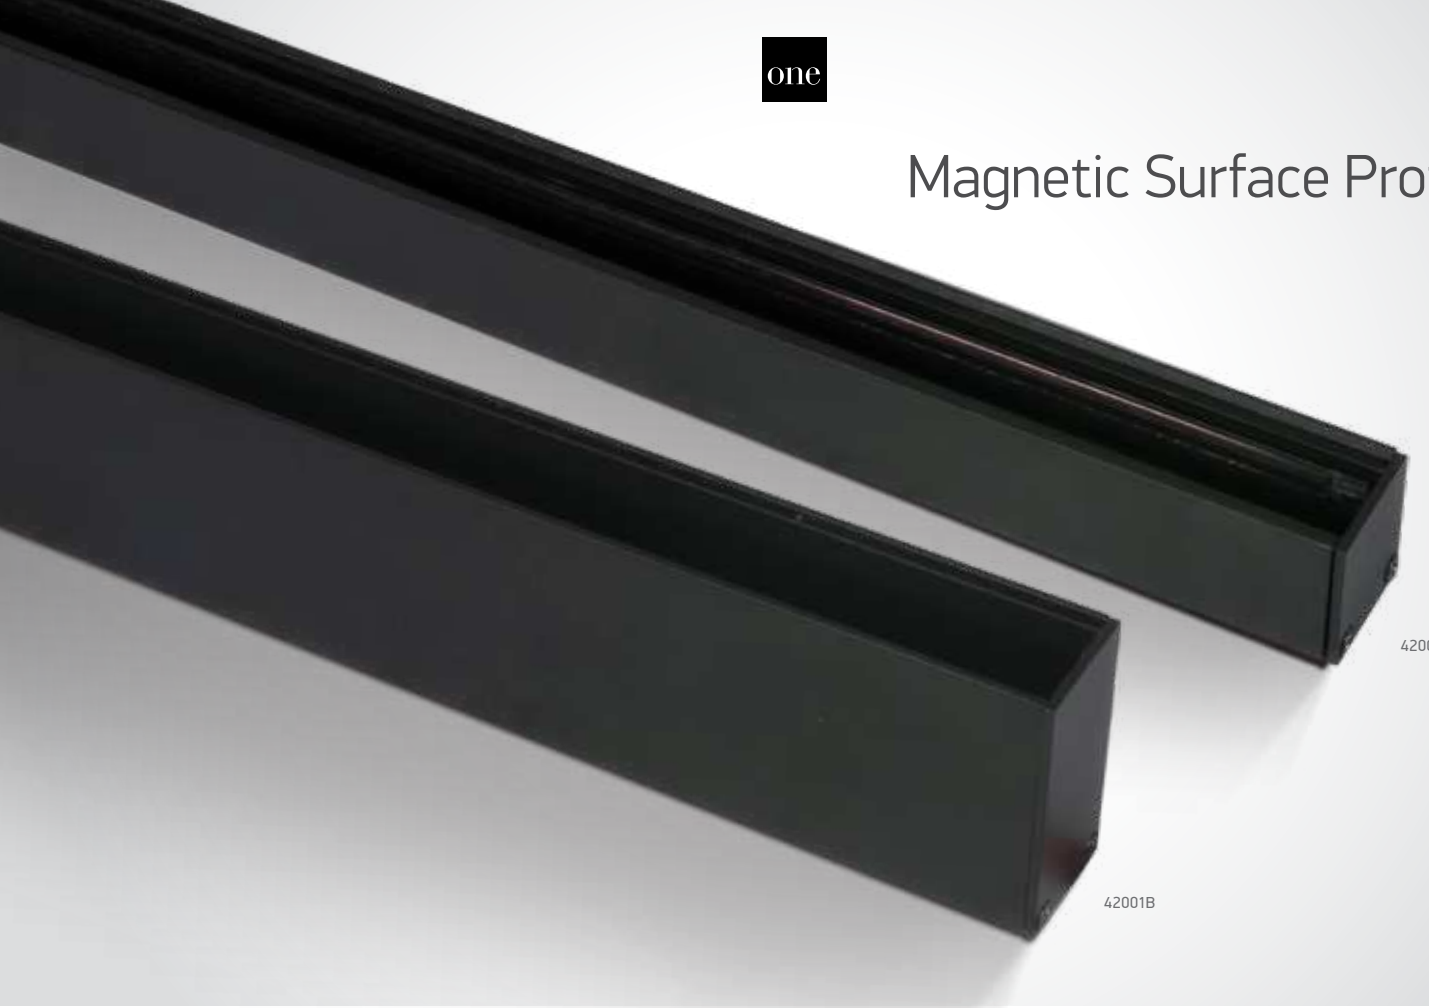

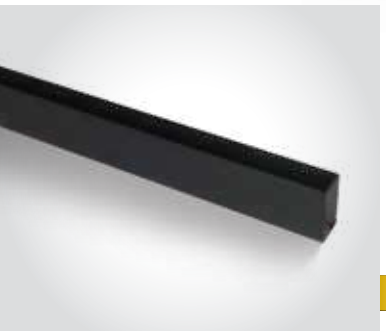

42001B | **42002B** | 48V | Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

CE 5 YEAR


new



Optional suspension kit. Order code 42026A.


Complete with 2pcs end caps.


Complete with cover.

MIDI



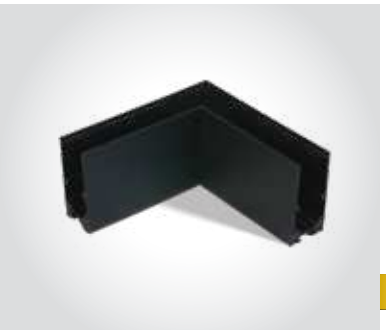


42012AB/B | Corner for 42001B & 42002B | Aluminium

CE 5 YEAR 1

new


Complete with 2pcs mechanical connectors.

MIDI






42012BB/B | Corner wall to wall (IN) for 42001B & 42002B | Aluminium

CE 5 YEAR 1


new


Complete with 2pcs mechanical connectors.

MIDI



Order Code	Colour	Length	Input	Class		Notes
42001B/B	Black	1m	48V	III	1	-
42002B/B	Black	2m	48V	III	1	-

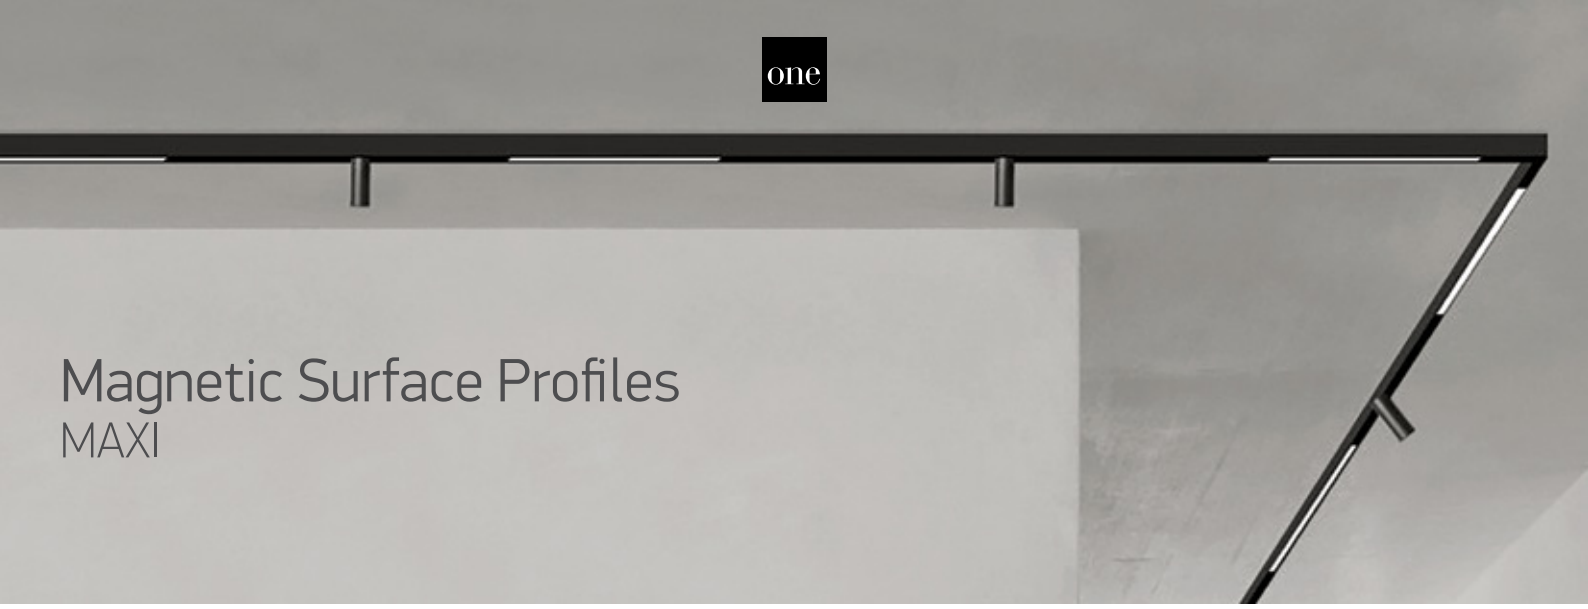

Magnetic Surface Profiles
MAXI



42001 | **42002** | **42003** | 48V | Magnetic profile | ON/OFF / DALI | Aluminium — Max 10m/driver | Max 400W/circuit

5 YEAR




Optional suspension kit. Order code 42026.




Complete with 2pcs end caps.



Complete with cover.



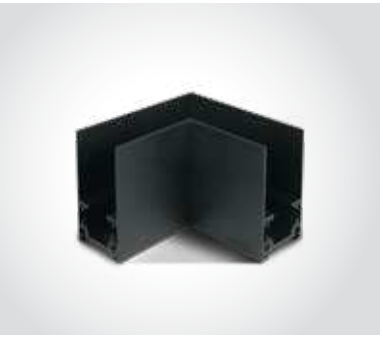


42012A/B | Corner for 42001, 42002 & 42003 | Aluminium

5 YEAR — 1



Complete with 2pcs mechanical connectors.






42012B/B | Corner wall to wall (IN) for 42001, 42002 & 42003 | Aluminium

5 YEAR — 1



Complete with 2pcs mechanical connectors.






42012C/B | Corner wall to wall (OUT) for 42001, 42002 & 42003 | Aluminium


5 YEAR — 1



Complete with 2pcs mechanical connectors.



Order Code	Colour	Length	Input	Class		Notes
42001/B	Black	1m	48V	III	1	-
42002/B	Black	2m	48V	III	1	-
42003/B	Black	3m	48V	III	1	-

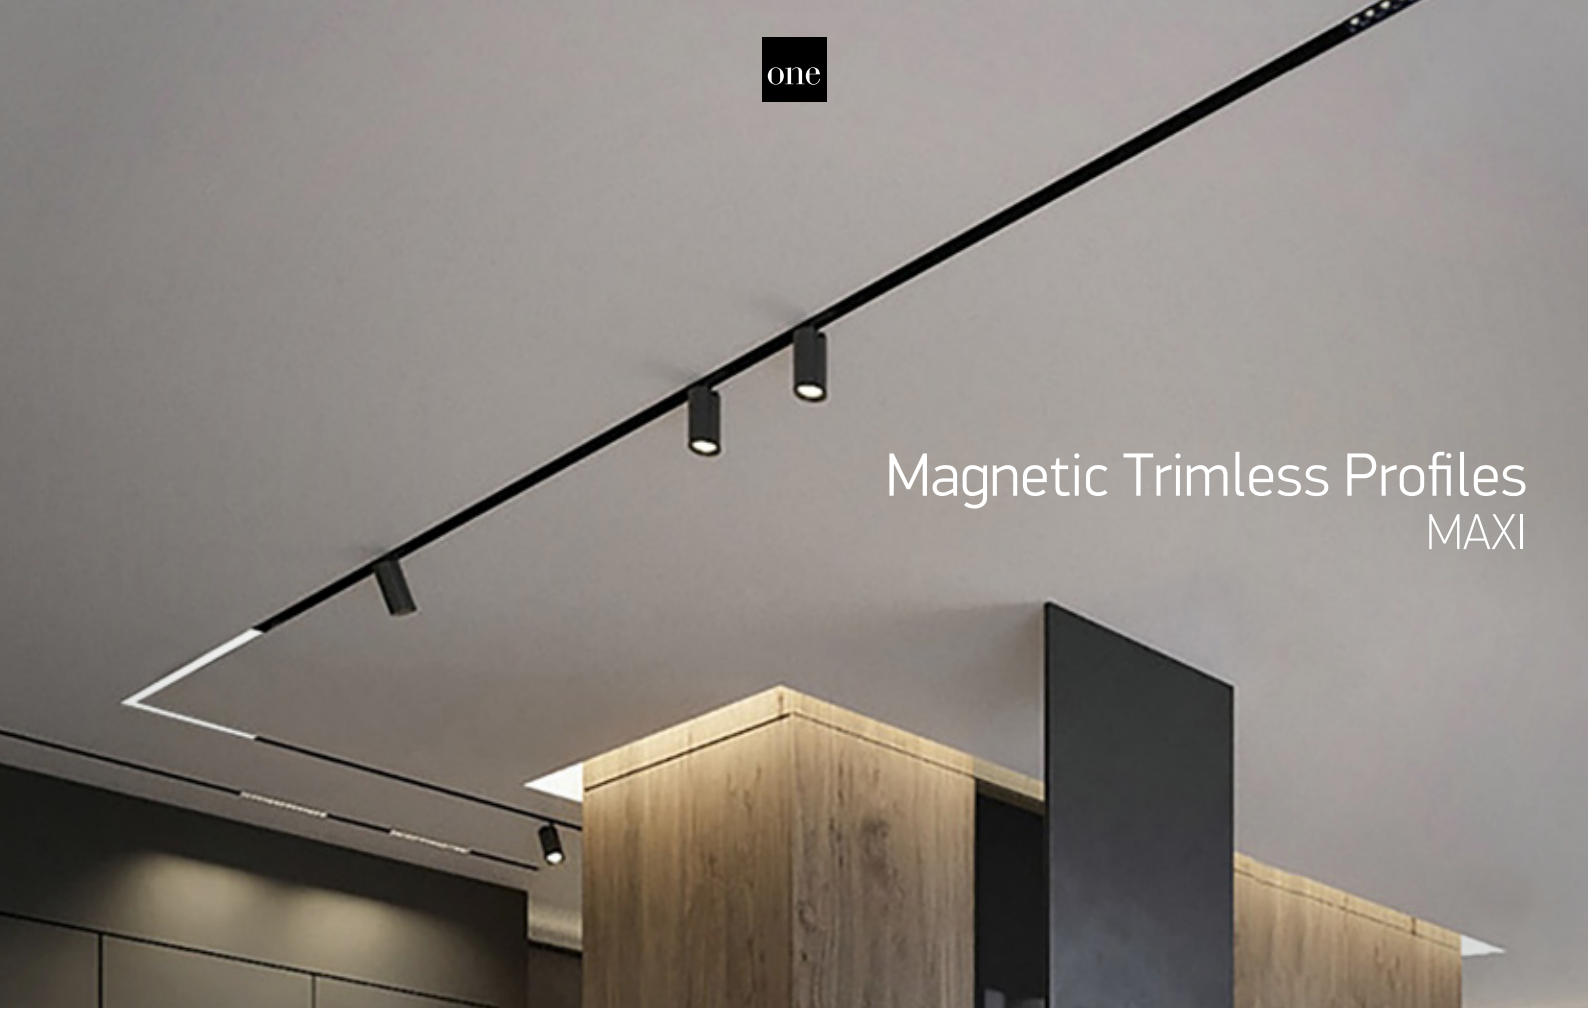

Magnetic Trimless Profiles
MAXI



42001TR | **42002TR** | 48V | Trimless recessed | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

CE 5 YEAR



Complete with 2 pcs mechanical connectors & 4 pcs side connectors.




Complete with 2 pcs end caps.



Complete with cover.

MAXI






42012ATR/B | Trimless recessed corner for 42001TR & 42002TR | Aluminium


Can not pass through cutout hole.

CE 5 YEAR 1





MAXI





42012BTR/B | Trimless recessed corner wall to wall (IN) for 42001TR & 42002TR | Aluminium


Can not pass through cutout hole.

CE 5 YEAR 1





MAXI



Order Code	Colour	Length	Input	Class				Notes
42001TR/B	Black	1m	48V	III	42x1000mm	120mm	1	-
42002TR/B	Black	2m	48V	III	42x2000mm	120mm	1	-



Magnetic Recessed Profiles
MIDI



42001RB | **42002RB** | 48V | Recessed magnetic profile | ON/OFF / DALI | Aluminium Max 10m/driver | Max 400W/circuit.

CE 5 YEAR

new



Complete with 4pcs fixing clips, 1pc mechanical & 2pcs side connectors.





Complete with 2pcs end caps.



Complete with cover.

MIDI



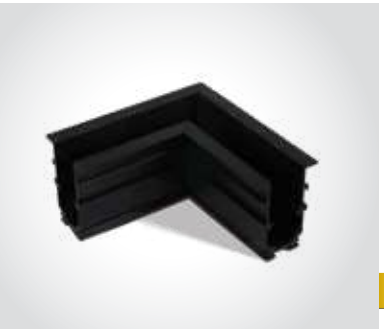


42012ARB/B | Recessed corner for 42001RB & 42002RB | Aluminium

CE 5 YEAR 1


new




Complete with 2pcs mechanical connectors & 4pcs side connectors.










MIDI

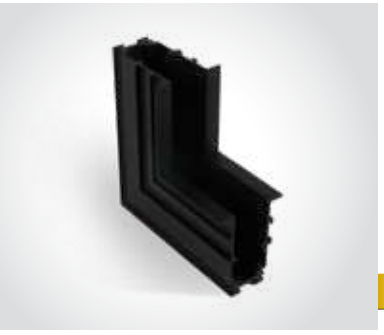

42012BRB/B | Recessed corner wall to wall (IN) for 42001RB & 42002RB | Aluminium


CE 5 YEAR 1


new



Complete with 2pcs mechanical connectors & 4pcs side connectors.








MIDI

Order Code	Colour	Length	Input	Class				Notes
42001RB/B	Black	1m	48V	III	35x1000mm	100mm	1	-
42002RB/B	Black	2m	48V	III	35x2000mm	100mm	1	-

Magnetic Recessed Profiles
MAXI

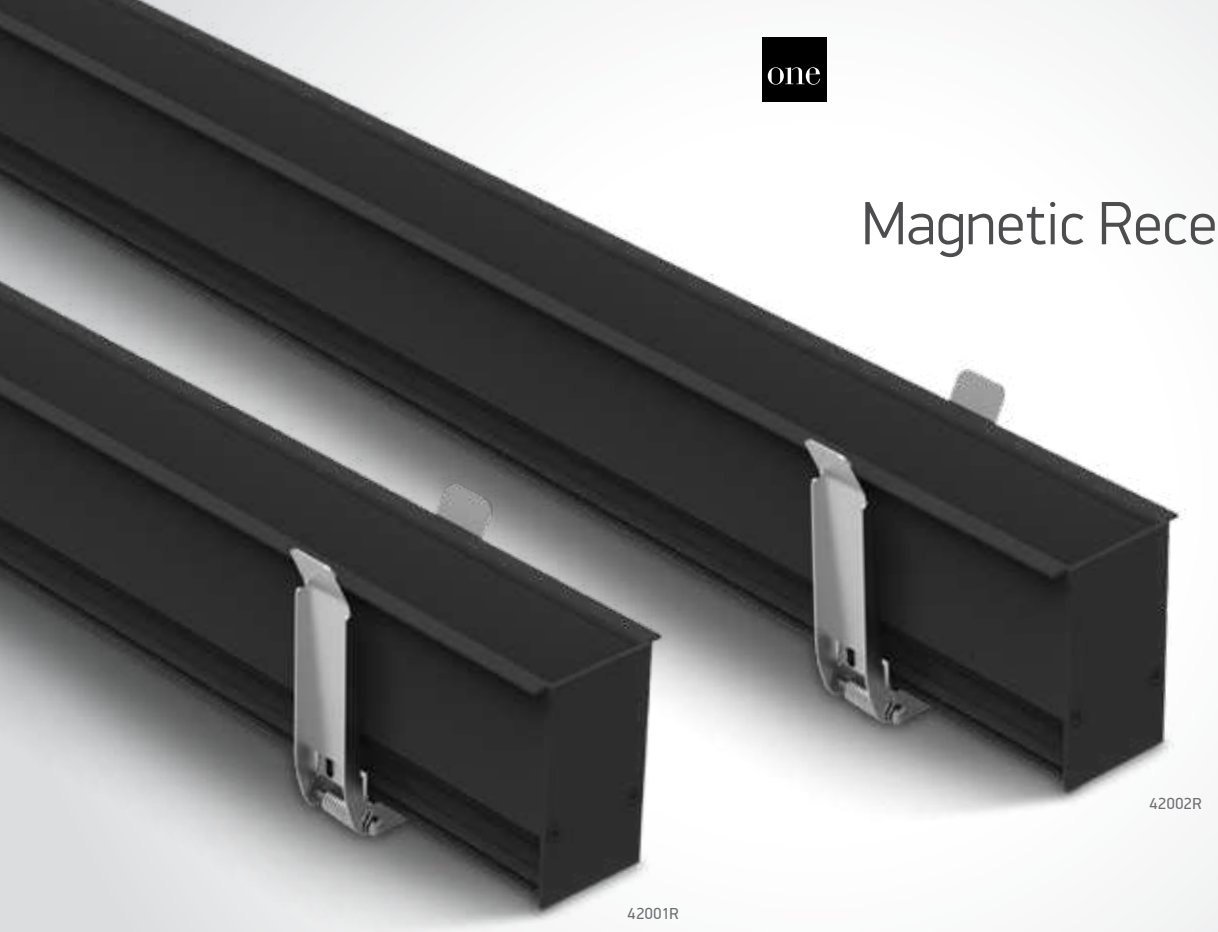



42001R | **42002R** | 48V | Recessed magnetic profile | ON/OFF / DALI | Aluminium — Max 10m/driver | Max 400W/circuit.

CE 5 YEAR



Complete with 4pcs fixing clips, 1pc mechanical & 2pcs side connectors.




Complete with 2pcs end caps.



Complete with cover.

MAXI






42012AR/B | Recessed corner for 42001R & 42002R | Aluminium

CE 5 YEAR 1




Complete with 2pcs mechanical connectors & 4pcs side connectors.



120mm

MAXI





42012BR/B | Recessed corner wall to wall (IN) for 42001R & 42002R | Aluminium

CE 5 YEAR 1




Complete with 2pcs mechanical connectors & 4pcs side connectors.

42x36mm (x2)

120mm

MAXI



Order Code	Colour	Length	Input	Class				Notes
42001R/B	Black	1m	48V	III	42x1000mm	120mm	1	-
42002R/B	Black	2m	48V	III	42x2000mm	120mm	1	-



Magnetic Profiles Accessories



42032A | Mechanical connector for 42001A, 42002A, 42001B, 42002B, 42001RB & 42002RB

CE

5 YEAR

new

MINI	MIDI
✓	✓






42032 | Mechanical connector for 42001, 42002 & 42003

CE

5 YEAR

MAXI
✓



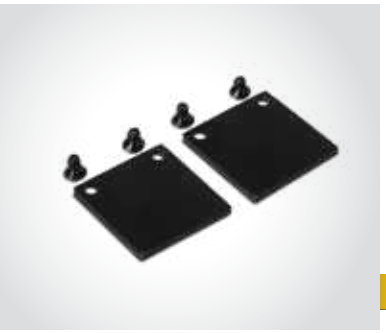

42022A/B | End caps for 42001A & 42002A

CE

5 YEAR

new

MINI
✓



42022B/B | End caps for 42001B, 42002B, 42001RB & 42002RB

CE

5 YEAR

new

MIDI
✓




42022/B | End caps for 42001, 42002, 42003, 42001R & 42002R

CE

5 YEAR

MAXI
✓

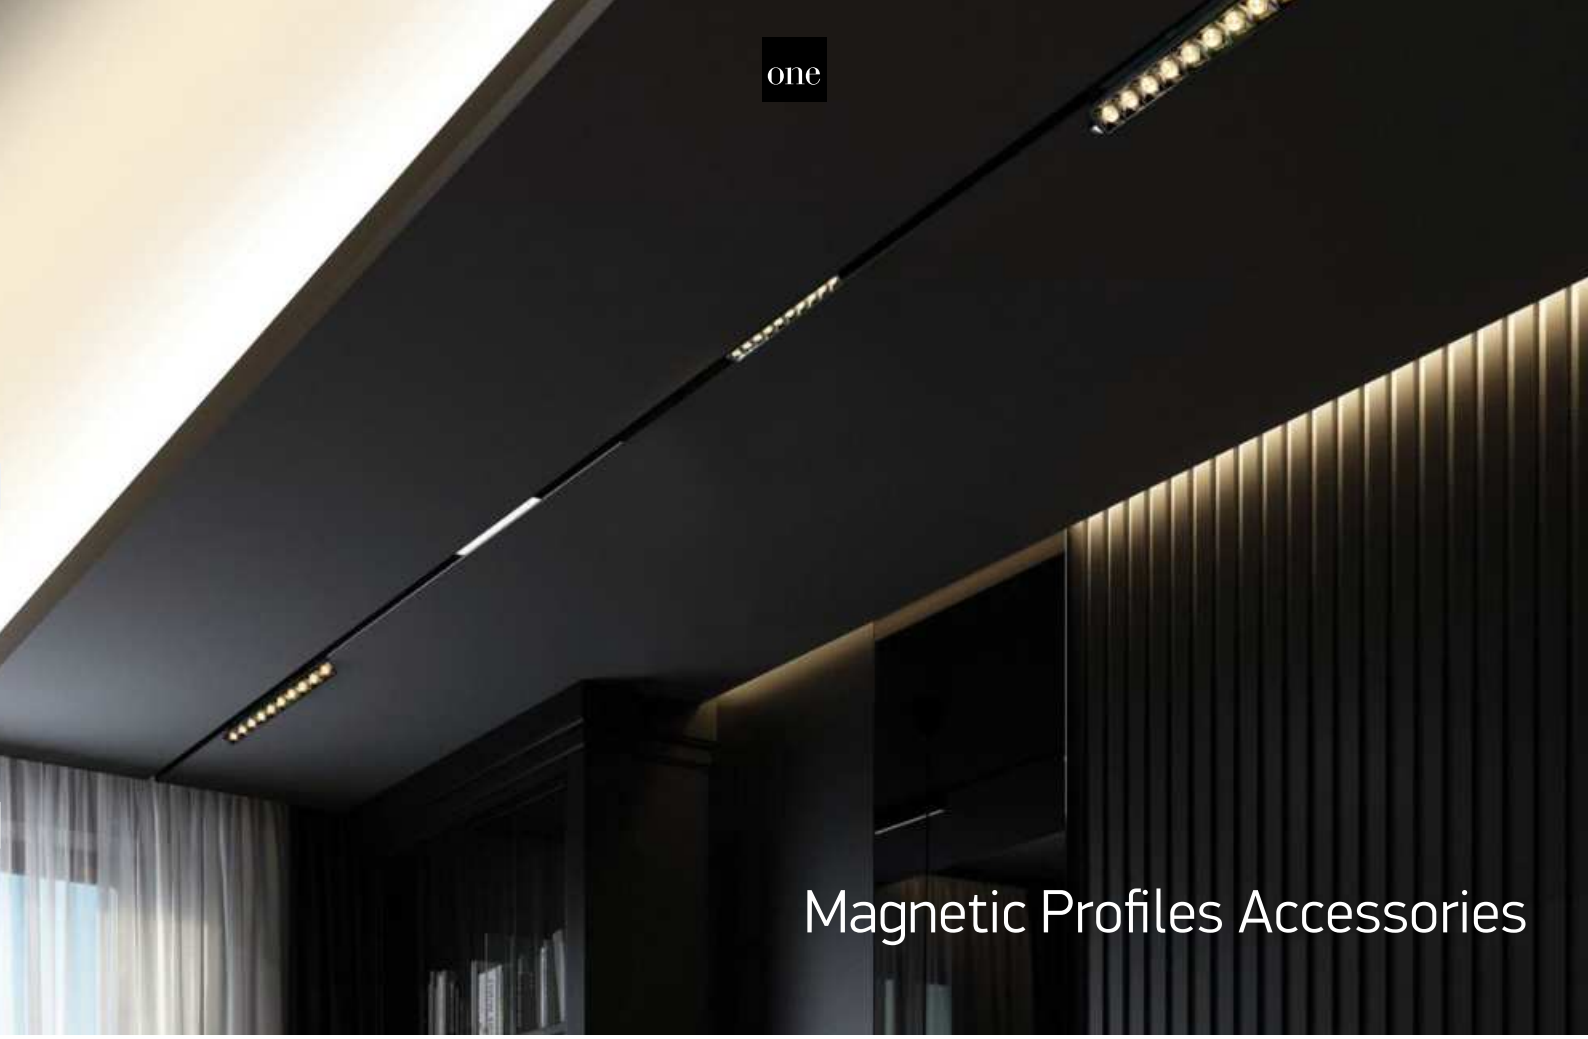

Magnetic Profiles Accessories




42004A/B | 48V | Power supply cable | ON/OFF / DALI | Plastic

200cm

5 YEAR

MINI	MIDI	MAXI
✓	✓	✓






42004C/B | 48V | Live connector/corner | ON/OFF / DALI | Plastic

5 YEAR

MINI	MIDI	MAXI
✓	✓	✓





42006BX | 200W | 48V DC | Driver for magnetic profiles

5 YEAR


MINI	MIDI	MAXI
✓	✓	✓

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
42006BX	230V	200W	48V DC	⧈	NO	20	-

Magnetic Linear Lights

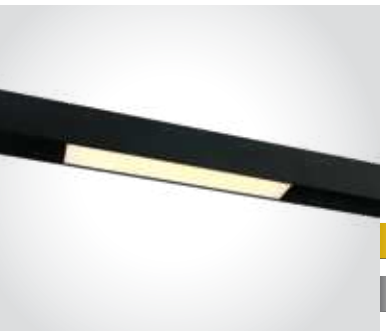

42100AA | 8W | SMD 2835 | Linear light | Aluminium + PC

new

IP20

LED BUILT IN

90 CRI


CE

3 YEAR



MINI ✓ MIDI ✓ 120°



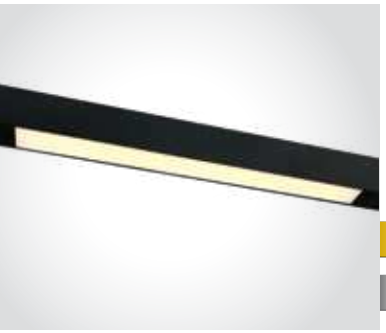

42100BA | 16W | SMD 2835 | Linear light | Aluminium + PC

new

IP20

LED BUILT IN

90 CRI

CE

3 YEAR



MINI ✓ MIDI ✓ 120°





42100A | 15W | SMD 2835 | Linear light | Aluminium + PC

IP20

LED BUILT IN

90 CRI

CE

3 YEAR



MAXI ✓ 120°





42100B | 25W | SMD 2835 | Linear light | Aluminium + PC

IP20

LED BUILT IN


90 CRI

CE

3 YEAR



MAXI ✓ 120°





42100BL | 25W | SMD 2835 | Linear light | DALI | Aluminium + PC

DALI

IP20

LED BUILT IN

90 CRI

DALI DIMMABLE

CE

3 YEAR



MAXI ✓ 120°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100AA/B/W	Black	Warm white	3000K	8W	640lm	120°	48V	III	50	-
42100BA/B/W	Black	Warm white	3000K	16W	1280lm	120°	48V	III	40	-
42100A/B/W	Black	Warm white	3000K	15W	1200lm	120°	48V	III	40	-
42100B/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	20	-
42100BL/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	20	-



Magnetic Linear Corners



42100EA | 16W | SMD 2835 | Corner light | Aluminium + PC


LED BUILT IN · 90 CRI · CE · 3 YEAR

new

IP20



MINI ✓ | MIDI ✓ | 120°






42100E | 25W | SMD 2835 | Corner light | Aluminium + PC

LED BUILT IN · 90 CRI · CE · 3 YEAR

IP20



MAXI ✓ | 120°





42100EL | 25W | SMD 2835 | Corner light | DALI | Aluminium + PC


LED BUILT IN · 90 CRI · DALI DIMMABLE · CE · 3 YEAR

new

IP20



MAXI ✓ | 120°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100EA/B/W	Black	Warm white	3000K	16W	1280lm	120°	48V	III	10	-
42100E/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	12	-
42100EL/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	12	-



Magnetic Linear Lights




42120B | 12W | SMD 3535 | Linear light | Assymetric | Aluminium + PC

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20










42102A | 12W | SMD 3535 | Linear spots | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20









42102B | 22W | SMD 3535 | Linear spots | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20









42102BL | 22W | SMD 3535 | Linear spots | DALI | Aluminium


LED BUILT IN · 90 CRI · DALI DIMMABLE · CE · 3 YEAR · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42120B/B/W	Black	Warm white	3000K	12W	960lm	90°	48V	III	40	-
42102A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	40	-
42102B/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-
42102BL/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-

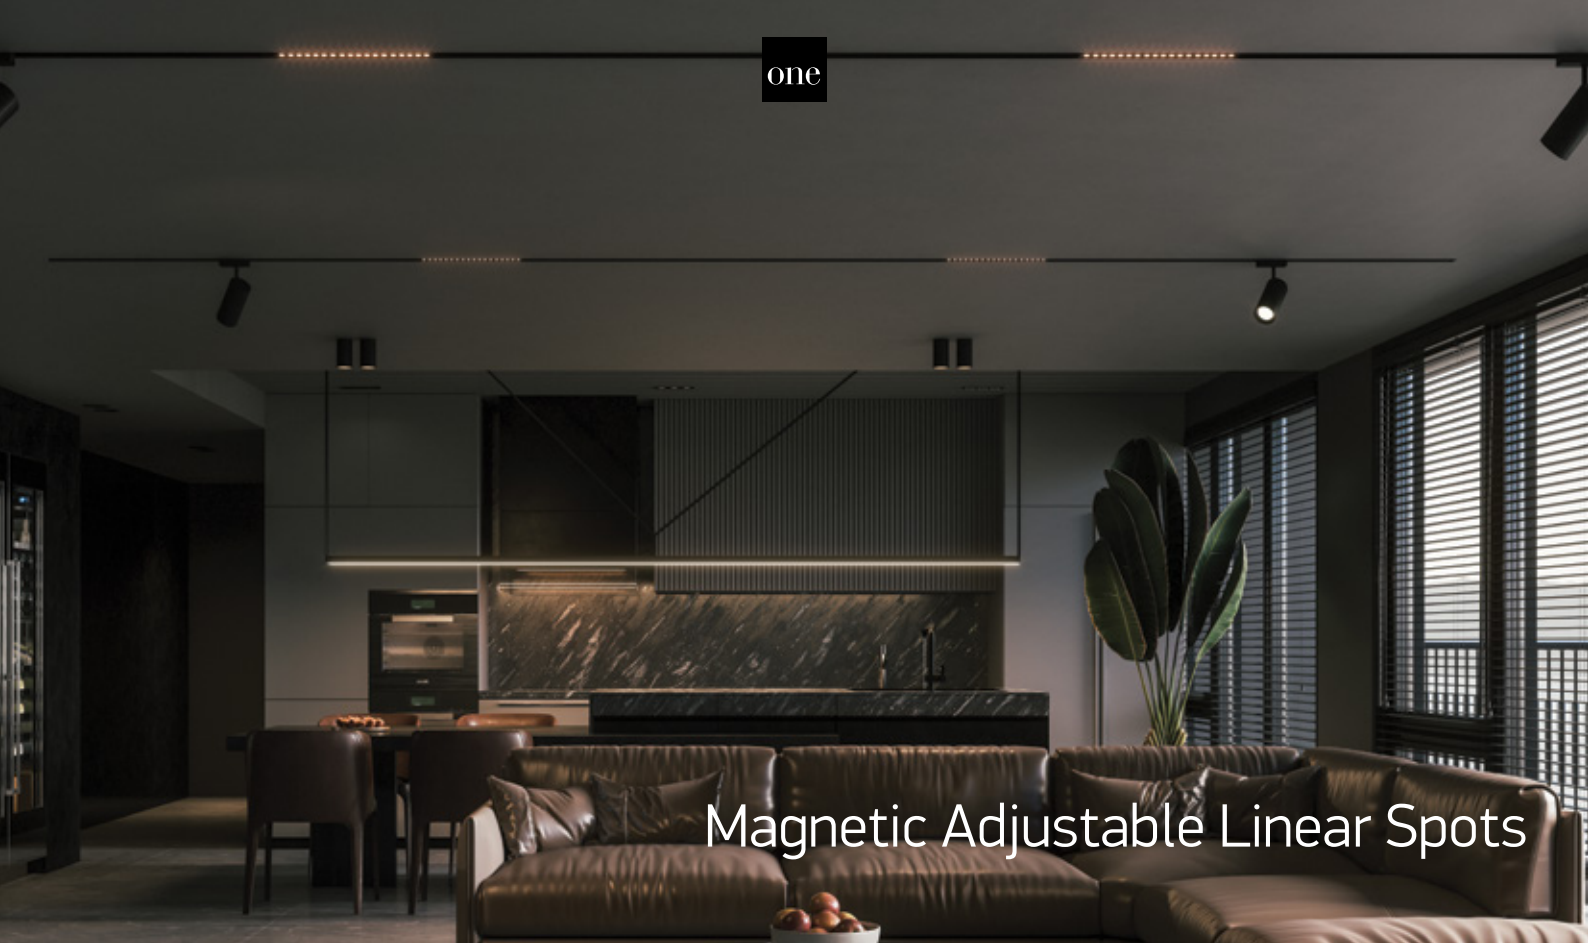


Magnetic Adjustable Linear Spots



42106A | 12W | SMD 3535 | Linear spots | Adjustable | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20








42106B | 22W | SMD 3535 | Linear spots | Adjustable | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20








42106BL | 22W | SMD 3535 | Linear spots | DALI | Adjustable | Aluminium

LED BUILT IN · 90 CRI · DALI DIMMABLE · ADJUSTABLE · CE · 3 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42106A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	30	-
42106B/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	20	-
42106BL/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	20	-

Magnetic Linear Spots



42112AA | 12W | SMD 3030 | Linear spots | Aluminium

new

IP20

LED BUILT IN

90 CRI


CE

3 YEAR







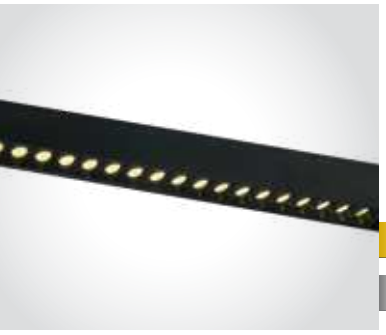

42112BA | 18W | SMD 3030 | Linear spots | Aluminium

new

IP20

LED BUILT IN

90 CRI


CE

3 YEAR







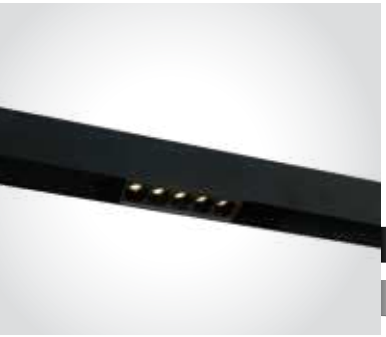

42104B | 12W | SMD 3535 | Linear spots | Aluminium

DARK LIGHT

IP20


LED BUILT IN


90 CRI

CE

3 YEAR









42124AA | 10W | SMD 3030 | Linear spots | Adjustable | Aluminium

new

IP20

LED BUILT IN

90 CRI

ADJUSTABLE MIDI


ADJUSTABLE MINI

CE

3 YEAR









42124BA | 20W | SMD 3030 | Linear spots | Adjustable | Aluminium

new

IP20

LED BUILT IN

90 CRI

ADJUSTABLE MIDI


ADJUSTABLE MINI

CE


3 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42112AA/B/W	Black	Warm white	3000K	12W	960lm	50°	48V		50	-
42112BA/B/W	Black	Warm white	3000K	18W	1440lm	50°	48V		40	-
42104B/B/W	Black	Warm white	3000K	12W	840lm	36°	48V		40	-
42124AA/B/W	Black	Warm white	3000K	10W	800lm	38°	48V		30	-
42124BA/B/W	Black	Warm white	3000K	20W	1600lm	38°	48V		20	-

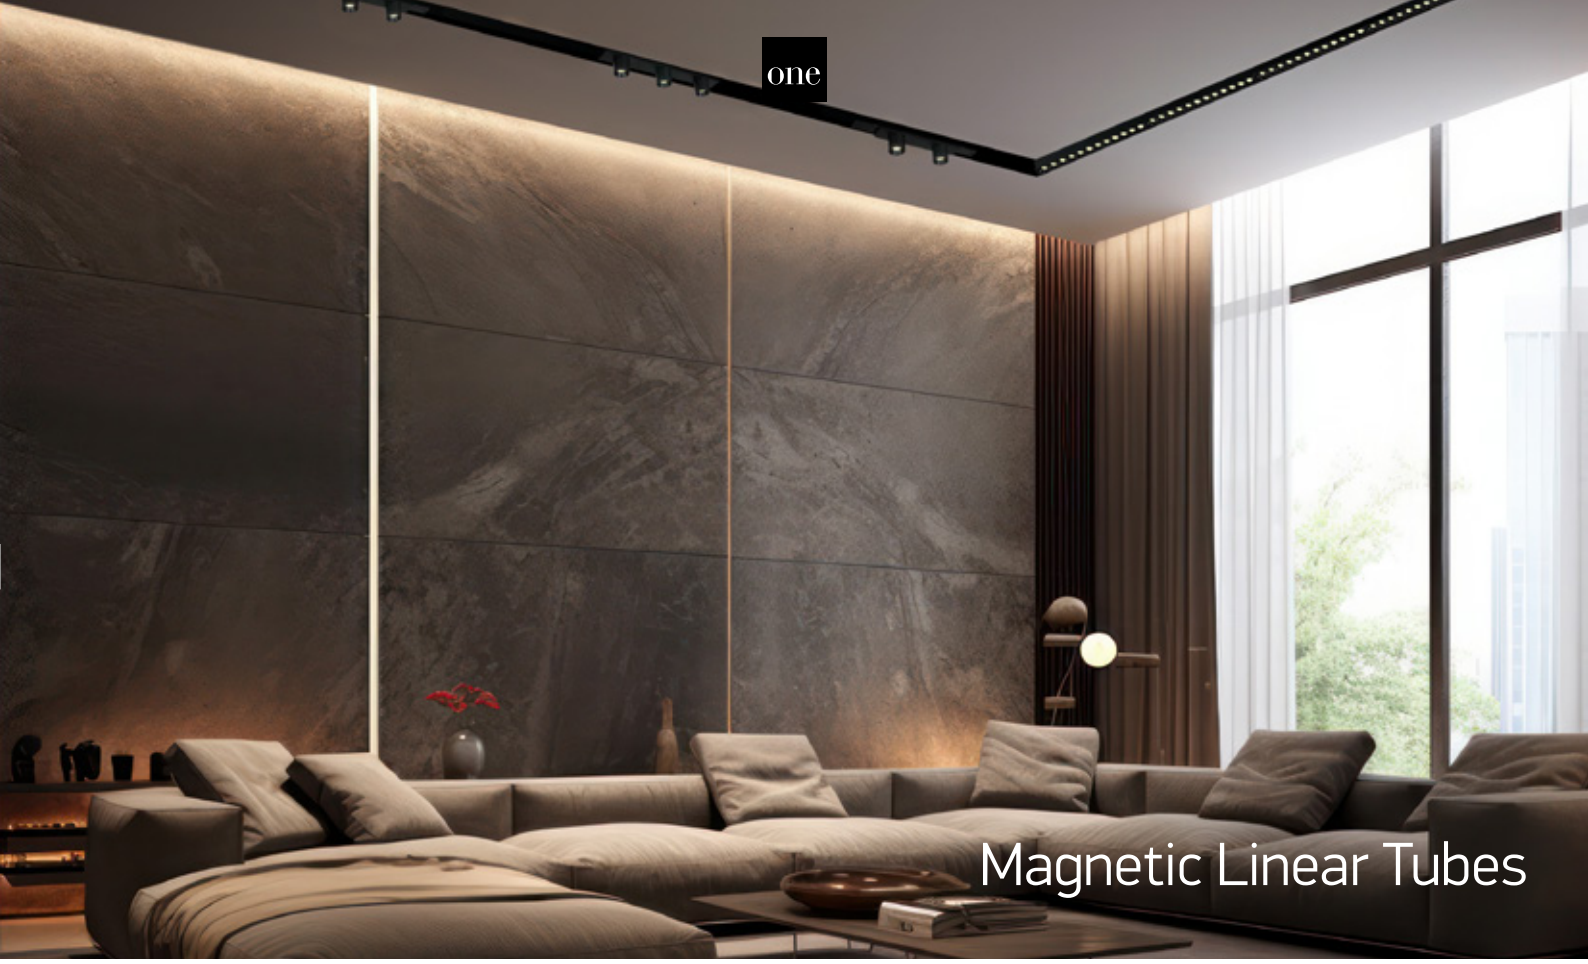

Magnetic Linear Tubes



42128A | 2x2W | SMD 3030 | Linear spots | Aluminium

new

IP20

LED BUILT IN


90 CRI

CE

3 YEAR









42128B | 3x2W | SMD 3030 | Linear spots | Aluminium

new

IP20

LED BUILT IN

90 CRI

CE

3 YEAR









42128C | 5x2W | SMD 3030 | Linear spots | Aluminium

new

IP20

LED BUILT IN

90 CRI

CE


3 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42128A/B/W	Black	Warm white	3000K	2x2W	200lm	36°	48V	III	50	-
42128B/B/W	Black	Warm white	3000K	3x2W	300lm	36°	48V	III	50	-
42128C/B/W	Black	Warm white	3000K	5x2W	500lm	36°	48V	III	30	-

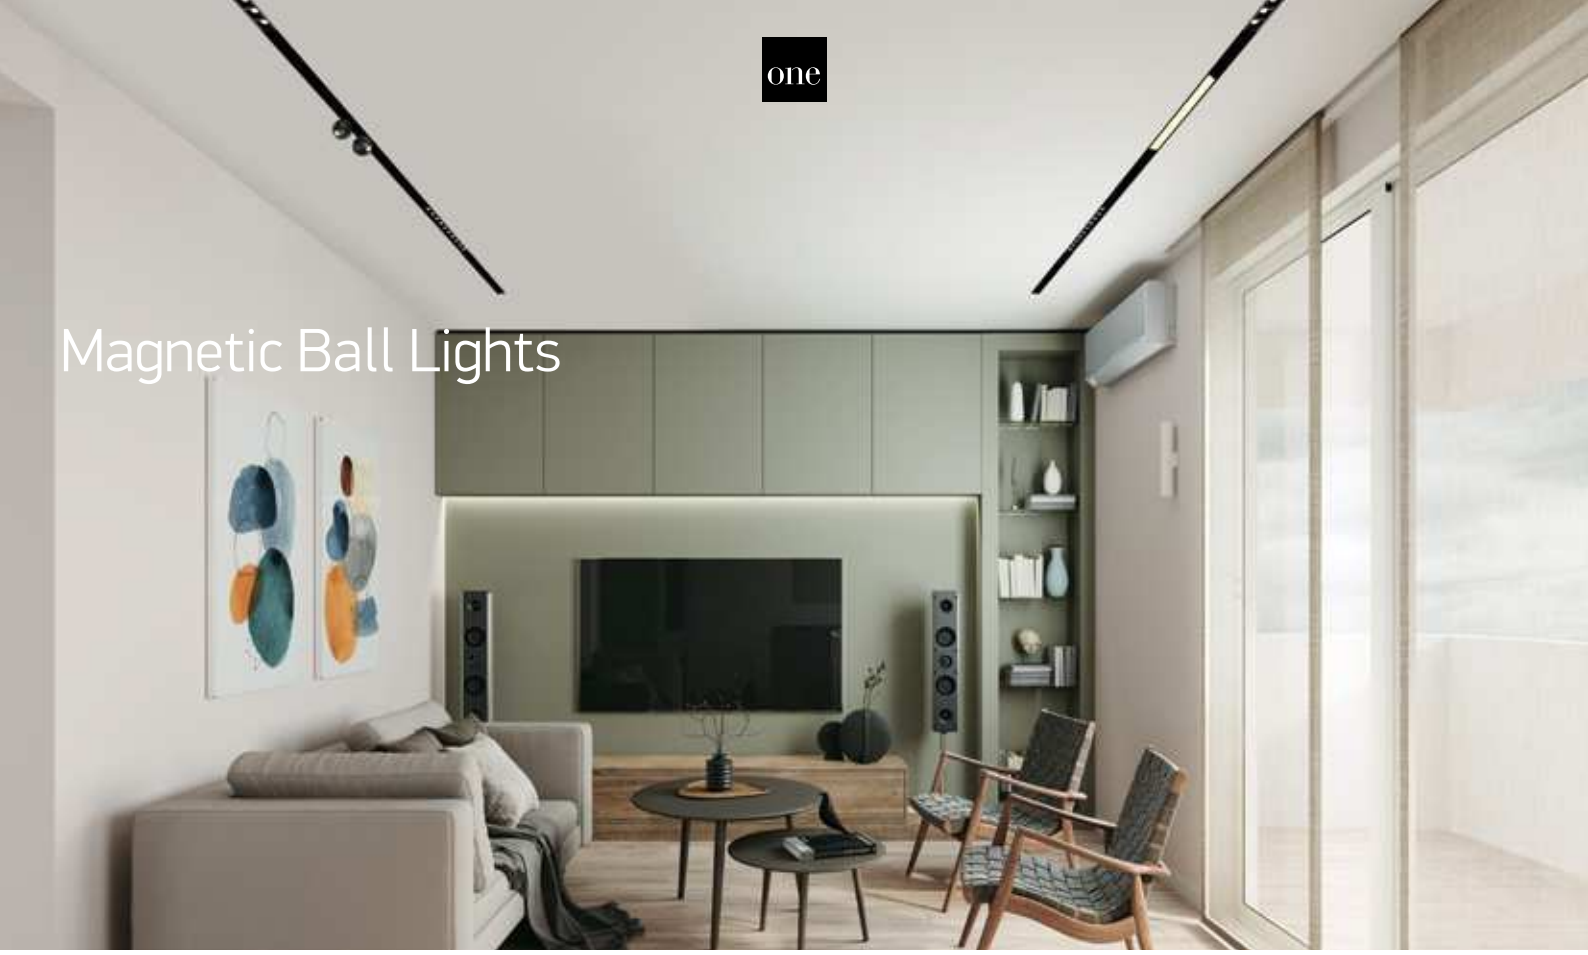


Magnetic Ball Lights



42134 | 7W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20








42134 | 7W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20








42134A | 2x7W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42134/B/W	Black	Warm white	3000K	7W	560lm	36°	48V	III	30	-
42134/BBS/W	Brushed brass	Warm white	3000K	7W	560lm	36°	48V	III	30	-
42134A/B/W	Black	Warm white	3000K	2x7W	1120lm	36°	48V	III	30	-


Magnetic Spots



42122A | 3W | SMD 3535 | Aluminium

new
IP20
LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR








42108 | 6W | COB LED | Aluminium

IP20
LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR








42108L | 6W | COB LED | DALI | Aluminium

new
IP20
LED BUILT IN
90 CRI
DALI DIMMABLE
ADJUSTABLE
CE
3 YEAR








42108A | 2x6W | COB LED | Aluminium

IP20
LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR








42108AL | 2x6W | COB LED | DALI | Aluminium

new
IP20
LED BUILT IN
90 CRI
DALI DIMMABLE
ADJUSTABLE
CE
3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42122A/B/W	Black	Warm white	3000K	3W	240lm	38°	48V	III	30	-
42108/B/W	Black	Warm white	3000K	6W	480lm	38°	48V	III	30	-
42108L/B/W	Black	Warm white	3000K	6W	480lm	38°	48V	III	30	-
42108A/B/W	Black	Warm white	3000K	2x6W	960lm	38°	48V	III	20	-
42108AL/B/W	Black	Warm white	3000K	2x6W	960lm	38°	48V	III	20	-

Magnetic Spots




42110 | 8W | COB LED | Honeycomb | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20



MINI ✓ MIDI ✓ MAXI ✓ 15°






42114A | 12W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



MINI ✓ MIDI ✓ MAXI ✓ 38°






42114B | 24W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



MINI ✓ MIDI ✓ MAXI ✓ 38°






42114BL | 24W | COB LED | DALI | Aluminium

LED BUILT IN · 90 CRI · DALI DIMMABLE · ADJUSTABLE · CE · 3 YEAR · IP20



MINI ✓ MIDI ✓ MAXI ✓ 38°






42116C | 15W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



MINI ✓ MIDI ✓ MAXI ✓ 38°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42110/B/W	Black	Warm white	3000K	8W	640lm	15°	48V	III	30	-
42114A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	24	-
42114B/B/W	Black	Warm white	3000K	24W	1920lm	38°	48V	III	16	-
42114BL/B/W	Black	Warm white	3000K	24W	1920lm	38°	48V	III	16	-
42116C/B/W	Black	Warm white	3000K	15W	1200lm	38°	48V	III	16	-




Magnetic Spots



42114C | 30W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20








42114CL | 30W | COB LED | DALI | Aluminium

LED BUILT IN · 90 CRI · DALI DIMMABLE · ADJUSTABLE · CE · 3 YEAR · IP20








42118 | 26W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20








42118L | 26W | COB LED | DALI | Aluminium

LED BUILT IN · 90 CRI · DALI DIMMABLE · ADJUSTABLE · CE · 3 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114C/B/W	Black	Warm white	3000K	30W	2400lm	38°	48V	III	16	-
42114CL/B/W	Black	Warm white	3000K	30W	2400lm	38°	48V	III	16	-
42118/B/W	Black	Warm white	3000K	26W	2080lm	50°	48V	III	20	-
42118L/B/W	Black	Warm white	3000K	26W	2080lm	50°	48V	III	20	-

Magnetic Cylinder Pendants






42130A | 5W | COB LED | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP20










42130B | 9W | COB LED | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP20









42132 | 7W | COB LED | Aluminium

With removable tube.


LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP20



With tube.



Without tube.







42132L | 7W | COB LED | DALI | Aluminium


LED BUILT IN · 90 CRI · DALI DIMMABLE · CE · 3 YEAR · new · DARK LIGHT · IP20



With tube.



Without tube.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42130A/B/W	Black	Warm white	3000K	5W	350lm	38°	48V	III	30	-
42130B/B/W	Black	Warm white	3000K	9W	630lm	38°	48V	III	30	-
42132/B/W	Black	Warm white	3000K	7W	490lm	10° / 38°	48V	III	30	-
42132L/B/W	Black	Warm white	3000K	7W	490lm	10° / 38°	48V	III	30	-




Magnetic Pendants



42126AA | 5W | LED | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CE
3 YEAR




MINI ✓ | MIDI ✓ | MAXI ✓ | 38°



42126BA | 12W | LED | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CE
3 YEAR




MINI ✓ | MIDI ✓ | MAXI ✓ | 38°



42134B | 7W | COB LED | Aluminium

IP20
LED BUILT IN
90 CRI
CE
3 YEAR





MINI ✓ | MIDI ✓ | MAXI ✓ | 36°



42136/B/W

42136 | 10W | SMD 2835 | Aluminium + acrylic

IP20
LED BUILT IN
90 CRI
CE
3 YEAR



42136/BBS/W



MINI ✓ | MIDI ✓ | MAXI ✓

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42126AA/B/W	Black/Brass	Warm white	3000K	5W	350lm	38°	48V	III	50	-
42126BA/B/W	Black/Brass	Warm white	3000K	12W	840lm	38°	48V	III	25	-
42134B/B/W	Black	Warm white	3000K	7W	560lm	36°	48V	III	30	-
42136/B/W	Black	Warm white	3000K	10W	700lm	-	48V	III	15	-
42136/BBS/W	Brushed brass	Warm white	3000K	10W	700lm	-	48V	III	15	-





Office & Kitchen

Pages 345-360

11







61066 | 8W | SMD 2835 | Plastic

Magnifying lens.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR

IP20








61066T | White floor stand for 61066

CE · 2 YEAR

1



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61066/W	White	Daylight	6000K	8W	760lm	230V		4	Complete with driver



Reading LED Lamps



61108/W/V

61108 | 5,5W | SMD LED | Dimmable | Aluminium

new

IP20

LED BUILT IN

85 CRI

3-STEP DIMMABLE

ADJUSTABLE


CCT V

CE

2 YEAR



61108/B/V





61110/W/W

61110 | 5W | SMD LED | Dimmable | ABS

new

IP20

LED BUILT IN

80 CRI

3-STEP DIMMABLE


ADJUSTABLE

CE

2 YEAR



61110/B/W





61110A/W

61110A | 10W | MR16 | GU10 | ABS

new

IP20


ADJUSTABLE

CE

5 YEAR



61110A/B



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61108/W/V	White	CCT V	3000K-4000K- 6500K	5,5W	300lm	230V / 12V		8	With EU plug
61108/B/V	Black	CCT V	3000K-4000K-6500K	5,5W	300lm	230V / 12V		8	With EU plug
61110/W/W	White	Warm white	3000K	5W	200lm	230V / 12V		12	With EU plug
61110/B/W	Black	Warm white	3000K	5W	200lm	230V / 12V		12	With EU plug
61110A/W	White	-	-	10W	-	100-240V		12	With EU plug
61110A/B	Black	-	-	10W	-	100-240V		12	With EU plug

The LED Linear Range



38248M | 48W | SMD 2835 | Aluminium + Plastic

LED BUILT IN

80 CRI

CE


2 YEAR

IP20



Optional suspension kit.
Order code 050090.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38248M/W/W	White	Warm white	3000K	48W	4200lm	230V		8	Complete with driver



The LED Linear Range
CCT V




38225M | 25W | SMD 2835 | Aluminium + Plastic

LED BUILT IN · 80 CRI · CCT V · CE · 2 YEAR · new · IP20



Optional suspension kit.
Order code 050090.

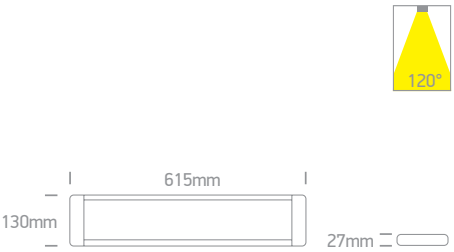



38248M | 48W | SMD 2835 | Aluminium + Plastic

LED BUILT IN · 80 CRI · CCT V · CE · 2 YEAR · new · IP20



Optional suspension kit.
Order code 050090.





38250M | 50W | SMD 2835 | Aluminium + Plastic

LED BUILT IN · 80 CRI · CCT V · CE · 2 YEAR · new · IP20



Optional suspension kit.
Order code 050090.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
38225M/W/V	White	CCT V	3000K-4000K-6500K	25W	2250lm	120°	230V	⏚	8	Complete with driver
38248M/W/V	White	CCT V	3000K-4000K-6500K	48W	4320lm	120°	230V	⏚	6	Complete with driver
38250M/W/V	White	CCT V	3000K-4000K-6500K	50W	4500lm	120°	230V	⏚	6	Complete with driver

LED Linear Floating Light





38148N/C

38148N | 48W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI

CE


2 YEAR

IP20




38148N/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38148N/C	White	Cool white	4000K	48W	4800lm	230V		4	Complete with driver
38148N/W	White	Warm white	3000K	48W	4800lm	230V		4	Complete with driver

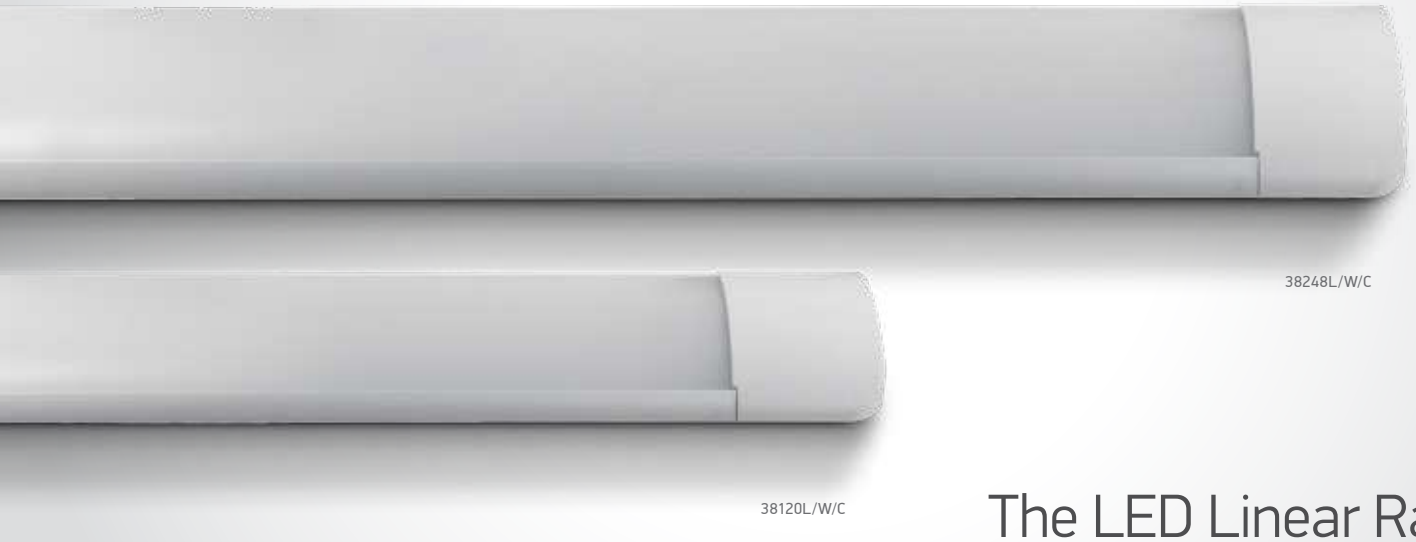

38248L/W/C

38120L/W/C

The LED Linear Range



38120L | 20W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI


CE

2 YEAR

IP20



Optional suspension kit.
Order code 050090.





38135L | 35W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI


CE

2 YEAR

IP20



Optional suspension kit.
Order code 050090.

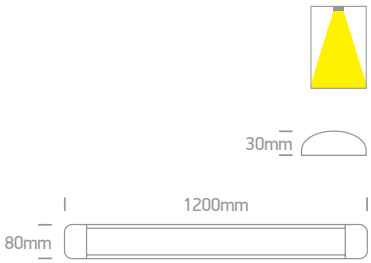



38248L | 48W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI


CE

2 YEAR

IP20



Optional suspension kit.
Order code 050090.

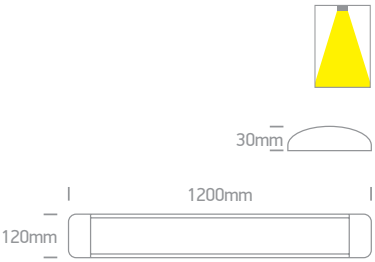

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38120L/W/C	White	Cool white	4000K	20W	1800lm	230V		12	Complete with driver
38120L/W/W	White	Warm white	3000K	20W	1700lm	230V		12	Complete with driver
38135L/W/C	White	Cool white	4000K	35W	3100lm	230V		12	Complete with driver
38135L/W/W	White	Warm white	3000K	35W	3000lm	230V		12	Complete with driver
38248L/W/C	White	Cool white	4000K	48W	4300lm	230V		12	Complete with driver
38248L/W/W	White	Warm white	3000K	48W	4200lm	230V		12	Complete with driver



LED Linear Profiles
Medium size




38150B | 40W | 48LEDs | Linear system | Aluminium


Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · UGR17 · DARK LIGHT · IP20





DALI DRIVER Page 763





38150C | 40W | 24LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · UGR19 · IP20





DALI DRIVER Page 763





38150BU | 40W + 20W Uplight | 48LEDs + Diffuser | Linear system | Aluminium


Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · UGR17 · DARK LIGHT · IP20






DALI DRIVER Page 763



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38150B/W/C	White	Cool white	4000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/W/W	White	Warm white	3000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/B/C	Black	Cool white	4000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/B/W	Black	Warm white	3000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150C/W/C	White	Cool white	4000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150C/W/W	White	Warm white	3000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150C/B/W	Black	Warm white	3000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150BU/W/C	White	Cool white	4000K	40W-20W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 1000mA + 500mA drivers
38150BU/W/W	White	Warm white	3000K	40W-20W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 1000mA + 500mA drivers
38150BU/B/C	Black	Cool white	4000K	40W-20W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 1000mA + 500mA drivers
38150BU/B/W	Black	Warm white	3000K	40W-20W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 1000mA + 500mA drivers

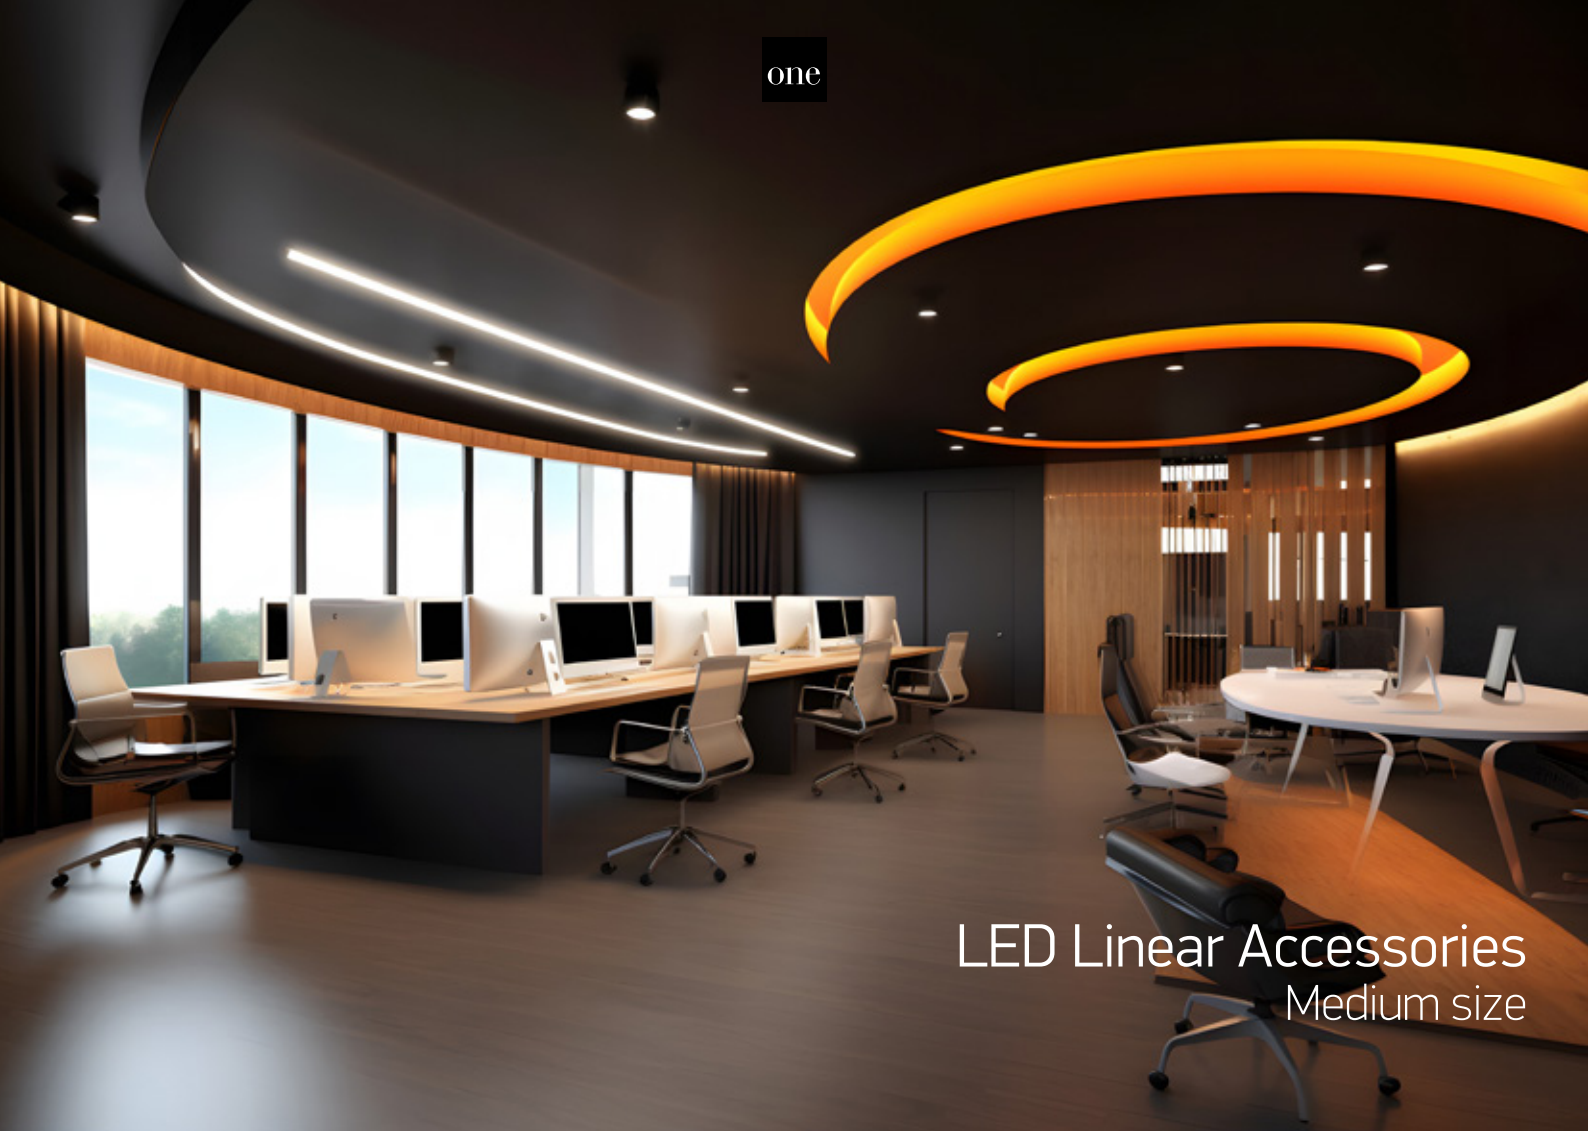

LED Linear Accessories
Medium size



38150E/W

38150E | 1m Profile for 38150A, 38150B, 38150BU, 38150C & 38151A

Can be connected in line.

5 YEAR

12

IP20



38150E/B



Complete with 4pcs fixing clips & 4pcs connectors.





050170C/W

050170C | Corner for 38150A, 38150B, 38150BU, 38150C & 38151A


5 YEAR

2

IP20



050170C/B





050170 | 3m Suspension kit for 38150A, 38150B, 38150BU, 38150C, 38151A, 38160A & 38161A

1



LED Linear Profiles
Medium size



38150A | 40W | SMD 2835 | Linear system | Diffuser | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI CE 3 YEAR

UGR19

IP20



Complete with 4pcs fixing clips & 4pcs connectors.

DALI DRIVER Page 763







38151A/W/W

38151A | 50W | SMD 2835 | Linear system | Diffuser | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI CE 3 YEAR

UGR19

IP20



38151A/B/C



Complete with 4pcs fixing clips & 4pcs connectors.

DALI DRIVER Page 763





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38150A/W/C	White	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38150A/W/W	White	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38151A/W/W	White	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38151A/B/C	Black	Cool white	4000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38151A/B/W	Black	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver



LED Linear Accessories
Medium size



050170D/W/W


050170D | 8W | SMD 2835 | Corner for 38150A & 38151A | Diffuser | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · UGR19 · IP20



050170D/B/W







38150E/W

38150E | 1m Profile for 38150A, 38150B, 38150BU, 38150C & 38151A

Can be connected in line.

CE · 5 YEAR · 12 · IP20



38150E/B



Complete with 4pcs fixing clips & 4pcs connectors.






050170C/W

050170C | Corner for 38150A, 38150B, 38150BU, 38150C & 38151A

CE · 5 YEAR · 2 · IP20



050170C/B





050170 | 3m Suspension kit for 38150A, 38150B, 38150BU, 38150C, 38151A, 38160A & 38161A

CE · 1

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
050170D/W/C	White	Cool white	4000K	8W	680lm	230V	☐	150cm	10	Complete with 250mA driver
050170D/W/W	White	Warm white	3000K	8W	680lm	230V	☐	150cm	10	Complete with 250mA driver
050170D/B/C	Black	Cool white	4000K	8W	680lm	230V	☐	150cm	10	Complete with 250mA driver
050170D/B/W	Black	Warm white	3000K	8W	680lm	230V	☐	150cm	10	Complete with 250mA driver



LED Linear Profiles
Large size


38160A/W/W

38160A | 40W | SMD 2835 | Linear system | Diffuser | Aluminium

Can be connected in line.

LED BUILT IN | 90 CRI | CE | 3 YEAR | UGR19 | IP20


38160A/B/W


Complete with 4pcs fixing clips & 4pcs connectors.

DALI DRIVER Page 763






38161A/W/C

38161A | 50W | SMD 2835 | Linear system | Diffuser | Aluminium

Can be connected in line.

LED BUILT IN | 90 CRI | CE | 3 YEAR | UGR19 | IP20


38161A/B/C


Complete with 5pcs fixing clips & 4pcs connectors.

DALI DRIVER Page 763








050170 | 3m Suspension kit for 38150A, 38150B, 38150BU, 38150C, 38151A, 38160A & 38161A

CE | 1

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38160A/W/C	White	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38160A/W/W	White	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38160A/B/C	Black	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38160A/B/W	Black	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38161A/W/C	White	Cool white	4000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38161A/W/W	White	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38161A/B/C	Black	Cool white	4000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38161A/B/W	Black	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver



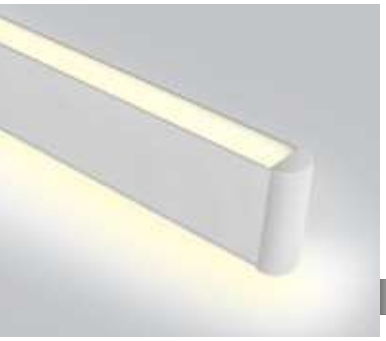

38140AU | 40W Downlight + Uplight | SMD 2835 | Linear suspended | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



Complete with 3m suspension kit.





38140AU | 40W Downlight + Uplight | SMD 2835 | Linear suspended | Aluminium


LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



Complete with 3m suspension kit.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38140AU/W/C	White	Cool white	4000K	40W	3600lm	230V		12	Complete with 900mA driver
38140AU/W/W	White	Warm white	3000K	40W	3600lm	230V		12	Complete with 900mA driver
38140AU/B/C	Black	Cool white	4000K	40W	3600lm	230V		12	Complete with 900mA driver
38140AU/B/W	Black	Warm white	3000K	40W	3600lm	230V		12	Complete with 900mA driver

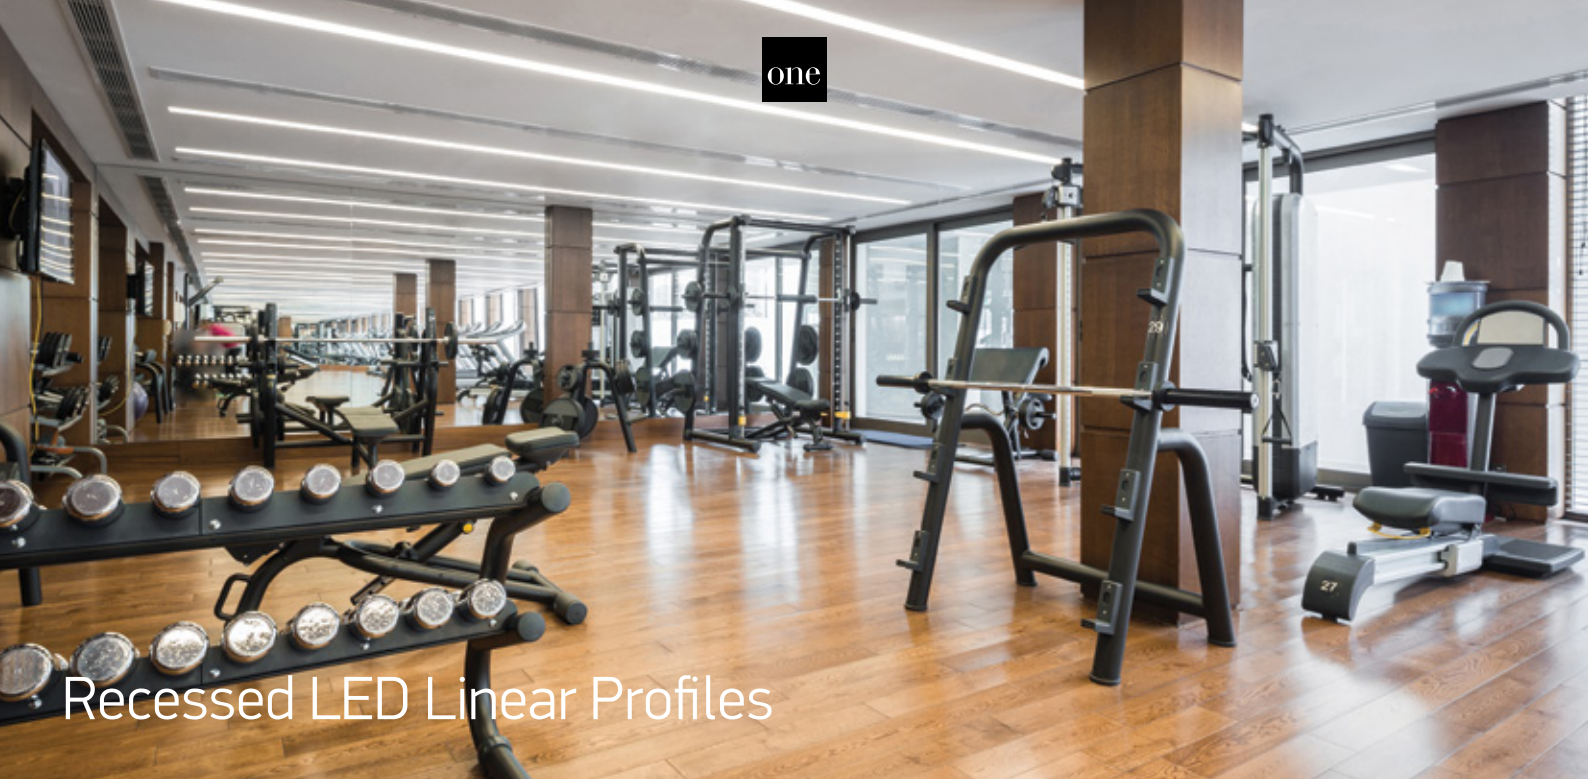

Recessed LED Linear Profiles



38152R/W/C

38152R | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20




38152R/B/W



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

DALI DRIVER Page 763





38152RC/W/C

38152RC | 8W | SMD 2835 | Corner for 38152R | Aluminium


LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



38152RC/W/W



Complete with 4pcs fixing clips & 4pcs connectors.





38152RL/W/C

38152RL | 10W | SMD 2835 | Ceiling to wall corner for 38152R | Aluminium


LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



38152RL/W/W



Complete with 4pcs fixing clips & 4pcs connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38152R/W/C	White	Cool white	4000K	40W	3600lm	120°	230V		1200x60mm	80mm	12	Complete with 1000mA driver
38152R/W/W	White	Warm white	3000K	40W	3600lm	120°	230V		1200x60mm	80mm	12	Complete with 1000mA driver
38152R/B/W	Black	Warm white	3000K	40W	3600lm	120°	230V		1200x60mm	80mm	12	Complete with 1000mA driver
38152RC/W/C	White	Cool white	4000K	8W	720lm	120°	230V		160x160x60mm	80mm	10	Complete with 200mA driver
38152RC/W/W	White	Warm white	3000K	8W	720lm	120°	230V		160x160x60mm	80mm	10	Complete with 200mA driver
38152RL/W/C	White	Cool white	4000K	10W	900lm	120°	230V		100x100x60mm	80mm	6	Complete with 200mA driver
38152RL/W/W	White	Warm white	3000K	10W	900lm	120°	230V		100x100x60mm	80mm	6	Complete with 200mA driver



UGR19 Recessed LED Linear Profiles



38145AR | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.


LED BUILT IN | 90 CRI | CE | 3 YEAR | UGR19 | IP20





Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

DALI DRIVER Page 763





38145AR | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.


LED BUILT IN | 90 CRI | CE | 3 YEAR | UGR19 | IP20





Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

DALI DRIVER Page 763





38150AR | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.


LED BUILT IN | 90 CRI | CE | 3 YEAR | UGR19 | IP20





Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

DALI DRIVER Page 763



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
38145AR/W/C	White	Cool white	4000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/W/W	White	Warm white	3000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/B/C	Black	Cool white	4000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/B/W	Black	Warm white	3000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38150AR/W/C	White	Cool white	4000K	40W	3600lm	230V		1200x68mm	80mm	12	Complete with 1000mA driver
38150AR/W/W	White	Warm white	3000K	40W	3600lm	230V		1200x68mm	80mm	12	Complete with 1000mA driver



38150BR/B/C

Recessed LED Linear Profiles



38150BR/W/C

38150BR | 40W | SMD 3030 | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI

CE

3 YEAR

UGR17

DARK LIGHT

IP20




38150BR/B/C



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

DALI DRIVER
Page 763





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38150BR/W/C	White	Cool white	4000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/W/W	White	Warm white	3000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/B/C	Black	Cool white	4000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/B/W	Black	Warm white	3000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver



The Office Floor Stand Range
Aluminium



36002/W/C


36002 | 60W | LED | Touch switch | Aluminium — EU Plug.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 3 YEAR · UGR17 · IP20



36002/B/C







36004/W/C


36004 | 75W | LED | Touch switch | Aluminium — EU Plug.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 3 YEAR · UGR15 · DARK LIGHT · IP20



36004/B/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
36002/W/C	White	Cool white	4000K	60W	8000lm	230V		1	Complete with 2x700mA drivers
36002/B/C	Black	Cool white	4000K	60W	8000lm	230V		1	Complete with 2x700mA drivers
36004/W/C	White	Cool white	4000K	75W	9700lm	230V		1	Complete with 700mA +1200mA drivers
36004/B/C	Black	Cool white	4000K	75W	9700lm	230V		1	Complete with 700mA + 1200mA drivers



www.1-light.eu



Wall & Ceiling

Pages 363-410

12





12105F/W

12105F | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20


CE 5 YEAR



12105F/BBS



12105F/MG





12105L/W

12105L | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20


CE 5 YEAR



12105L/BBS



12105L/DC



Order Code	Colour	Watts	Input	Class		Notes
12105F/W	White	10W	100-240V		30	-
12105F/BBS	Brushed brass	10W	100-240V		30	-
12105F/MG	Metal grey	10W	100-240V		30	-
12105L/W	White	10W	100-240V		30	-
12105L/BBS	Brushed brass	10W	100-240V		30	-
12105L/DC	Dark chrome	10W	100-240V		30	-



12105K/DC

12105J/CU

12105L/DC

The Decorative Cylinders
Aluminium



12105J | 10W | MR16 | GU10 | Aluminium


DARK LIGHT

IP20

CE 5 YEAR



Suitable for GU10 LED lamp.





12105K/BBS

12105K | 10W | MR16 | GU10 | Aluminium


DARK LIGHT

IP20

CE 5 YEAR



Suitable for GU10 LED lamp.





12105K/DC

12105K | 10W | MR16 | GU10 | Aluminium


DARK LIGHT

IP20

CE 5 YEAR



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12105J/CU	Copper	10W	100-240V		30	-
12105K/BBS	Brushed brass	10W	100-240V		30	-
12105K/DC	Dark chrome	10W	100-240V		30	-




The Decorative Cylinders
Aluminium


12105H/BS

12105H | 10W | MR16 | GU10 | Aluminium

IP20


Suitable for GU10 LED lamp.





12105H/DC


12105H | 10W | MR16 | GU10 | Aluminium

IP20


Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12105H/BS	Brass	10W	100-240V		30	-
12105H/DC	Dark chrome	10W	100-240V		30	-

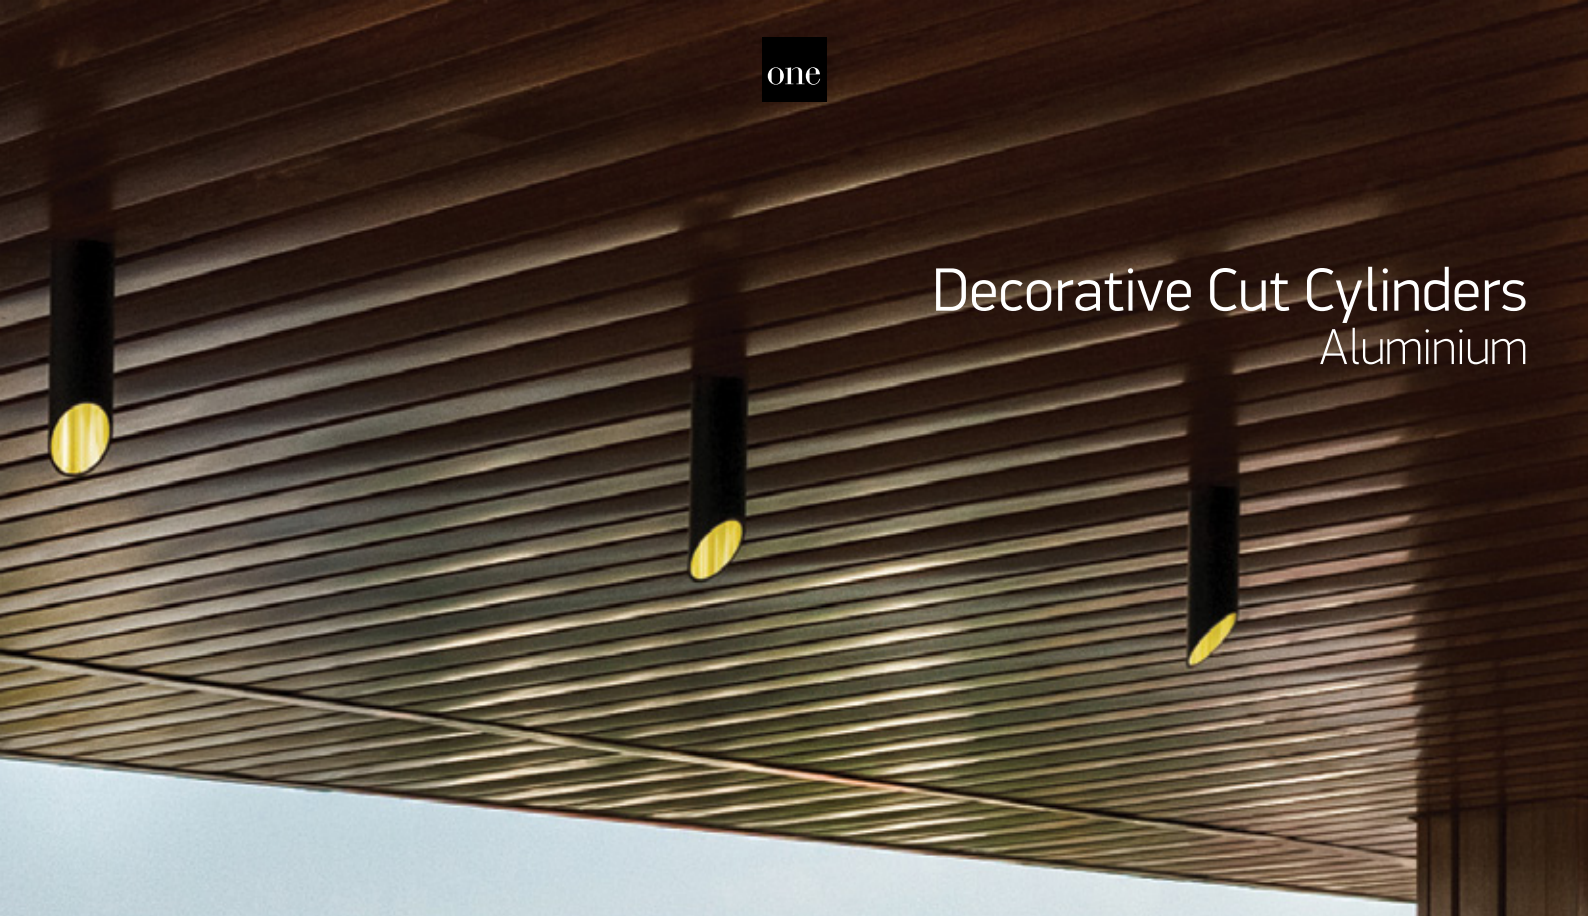


Decorative Cut Cylinders
Aluminium



12105E1 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20





12105E2/B/GL


12105E2 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20



12105E2/W/B







12105E3 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT


IP20



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105E1/B/GL	Black	Gold	10W	100-240V		20	-
12105E2/W/B	White	Black	10W	100-240V		20	-
12105E2/B/GL	Black	Gold	10W	100-240V		20	-
12105E3/W/B	White	Black	10W	100-240V		20	-

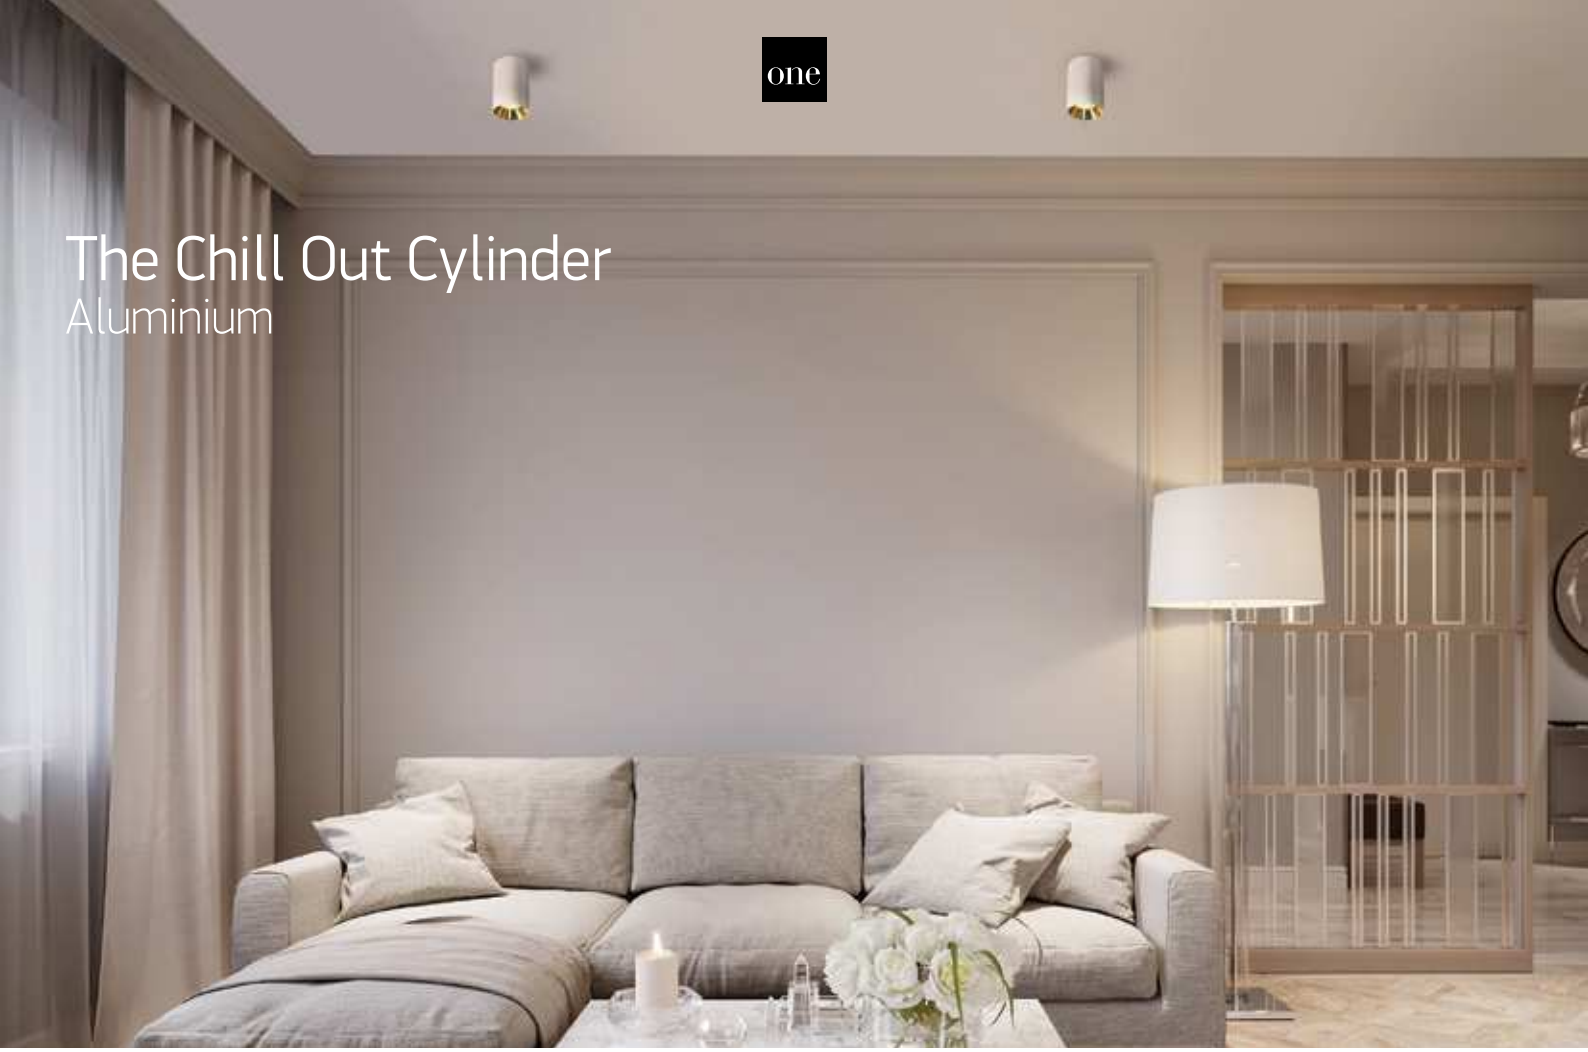

The Chill Out Cylinder
Aluminium

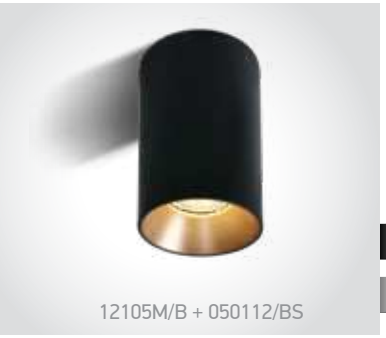

12105M/B + 050112/BS


12105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.


DARK LIGHT

IP20

CE 5 YEAR



12105M/W + 050112/B





12105M/BBS + 050112/B

12105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.


DARK LIGHT

IP20

CE 5 YEAR




12105M/MG + 050112/B






050112/W White



050112/B Black



050112/G Grey




050112/BS Brass




050112/ABS Antique brass



050112/GL Gold



050112/CU Copper



050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
12105M/W	White	10W	100-240V		20	-
12105M/B	Black	10W	100-240V		20	-
12105M/BBS	Brushed brass	10W	100-240V		20	-
12105M/MG	Metal grey	10W	100-240V		20	-



The Chill Out Cylinder
Aluminium


12105MA/W + 050112/GL

12105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

5 YEAR


12105MA/B + 050112/BS




12105MA/MG + 050112/B

12105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

5 YEAR



12105MA/BBS + 050112/B





050112/W White


050112/B Black



050112/G Grey


050112/BS Brass


050112/ABS Antique brass


050112/GL Gold


050112/CU Copper


050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
12105MA/W	White	10W	100-240V		20	-
12105MA/B	Black	10W	100-240V		20	-
12105MA/BBS	Brushed brass	10W	100-240V		20	-
12105MA/MG	Metal grey	10W	100-240V		20	-

The GU10 Dark Light
Aluminium





12105N/W

12105N | 10W | MR16 | GU10 | Aluminium


DARK LIGHT

IP20

CE 5 YEAR



12105N/B





12105N/BBS

12105N | 10W | MR16 | GU10 | Aluminium


DARK LIGHT

IP20

CE 5 YEAR



12105N/MG



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105N/W	White	Black	10W	100-240V		36	-
12105N/B	Black	Brass	10W	100-240V		36	-
12105N/BBS	Brushed brass	Black	10W	100-240V		36	-
12105N/MG	Metal grey	Black	10W	100-240V		36	-



The GU10 Dark Light
Aluminium


12105NA/W


12105NA | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20


12105NA/B




12205NA/W


12205NA | 2x10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20


12205NA/B



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105NA/W	White	Black	10W	100-240V	⏚	36	-
12105NA/B	Black	Brass	10W	100-240V	⏚	36	-
12205NA/W	White	Black	2x10W	100-240V	⏚	24	-
12205NA/B	Black	Brass	2x10W	100-240V	⏚	24	-




GU10 Decorative Cylinders
Aluminium




12105T/W

12105T | 10W | MR16 | GU10 | Aluminium

IP20




12105T/B






12205T | 2x10W | MR16 | GU10 | Aluminium

IP20



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105T/W	White	Brass	10W	100-240V		20	-
12105T/B	Black	Brass	10W	100-240V		20	-
12205T/B	Black	Brass	2x10W	100-240V		20	-

GU10 Decorative Cubes
Aluminium

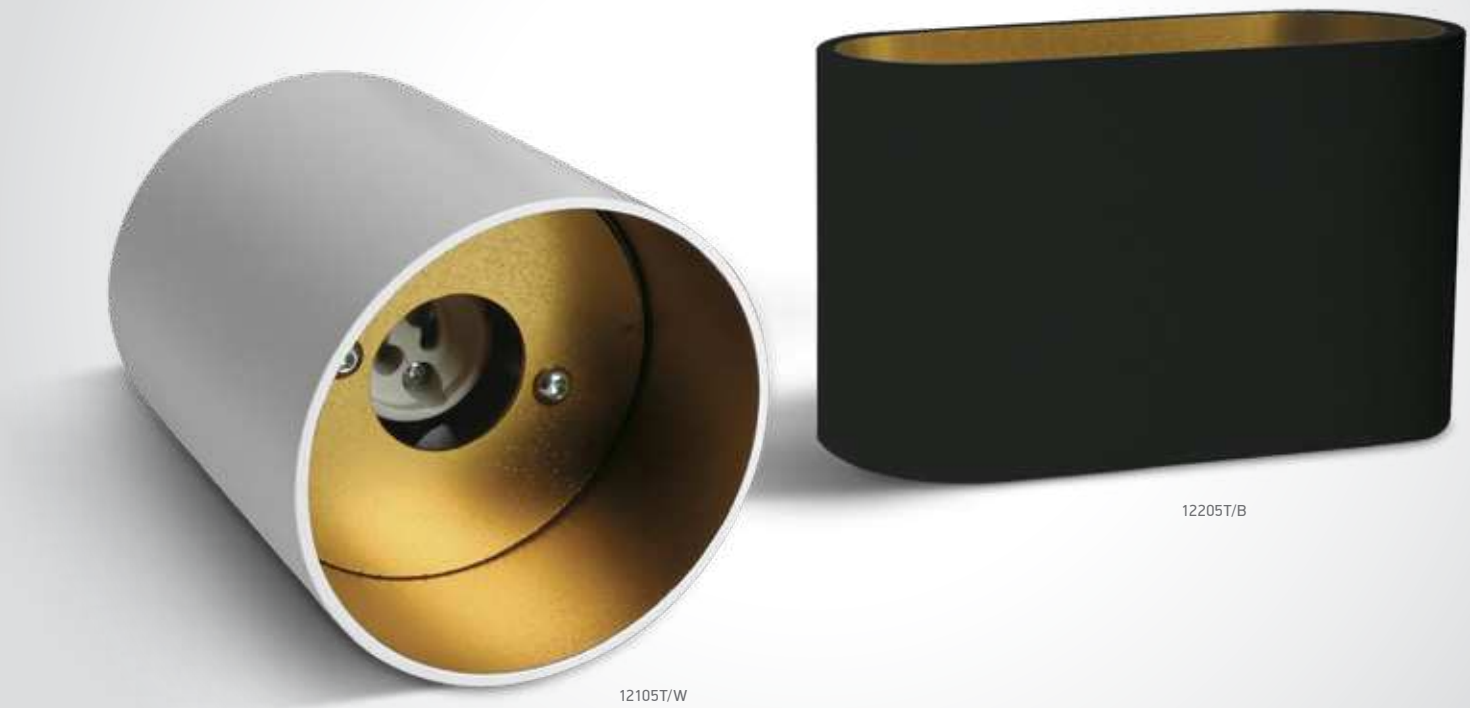

12105T/W

12205T/B




12105TA/W

12105TA | 10W | MR16 | GU10 | Aluminium




12105TA/B





12205TA | 2x10W | MR16 | GU10 | Aluminium



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105TA/W	White	Brass	10W	100-240V		20	-
12105TA/B	Black	Brass	10W	100-240V		20	-
12205TA/W	White	Brass	2x10W	100-240V		20	-

The GU10 & G9 Ceiling Lights




12132 | 10W | MR16 | GU10 | Natural aluminium

IP20 offer

CE 5 YEAR



Suitable for GU10 LED lamp.






12126 | 10W | MR16 | GU10 | Natural aluminium

IP20 offer

CE 5 YEAR



Suitable for GU10 LED lamp.






12124 | 10W | MR16 | GU10 | Natural aluminium

IP20 offer

CE 5 YEAR



Suitable for GU10 LED lamp.





12134/AL


12134 | 10W | MR16 | GU10 | Natural aluminium

IP20 offer

CE 5 YEAR



12134/B






12120 | 25W | G9 | Natural aluminium

IP20 offer

CE 5 YEAR



Suitable for G9 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12132/AL	Aluminium	10W	100-240V		50	-
12126/AL	Aluminium	10W	100-240V		20	-
12124/AL	Aluminium	10W	100-240V		12	-
12134/B	Black	10W	100-240V		20	-
12134/AL	Aluminium	10W	100-240V		20	-
12120/AL	Aluminium	25W	100-240V		4	-



The Dark Light Cylinders
Aluminium

12105E | 10W | MR16 | GU10 | Aluminium



12105E/W


DARK LIGHT

IP20

5 YEAR



12105E/B



12105AL | 10W | MR16 | GU10 | Aluminium




12105AL/W/B

DARK LIGHT

IP20

5 YEAR



12105AL | 10W | MR16 | GU10 | Aluminium



12105AL/B/B


DARK LIGHT

IP20

5 YEAR



12105AL/B/GL



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105E/W	White	-	10W	100-240V		20	-
12105E/B	Black	-	10W	100-240V		20	-
12105AL/W/B	White	Black	10W	100-240V		20	-
12105AL/B/B	Black	Black	10W	100-240V		20	-
12105AL/B/GL	Black	Gold	10W	100-240V		20	-



The GU10 Ceiling Lights
Square



12105AC/W

12105AC | 10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

IP20



Suitable for GU10 LED lamp.





12105AC/B

12105AC | 10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

IP20



Suitable for GU10 LED lamp.





12105AC/AL

12105AC | 10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

IP20



Suitable for GU10 LED lamp.





12105B | 10W | MR16 | GU10 | Natural aluminium

ADJUSTABLE


5 YEAR

IP20

offer



Suitable for GU10 LED lamp.

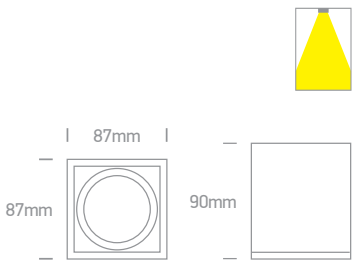

Order Code	Colour	Watts	Input	Class		Notes
12105AC/W	White	10W	100-240V		10	-
12105AC/B	Black	10W	100-240V		10	-
12105AC/AL	Aluminium	10W	100-240V		10	-
12105B/AL	Aluminium	10W	100-240V		20	-



The GU10 Ceiling Lights
Round



12105AB/W

12105AB | 10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

IP20



Suitable for GU10 LED lamp.





12105AB/B

12105AB | 10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

IP20




Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12105AB/W	White	10W	100-240V	⏚	20	-
12105AB/B	Black	10W	100-240V	⏚	20	-

The GU10 Adjustable Cylinders
Aluminium

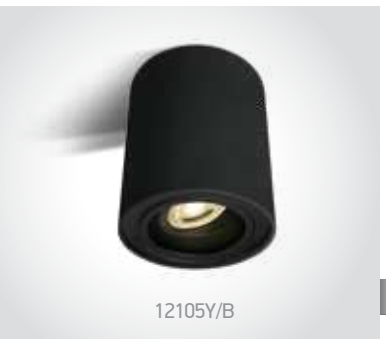

12105Y/B

12105Y | 10W | MR16 | GU10 | Aluminium


ADJUSTABLE

CE 5 YEAR

IP20



12105Y/W





12205Y/B

12205Y | 2x10W | MR16 | GU10 | Aluminium


ADJUSTABLE

CE 5 YEAR

IP20



12205Y/W



Order Code	Colour	Watts	Input	Class		Notes
12105Y/W	White	10W	100-240V		20	-
12105Y/B	Black	10W	100-240V		20	-
12205Y/W	White	2x10W	100-240V		20	-
12205Y/B	Black	2x10W	100-240V		20	-



The GU10 Adjustable Cubes
Aluminium


12105YA/B


12105YA | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20


12105YA/W




12205YA/B


12205YA | 2x10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20


12205YA/W



Order Code	Colour	Watts	Input	Class		Notes
12105YA/W	White	10W	100-240V		20	-
12105YA/B	Black	10W	100-240V		20	-
12205YA/W	White	2x10W	100-240V		20	-
12205YA/B	Black	2x10W	100-240V		20	-



12138G/W

Adjustable Ceiling Lights



12142 | 15W | R111 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.





12138G/W

12138G | 75W | R111 | GU10 | Die cast

ADJUSTABLE


5 YEAR

IP20

offer



Suitable for R111 LED lamp.





12138G/B

12138G | 75W | R111 | GU10 | Die cast

ADJUSTABLE


5 YEAR

IP20

offer



Suitable for R111 LED lamp.





12138G/G

12138G | 75W | R111 | GU10 | Die cast

ADJUSTABLE


5 YEAR

IP20

offer



Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12142/W	White	15W	100-240V		20	-
12138G/W	White	75W	100-240V		32	-
12138G/B	Black	75W	100-240V		32	-
12138G/G	Grey	75W	100-240V		32	-



R111 GU10 Ceiling Lights

12144 | 15W | R111 | GU10 | Aluminium




12144/B

IP20




12144/W



12144A | 15W | R111 | GU10 | Aluminium



IP20



Order Code	Colour	Watts	Input	Class		Notes
12144/W	White	15W	100-240V		20	-
12144/B	Black	15W	100-240V		20	-
12144A/B	Black	15W	100-240V		20	-

The R111 GU10 Spots
Natural aluminium





62310A | 3x75W | R111 | GU10 | Natural aluminium






IP20

offer



Suitable for R111 LED lamp.

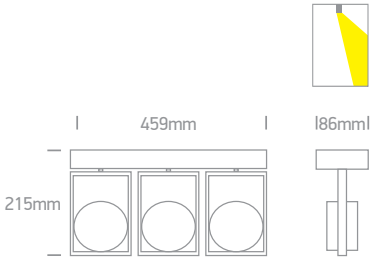

Order Code	Colour	Watts	Input	Class		Notes
62310A/AL	Aluminium	3x75W	100-240V	⏚	4	-

The Retro Square GU10 Spots



65105NB/W

65105NB | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Suitable for GU10 LED lamp.





65105NB/B

65105NB | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



Suitable for GU10 LED lamp.




Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NB/W	White	Black	10W	100-240V		12	-
65105NB/B	Black	Brass	10W	100-240V		12	-


65105N/B

65105N | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR


65105N/W





65205N/B

65205N | 2x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR


65205N/W





65305N/B

65305N | 3x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR


65305N/W





65405N/B

65405N | 4x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR


65405N/W





65505N/B

65505N | 5x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR


65505N/W

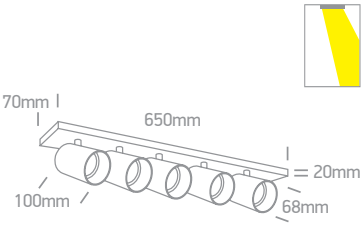

Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105N/W	White	Black	10W	100-240V		12	-
65105N/B	Black	Brass	10W	100-240V		12	-
65205N/W	White	Black	2x10W	100-240V		6	-
65205N/B	Black	Brass	2x10W	100-240V		6	-
65305N/W	White	Black	3x10W	100-240V		6	-
65305N/B	Black	Brass	3x10W	100-240V		6	-
65405N/W	White	Black	4x10W	100-240V		6	-
65405N/B	Black	Brass	4x10W	100-240V		6	-
65505N/W	White	Black	5x10W	100-240V		6	-
65505N/B	Black	Brass	5x10W	100-240V		6	-

The Retro GU10 Spots


65105N/BBS

65105N | 10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

DARK LIGHT

IP20


65105N/MG




65205N/BBS

65205N | 2x10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

DARK LIGHT

IP20


65205N/MG




65305N/BBS

65305N | 3x10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

DARK LIGHT

IP20


65305N/MG




65405N/BBS

65405N | 4x10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

DARK LIGHT

IP20


65405N/MG




65505N/BBS

65505N | 5x10W | MR16 | GU10 | Aluminium


ADJUSTABLE

5 YEAR

DARK LIGHT

IP20


65505N/MG

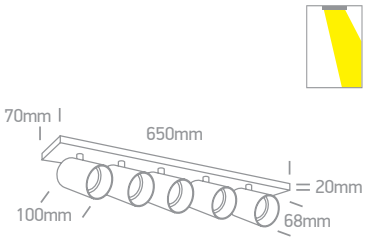

Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105N/BBS	Brushed brass	Black	10W	100-240V		12	-
65105N/MG	Metal grey	Black	10W	100-240V		12	-
65205N/BBS	Brushed brass	Black	2x10W	100-240V		6	-
65205N/MG	Metal grey	Black	2x10W	100-240V		6	-
65305N/BBS	Brushed brass	Black	3x10W	100-240V		6	-
65305N/MG	Metal grey	Black	3x10W	100-240V		6	-
65405N/BBS	Brushed brass	Black	4x10W	100-240V		6	-
65405N/MG	Metal grey	Black	4x10W	100-240V		6	-
65505N/BBS	Brushed brass	Black	5x10W	100-240V		6	-
65505N/MG	Metal grey	Black	5x10W	100-240V		6	-



Decorative Directional Spots
GU10



12105E4/W

12105E4 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE 5 YEAR

DARK LIGHT


IP20




Suitable for 7306CG GU10 LED lamp.



Complete with Black & Brass reflectors.



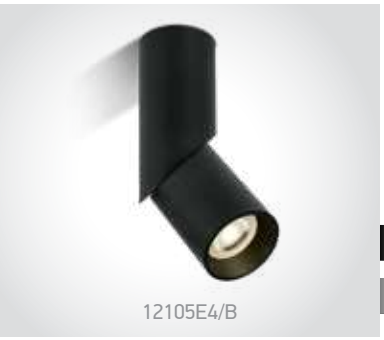

12105E4/B

12105E4 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE 5 YEAR

DARK LIGHT


IP20



Suitable for 7306CG GU10 LED lamp.



Complete with Black & Brass reflectors.





12105E6/W

12105E6 | 10W | MR16 | GU10 | Die cast

ADJUSTABLE 5 YEAR

DARK LIGHT


IP20




Suitable for 7306CG GU10 LED lamp.



Complete with Black & Brass reflectors.



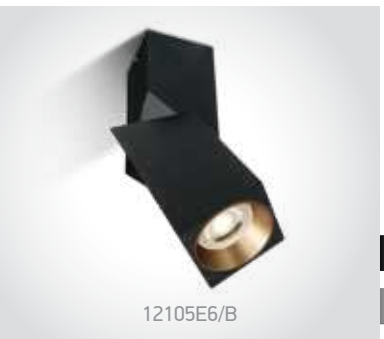

12105E6/B

12105E6 | 10W | MR16 | GU10 | Die cast

ADJUSTABLE 5 YEAR

DARK LIGHT


IP20




Suitable for 7306CG GU10 LED lamp.



Complete with Black & Brass reflectors.



Order Code	Colour	Watts	Input	Class		Notes
12105E4/W	White	10W	100-240V		30	-
12105E4/B	Black	10W	100-240V		30	-
12105E6/W	White	10W	100-240V		30	-
12105E6/B	Black	10W	100-240V		30	-

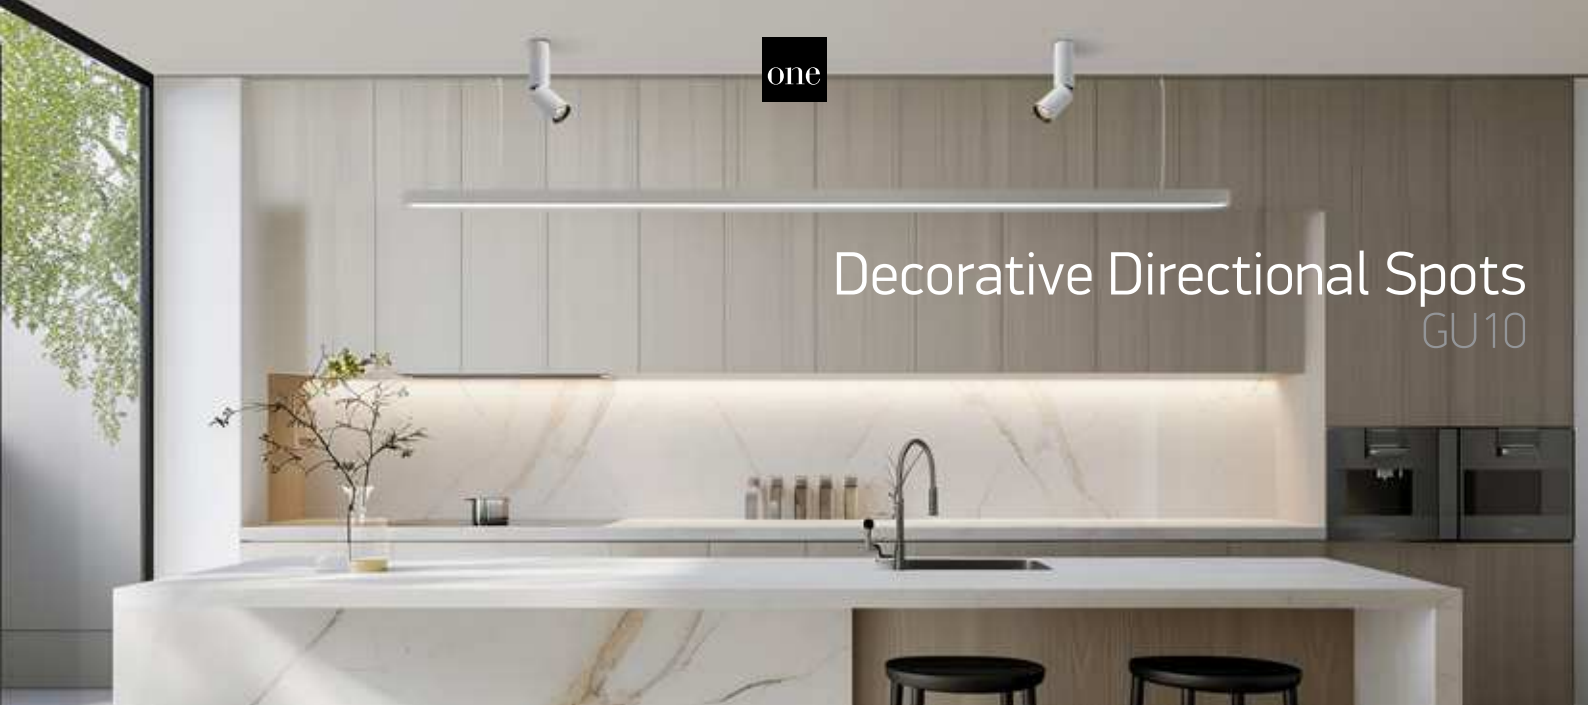

Decorative Directional Spots
GU10

65105E | 10W | MR16 | GU10 | Aluminium

Complete with black & brass reflectors.



65105E/W

ADJUSTABLE

5 YEAR


DARK LIGHT

IP20



65105E/B

65105E/CH



65205E | 2x10W | MR16 | GU10 | Aluminium

Complete with black & brass reflectors.



65205E/W

ADJUSTABLE

5 YEAR


DARK LIGHT

IP20



65205E/B

65205E/CH



65105EA | 10W | MR16 | GU10 | Aluminium

Complete with black & brass reflectors.



65105EA/W

ADJUSTABLE

5 YEAR


DARK LIGHT

IP20




65105EA/B

65105EA/CH



Order Code	Colour	Watts	Input	Class		Notes
65105E/W	White	10W	100-240V		20	-
65105E/B	Black	10W	100-240V		20	-
65105E/CH	Champagne	10W	100-240V		20	-
65205E/W	White	2x10W	100-240V		12	-
65205E/B	Black	2x10W	100-240V		12	-
65205E/CH	Champagne	2x10W	100-240V		12	-
65105EA/W	White	10W	100-240V		20	-
65105EA/B	Black	10W	100-240V		20	-
65105EA/CH	Champagne	10W	100-240V		20	-

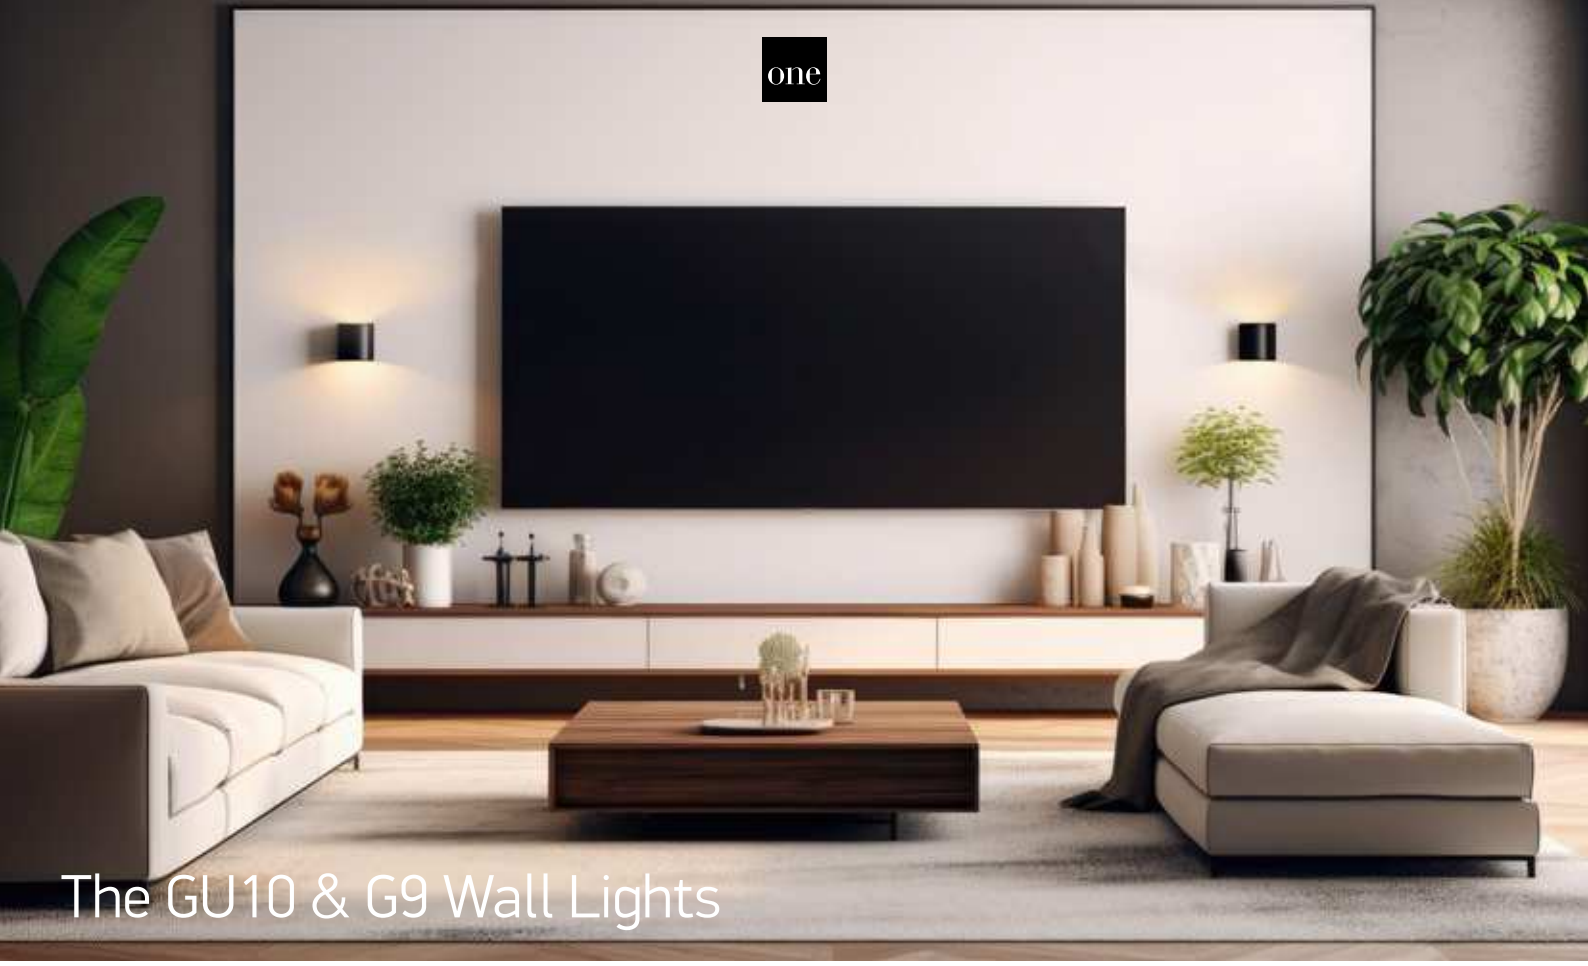

The GU10 & G9 Wall Lights



6017G | 40W | G9 | Natural aluminium


IP20

offer

3 YEAR



Suitable for G9 LED lamp.





6022 | 2x10W | MR16 | GU10 | Natural aluminium


IP20

offer

3 YEAR



Suitable for GU10 LED lamps.





6005 | 10W | MR16 | GU10 | Die cast


IP20

offer

5 YEAR



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
6017G/AL	Aluminium	40W	100-240V		20	-
6022/AL	Aluminium	2x10W	100-240V		25	-
6005/G	Grey	10W	100-240V		20	-





G9 Decorative Wall Lights
Aluminium



60056 | 10W | G9 | Aluminium

IP20








6017 | 10W | G9 | Aluminium

IP20








6017A | 10W | G9 | Aluminium

IP20









6030 | 10W | G9 | Mirror reflector | Aluminium

IP20





Order Code	Colour	Reflector	Watts	Input	Class		Notes
60056/W	White	Brass	10W	100-240V		20	-
60056/B	Black	Brass	10W	100-240V		20	-
6017/W	White	Brass	10W	100-240V		20	-
6017/B	Black	Brass	10W	100-240V		20	-
6017A/W	White	Brass	10W	100-240V		20	-
6017A/B	Black	Brass	10W	100-240V		20	-
6030/W	White	White	10W	100-240V		20	-
6030/B	Black	Black	10W	100-240V		20	-

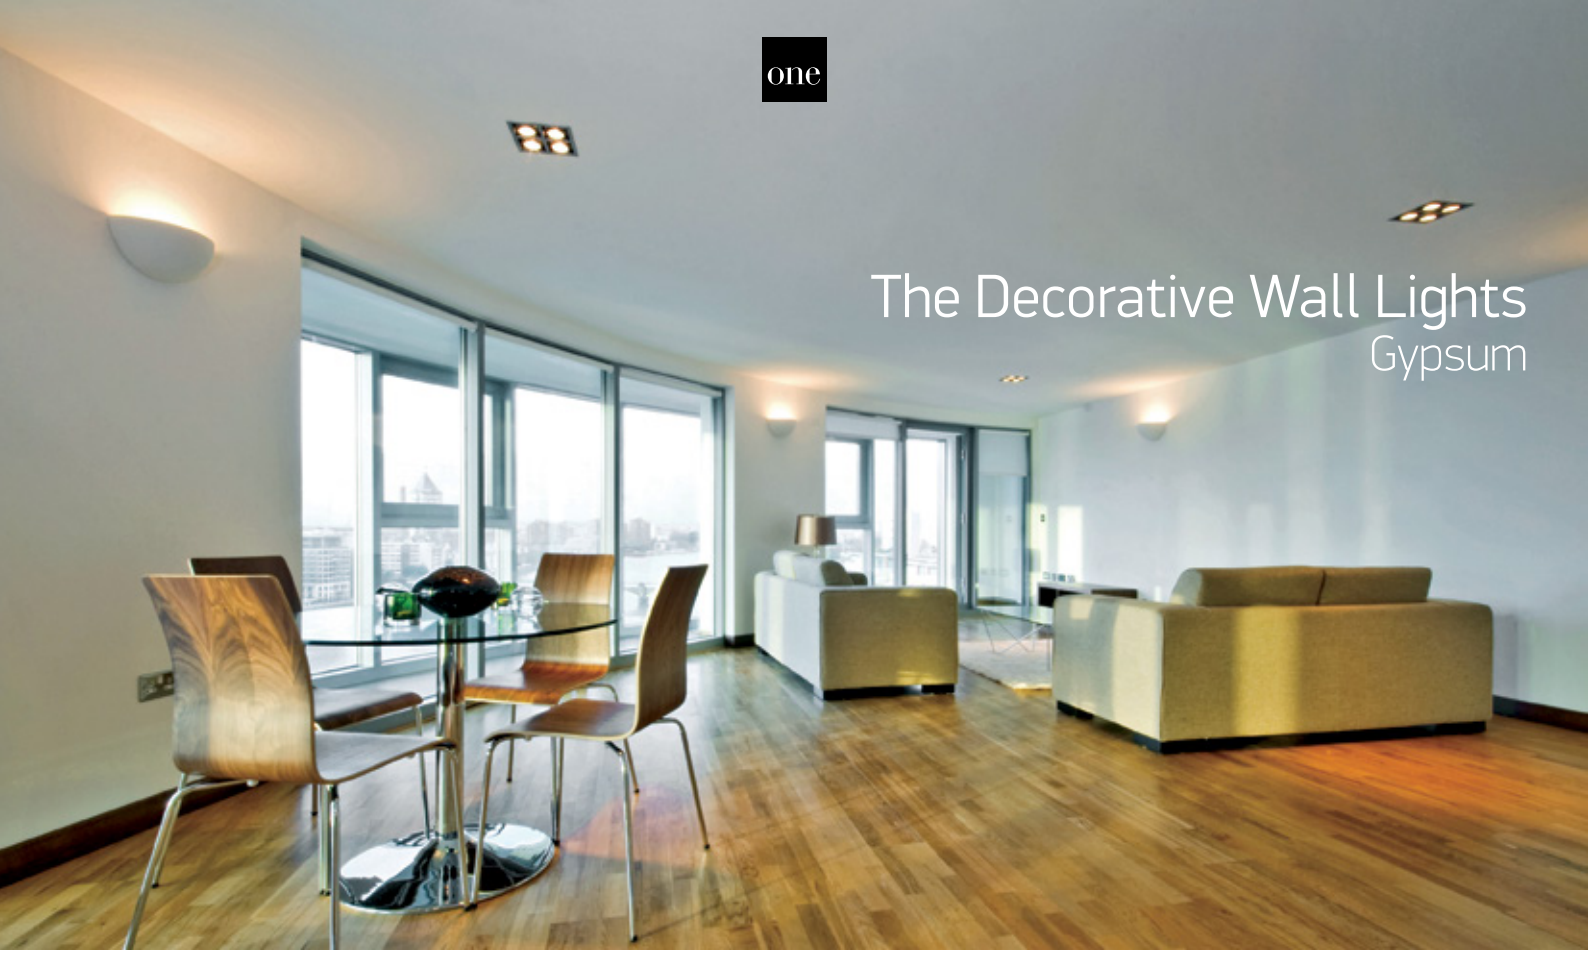

The Decorative Wall Lights
Gypsum




60038 | 20W | E27 | Gypsum

5 YEAR

IP20



Suitable for E27 LED lamp.






60040 | 10W | G9 | Gypsum


5 YEAR

IP20



Suitable for G9 LED lamp.



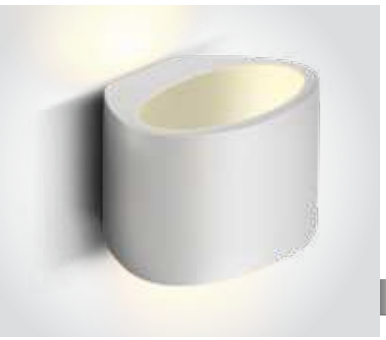


60042 | 10W | G9 | Gypsum

5 YEAR

IP20



Suitable for G9 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
60038	White	20W	100-240V		6	-
60040	White	10W	100-240V		18	-
60042	White	10W	100-240V		9	-



Indoor/Outdoor Wall Light



67518/W

67518 | 12W | E27 | ABS + PC











67518/AN

67518 | 12W | E27 | ABS + PC









Order Code	Colour	Watts	Input	Class		Notes
67518/W	White	12W	100-240V		10	-
67518/AN	Anthracite	12W	100-240V		10	-



The GU10 Outdoor Cylinder Lights
ABS + PC



67142A/W

67142A | 6W | MR16 | GU10 | ABS + PC

IK06

CE 3 YEAR


IP65



67142A/AN



67142A/B





67142B/W

67142B | 10W | MR16 | GU10 | ABS + PC

IK06

CE 3 YEAR


IP65



67142B/AN



67142B/B



Order Code	Colour	Watts	Input	Class		Notes
67142A/W	White	6W	100-240V	☐	20	-
67142A/AN	Anthracite	6W	100-240V	☐	20	-
67142A/B	Black	6W	100-240V	☐	20	-
67142B/W	White	10W	100-240V	☐	20	-
67142B/AN	Anthracite	10W	100-240V	☐	20	-
67142B/B	Black	10W	100-240V	☐	20	-



The GU10 Outdoor Cylinder Lights

ABS + PC


67142F | 6W | MR16 | GU10 | ABS + PC


67142F/W

IP65


67142F/AN


67142F/B




67142G | 2x6W | MR16 | GU10 | ABS + PC


67142G/W

IP65


67142G/AN


67142G/B




67536A | 6W | MR16 | GU10 | ABS + PC


67536A/W

IP65


67536A/AN


67536A/B




67536B | 2x6W | MR16 | GU10 | ABS + PC


67536B/W

IP65


67536B/AN


67536B/B



Order Code	Colour	Watts	Input	Class		Notes
67142F/W	White	6W	100-240V		20	-
67142F/AN	Anthracite	6W	100-240V		20	-
67142F/B	Black	6W	100-240V		20	-
67142G/W	White	2x6W	100-240V		20	-
67142G/AN	Anthracite	2x6W	100-240V		20	-
67142G/B	Black	2x6W	100-240V		20	-
67536A/W	White	6W	100-240V		24	-
67536A/AN	Anthracite	6W	100-240V		24	-
67536A/B	Black	6W	100-240V		24	-
67536B/W	White	2x6W	100-240V		20	-
67536B/AN	Anthracite	2x6W	100-240V		20	-
67536B/B	Black	2x6W	100-240V		20	-



The GU10 Outdoor Cube Lights
ABS + PC




67142D/W

67142D | 6W | MR16 | GU10 | ABS + PC

IP65



Suitable for GU10 LED lamp.






67142D/AN


67142D | 6W | MR16 | GU10 | ABS + PC

IP65



Suitable for GU10 LED lamp.



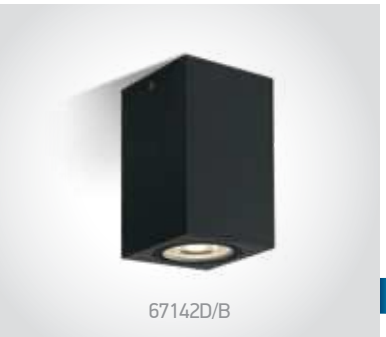


67142D/B

67142D | 6W | MR16 | GU10 | ABS + PC

IP65



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67142D/W	White	6W	100-240V		20	-
67142D/AN	Anthracite	6W	100-240V		20	-
67142D/B	Black	6W	100-240V		20	-

The GU10 Outdoor Cube Lights
ABS + PC





67142H/W

67142H | 6W | MR16 | GU10 | ABS + PC

IK06

CE 3 YEAR


IP65



67142H/AN



67142H/B





67142K/W

67142K | 2x6W | MR16 | GU10 | ABS + PC

IK06

CE 3 YEAR


IP65



67142K/AN



67142K/B



Order Code	Colour	Watts	Input	Class		Notes
67142H/W	White	6W	100-240V	☐	20	-
67142H/AN	Anthracite	6W	100-240V	☐	20	-
67142H/B	Black	6W	100-240V	☐	20	-
67142K/W	White	2x6W	100-240V	☐	20	-
67142K/AN	Anthracite	2x6W	100-240V	☐	20	-
67142K/B	Black	2x6W	100-240V	☐	20	-

GU10 Outdoor Cylinders
Die cast



67130C/W

67130C | 10W | MR16 | GU10 | Die cast

3 YEAR

IP54



Suitable for GU10 LED lamp.





67130C/AN

67130C | 10W | MR16 | GU10 | Die cast

3 YEAR

IP54



Suitable for GU10 LED lamp.





67130C/B

67130C | 10W | MR16 | GU10 | Die cast

3 YEAR

IP54



Suitable for GU10 LED lamp.





67130C/G

67130C | 10W | MR16 | GU10 | Die cast

3 YEAR

IP54



Suitable for GU10 LED lamp.





67130C/BR

67130C | 10W | MR16 | GU10 | Die cast

3 YEAR

IP54



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67130C/W	White	10W	100-240V		30	-
67130C/AN	Anthracite	10W	100-240V		30	-
67130C/B	Black	10W	100-240V		30	-
67130C/G	Grey	10W	100-240V		30	-
67130C/BR	Rust brown	10W	100-240V		30	-




The GU10 Outdoor Wall Lights
Die cast


67400A/W

67400A | 10W | MR16 | GU10 | Die cast



67400A/AN | 67400A/B | 67400A/G | 67400A/BR




67400B/W

67400B | 2x10W | MR16 | GU10 | Die cast


67400B/AN | 67400B/B | 67400B/G | 67400B/BR



Order Code	Colour	Watts	Input	Class		Notes
67400A/W	White	10W	100-240V		12	-
67400A/AN	Anthracite	10W	100-240V		12	-
67400A/B	Black	10W	100-240V		12	-
67400A/G	Grey	10W	100-240V		12	-
67400A/BR	Rust brown	10W	100-240V		12	-
67400B/W	White	2x10W	100-240V		12	-
67400B/AN	Anthracite	2x10W	100-240V		12	-
67400B/B	Black	2x10W	100-240V		12	-
67400B/G	Grey	2x10W	100-240V		12	-
67400B/BR	Rust brown	2x10W	100-240V		12	-

The GU10 Outdoor Wall Cylinders
Die cast





67130E/AN

67130E | 10W | MR16 | GU10 | Die cast

CE 3 YEAR

IP54



67130E/W




67130E/B



67130E/G



67130E/BR





67130/AN

67130 | 2x10W | MR16 | GU10 | Die cast

CE 3 YEAR

IP54



67130/W




67130/B



67130/G



67130/BR



Order Code	Colour	Watts	Input	Class		Notes
67130E/W	White	10W	100-240V		18	-
67130E/AN	Anthracite	10W	100-240V		18	-
67130E/B	Black	10W	100-240V		18	-
67130E/G	Grey	10W	100-240V		18	-
67130E/BR	Rust brown	10W	100-240V		18	-
67130/W	White	2x10W	100-240V		18	-
67130/AN	Anthracite	2x10W	100-240V		18	-
67130/B	Black	2x10W	100-240V		18	-
67130/G	Grey	2x10W	100-240V		18	-
67130/BR	Rust brown	2x10W	100-240V		18	-



The GU10 Outdoor Wall Cube Lights
Die cast


67426/AN


67426 | 10W | MR16 | GU10 | Die cast

IP65


67426/W


67426/B


67426/G




67426A/AN


67426A | 2x10W | MR16 | GU10 | Die cast

IP65


67426A/W


67426A/B


67426A/G



Order Code	Colour	Watts	Input	Class		Notes
67426/W	White	10W	100-240V		18	-
67426/AN	Anthracite	10W	100-240V		18	-
67426/B	Black	10W	100-240V		18	-
67426/G	Grey	10W	100-240V		18	-
67426A/W	White	2x10W	100-240V		12	-
67426A/AN	Anthracite	2x10W	100-240V		12	-
67426A/B	Black	2x10W	100-240V		12	-
67426A/G	Grey	2x10W	100-240V		12	-





67130D/AN

67130D | 10W | MR16 | GU10 | Die cast

3 YEAR


IP54



67130D/B



67130D/G





67130DD/W

67130DD | 10W | MR16 | GU10 | Aluminium


3 YEAR

DARK LIGHT

IP54



67130DD/AN



Order Code	Colour	Watts	Input	Class		Notes
67130D/AN	Anthracite	10W	100-240V		20	-
67130D/B	Black	10W	100-240V		20	-
67130D/G	Grey	10W	100-240V		20	-
67130DD/W	White	10W	100-240V		18	-
67130DD/AN	Anthracite	10W	100-240V		18	-




The GU10 Outdoor Cubes
Die cast


67130F/W

67130F | 10W | MR16 | GU10 | Die cast

IP54



67130F/G





67130A | 2x10W | MR16 | GU10 | Die cast

IP54



Order Code	Colour	Watts	Input	Class		Notes
67130F/W	White	10W	100-240V		20	-
67130F/G	Grey	10W	100-240V		20	-
67130A/G	Grey	2x10W	100-240V		20	-

The GU10 Outdoor Cubes
Die cast





67426D/W

67426D | 10W | MR16 | GU10 | Die cast

IP54

IK06

CE

3 YEAR



67426D/AN




67426D/B



67426D/G



67426D/BR



Order Code	Colour	Watts	Input	Class		Notes
67426D/W	White	10W	100-240V		18	-
67426D/AN	Anthracite	10W	100-240V		18	-
67426D/B	Black	10W	100-240V		18	-
67426D/G	Grey	10W	100-240V		18	-
67426D/BR	Rust brown	10W	100-240V		18	-

The GU10 Outdoor Cubes

Die cast





67426B/W

67426B | 10W | MR16 | GU10 | Die cast

IP54 · IK06 · CE · 3 YEAR


67426B/AN · 67426B/B · 67426B/G · 67426B/BR





67426C/W


67426C | 2x10W | MR16 | GU10 | Die cast

IP54 · IK06 · CE · 3 YEAR


67426C/AN · 67426C/B · 67426C/G · 67426C/BR



Order Code	Colour	Watts	Input	Class	📦	Notes
67426B/W	White	10W	100-240V	⏚	18	-
67426B/AN	Anthracite	10W	100-240V	⏚	18	-
67426B/B	Black	10W	100-240V	⏚	18	-
67426B/G	Grey	10W	100-240V	⏚	18	-
67426B/BR	Rust brown	10W	100-240V	⏚	18	-
67426C/W	White	2x10W	100-240V	⏚	18	-
67426C/AN	Anthracite	2x10W	100-240V	⏚	18	-
67426C/B	Black	2x10W	100-240V	⏚	18	-
67426C/G	Grey	2x10W	100-240V	⏚	18	-
67426C/BR	Rust brown	2x10W	100-240V	⏚	18	-

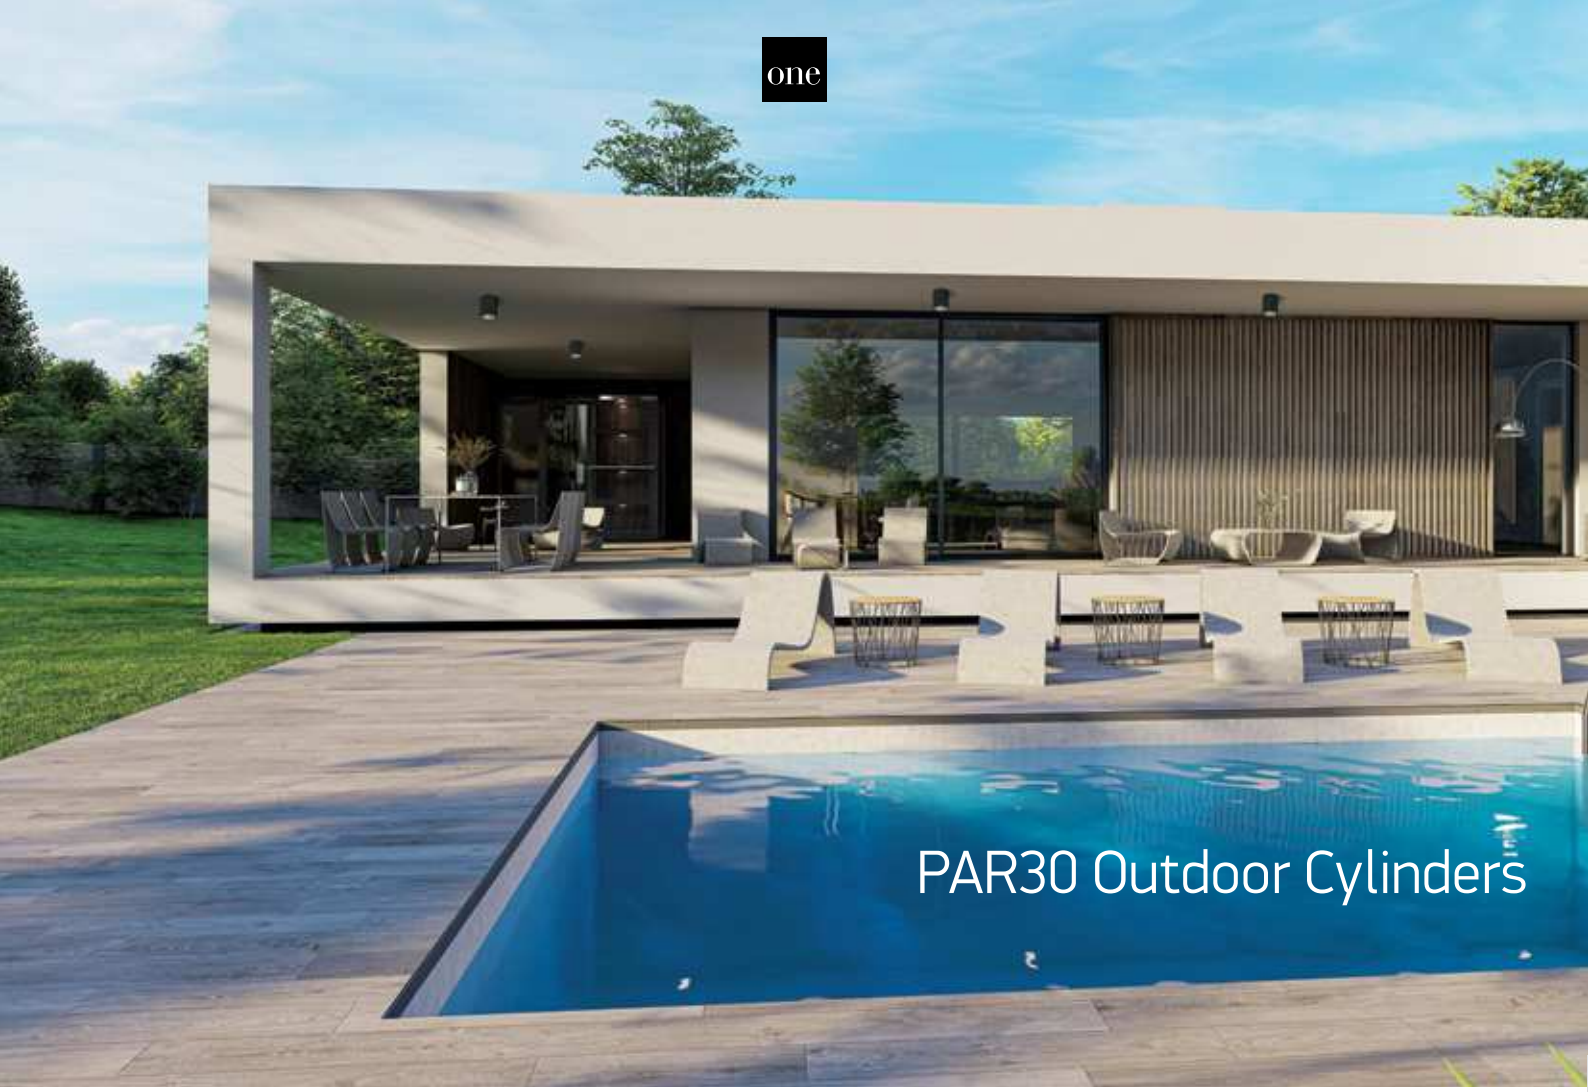

PAR30 Outdoor Cylinders



67132C/W

67132C | 20W | PAR30 | E27 | Die cast

IP54



67132C/AN | 67132C/B | 67132C/G | 67132C/BR






67142C/W

67142C | 10W | PAR30 | E27 | ABS + PC

IP65



67142C/AN | 67142C/B



Order Code	Colour	Watts	Input	Class		Notes
67132C/W	White	20W	100-240V		18	-
67132C/AN	Anthracite	20W	100-240V		18	-
67132C/B	Black	20W	100-240V		18	-
67132C/G	Grey	20W	100-240V		18	-
67132C/BR	Rust brown	20W	100-240V		18	-
67142C/W	White	10W	100-240V		20	-
67142C/AN	Anthracite	10W	100-240V		20	-
67142C/B	Black	10W	100-240V		20	-




The PAR30 Outdoor Wall Lights
Die cast


67400D/W

67400D | 20W | PAR30 | E27 | Die cast

IP65 IK06 CE 3 YEAR


67400D/AN | 67400D/B | 67400D/G | 67400D/BR





67400E/W

67400E | 2x20W | PAR30 | E27 | Die cast

IP65 IK06 CE 3 YEAR


67400E/AN | 67400E/B | 67400E/G



Order Code	Colour	Watts	Input	Class		Notes
67400D/W	White	20W	100-240V		6	-
67400D/AN	Anthracite	20W	100-240V		6	-
67400D/B	Black	20W	100-240V		6	-
67400D/G	Grey	20W	100-240V		6	-
67400D/BR	Rust brown	20W	100-240V		6	-
67400E/W	White	2x20W	100-240V		6	-
67400E/AN	Anthracite	2x20W	100-240V		6	-
67400E/B	Black	2x20W	100-240V		6	-
67400E/G	Grey	2x20W	100-240V		6	-

PAR30 Outdoor Cubes

Die cast

67132D/G



67132A/W




67132D/AN


67132D | 20W | PAR30 | E27 | Die cast





Suitable for PAR30 LED lamp.



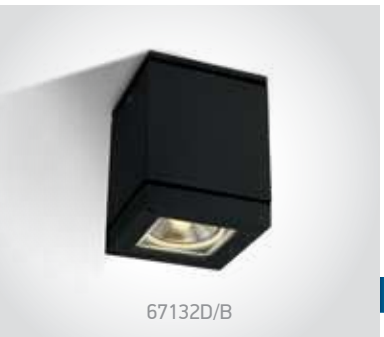


67132D/B

67132D | 20W | PAR30 | E27 | Die cast





Suitable for PAR30 LED lamp.






67132D/G

67132D | 20W | PAR30 | E27 | Die cast





Suitable for PAR30 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67132D/AN	Anthracite	20W	100-240V		18	-
67132D/B	Black	20W	100-240V		18	-
67132D/G	Grey	20W	100-240V		18	-

PAR30 Outdoor Wall Cubes
Die cast





67132A/W

67132A | 2x20W | PAR30 | E27 | Die cast

IP54

3 YEAR




67132A/AN



67132A/B



67132A/G



Order Code	Colour	Watts	Input	Class		Notes
67132A/W	White	2x20W	100-240V		12	-
67132A/AN	Anthracite	2x20W	100-240V		12	-
67132A/B	Black	2x20W	100-240V		12	-
67132A/G	Grey	2x20W	100-240V		12	-

The E27 Outdoor Plafo

Die cast






67204B | 2x10W | E27 | Die cast

IP54












67204 | 12W | E27 | Die cast

IP54












67216 | 2x20W | E27 | Die cast

IP54





Order Code	Colour	Watts	Input	Class		Notes
67204B/W	White	2x10W	100-240V		10	-
67204B/AN	Anthracite	2x10W	100-240V		10	-
67204B/B	Black	2x10W	100-240V		10	-
67204B/G	Grey	2x10W	100-240V		10	-
67204/W	White	12W	100-240V		6	-
67204/AN	Anthracite	12W	100-240V		6	-
67204/B	Black	12W	100-240V		6	-
67204/G	Grey	12W	100-240V		6	-
67216/G	Grey	2x20W	100-240V		6	-



The Square E27 Outdoor Plafo
Die cast



67208B/W

67208B | 2x10W | E27 | Die cast

IP54




67208B/AN



67208B/B




67208B/G





67208 | 12W | E27 | Die cast

IP54






67210/W

67210 | 2x10W | E27 | Die cast

IP54



67210/G



Order Code	Colour	Watts	Input	Class		Notes
67208B/W	White	2x10W	100-240V		10	-
67208B/AN	Anthracite	2x10W	100-240V		10	-
67208B/B	Black	2x10W	100-240V		10	-
67208B/G	Grey	2x10W	100-240V		10	-
67208/W	White	12W	100-240V		8	-
67210/W	White	2x10W	100-240V		6	-
67210/G	Grey	2x10W	100-240V		6	-



Outdoor E27 Square
Die cast




67328/AN

67328 | 12W | E27 | Die cast + PC

CE 3 YEAR

IP54






67328/G

67328 | 12W | E27 | Die cast + PC

CE 3 YEAR

IP54



Order Code	Colour	Watts	Input	Class		Notes
67328/AN	Anthracite	12W	100-240V	⏚	8	-
67328/G	Grey	12W	100-240V	⏚	8	-



67420/W

Outdoor E27 Square
Die cast



67420/W

67420 | 12W | E27 | Die cast + frosted glass

IP54




67420/AN



67420/B



67420/G






67420A | 12W | E27 | Die cast + frosted glass

IP54



Suitable for
E27 LED lamps.





67420B/W

67420B | 2x12W | E27 | Die cast + frosted glass

IP54




67420B/AN



67420B/B



67420B/G



Order Code	Colour	Watts	Input	Class		Notes
67420/W	White	12W	100-240V		6	-
67420/AN	Anthracite	12W	100-240V		6	-
67420/B	Black	12W	100-240V		6	-
67420/G	Grey	12W	100-240V		6	-
67420A/AN	Anthracite	12W	100-240V		6	-
67420B/W	White	2x12W	100-240V		4	-
67420B/AN	Anthracite	2x12W	100-240V		4	-
67420B/B	Black	2x12W	100-240V		4	-
67420B/G	Grey	2x12W	100-240V		4	-






Wall & Ceiling LED

Pages 413-484

13

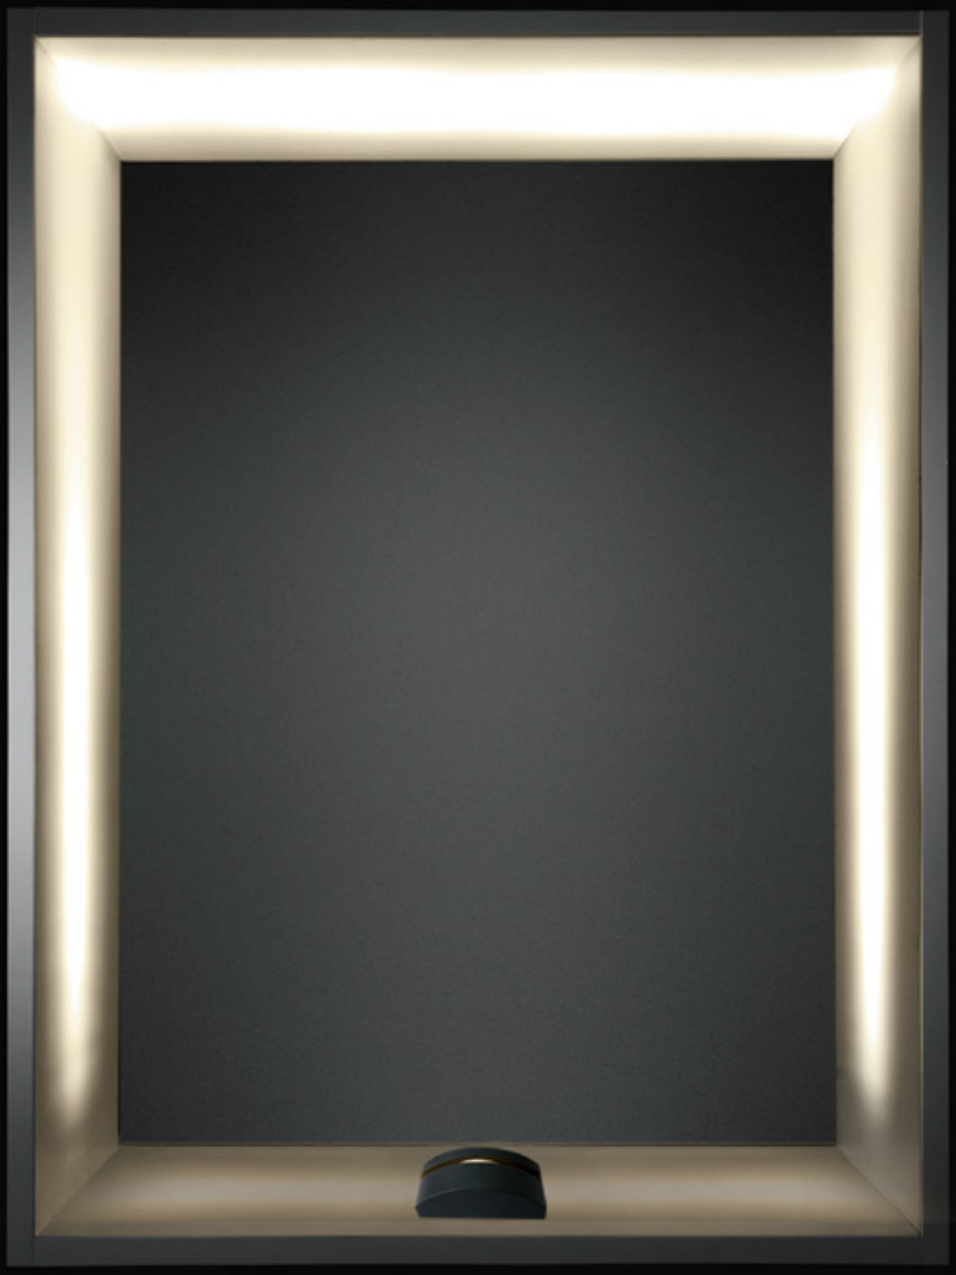



Window Frame Illumination



67454 | 6W | LED | Die cast

Window frame illumination.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67454/AN/W	Anthracite	Warm white	3000K	6W	330lm	270°	100-240V		18	Complete with 500mA driver





62401AL/D/15

60008/AL/D

60008A/AL/BL

Indoor Mini Series
Natural aluminium




60008A | 1W | LED | Natural aluminium

LED BUILT IN

2 YEAR

IP20 offer








60008 | 2x1W | LED | Natural aluminium


LED BUILT IN

2 YEAR

IP20 offer





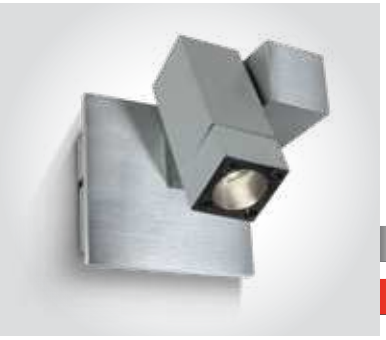

65102 | 1W | LED | Natural aluminium


LED BUILT IN

ADJUSTABLE

2 YEAR

IP20 offer







62401AL | 4x1W | LED | Natural aluminium


LED BUILT IN

ADJUSTABLE

2 YEAR

IP20 offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
60008A/AL/BL	Aluminium	Blue	-	1W	-	100-240V		50	Complete with driver
60008/AL/D	Aluminium	Daylight	6000K	2x1W	2x60lm	100-240V		50	Complete with driver
60008/AL/BL	Aluminium	Blue	-	2x1W	-	100-240V		50	Complete with driver
65102/D	Aluminium	Daylight	6000K	1W	60lm	100-240V		20	Complete with driver
65102/W	Aluminium	Warm white	3000K	1W	45lm	100-240V		20	Complete with driver
62401AL/D/15	Aluminium	Daylight	6000K	4x1W	4x60lm	100-240V		20	Complete with driver
62401AL/W/15	Aluminium	Warm white	3000K	4x1W	4x45lm	100-240V		20	Complete with driver



Zoomable Moving Heads
COB



12115G/W/W

12115G | 15W | COB LED | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.


LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Zoomable



Removable Honeycomb





12115G/B/W

12115G | 15W | COB LED | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.


LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Zoomable



Removable Honeycomb



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12115G/W/W	White	Warm white	3000K	15W	1500lm	15°-45°	230V	⏚	40	Complete with 350mA driver
12115G/B/W	Black	Warm white	3000K	15W	1500lm	15°-45°	230V	⏚	40	Complete with 350mA driver




The COB Adjustable Display Spots



12108LA | 8W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20








12208LA | 2x8W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20








65107 | 7W | COB LED | Aluminium


LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20
offer



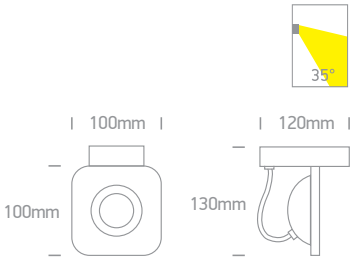

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12108LA/W/W	White	Warm white	3000K	8W	600lm	25°	230V		24	Complete with 700mA driver
12108LA/B/W	Black	Warm white	3000K	8W	600lm	25°	230V		24	Complete with 700mA driver
12208LA/W/W	White	Warm white	3000K	2x8W	2x600lm	25°	230V		18	Complete with 2x700mA drivers
12208LA/B/W	Black	Warm white	3000K	2x8W	2x600lm	25°	230V		18	Complete with 2x700mA drivers
65107/W/W	White	Warm white	3000K	7W	594lm	35°	230V		12	Complete with 700mA driver

Decorative Wall & Ceiling
Natural aluminium

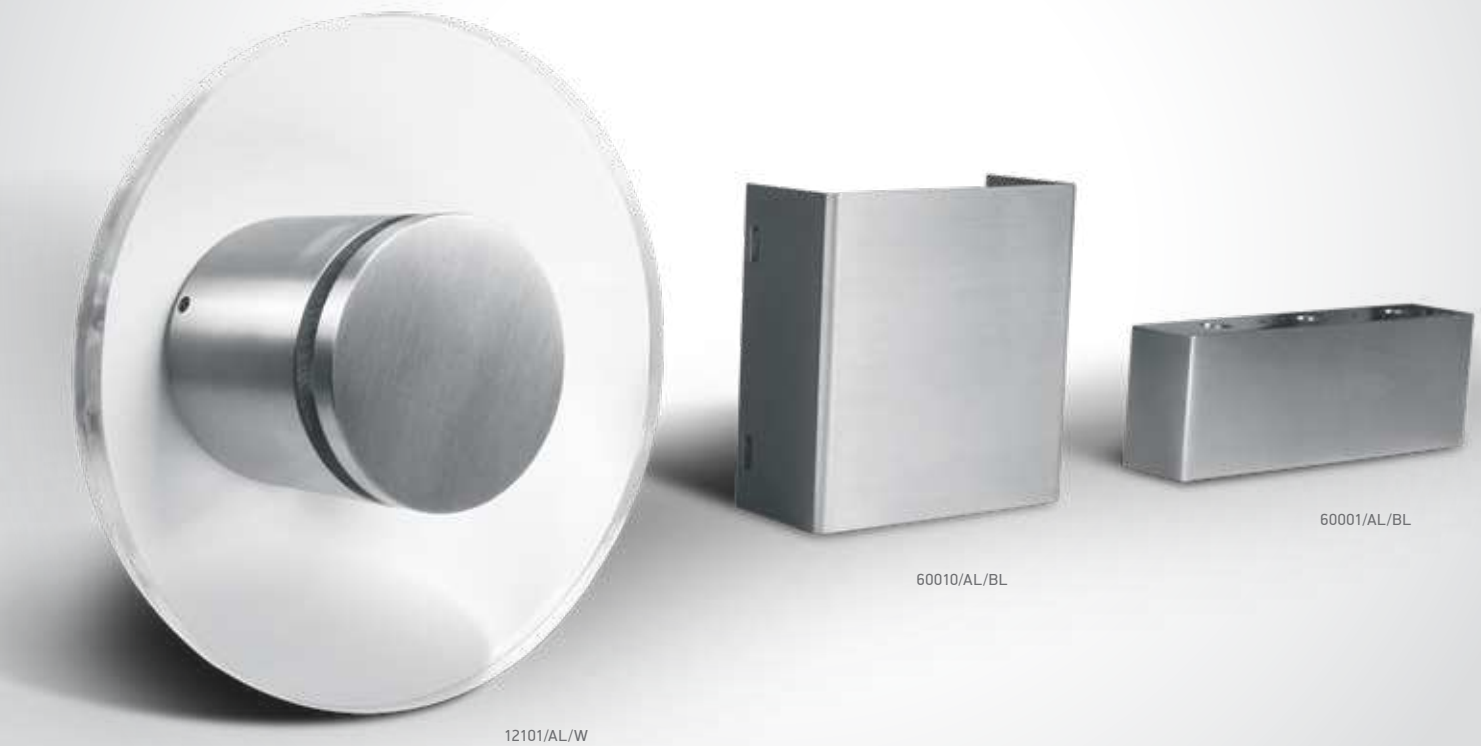

12101/AL/W

60010/AL/BL

60001/AL/BL




12101/AL/D

12101 | 6x0,2W | LED | Natural aluminium + PC

LED BUILT IN

CE 2 YEAR

IP20 offer

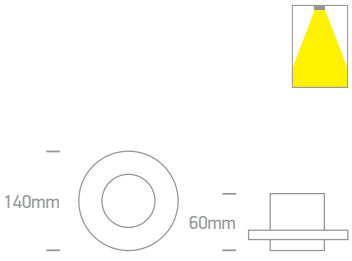




12101/AL/W

12101 | 6x0,2W | LED | Natural aluminium + PC

LED BUILT IN

CE 2 YEAR

IP20 offer



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
12101/AL/D	Aluminium	Daylight	6000K	6x0,2W	230V		24	Complete with driver
12101/AL/W	Aluminium	Warm white	3000K	6x0,2W	230V		24	Complete with driver



Decorative Wall & Ceiling
Natural aluminium




60001 | 3x0,2W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

IP20 offer








60010 | 1W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

IP20 offer



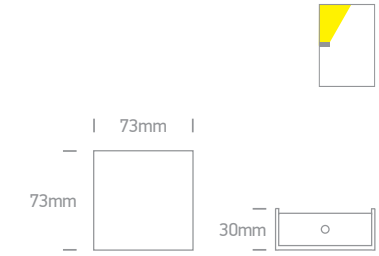


Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
60001/AL/BL	Aluminium	Blue	-	6x0,2W	230V		100	Complete with driver
60010/AL/BL	Aluminium	Blue	-	1W	100-240V		100	Complete with driver

Other available colours: **60001/AL/GR** Green **60001/AL/R** Red


The Backlight Wall Range
Aluminium



67466A/B/W

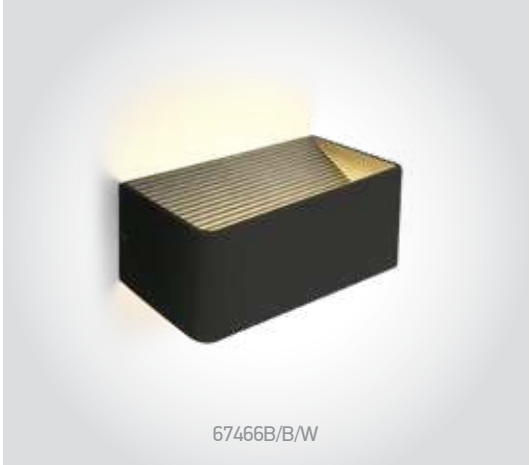

67466B/B/W

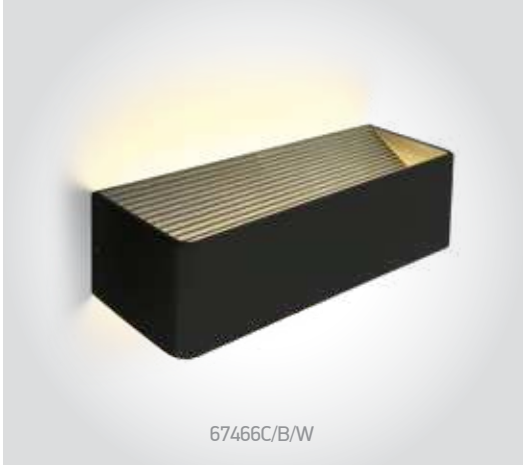

67466C/B/W




The Backlight Wall Range
Aluminium


67466A/W/W

67466A | 6W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP20


67466A/B/W





67466B/W/W

67466B | 6W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP20


67466B/B/W





67466C/W/W

67466C | 12W | SMD 2835 | Aluminium


LED BUILT IN
80 CRI
CE
2 YEAR
IP20


67466C/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67466A/W/W	White	Warm white	3000K	6W	400lm	230V		12	Complete with 300mA driver
67466A/B/W	Black	Warm white	3000K	6W	400lm	230V		12	Complete with 300mA driver
67466B/W/W	White	Warm white	3000K	6W	400lm	230V		12	Complete with 300mA driver
67466B/B/W	Black	Warm white	3000K	6W	400lm	230V		12	Complete with 300mA driver
67466C/W/W	White	Warm white	3000K	12W	800lm	230V		12	Complete with 300mA driver
67466C/B/W	Black	Warm white	3000K	12W	800lm	230V		12	Complete with 300mA driver

The COB Indoor Round Cylinder

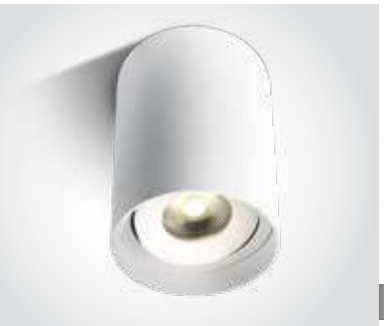

12110D | 10W | COB LED | Die cast

LED BUILT IN

90 CRI


ADJUSTABLE

CE

3 YEAR

IP20





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12110D/W/W	White	-	Warm white	3000K	10W	800lm	36°	230V	⏚	18	Complete with 500mA driver



12107KA/W/W + 050106/B

12107K/B/W + 050106/BS

12107K/W/W + 050106/W

The Chill Out LED Cylinders
Dimmable



12107K/B/W + 050106/BS

12107K | 7W | COB LED | Dimmable | Aluminium


Ring must be ordered separately.

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CE · 2 YEAR · IP20



12107K/W/W + 050106/B







12107KA/B/W + 050106/BS

12107KA | 7W | COB LED | Dimmable | Aluminium


Ring must be ordered separately.

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CE · 2 YEAR · IP20



12107KA/W/W + 050106/B








050106/W White



050106/B Black

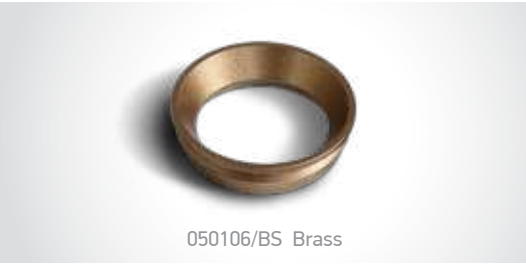

050106/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107K/W/W	White	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107K/B/W	Black	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107KA/W/W	White	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107KA/B/W	Black	Warm white	3000K	7W	500lm	35°	230V		30	AC LED

LED Decorative Cylinders





12115D/B/W

12115D | 15W | COB LED | Aluminium + plastic

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20


12115D/W/W

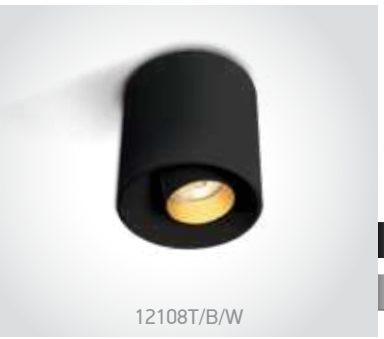




12108T/B/W


12108T | 8W | COB LED | Die cast

Complete with black & brass reflectors.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · 5 YEAR · IP20


12108T/W/W



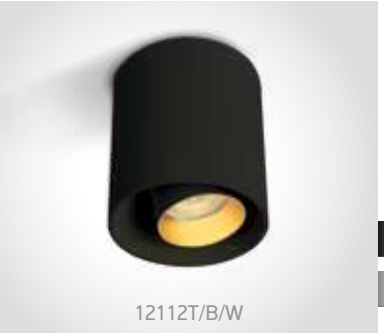

12112T/B/W

12112T | 12W | COB LED | Die cast

Complete with black & brass reflectors.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · 5 YEAR · IP20


12112T/W/W




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12115D/W/W	White	Warm white	3000K	15W	1200lm	45°	230V		24	Complete with 350mA driver
12115D/B/W	Black	Warm white	3000K	15W	1200lm	45°	230V		24	Complete with 350mA driver
12108T/W/W	White	Warm white	3000K	8W	720lm	36°	230V		30	Complete with 700mA driver
12108T/B/W	Black	Warm white	3000K	8W	720lm	36°	230V		30	Complete with 700mA driver
12112T/W/W	White	Warm white	3000K	12W	1080lm	36°	230V		20	Complete with 350mA driver
12112T/B/W	Black	Warm white	3000K	12W	1080lm	36°	230V		20	Complete with 350mA driver



LED Fashion Cylinders

12107V | 7W | LED | Dimmable | Aluminium

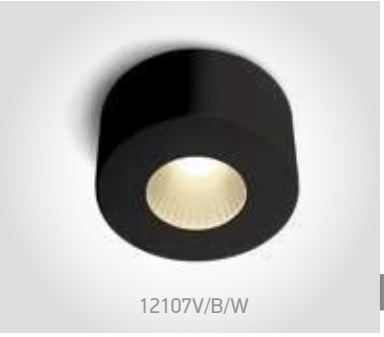


12107V/B/W

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CE · 3 YEAR · IP20



12107V/W/W



12108C | 8W | COB LED | Die cast




12108C/B/W


LED BUILT IN · 90 CRI · CE · 5 YEAR · IP20



12108C/W/W



12122C | 22W | COB LED | Die cast

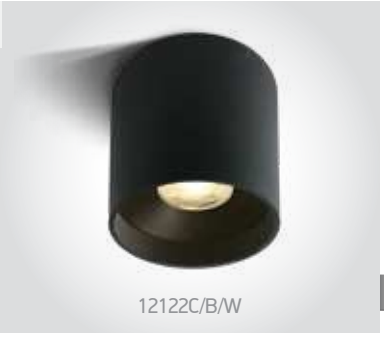


12122C/B/W

LED BUILT IN · 90 CRI · CE · 5 YEAR · IP20



12122C/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107V/W/W	White	Warm white	3000K	7W	500lm	40°	230V		20	AC LED
12107V/B/W	Black	Warm white	3000K	7W	500lm	40°	230V		20	AC LED
12108C/W/W	White	Warm white	3000K	8W	520lm	38°	230V		50	Complete with 700mA driver
12108C/B/W	Black	Warm white	3000K	8W	520lm	38°	230V		50	Complete with 700mA driver
12122C/W/W	White	Warm white	3000K	22W	1500lm	38°	230V		20	Complete with 500mA driver
12122C/B/W	Black	Warm white	3000K	22W	1500lm	38°	230V		20	Complete with 500mA driver



Dark Light Cylinders Tubes
Aluminium



12108D/W/W + 050206/W

12108D | 8W | COB LED | Aluminium

Reflector must be ordered separately.

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20


12108D/B/W + 050206/B





12108D/BBS/W + 050206/B

12108D | 8W | COB LED | Aluminium

Reflector must be ordered separately.

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20


12108D/MG/W + 050206/B





12108DB/W/W + 050206/B

12108DB | 8W | LED | Backlit | Aluminium

Reflector must be ordered separately.

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20


12108DB/B/W + 050206/BS




050206/W White


050206/B Black


050206/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12108D/W/W	White	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108D/B/W	Black	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108D/BBS/W	Brushed brass	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108D/MG/W	Metal grey	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108DB/W/W	White	Warm white	3000K	8W	320+100lm	36°	230V		50	Complete with 700mA driver
12108DB/B/W	Black	Warm white	3000K	8W	320+100lm	36°	230V		50	Complete with 700mA driver



Dark Light Cylinders Tubes
Aluminium



12122D/W/W + 050208/BS

12122D | 22W | COB LED | Aluminium

Reflector must be ordered separately.

LED BUILT IN

90 CRI

CE


5 YEAR

DARK LIGHT

IP20



12122D/B/W + 050208/B





12122D/BBS/W + 050208/B

12122D | 22W | COB LED | Aluminium

Reflector must be ordered separately.

LED BUILT IN

90 CRI

CE


5 YEAR

DARK LIGHT

IP20



12122D/MG/W + 050208/B





050208/W White



050208/B Black




050208/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12122D/W/W	White	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver
12122D/B/W	Black	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver
12122D/BBS/W	Brushed brass	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver
12122D/MG/W	Metal grey	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver



The Retro Dark Light Cylinders

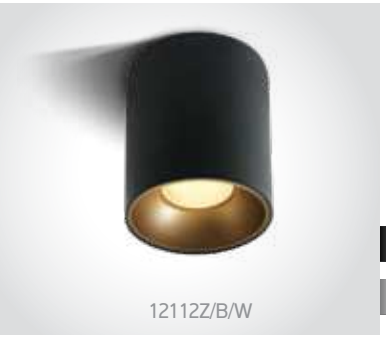

12112Z/B/W

12112Z | 12W | COB LED | Die cast + Plastic

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



12112Z/W/W



Complete with Black & Brass reflectors. Optional White reflector code 050378B/W.





12120Z/B/W

12120Z | 20W | COB LED | Die cast + Plastic


LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20




12120Z/W/W



Complete with Black & Brass reflectors. Optional White reflector code 050378C/W.



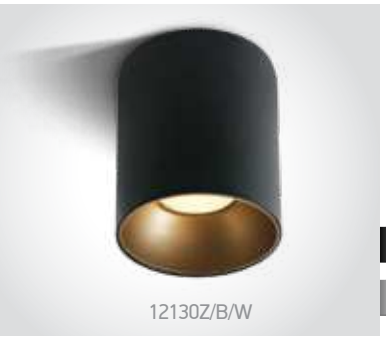

12130Z/B/W

12130Z | 30W | COB LED | Die cast + Plastic

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20




12130Z/W/W



Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112Z/W/W	White	Warm white	3000K	12W	960lm	45°	230V		30	Complete with 300mA driver
12112Z/B/W	Black	Warm white	3000K	12W	960lm	45°	230V		30	Complete with 300mA driver
12120Z/W/W	White	Warm white	3000K	20W	1600lm	45°	230V		24	Complete with 500mA driver
12120Z/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V		24	Complete with 500mA driver
12130Z/W/W	White	Warm white	3000K	30W	2400lm	45°	230V		12	Complete with 700mA driver
12130Z/B/W	Black	Warm white	3000K	30W	2400lm	45°	230V		12	Complete with 700mA driver

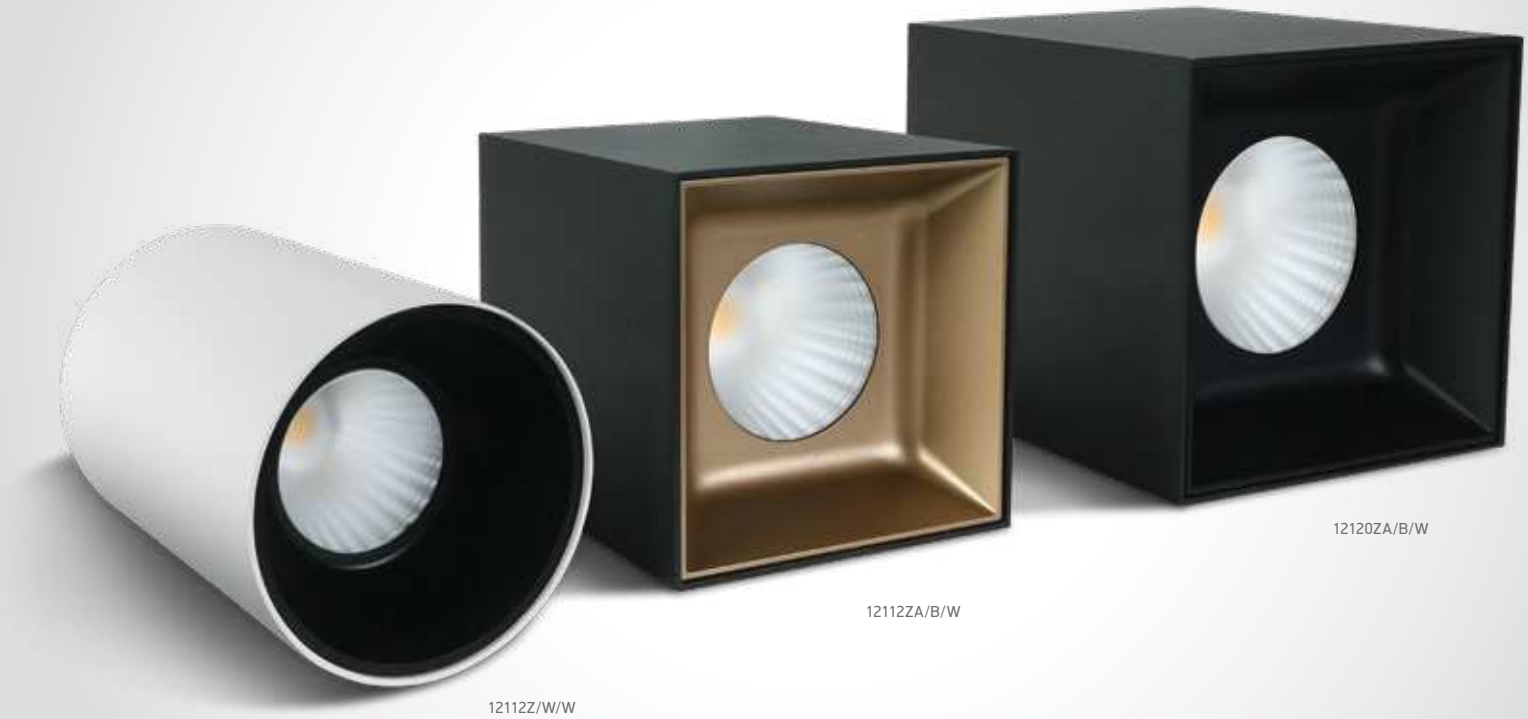

The Retro Dark Light Cubes



12112ZA/B/W

12112ZA | 12W | COB LED | Die cast + Plastic

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20


12112ZA/W/W


Complete with Black & Brass reflectors.





12120ZA/B/W

12120ZA | 20W | COB LED | Die cast + Plastic

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20


12120ZA/W/W


Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112ZA/W/W	White	Warm white	3000K	12W	960lm	45°	230V	⏚	30	Complete with 300mA driver
12112ZA/B/W	Black	Warm white	3000K	12W	960lm	45°	230V	⏚	30	Complete with 300mA driver
12120ZA/W/W	White	Warm white	3000K	20W	1600lm	45°	230V	⏚	24	Complete with 500mA driver
12120ZA/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V	⏚	24	Complete with 500mA driver



The Backlight Cylinders

12112A | 10W+2W | COB LED | Aluminium

Downlight + Uplight.



12112A/W/W

new

DARK LIGHT


IP20

LED BUILT IN

90 CRI


CE

3 YEAR



12112A/B/W





12120A | 18W+2W | COB LED | Aluminium

Downlight + Uplight.



12120A/W/W

new

DARK LIGHT


IP20

LED BUILT IN

90 CRI


CE

3 YEAR



12120A/B/W





12128A | 26W+2W | COB LED | Aluminium

Downlight + Uplight.



12128A/W/W

new

DARK LIGHT


IP20

LED BUILT IN

90 CRI


CE

3 YEAR



12128A/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112A/W/W	White	Warm white	3000K	10W+2W	1000lm	60°	230V	⏚	40	Complete with 300mA driver
12112A/B/W	Black	Warm white	3000K	10W+2W	1000lm	60°	230V	⏚	40	Complete with 300mA driver
12120A/W/W	White	Warm white	3000K	18W+2W	1800lm	60°	230V	⏚	30	Complete with 500mA driver
12120A/B/W	Black	Warm white	3000K	18W+2W	1800lm	60°	230V	⏚	30	Complete with 500mA driver
12128A/W/W	White	Warm white	3000K	26W+2W	2600lm	60°	230V	⏚	20	Complete with 700mA driver
12128A/B/W	Black	Warm white	3000K	26W+2W	2600lm	60°	230V	⏚	20	Complete with 700mA driver

The PRO Cylinders Range



12120F/B/W



12115F/W/W



12112A/W/W



12115F | 15W | COB LED | Die cast

LED BUILT IN

90 CRI


CE

5 YEAR

DARK LIGHT

IP20


12115F/W/W



12115F/B/W



0750A/15 (15°)
0750A/24 (24°)





12120F | 20W | COB LED | Die cast

LED BUILT IN

90 CRI


CE

5 YEAR

DARK LIGHT

IP20


12120F/W/W



12120F/B/W



0750B/15 (15°)
0750B/24 (24°)



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12115F/W/W	White	Warm white	3000K	15W	1800lm	38°	230V	⏚	20	Complete with 350mA driver
12115F/B/W	Black	Warm white	3000K	15W	1800lm	38°	230V	⏚	20	Complete with 350mA driver
12120F/W/W	White	Warm white	3000K	20W	2400lm	38°	230V	⏚	10	Complete with 450mA driver
12120F/B/W	Black	Warm white	3000K	20W	2400lm	38°	230V	⏚	10	Complete with 450mA driver



The Dark Light Mirror Cylinders
Aluminium



12106X/W/W

12106X | 6W | SMD 3030 | Aluminium

LED BUILT IN


90 CRI

CE


5 YEAR

DARK LIGHT

IP20



12106X/B/W





12112X/W/W

12112X | 12W | SMD 3030 | Aluminium

LED BUILT IN

90 CRI

CE


5 YEAR

DARK LIGHT

IP20



12112X/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12106X/W/W	White	Warm white	3000K	6W	480lm	38°	230V		40	Complete with 150mA driver
12106X/B/W	Black	Warm white	3000K	6W	480lm	38°	230V		40	Complete with 150mA driver
12112X/W/W	White	Warm white	3000K	12W	960lm	38°	230V		40	Complete with 300mA driver
12112X/B/W	Black	Warm white	3000K	12W	960lm	38°	230V		40	Complete with 300mA driver



The Dark Light Mirror Cylinders
Aluminium



12120X/W/W

12120X | 20W | SMD 3030 | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR

DARK LIGHT
IP20


12120X/B/W





12124X/W/W

12124X | 24W | SMD 3030 | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR

DARK LIGHT
IP20


12124X/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12120X/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		30	Complete with 450mA driver
12120X/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		30	Complete with 450mA driver
12124X/W/W	White	Warm white	3000K	24W	1900lm	38°	230V		20	Complete with 600mA driver
12124X/B/W	Black	Warm white	3000K	24W	1900lm	38°	230V		20	Complete with 600mA driver




12110H | 10W | SMD 3535 | Aluminium


12110H/B/W

DARK LIGHT
IP20

LED BUILT IN
90 CRI
CE
5 YEAR


12110H/W/W




12110HB | 10W | SMD 3535 | Aluminium


12110HB/B/W

DARK LIGHT
IP20

LED BUILT IN
90 CRI
CE
5 YEAR


12110HB/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12110H/W/W	White	Warm white	3000K	10W	700lm	38°	230V		30	Complete with 700mA driver
12110H/B/W	Black	Warm white	3000K	10W	700lm	38°	230V		30	Complete with 700mA driver
12110HB/W/W	White	Warm white	3000K	10W	700lm	38°	230V		30	Complete with 700mA driver
12110HB/B/W	Black	Warm white	3000K	10W	700lm	38°	230V		30	Complete with 700mA driver



12110HB/W/W

12112H/B/W

The Dark Light Ceiling Lights
Aluminium



12112H/B/W

12112H | 12W | SMD 3535 | Aluminium

LED BUILT IN

90 CRI

CE


5 YEAR

DARK LIGHT

IP20



12112H/W/W





12124H/B/W

12124H | 24W | SMD 3535 | Aluminium

LED BUILT IN

90 CRI

CE


5 YEAR

DARK LIGHT

IP20



12124H/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112H/W/W	White	Warm white	3000K	12W	840lm	38°	230V		40	Complete with 700mA driver
12112H/B/W	Black	Warm white	3000K	12W	840lm	38°	230V		40	Complete with 700mA driver
12124H/W/W	White	Warm white	3000K	24W	1700lm	38°	230V		30	Complete with 700mA driver
12124H/B/W	Black	Warm white	3000K	24W	1700lm	38°	230V		30	Complete with 700mA driver




Surface Shop Square Boxes
Aluminium



12107B | 7W | COB LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CE · 3 YEAR · IP20








12207B | 2x7W | COB LED | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20








12307B | 3x7W | COB LED | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107B/W/W	White	Warm white	3000K	7W	550lm	36°	230V	⏚	36	Complete with 350mA driver
12207B/W/W	White	Warm white	3000K	2x7W	1100lm	36°	100-240V	⏚	24	Complete with 350mA driver
12307B/W/W	White	Warm white	3000K	3x7W	1650lm	36°	100-240V	⏚	12	Complete with 350mA driver



12115HA/W/W

12110HA/W/W


Dark Light Pro Cubes
Aluminium



12110HA | 10W | COB LED | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20









12115HA | 15W | COB LED | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12110HA/W/W	White	Warm white	3000K	10W	800lm	60°	230V	⏚	48	Complete with 250mA driver
12115HA/W/W	White	Warm white	3000K	15W	1200lm	60°	230V	⏚	48	Complete with 350mA driver

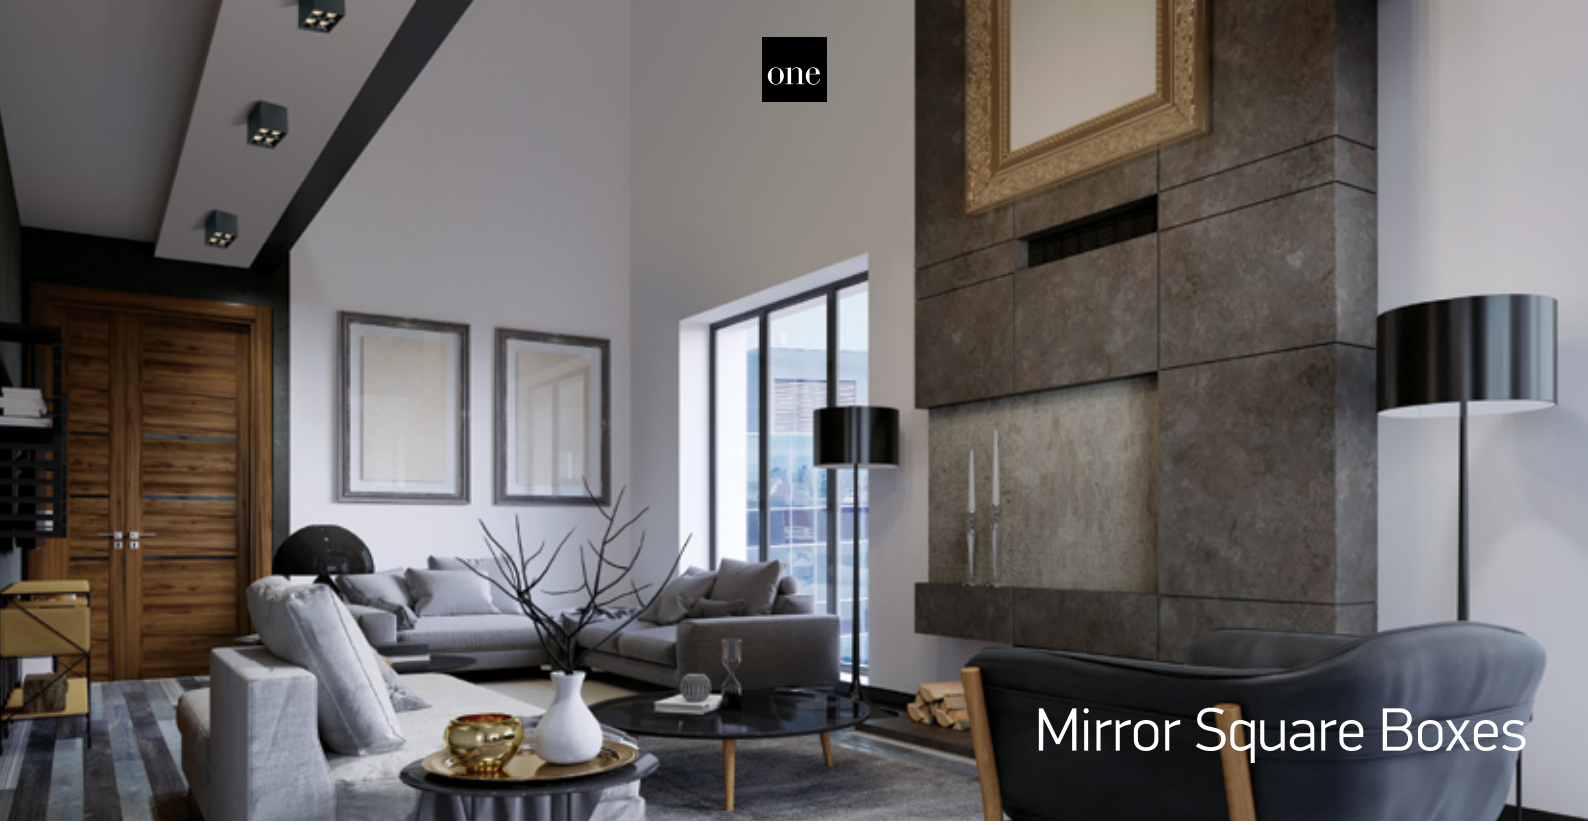



12106B/W/W

12106B | 6W | COB LED | Aluminium


LED BUILT IN

90 CRI CE 3 YEAR

IP20



12106B/B/W





12406B/W/W

12406B | 15W | COB LED | Aluminium


LED BUILT IN

90 CRI CE 3 YEAR

IP20



12406B/B/W





12906B/W/W

12906B | 30W | COB LED | Aluminium


LED BUILT IN

90 CRI CE 3 YEAR

IP20



12906B/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12106B/W/W	White	Warm white	3000K	6W	480lm	38°	230V		60	Complete with 120mA driver
12106B/B/W	Black	Warm white	3000K	6W	480lm	38°	230V		60	Complete with 120mA driver
12406B/W/W	White	Warm white	3000K	15W	1200lm	38°	230V		30	Complete with 350mA driver
12406B/B/W	Black	Warm white	3000K	15W	1200lm	38°	230V		30	Complete with 350mA driver
12906B/W/W	White	Warm white	3000K	30W	2400lm	38°	230V		12	Complete with 700mA driver
12906B/B/W	Black	Warm white	3000K	30W	2400lm	38°	230V		12	Complete with 700mA driver




Dark Light Ceiling Tubes


12406C/W/W

12406C | 10W | SMD 3535 | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20


12406C/B/W





12606C/W/W

12606C | 15W | SMD 3535 | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20


12606C/B/W





12906C/W/W

12906C | 20W | SMD 3535 | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20


12906C/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12406C/W/W	White	Warm white	3000K	10W	800lm	25°	230V		40	Complete with 700mA driver
12406C/B/W	Black	Warm white	3000K	10W	800lm	25°	230V		40	Complete with 700mA driver
12606C/W/W	White	Warm white	3000K	15W	1200lm	25°	230V		30	Complete with 700mA driver
12606C/B/W	Black	Warm white	3000K	15W	1200lm	25°	230V		30	Complete with 700mA driver
12906C/W/W	White	Warm white	3000K	20W	1600lm	25°	230V		20	Complete with 700mA driver
12906C/B/W	Black	Warm white	3000K	20W	1600lm	25°	230V		20	Complete with 700mA driver

Adjustable COB Ceiling Lights







12108X | 8W | COB LED | Dimmable | Aluminium







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12108X/W/W	White	Warm white	3000K	8W	640lm	36°	230V	⏚	36	Complete with 350mA dimmable driver

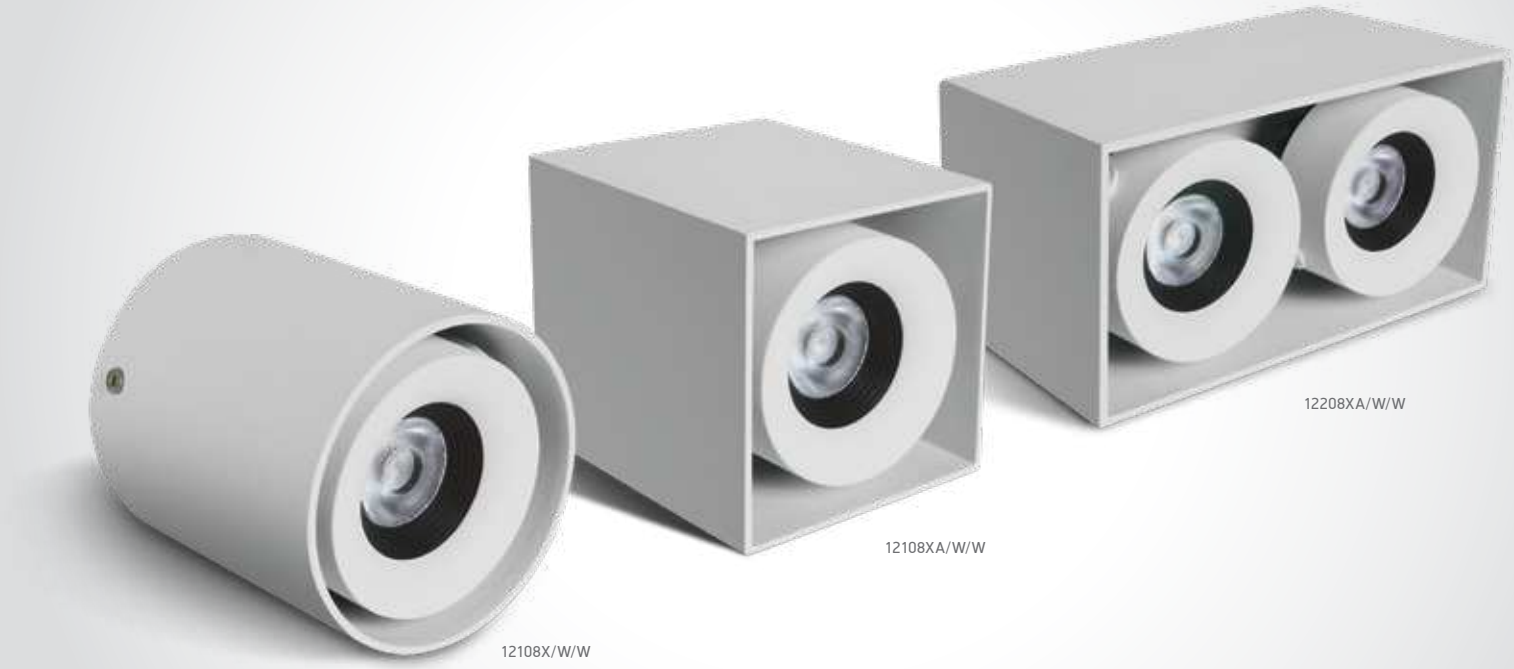


Adjustable COB Ceiling Lights



12108XA | 8W | COB LED | Dimmable | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
ADJUSTABLE
CE 3 YEAR
IP20








12208XA | 2x8W | COB LED | Dimmable | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
ADJUSTABLE
CE 3 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12108XA/W/W	White	Warm white	3000K	8W	640lm	36°	230V	⏚	36	Complete with 350mA dimmable driver
12208XA/W/W	White	Warm white	3000K	2x8W	2x640lm	36°	230V	⏚	24	Complete with 350mA dimmable driver

The SMD Cylinders
Aluminium





12115L/B/W

12115L | 15W | SMD LED | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP40








12125L | 25W | SMD LED | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP40










12135L | 35W | SMD LED | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP40







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
12115L/B/W	Black	Warm white	3000K	15W	1280lm	230V		36	Complete with 350mA driver
12125L/W/W	White	Warm white	3000K	25W	2050lm	230V		36	Complete with 600mA driver
12135L/W/W	White	Warm white	3000K	35W	3000lm	230V		12	Complete with 800mA driver



The SMD Cylinders
Aluminium




12112D | 12W | SMD LED | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR UGR19
new
IP44












12120D | 20W | SMD LED | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR UGR19
new
IP44












12125D | 25W | SMD LED | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR UGR19
new
IP44












12130D | 30W | SMD LED | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR UGR19
new
IP44









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112D/W/V	White	CCT V	3000K-4000K-5000K	12W	1200lm	120°	230V		30	Complete with 300mA driver
12112D/B/V	Black	CCT V	3000K-4000K-5000K	12W	1200lm	120°	230V		30	Complete with 300mA driver
12120D/W/V	White	CCT V	3000K-4000K-5000K	20W	2000lm	120°	230V		30	Complete with 500mA driver
12120D/B/V	Black	CCT V	3000K-4000K-5000K	20W	2000lm	120°	230V		30	Complete with 500mA driver
12125D/W/V	White	CCT V	3000K-4000K-5000K	25W	2500lm	120°	230V		20	Complete with 650mA driver
12125D/B/V	Black	CCT V	3000K-4000K-5000K	25W	2500lm	120°	230V		20	Complete with 650mA driver
12130D/W/V	White	CCT V	3000K-4000K-5000K	30W	3000lm	120°	230V		12	Complete with 750mA driver
12130D/B/V	Black	CCT V	3000K-4000K-5000K	30W	3000lm	120°	230V		12	Complete with 750mA driver



12108FD/W/W

12116FD/W/W

The Hidden Light Cylinders Range



12108FD/W/W

12108FD | 8W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20







12108FD/B/BS

12108FD | 8W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20







12116FD/W/W

12116FD | 16W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20







12116FD/B/BS

12116FD | 16W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR

DARK LIGHT

IP20





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
12108FD/W/W	White	White	Warm white	3000K	8W	560lm	230V		36	Complete with 300mA driver
12108FD/B/BS	Black	Brass	Warm white	3000K	8W	400lm	230V		36	Complete with 300mA driver
12116FD/W/W	White	White	Warm white	3000K	16W	1100lm	230V		20	Complete with 300mA driver
12116FD/B/BS	Black	Brass	Warm white	3000K	16W	800lm	230V		20	Complete with 300mA driver

The COB LED Indoor Cylinder
Aluminium



12130LA | 30W | COB LED | Aluminium

LED BUILT IN


80 CRI

CE

3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12130LA/W/W	White	Warm white	3000K	30W	2500lm	50°	230V	⏚	12	Complete with 700mA driver






67380 | 10W | COB LED | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54








67380A | 25W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67380/W/W	White	Warm white	3000K	10W	730lm	60°	230V		24	Complete with 230mA driver
67380A/W/W	White	Warm white	3000K	25W	1800lm	60°	230V		12	Complete with 600mA driver






67516A | 15W | COB LED | Aluminium

LED BUILT IN
90 CRI
2 YEAR
DARK LIGHT
IP65









67516C | 40W | COB LED | Aluminium

LED BUILT IN
90 CRI
2 YEAR
DARK LIGHT
IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67516A/W/W	White	Warm white	3000K	15W	1200lm	40°	230V	⏚	24	Complete with 350mA driver
67516C/W/W	White	Warm white	3000K	40W	3200lm	40°	230V	⏚	6	Complete with 1000mA driver

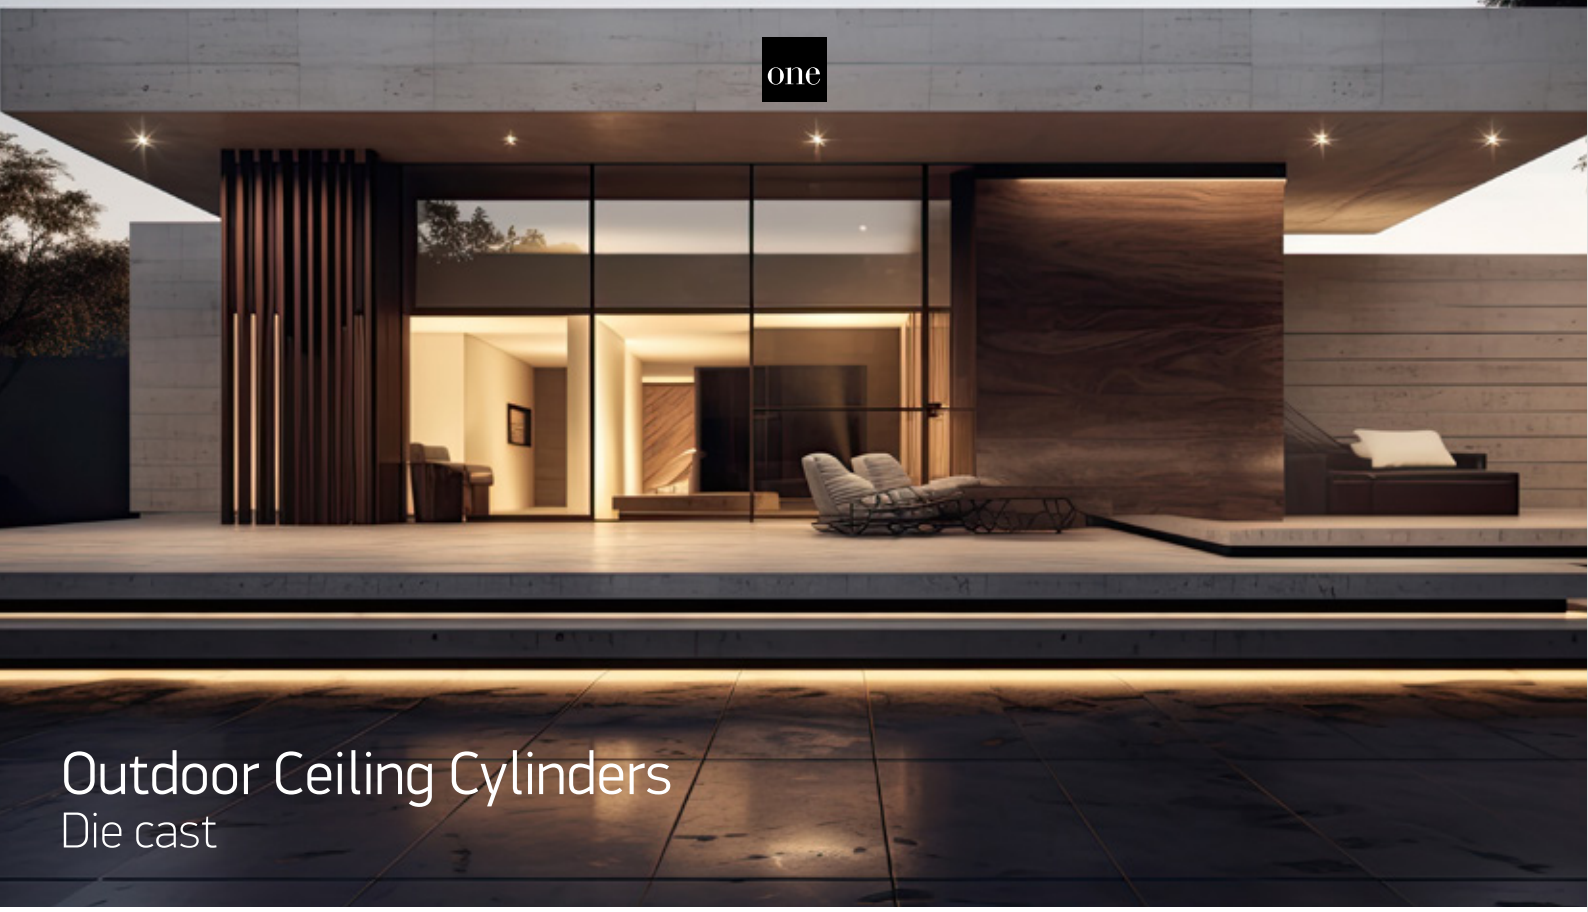

Outdoor Ceiling Cylinders
Die cast




67138E/G/D | 6x1W | LED | Die cast

LED BUILT IN

CE 2 YEAR

IP54 offer







67138C/G/D

67138C | 6x1W | LED | Die cast


LED BUILT IN

CE 2 YEAR

IP54 offer



67138C/G/W






67138D | 6x1W | LED | Die cast

LED BUILT IN

CE 2 YEAR

IP54 offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67138E/G/D	Grey	Daylight	6000K	6x1W	440lm	230V		12	Complete with driver
67138C/G/D	Grey	Daylight	6000K	6x1W	440lm	230V		12	Complete with driver
67138C/G/W	Grey	Warm white	3000K	6x1W	440lm	230V		12	Complete with driver
67138D/G/D	Grey	Daylight	6000K	6x1W	440lm	230V		12	Complete with driver



67138D/G/W

67138C/B/W

Outdoor Ceiling Cylinders
Die cast



67138C/W/W

67138C | 6W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR


IP54



67138C/AN/W



67138C/B/W





67138D/AN/W

67138D | 6W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR


IP54



67138D/B/W



67138D/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138C/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138C/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138C/B/W	Black	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138D/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138D/B/W	Black	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138D/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver




Outdoor Wall Cylinders
Down beam



67138E | 6W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54








67138E | 6W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54








67138E | 6W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54








67138E | 6W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138E/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver
67138E/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver
67138E/B/W	Black	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver
67138E/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver




Outdoor Wall Cylinders
Down beam



67138F | 6W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54








67138F | 6W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138F/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver
67138F/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver




67138/AN/W


67138 | 2x6W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67138/W/W


67138/B/W


67138/G/W





67138A/AN/W

67138A | 2x6W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67138A/W/W


67138A/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138/W/W	White	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138/AN/W	Anthracite	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138/B/W	Black	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138/G/W	Grey	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138A/W/W	White	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138A/AN/W	Anthracite	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138A/B/W	Black	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver



Outdoor Wall Cylinders High Power

67138EL | 20W | COB LED | Die cast



67138EL/AN/C

LED BUILT IN

80 CRI


TRIAC DIMMABLE

2 YEAR

IP65



67138EL/AN/W



67138L | 2x20W | COB LED | Die cast



67138L/AN/C

LED BUILT IN

80 CRI


TRIAC DIMMABLE

2 YEAR

IP65



67138L/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138EL/AN/C	Anthracite	Cool white	4000K	20W	1400lm	35°	230V		4	AC LED
67138EL/AN/W	Anthracite	Warm white	3000K	20W	1400lm	35°	230V		4	AC LED
67138L/AN/C	Anthracite	Cool white	4000K	2x20W	2x1400lm	35°	230V		2	AC LED
67138L/AN/W	Anthracite	Warm white	3000K	2x20W	2x1400lm	35°	230V		2	AC LED




Indoor/Outdoor Wall Lights
Die cast



67480A | 6W | COB LED | Die cast

LED BUILT IN
80 CRI
IK06
CE
2 YEAR
IP65








67480B | 2x6W | COB LED | Die cast

LED BUILT IN
80 CRI
IK06
CE
2 YEAR
IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67480A/AN/W	Anthracite	Warm white	3000K	6W	480lm	230V		8	Complete with 500mA driver
67480B/AN/W	Anthracite	Warm white	3000K	2x6W	960lm	230V		8	Complete with 500mA driver



67524A/AN/W



67524B/AN/W

The Cube Wall Lights
Die cast




67524A/AN/W

67524A | 6W | COB LED | Die cast

LED BUILT IN
80 CRI
IK10
CE
2 YEAR
IP65



67524A/W/W






67524B/AN/W

67524B | 2x6W | COB LED | Die cast

LED BUILT IN
80 CRI
IK10
CE
2 YEAR
IP65



67524B/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67524A/W/W	White	Warm white	3000K	6W	500lm	36°	230V	⏚	12	Complete with 500mA driver
67524A/AN/W	Anthracite	Warm white	3000K	6W	500lm	36°	230V	⏚	12	Complete with 500mA driver
67524B/W/W	White	Warm white	3000K	2x6W	1000lm	36°	230V	⏚	12	Complete with 500mA driver
67524B/AN/W	Anthracite	Warm white	3000K	2x6W	1000lm	36°	230V	⏚	12	Complete with 500mA driver



Wall Adjustable Beams



67440/AN/W

67440 | 9W | SMD 2835 | Adjustable beam | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR

IP54



67440/W/W





67440A | 11W | SMD 2835 | Adjustable beam | Die cast

LED BUILT IN


80 CRI

CE

2 YEAR

IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67440/W/W	White	Warm white	3000K	9W	600lm	230V	⏚	8	Complete with 350mA driver
67440/AN/W	Anthracite	Warm white	3000K	9W	600lm	230V	⏚	8	Complete with 350mA driver
67440A/AN/W	Anthracite	Warm white	3000K	11W	700lm	230V	⏚	8	Complete with 350mA driver




The Glass Face Wall Lights



67076 | 4W | SMD LED | Glass + metal

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP65








67076A | 5W | SMD LED | Glass + metal

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67076/W/W	White	Warm white	3000K	4W	300lm	230V	⏚	12	AC LED
67076/B/W	Black	Warm white	3000K	4W	300lm	230V	⏚	12	AC LED
67076A/W/W	White	Warm white	3000K	5W	350lm	230V	⏚	12	AC LED
67076A/B/W	Black	Warm white	3000K	5W	350lm	230V	⏚	12	AC LED




Outdoor Wall Up & Down Lights
Die cast



67374 | 2x3W | SMD 2835 | Die cast


LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54





67374 | 2x3W | SMD 2835 | Die cast


LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54





67374A | 2x6W | SMD 2835 | Die cast


LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54





67374A | 2x6W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67374/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67374/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67374A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67374A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver





67492 | 12W | SMD 2835 | Plastic + PC


LED BUILT IN

80 CRI

CE

2 YEAR

IP54







67492P | 12W | SMD 2835 | Sensor | Plastic + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67492/AN/W	Anthracite	Warm white	3000K	12W	600lm	230V	☐	12	Complete with 300mA driver
67492P/AN/W	Anthracite	Warm white	3000K	12W	600lm	230V	☐	12	Complete with 300mA driver

Outdoor Wall Up & Down Light



67474A | 10W | LED | Die cast

LED BUILT IN


80 CRI

CE

2 YEAR

IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67474A/AN/W	Anthracite	Warm white	3000K	10W	700lm	230V	⏚	12	AC LED



67474A/AN/W

Outdoor Wall Up & Down Lights



67362C/W/W

67362C | 2x4,5W | SMD 3014 | Die cast


LED BUILT IN

80 CRI

CE

2 YEAR

IP54





67362C/AN/W

67362C | 2x4,5W | SMD 3014 | Die cast


LED BUILT IN

80 CRI

CE

2 YEAR

IP54





67392/W/W

67392 | 7W | SMD 2835 | ABS + PC


LED BUILT IN

80 CRI

CE

2 YEAR

IP65





67392/AN/W

67392 | 7W | SMD 2835 | ABS + PC


LED BUILT IN

80 CRI


CE

2 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67362C/W/W	White	Warm white	3000K	2x4,5W	2x315lm	230V		12	Complete with 350mA driver
67362C/AN/W	Anthracite	Warm white	3000K	2x4,5W	2x315lm	230V		12	Complete with 350mA driver
67392/W/W	White	Warm white	3000K	7W	400lm	230V		20	Complete with 500mA driver
67392/AN/W	Anthracite	Warm white	3000K	7W	400lm	230V		20	Complete with 500mA driver

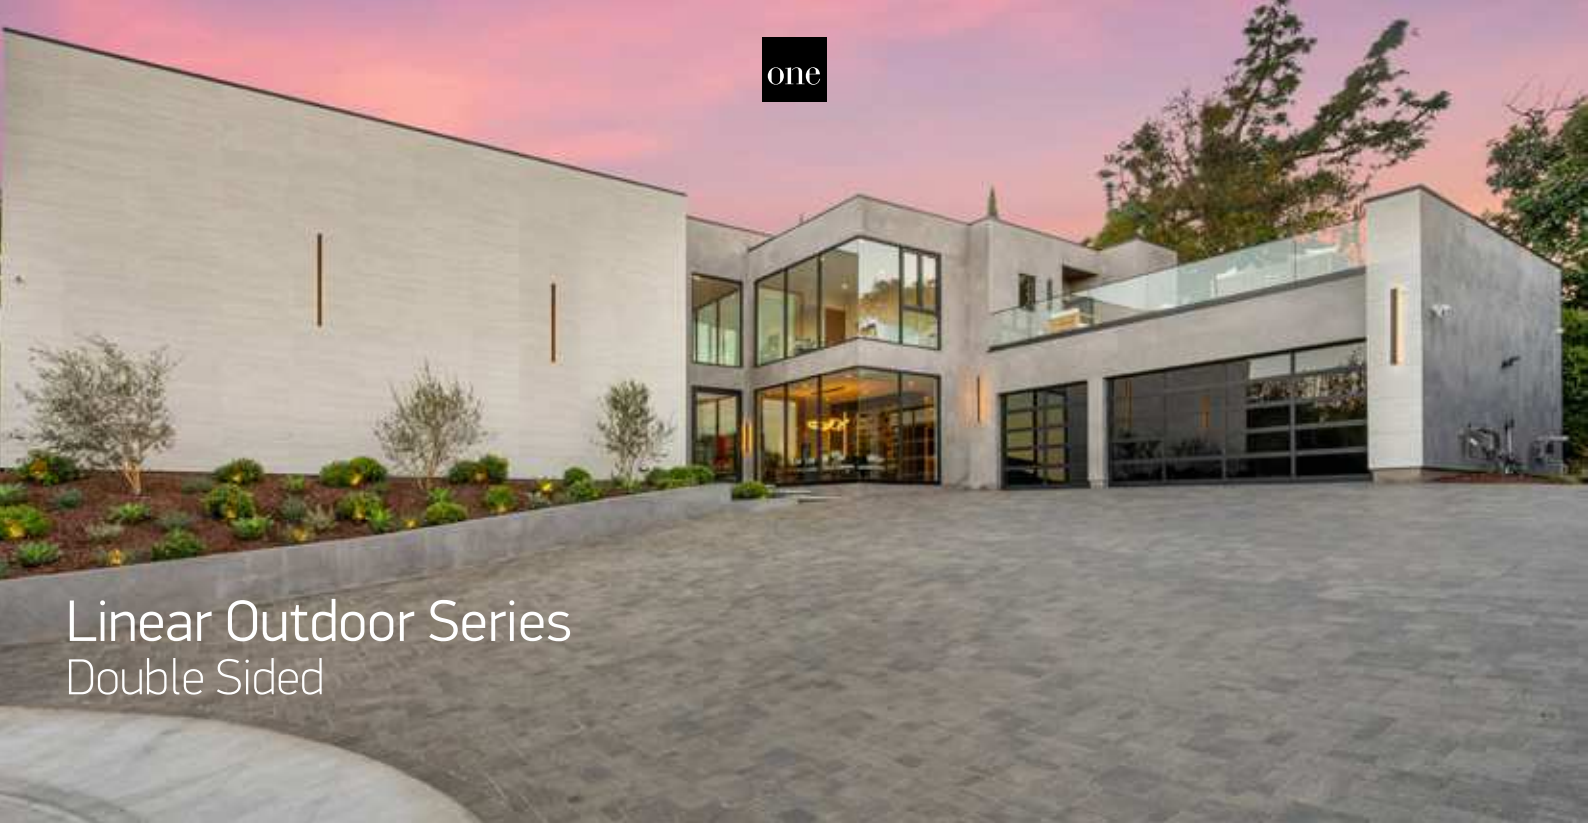

Linear Outdoor Series
Double Sided



67526B1/W/W

67526B1 | 2x6W | SMD 3030 | Die cast

LED BUILT IN

80 CRI

IK07


CE

2 YEAR

IP65



67526B1/AN/W





67526B2/W/W

67526B2 | 2x10W | SMD 3030 | Die cast

LED BUILT IN

80 CRI

IK07


CE

2 YEAR

IP65



67526B2/AN/W





67526B3/W/W

67526B3 | 2x13W | SMD 3030 | Die cast

LED BUILT IN

80 CRI

IK07


CE

2 YEAR

IP65



67526B3/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67526B1/W/W	White	Warm white	3000K	2x6W	720lm	230V		12	Complete with 300mA driver
67526B1/AN/W	Anthracite	Warm white	3000K	2x6W	720lm	230V		12	Complete with 300mA driver
67526B2/W/W	White	Warm white	3000K	2x10W	1200lm	230V		6	Complete with 500mA driver
67526B2/AN/W	Anthracite	Warm white	3000K	2x10W	1200lm	230V		6	Complete with 500mA driver
67526B3/W/W	White	Warm white	3000K	2x13W	1560lm	230V		4	Complete with 700mA driver
67526B3/AN/W	Anthracite	Warm white	3000K	2x13W	1560lm	230V		4	Complete with 700mA driver




Linear Outdoor Series
Single Sided



67526A1 | 8W | SMD 3030 | Die cast

LED BUILT IN
80 CRI
IK07
CE
2 YEAR
IP65








67526A2 | 9W | SMD 3030 | Die cast

LED BUILT IN
80 CRI
IK07
CE
2 YEAR
IP65








67526A3 | 13W | SMD 3030 | Die cast

LED BUILT IN
80 CRI
IK07
CE
2 YEAR
IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67526A1/W/W	White	Warm white	3000K	8W	480lm	230V		12	Complete with 350mA driver
67526A1/AN/W	Anthracite	Warm white	3000K	8W	480lm	230V		12	Complete with 350mA driver
67526A2/W/W	White	Warm white	3000K	9W	540lm	230V		6	Complete with 500mA driver
67526A2/AN/W	Anthracite	Warm white	3000K	9W	540lm	230V		6	Complete with 500mA driver
67526A3/W/W	White	Warm white	3000K	13W	780lm	230V		4	Complete with 700mA driver
67526A3/AN/W	Anthracite	Warm white	3000K	13W	780lm	230V		4	Complete with 700mA driver




Outdoor General Lighting
ABS + PC



67394A | 3,5W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65






67394/W/W

67394 | 3,5W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



67394/AN/W






67364 | 8W | SMD LED | Die cast + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54






Automatic day/night operation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67394A/AN/W	Anthracite	Warm white	3000K	3,5W	250lm	230V		40	AC LED
67394/W/W	White	Warm white	3000K	3,5W	250lm	230V		24	AC LED
67394/AN/W	Anthracite	Warm white	3000K	3,5W	250lm	230V		24	AC LED
67364/G/W	Grey	Warm white	3000K	8W	450lm	230V		8	Photocell




Indoor/Outdoor Wall Lights
ABS + PC

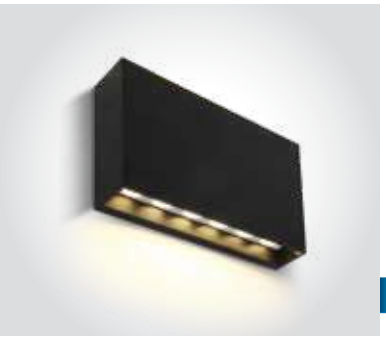


67472A | 6W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP65






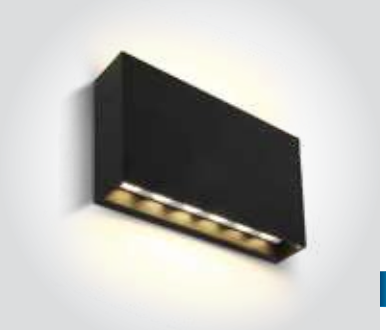

67472 | 2x6W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67472A/AN/W	Anthracite	Warm white	3000K	6W	500lm	230V		20	Complete with 300mA driver
67472/AN/W	Anthracite	Warm white	3000K	2x6W	2x500lm	230V		20	Complete with 300mA driver



Outdoor Slim Oval Range
Up & down beam



67378A | 2x6W | SMD 2835 | Die cast

LED BUILT IN


80 CRI

CE

2 YEAR

IP54







67378A | 2x6W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67378A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67378A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver




Outdoor Slim Range
Up & down beam


67376/AN/W

67376 | 2x3W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67376/W/W

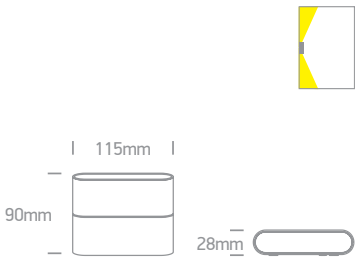



67376A/AN/W

67376A | 2x6W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67376A/W/W

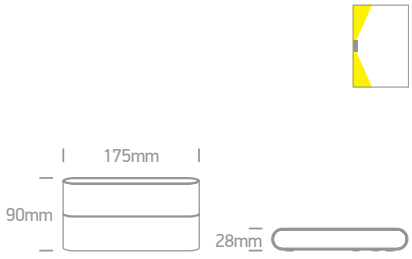



67412/AN/W

67412 | 2x6W | COB LED | Adjustable beam | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67412/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67376/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67376/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67376A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67376A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67412/W/W	White	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver
67412/AN/W	Anthracite	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver




Adjustable Beams
Indoor / Outdoor



67340A | 2x3W | LED | Adjustable beam | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54








67340A | 2x3W | LED | Adjustable beam | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54








67340A | 2x3W | LED | Adjustable beam | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54








67354 | 2x3W | LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54 · offer



Use provided accessories to change to narrow beam.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67340A/W/W	White	Warm white	3000K	2x3W	2x210lm	230V	⏚	8	Complete with 700mA driver
67340A/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V	⏚	8	Complete with 700mA driver
67340A/G/W	Grey	Warm white	3000K	2x3W	2x210lm	230V	⏚	8	Complete with 700mA driver
67354/G/W	Grey	Warm white	3000K	2x3W	182lm	100-240V	⏚	12	Complete with driver




Outdoor Wall Dark Lights
Die cast



67398 | 3W | COB LED | Die cast

LED BUILT IN
80 CRI
2 YEAR
DARK LIGHT
IP54









67398A | 2x3W | LED | Die cast

LED BUILT IN
80 CRI
2 YEAR
DARK LIGHT
IP54







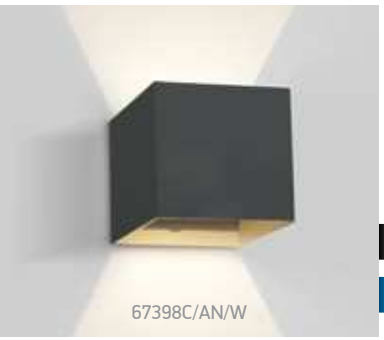


67398C | 2x3W | LED | Die cast

LED BUILT IN
80 CRI
2 YEAR
DARK LIGHT
IP54








Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67398/W/W	White	Warm white	3000K	3W	200lm	100-240V		24	Complete with 350mA driver
67398/AN/W	Anthracite	Warm white	3000K	3W	200lm	100-240V		24	Complete with 350mA driver
67398A/W/W	White	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with 350mA driver
67398A/AN/W	Anthracite	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with 350mA driver
67398A/B/W	Black	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with 350mA driver
67398C/W/W	White	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with 350mA driver
67398C/AN/W	Anthracite	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with 350mA driver
67398C/B/W	Black	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with 350mA driver




The Backlight Range

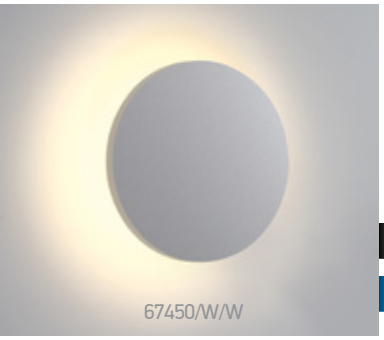

67450 | 7W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · DARK LIGHT · IP54








67532 | 15W | SMD 2835 | Dimmable | Aluminium + PC

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · IK06 · CE · 2 YEAR · DARK LIGHT · IP65









67450A | 7W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · DARK LIGHT · IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67450/W/W	White	Warm white	3000K	7W	600lm	230V	⧈	24	Complete with 300mA driver
67450/AN/W	Anthracite	Warm white	3000K	7W	600lm	230V	⧈	24	Complete with 300mA driver
67532/W/W	White	Warm white	3000K	15W	1100lm	230V	⏚	12	Complete with 190mA dimmable driver
67532/B/W	Black	Warm white	3000K	15W	1100lm	230V	⏚	12	Complete with 190mA dimmable driver
67450A/W/W	White	Warm white	3000K	7W	600lm	230V	⧈	24	Complete with 300mA driver
67450A/AN/W	Anthracite	Warm white	3000K	7W	600lm	230V	⧈	24	Complete with 300mA driver

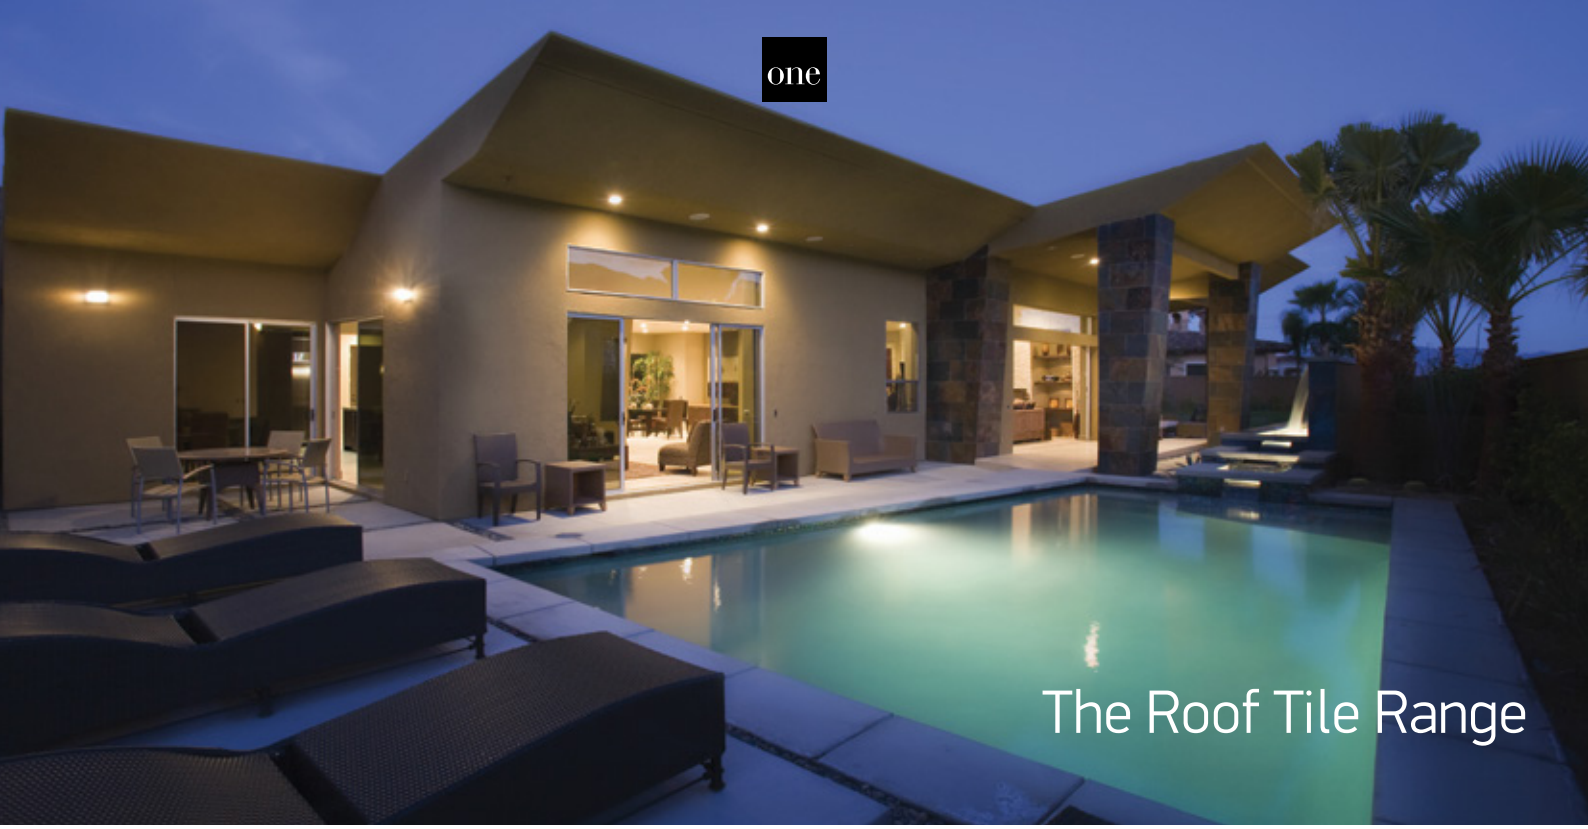

The Roof Tile Range



67422/W/W

67422 | 6W | COB LED | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR

IP54



67422/AN/W





67422A/W/W

67422A | 2x6W | COB LED | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR

IP54



67422A/AN/W





67512/W/W

67512 | 8W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI


CE

2 YEAR

IP65



67512/AN/W




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67422/W/W	White	Warm white	3000K	6W	400lm	230V		24	Complete with 500mA driver
67422/AN/W	Anthracite	Warm white	3000K	6W	400lm	230V		24	Complete with 500mA driver
67422A/W/W	White	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver
67422A/AN/W	Anthracite	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver
67512/W/W	White	Warm white	3000K	8W	400lm	230V		20	Complete with 200mA driver
67512/AN/W	Anthracite	Warm white	3000K	8W	400lm	230V		20	Complete with 200mA driver

Outdoor Wall Light
Die cast



67124/G/BL

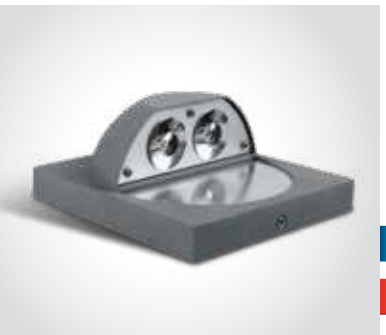

67124 | 2x1W | LED | Die cast


LED BUILT IN

2 YEAR

IP54

offer



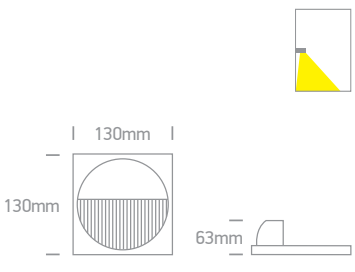

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67124/G/BL	Grey	Blue	-	2x1W	-	230V		18	Complete with driver

Indoor/Outdoor Wall Lines
Die cast






67170 | 3W | LED | Die cast


LED BUILT IN

2 YEAR


IP54

offer





Order Code	Colour	Light Colour	Watts	Input	Class		Notes
67170/G/BL	Grey	Blue	3W	100-240V		40	Complete with driver

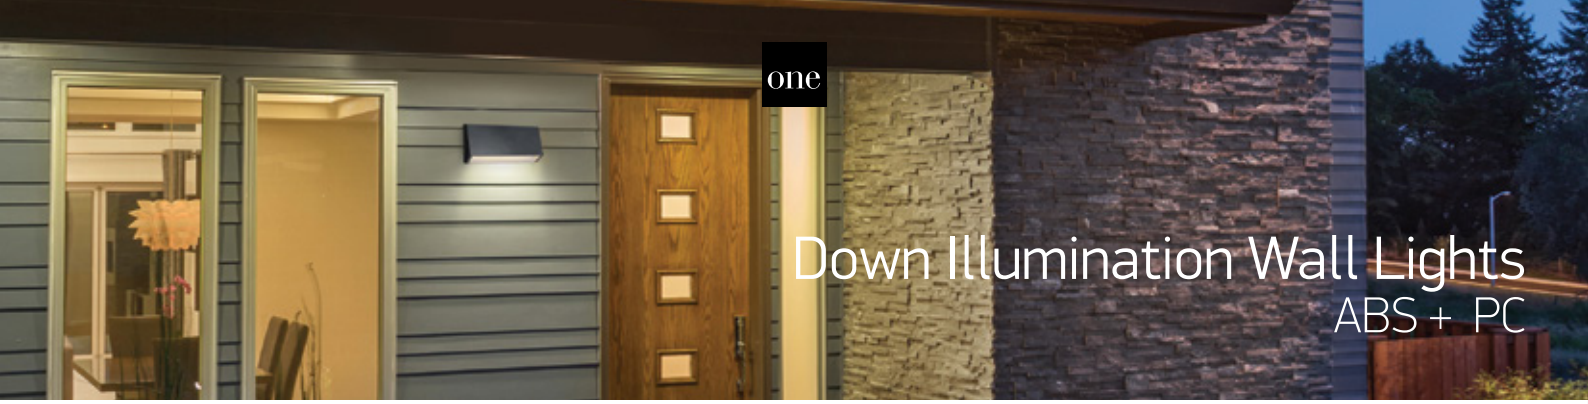


Down Illumination Wall Lights
ABS + PC

67386A | 1,5W | SMD 2835 | ABS + PC


67386A/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP65


67386A/AN/W




67386C | 4W | SMD 2835 | ABS + PC


67386C/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP65


67386C/AN/W




67396 | 6W | SMD 2835 | ABS + PC


67396/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP65


67396/AN/W




67396A | 6W | SMD 2835 | Sensor | ABS + PC


67396A/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP65


67396A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67386A/W/W	White	Warm white	3000K	1,5W	80lm	230V	☐	40	AC LED
67386A/AN/W	Anthracite	Warm white	3000K	1,5W	80lm	230V	☐	40	AC LED
67386C/W/W	White	Warm white	3000K	4W	220lm	230V	☐	20	AC LED
67386C/AN/W	Anthracite	Warm white	3000K	4W	220lm	230V	☐	20	AC LED
67396/W/W	White	Warm white	3000K	6W	300lm	230V	☐	20	AC LED
67396/AN/W	Anthracite	Warm white	3000K	6W	300lm	230V	☐	20	AC LED
67396A/W/W	White	Warm white	3000K	6W	300lm	230V	☐	20	AC LED
67396A/AN/W	Anthracite	Warm white	3000K	6W	300lm	230V	☐	20	AC LED

Outdoor Dark Lights
ABS + PC




67388B/W/W



67388B | 2W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
DARK LIGHT
IP65






67388C/W/W

67388C | 2W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
DARK LIGHT
IP65






67388C/AN/W

67388C | 2W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
DARK LIGHT
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67388B/W/W	White	Warm white	3000K	2W	60lm	230V		40	AC LED
67388C/W/W	White	Warm white	3000K	2W	75lm	230V		24	AC LED
67388C/AN/W	Anthracite	Warm white	3000K	2W	75lm	230V		24	AC LED



Round Indoor/Outdoor Wall Dark Lights

Die cast



67359 | 3W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE


2 YEAR

DARK LIGHT

IP54





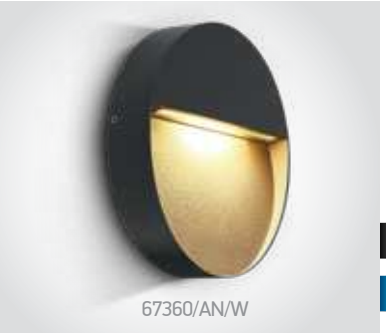

67360 | 9W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR


DARK LIGHT

IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67359/W/W	White	Warm white	3000K	3W	200lm	100-240V		30	Complete with 350mA driver
67359/AN/W	Anthracite	Warm white	3000K	3W	200lm	100-240V		30	Complete with 350mA driver
67360/W/W	White	Warm white	3000K	9W	350lm	230V		12	Complete with 700mA driver
67360/AN/W	Anthracite	Warm white	3000K	9W	350lm	230V		12	Complete with 700mA driver

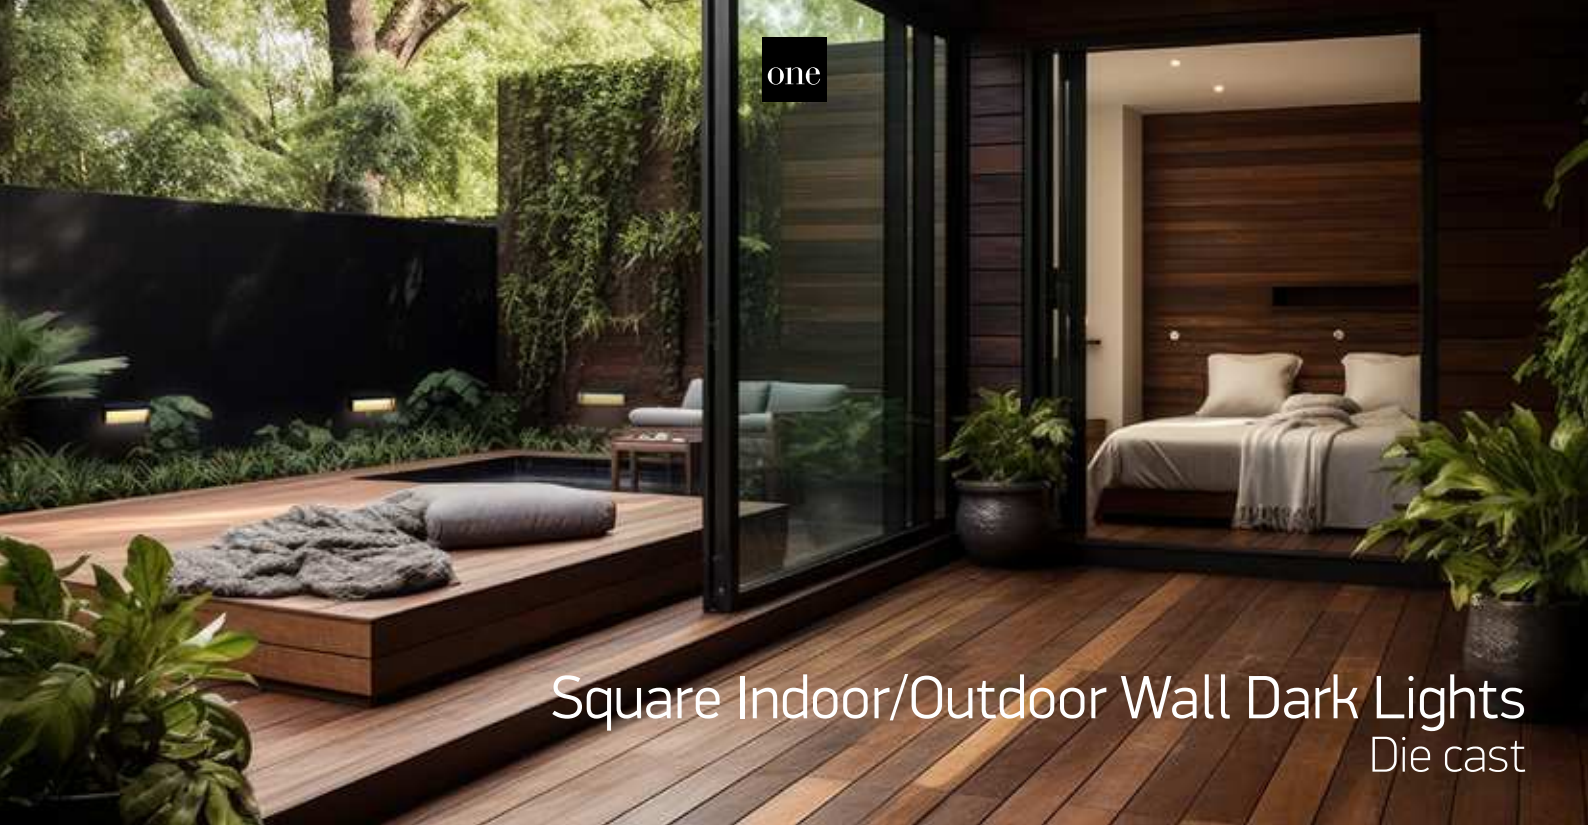

Square Indoor/Outdoor Wall Dark Lights
Die cast




67359A/AN/W

67359A | 4W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP54



67359A/W/W






67360A/AN/W

67360A | 9W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP54



67360A/W/W






67359B/AN/W

67359B | 7W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP54



67359B/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67359A/W/W	White	Warm white	3000K	4W	200lm	100-240V		30	Complete with 350mA driver
67359A/AN/W	Anthracite	Warm white	3000K	4W	200lm	100-240V		30	Complete with 350mA driver
67360A/W/W	White	Warm white	3000K	9W	450lm	230V		12	Complete with 700mA driver
67360A/AN/W	Anthracite	Warm white	3000K	9W	450lm	230V		12	Complete with 700mA driver
67359B/W/W	White	Warm white	3000K	7W	400lm	230V		24	Complete with 350mA driver
67359B/AN/W	Anthracite	Warm white	3000K	7W	400lm	230V		24	Complete with 350mA driver



Outdoor Dark Lights



67430A/W/W

67430A | 8W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI


CE

2 YEAR

DARK LIGHT

IP65







67430A/AN/W

67430A | 8W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI


CE

2 YEAR

DARK LIGHT

IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67430A/W/W	White	Warm white	3000K	8W	350lm	230V	☐	20	Complete with 300mA driver
67430A/AN/W	Anthracite	Warm white	3000K	8W	350lm	230V	☐	20	Complete with 300mA driver



67418/W/W



67414/AN/W


Outdoor Dark Lights




67414/W/W

67414 | 3W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP65



67414/AN/W






67417/W/W

67417 | 1,5W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
IK06
CE
2 YEAR
DARK LIGHT
IP65



67417/AN/W






67418/W/W

67418 | 3W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67414/W/W	White	Warm white	3000K	3W	100lm	230V		20	AC LED
67414/AN/W	Anthracite	Warm white	3000K	3W	100lm	230V		20	AC LED
67417/W/W	White	Warm white	3000K	1.5W	40lm	230V		40	AC LED
67417/AN/W	Anthracite	Warm white	3000K	1.5W	40lm	230V		40	AC LED
67418/W/W	White	Warm white	3000K	3W	100lm	230V		40	AC LED

Outdoor Wall Bricks

Die cast

67174/G/D



67176/G/W





67174 | 3W | LED | Die cast


LED BUILT IN

80 CRI

CE

2 YEAR

IP54





67176 | 3W | LED | Die cast


LED BUILT IN

80 CRI

CE

2 YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67174/G/D	Grey	Daylight	6000K	3W	230V	⏚	12	Complete with driver
67176/G/W	Grey	Warm white	3000K	3W	230V	⏚	12	Complete with driver



Outdoor Wall Bricks
ABS + PC




67502A | 6W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65



Removable front grill.






67502B | 6W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65



Removable front part.






67502C | 6W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP65



Removable front grill.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67502A/W/W	White	Warm white	3000K	6W	120lm	230V	⧈	20	AC LED
67502B/W/W	White	Warm white	3000K	6W	110lm	230V	⧈	20	AAC LED
67502C/W/W	White	Warm white	3000K	6W	330lm	230V	⧈	20	AC LED

The Classic Outdoor Range
Die cast



67442B/B/W



67444C/B/W




67444C | 10W | SMD 2835 | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP54






67442B | 10W | SMD 2835 | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP54






67442/W/W

67442 | 10W | SMD 2835 | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP54






67442/B/W

67442 | 10W | SMD 2835 | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67444C/B/W	Black	Warm white	3000K	10W	600lm	230V		12	AC LED
67442B/B/W	Black	Warm white	3000K	10W	600lm	230V		12	AC LED
67442/W/W	White	Warm white	3000K	10W	600lm	230V		12	AC LED
67442/B/W	Black	Warm white	3000K	10W	600lm	230V		12	AC LED

The Cage Wall/Ceiling Light



67420AL | 7W | SMD 2835 | Die cast + frosted glass

LED BUILT IN


80 CRI

CE

2 YEAR

IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67420AL/AN/W	Anthracite	Warm white	3000K	7W	300lm	230V	⏚	6	Complete with 350mA driver





67484/W/W

67484 | 6W | LED | Dimmable | Die cast

LED BUILT IN
80 CRI
TRIAC DIMMABLE
IK06
CE
2 YEAR
IP65


67484/B/W





67478/W/W

67478 | 12W | SMD 2835 | Die cast + PC

LED BUILT IN
80 CRI
IK06
CE
2 YEAR
DARK LIGHT
IP65



67478/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67484/W/W	White	Warm white	3000K	6W	480lm	230V		12	AC LED
67484/B/W	Black	Warm white	3000K	6W	480lm	230V		12	AC LED
67478/W/W	White	Warm white	3000K	12W	325lm	230V		6	Complete with 300mA driver
67478/B/W	Black	Warm white	3000K	12W	325lm	230V		6	Complete with 300mA driver



Outdoor Wall Lights

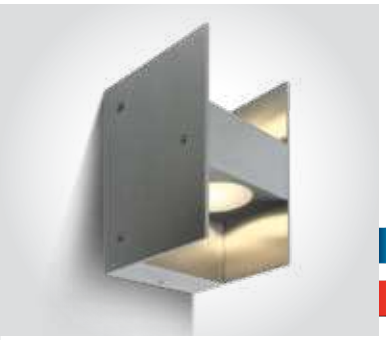



67336 | 2x1W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

IP54 offer







67242 | 3W | LED | Die cast


LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP54 offer








67126 | 1,5W | LED | Die cast

LED BUILT IN

CE 2 YEAR

IP54 offer



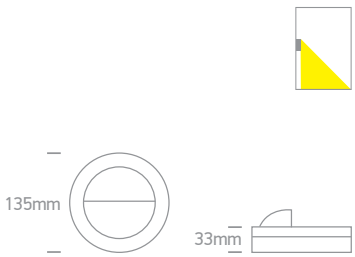

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67336/AL/W	Aluminium	Warm white	3000K	2x1W	130lm	100-240V		20	Complete with driver
67242/G/D	Grey	Daylight	6000K	3W	-	100-240V		30	Complete with driver
67126/G/BL	Grey	Blue	-	1,5W	-	230V		30	Complete with driver



one

Plafo

Pages 487-528

14



Multi LED Slim Plafo

64004/G/C



64002/G/C





64002 | 7W | LED | Die cast


LED BUILT IN

DARK LIGHT

IP20

offer

CE 2 YEAR







64004 | 16W | LED | Die cast


LED BUILT IN

DARK LIGHT

IP20

offer

CE 2 YEAR







64010 | 17W | LED | Die cast

LED BUILT IN

DARK LIGHT

IP20

offer

CE 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
64002/G/C	Grey	Cool white	4000K	7W	400lm	230V	⧈	10	Complete with driver
64004/G/C	Grey	Cool white	4000K	16W	860lm	230V	⧈	10	Complete with driver
64010/G/C	Grey	Cool white	4000K	17W	1100lm	230V	⧈	10	Complete with driver




Square LED Plafo
Steel



62102 | 17W | SMD LED | Steel

LED BUILT IN
80 CRI
CE
2 YEAR
IP20
offer



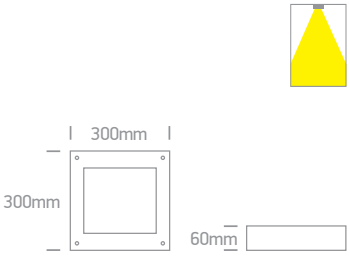




62104 | 30W | SMD LED | Steel

LED BUILT IN
80 CRI
CE
2 YEAR
IP20
offer



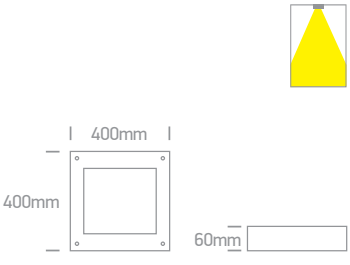

Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
62102/MC	Brushed chrome	Warm white	3000K	17W	230V	⏚	5	Complete with 700mA driver
62104/MC	Brushed chrome	Warm white	3000K	30W	230V	⏚	4	Complete with 700mA driver

Decorative LED Plafo
Metal + PC


62010/G/OR


62010A/G/V


62010/G/OR

62010 | 11W | LED | Metal + PC

LED BUILT IN

CE 2 YEAR


IP20

offer

offer


62010/G/V







62010A | 31W | LED | Metal + PC

LED BUILT IN


CE 2 YEAR

IP20

offer









62014 | 31W | LED | Metal + PC

LED BUILT IN

CE 2 YEAR

IP20

offer







Order Code	Colour	Ring Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
62010/G/OR	Grey	Orange	Warm white	3000K	11W	230V		5	-
62010/G/V	Grey	Violet	Warm white	3000K	11W	230V		5	-
62010A/G/V	Grey	Violet	Warm white	3000K	31W	230V		5	-
62014/G	Grey	-	Warm white	3000K	31W	230V		5	-






62024C | 26W | SMD LED | Metal + plastic

LED BUILT IN

CE 2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62024C/W	White	Warm white	3000K	26W	1600lm	230V	⏚	5	Complete with 700mA driver

The LED Slim Plafo Range
Round



62022B/W/W



62022A | 20W | SMD 2835 | PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP20









62022B | 25W | SMD 2835 | PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62022A/W/W	White	Warm white	3000K	20W	1600lm	230V		5	Complete with 450mA driver
62022B/W/W	White	Warm white	3000K	25W	2000lm	230V		5	Complete with 600mA driver

The LED Plafo Range




62026D/W/W



62026A | 15W | SMD 2835 | Metal + PMMA


LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





62026B | 24W | SMD 2835 | Metal + PMMA


LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





62026C | 30W | SMD 2835 | Metal + PMMA


LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





62026D | 50W | SMD 2835 | Metal + PMMA

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62026A/W	White	Warm white	3000K	15W	1050lm	230V	⏚	5	Complete with driver
62026B/W	White	Warm white	3000K	24W	1700lm	230V	⏚	5	Complete with driver
62026C/W	White	Warm white	3000K	30W	2150lm	230V	⏚	5	Complete with driver
62026D/W/C	White	Cool white	4000K	50W	3750lm	230V	⏚	5	Complete with driver
62026D/W/W	White	Warm white	3000K	50W	3750lm	230V	⏚	5	Complete with driver

The LED Slim Plafo Range



67448 | 24W | SMD LED | Metal + Plastic

LED BUILT IN


85 CRI

CE

2 YEAR

IP20







67448A | 36W | SMD LED | Metal + Plastic

LED BUILT IN


85 CRI

CE

2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67448/W/W	White	Warm white	3000K	24W	1800lm	230V		5	Complete with 550mA driver
67448A/W/W	White	Warm white	3000K	36W	2700lm	230V		5	Complete with 900mA driver

The LED Plafo Range






62154/W/W

62154 | 24W | SMD 2835 | Metal + Plastic

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20








62154/B/W

62154 | 24W | SMD 2835 | Metal + Plastic

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20








62154/C/W

62154 | 24W | SMD 2835 | Metal + Plastic

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62154/W/W	White	Warm white	3000K	24W	1560lm	230V		10	Complete with 200mA driver
62154/B/W	Black	Warm white	3000K	24W	1560lm	230V		10	Complete with 200mA driver
62154/C/W	Chrome	Warm white	3000K	24W	1560lm	230V		10	Complete with 200mA driver

The LED Project Plafo
Metal



67438/W/W



62125D/W/C



62118D | 20W | SMD 2835 | Metal

LED BUILT IN


80 CRI

CE

3 YEAR

IP20







62125D | 25W | SMD 2835 | Metal

LED BUILT IN


80 CRI

CE

3 YEAR

IP20







62150D | 50W | SMD 2835 | Metal

LED BUILT IN


80 CRI

CE

3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62118D/W/W	White	Warm white	3000K	20W	1700lm	120°	230V		1	Complete with 500mA driver
62125D/W/C	White	Cool white	4000K	25W	2125lm	120°	230V		1	Complete with 700mA driver
62125D/W/W	White	Warm white	3000K	25W	2125lm	120°	230V		1	Complete with 700mA driver
62150D/W/C	White	Cool white	4000K	50W	4250lm	120°	230V		1	Complete with 1400mA driver
62150D/W/W	White	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1400mA driver






67438 | 40W | SMD 3030 | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
IP20








67438 | 40W | SMD 3030 | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67438/W/W	White	Warm white	3000K	40W	3400lm	230V	⏚	1	Complete with 1000mA driver
67438/B/W	Black	Warm white	3000K	40W	3400lm	230V	⏚	1	Complete with 1000mA driver



The LED Slim Line Plafo



62146/W/W


62146 | 55W | SMD 2835 | Metal + PS

LED BUILT IN

80 CRI CE 3 YEAR

IP20







62146/B/W


62146 | 55W | SMD 2835 | Metal + PS

LED BUILT IN

80 CRI CE 3 YEAR

IP20








62146A | 50W | SMD 2835 | Metal + PS

LED BUILT IN

80 CRI CE 3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62146/W/W	White	Warm white	3000K	55W	4100lm	230V		1	Complete with 600mA driver
62146/B/W	Black	Warm white	3000K	55W	4100lm	230V		1	Complete with 600mA driver
62146A/B/W	Black	Warm white	3000K	50W	3800lm	230V		1	Complete with 480mA driver






62160 | 62W | SMD 2835 | Metal

LED BUILT IN

80 CRI CE 3 YEAR

IP20






62160A | 62W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62160/W/W	White	Warm white	3000K	62W	3600lm	120°	230V		1	Complete with 1500mA driver
62160A/W/W	White	Warm white	3000K	62W	3600lm	120°	230V		1	Complete with 1500mA driver
62160A/B/W	Black	Warm white	3000K	62W	3600lm	120°	230V		1	Complete with 1500mA driver



The Ultra Slim LED Plafo
Aluminium



62140FB/W/W

62140FB | 40W | SMD 2835 | Aluminium

LED BUILT IN

90 CRI CE 3 YEAR

IP20



62140FB/B/C









62160FB/W/W

62160FB | 60W | SMD 2835 | Aluminium

LED BUILT IN

90 CRI CE 3 YEAR

IP20



62160FB/B/C









62152 | 40W | SMD 2835 | Aluminium


Super slim.

LED BUILT IN


80 CRI CE 3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140FB/W/C	White	Cool white	4000K	40W	3500lm	230V		4	Complete with 1000mA driver
62140FB/W/W	White	Warm white	3000K	40W	3500lm	230V		4	Complete with 1000mA driver
62140FB/B/C	Black	Cool white	4000K	40W	3500lm	230V		4	Complete with 1000mA driver
62160FB/W/C	White	Cool white	4000K	60W	5300lm	230V		3	Complete with 1500mA driver
62160FB/W/W	White	Warm white	3000K	60W	5300lm	230V		3	Complete with 1500mA driver
62160FB/B/C	Black	Cool white	4000K	60W	5300lm	230V		3	Complete with 1500mA driver
62152/W/C	White	Cool white	4000K	40W	2800lm	230V		5	Complete with 950mA driver

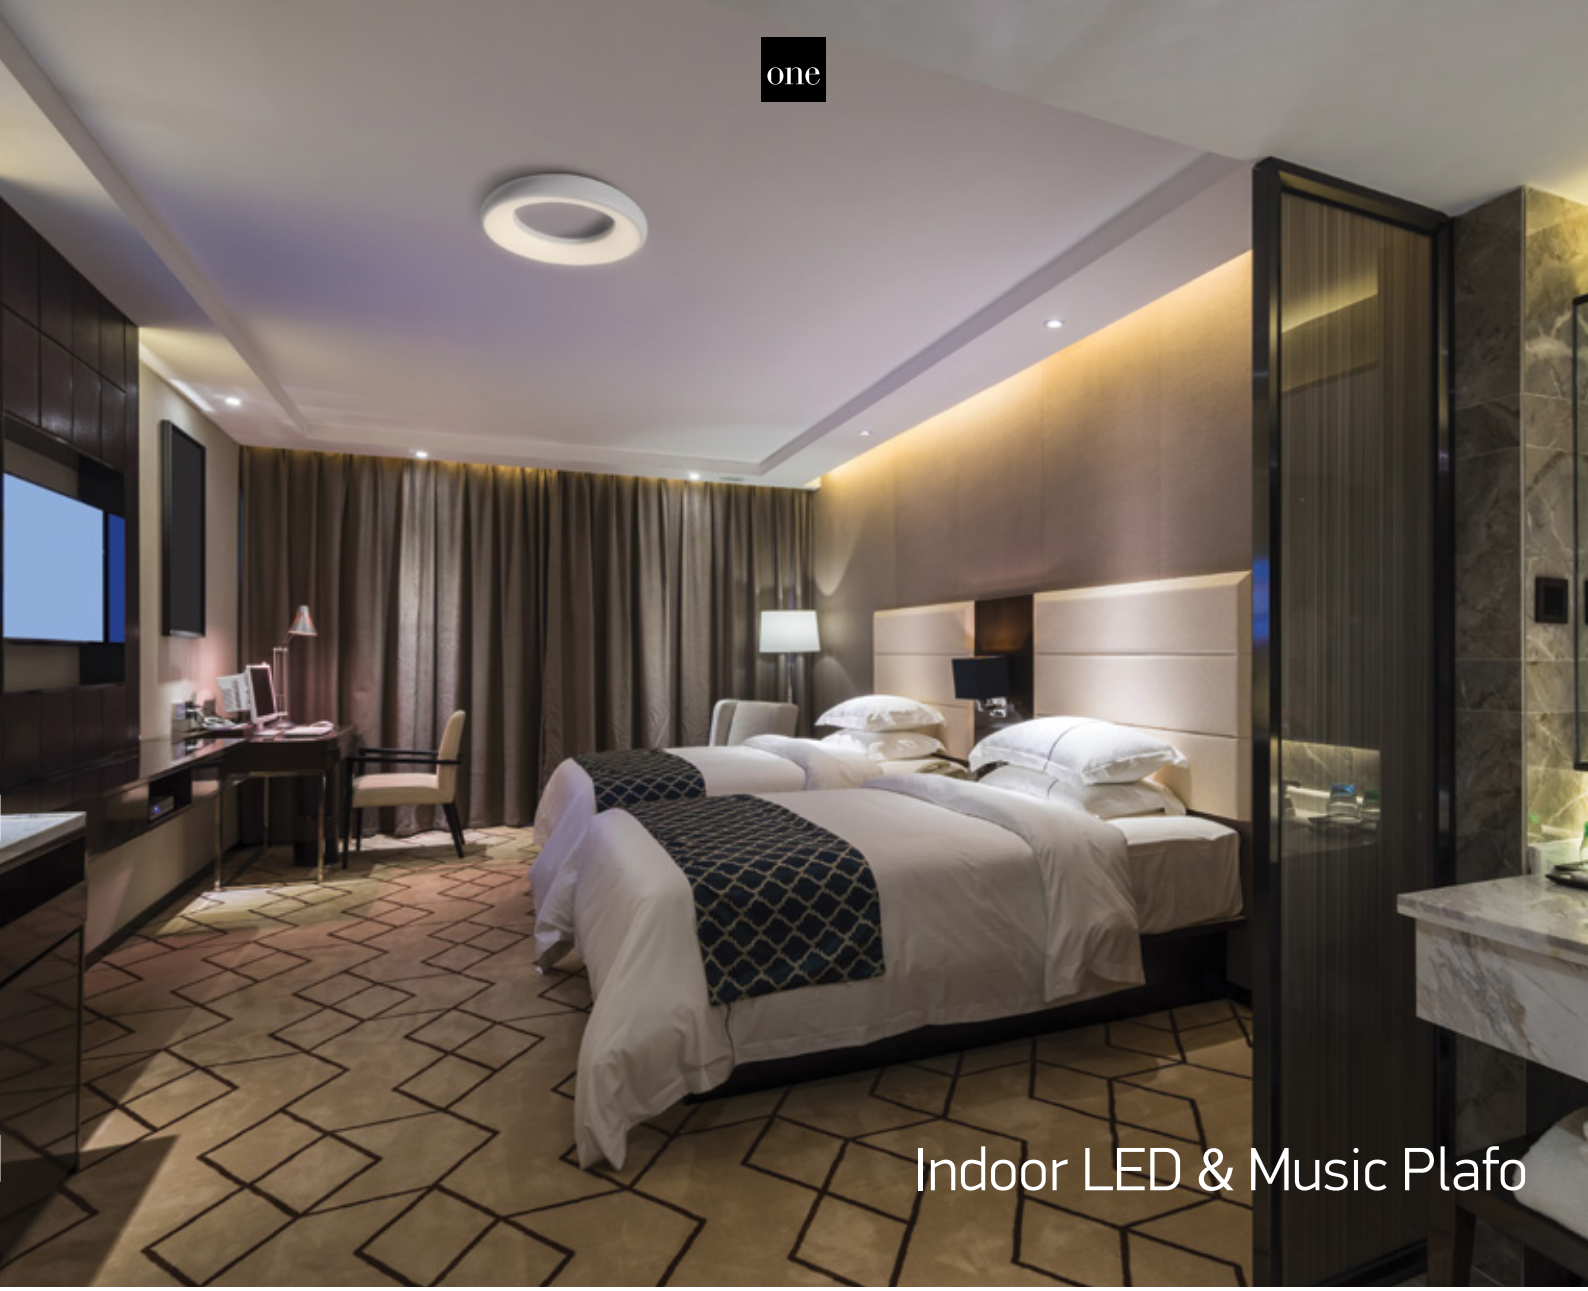

Indoor LED & Music Plafo



67402/W/W

67402 | 25W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI


CE

2 YEAR

IP40



67402/B/W





62025 | 24W | SMD LED | Dimmable + RGB + Speaker | CCT Variable | ABS + PMMA

Bluetooth speaker plafo.

LED BUILT IN

80 CRI

DIMMABLE

CCT V

CE


2 YEAR

IP20

Google play

App Store

Application i-lamp.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67402/W/W	White	Warm white	3000K	25W	1850lm	100-240V		10	Complete with driver
67402/B/W	Black	Warm white	3000K	25W	1850lm	100-240V		10	Complete with driver
62025	White	CCT V	2700K - 6500K	24W	1560lm	100-240V		5	Complete with driver

Slim Line Panel Plafo
Square





62018AF | 18W | SMD 4014 | Aluminium + PC

LED BUILT IN


80 CRI

CE

2 YEAR

IP40





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62018AF/W/W	White	Warm white	3000K	18W	1400lm	230V	⏚	20	Complete with driver

The Ultra Slim LED Panel Plafo
Round

62030F/W/W



62018F/W/W





62018F | 18W | SMD 4014 | Aluminium + PC

LED BUILT IN


80 CRI

CE

2 YEAR

IP40







62030F | 30W | SMD 4014 | Aluminium + PC


LED BUILT IN


80 CRI

CE

2 YEAR

IP40







62038F | 38W | SMD 4014 | Aluminium + PC


LED BUILT IN


80 CRI

CE

2 YEAR

IP40





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62018F/W/W	White	Warm white	3000K	18W	1400lm	230V		20	Complete with driver
62030F/W/W	White	Warm white	3000K	30W	2300lm	230V		10	Complete with driver
62038F/W/C	White	Cool white	4000K	38W	3000lm	230V		5	Complete with driver
62038F/W/W	White	Warm white	3000K	38W	2900lm	230V		5	Complete with driver

The LED Decorative Plafo
Round



62142N/AN/W

62132N/W/W




62132N/AN/W

62132N | 32W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20



62132N/W/W






62132N/BBS/W

62132N | 32W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20



62132N/MG/W






62142N/AN/W

62142N | 42W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20



62142N/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62132N/W/W	White	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62132N/AN/W	Anthracite	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62132N/BBS/W	Brushed brass	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62132N/MG/W	Metal grey	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62142N/W/W	White	Warm white	3000K	42W	3570lm	120°	230V		1	Complete with 1050mA driver
62142N/AN/W	Anthracite	Warm white	3000K	42W	3570lm	120°	230V		1	Complete with 1050mA driver





62130N/W/V

62130N | 20W | SMD 2835 | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
new
IP20


62130N/AN/V





62132N/W/V


62132N | 32W | SMD 2835 | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
new
IP20


62132N/AN/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62130N/W/V	White	CCT V	2700K-3000K-4000K	20W	1700lm	120°	230V	⏚	1	Complete with 500mA driver
62130N/AN/V	Anthracite	CCT V	2700K-3000K-4000K	20W	1700lm	120°	230V	⏚	1	Complete with 500mA driver
62132N/W/V	White	CCT V	2700K-3000K-4000K	32W	2720lm	120°	230V	⏚	1	Complete with 800mA driver
62132N/AN/V	Anthracite	CCT V	2700K-3000K-4000K	32W	2720lm	120°	230V	⏚	1	Complete with 800mA driver

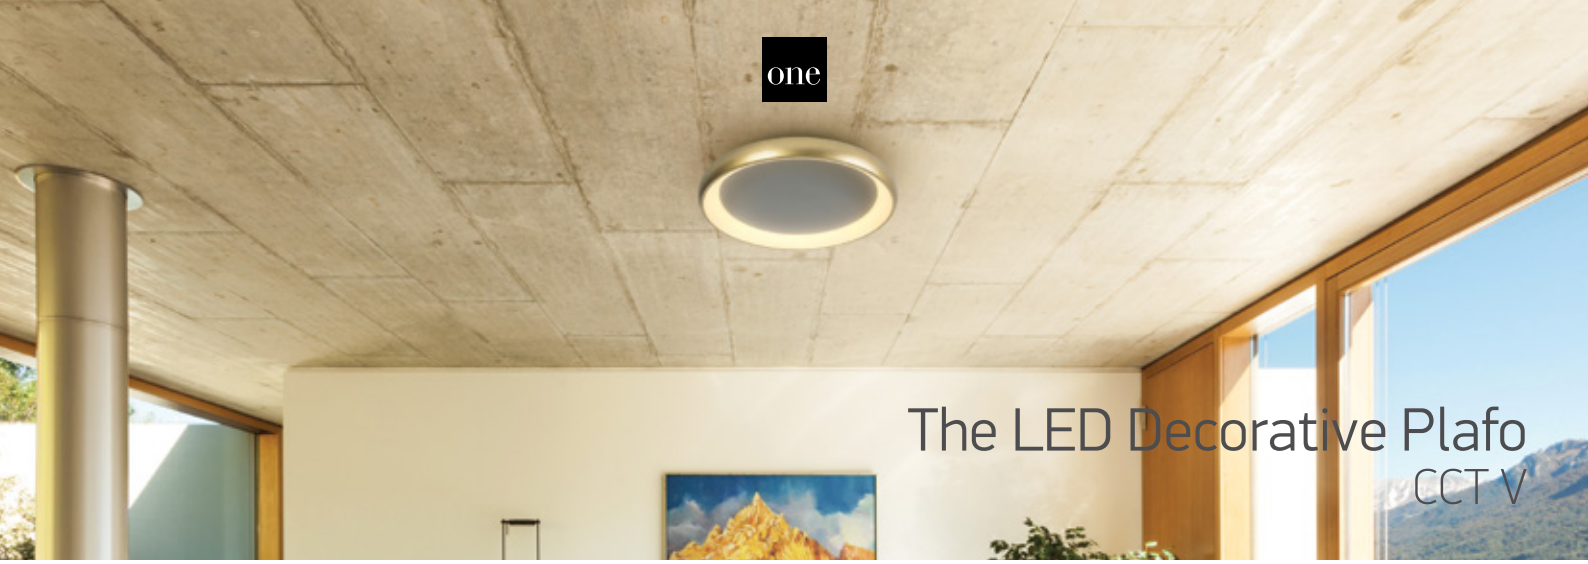


The LED Decorative Plafo
CCT V



62134N/W/V

62134N | 30W | SMD LED | Aluminium

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR · new · IP20






62134N/B/V

62134N | 30W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20






62134N/BBS/V

62134N | 30W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20






62134N/BGL/V

62134N | 30W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62134N/W/V	White	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA driver
62134N/B/V	Black	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62134N/BBS/V	Brushed brass	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62134N/BGL/V	Brushed gold	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver

The LED Decorative Plafo



62144N/B/W



62144N/BGL/W



62144N/W/W

62144N | 50W | SMD 2835 | Aluminium

LED BUILT IN


80 CRI

CE

3 YEAR

IP20







62144N/B/W

62144N | 50W | SMD 2835 | Aluminium

LED BUILT IN


80 CRI

CE

3 YEAR

IP20







62144N/BBS/W

62144N | 50W | SMD 2835 | Aluminium

LED BUILT IN


80 CRI

CE

3 YEAR

IP20







62144N/BGL/W

62144N | 50W | SMD 2835 | Aluminium

LED BUILT IN


80 CRI

CE

3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62144N/W/W	White	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver
62144N/B/W	Black	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver
62144N/BBS/W	Brushed brass	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver
62144N/BGL/W	Brushed gold	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver

The LED Decorative Plafo
CCT V



62130L/B/V



62130L/BGL/V




62130L/W/V

62130L | 30W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20










62130L/B/V

62130L | 30W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20










62130L/BBS/V

62130L | 30W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20










62130L/BGL/V

62130L | 30W | SMD LED | Dimmable | Aluminium


LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62130L/W/V	White	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62130L/B/V	Black	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62130L/BBS/V	Brushed brass	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62130L/BGL/V	Brushed gold	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver

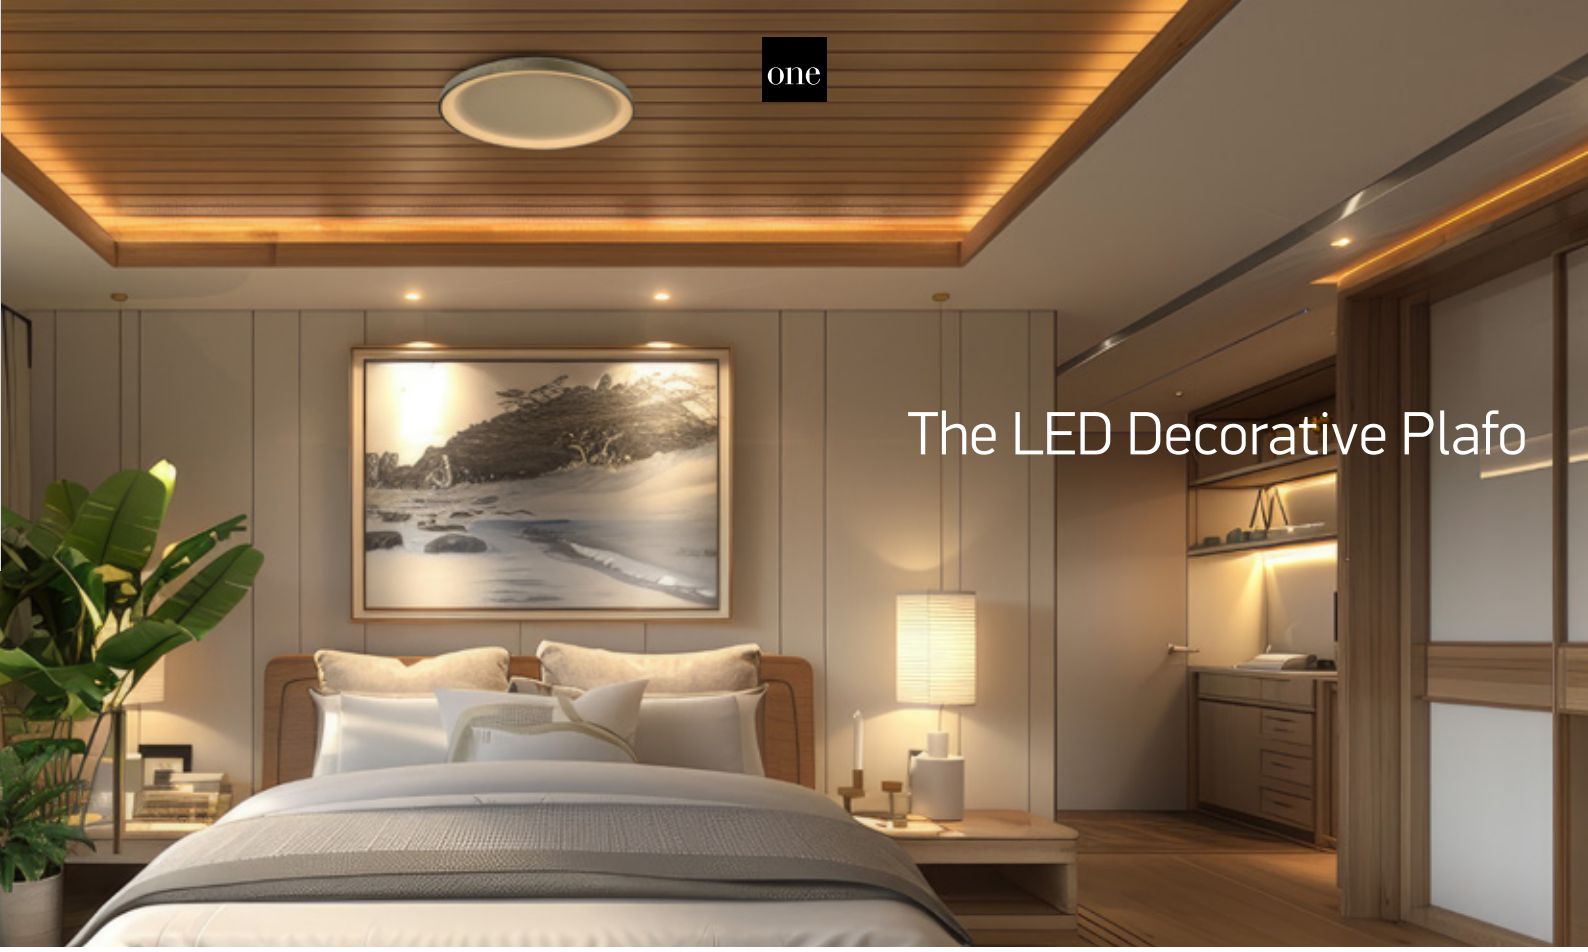



62148L/W/V

62148L | 48W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20







62148L/B/V

62148L | 48W | SMD LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20







62148L/BGL/W

62148L | 48W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62148L/W/V	White	CCT V	2700K-3000K-4000K	48W	4080lm	120°	230V		1	Complete with 1200mA dimmable driver
62148L/B/V	Black	CCT V	2700K-3000K-4000K	48W	4080lm	120°	230V		1	Complete with 1200mA dimmable driver
62148L/BGL/W	Brushed gold	Warm white	3000K	48W	4080lm	120°	230V		1	Complete with 1200mA driver



Decorative Plafo
Round



62182/BAN/W

62182 | 40W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR


IP20



62182/BGL/W



62182/BBR/W





62182A/BAN/W

62182A | 50W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR


IP20



62182A/BGL/W



62182A/BBR/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62182/BAN/W	Brushed anthracite	Warm white	3000K	40W	3400lm	230V		1	Complete with 1050mA driver
62182/BGL/W	Brushed gold	Warm white	3000K	40W	3400lm	230V		1	Complete with 1050mA driver
62182/BBR/W	Brushed brown	Warm white	3000K	40W	3400lm	230V		1	Complete with 1050mA driver
62182A/BAN/W	Brushed anthracite	Warm white	3000K	50W	4250lm	230V		1	Complete with 1400mA driver
62182A/BGL/W	Brushed gold	Warm white	3000K	50W	4250lm	230V		1	Complete with 1400mA driver
62182A/BBR/W	Brushed brown	Warm white	3000K	50W	4250lm	230V		1	Complete with 1400mA driver



The LED Decorative Plafo
Square



62132NA/W/W

62132NA | 38W | SMD 2835 | Aluminium

LED BUILT IN


80 CRI

CE

3 YEAR

IP20







62142NA/W/W

62142NA | 50W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE


3 YEAR

IP20



62142NA/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62132NA/W/W	White	Warm white	3000K	38W	3230lm	120°	230V	⏚	1	Complete with 1000mA driver
62142NA/W/W	White	Warm white	3000K	50W	4250lm	120°	230V	⏚	1	Complete with 1200mA driver
62142NA/B/W	Black	Warm white	3000K	50W	4250lm	120°	230V	⏚	1	Complete with 1200mA driver



Decorative Plafo



62112 | 12W | SMD 2835 | Aluminium

LED BUILT IN


80 CRI

CE

2 YEAR

IP20







62135NA | 35W | SMD 2835 | Metal

LED BUILT IN


80 CRI

CE


3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62112/BS/W	Brass	Warm white	3000K	12W	960lm	230V	⏚	1	Complete with 24V DC driver
62135NA/W/W	White	Warm white	3000K	35W	2100lm	230V	⏚	1	Complete with 700mA driver

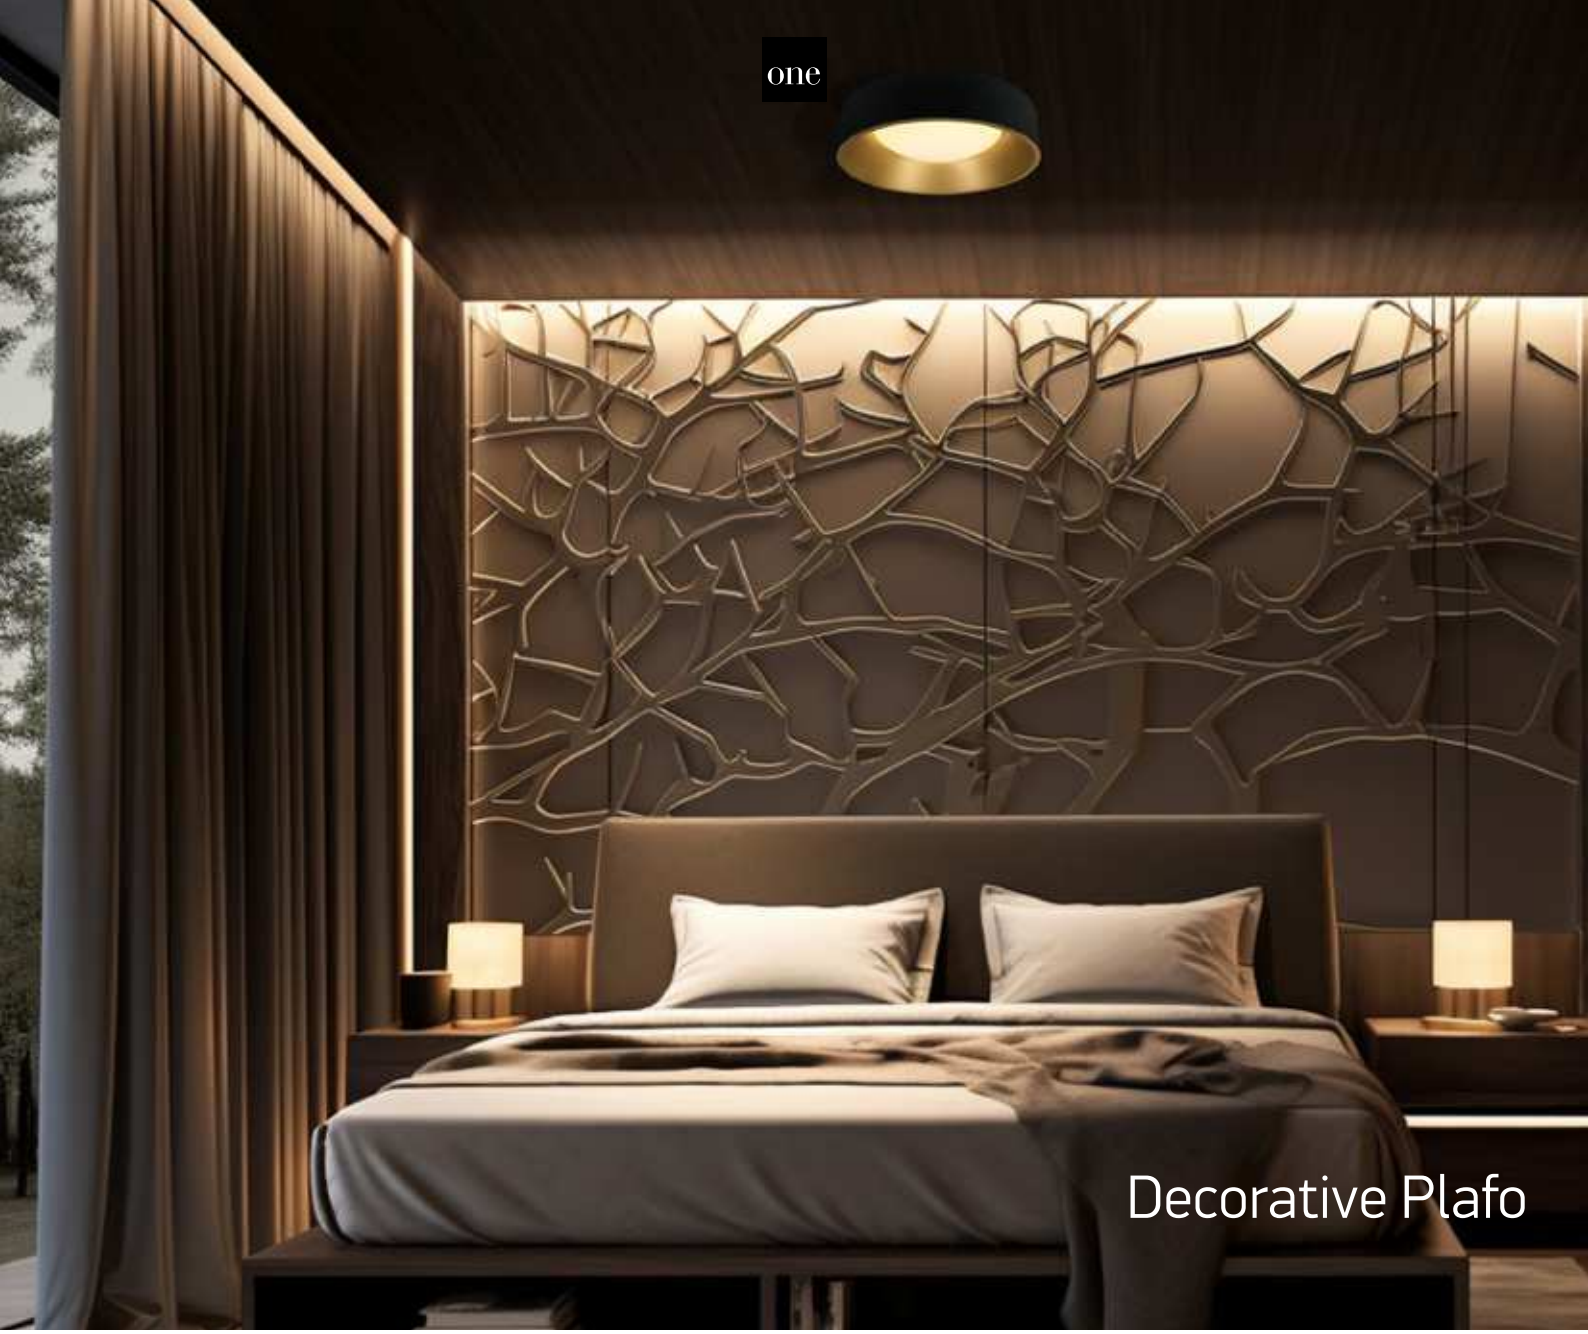



67452/W/W


67452 | 30W | SMD 3030 | Aluminium

LED BUILT IN

90 CRI CE 3 YEAR

DARK LIGHT

IP20





67452/B/W


67452 | 30W | SMD 3030 | Aluminium

LED BUILT IN

90 CRI CE 3 YEAR

DARK LIGHT

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67452/W/W	White	Warm white	3000K	30W	2400lm	230V		1	Complete with 800mA driver
67452/B/W	Black	Warm white	3000K	30W	2400lm	230V		1	Complete with 800mA driver

The LED Panel Plafo
Round



62115F/W/W



62130F/B/W



62115F/W/W

62115F | 15W | SMD 4014 | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR

IP40



62115F/B/W

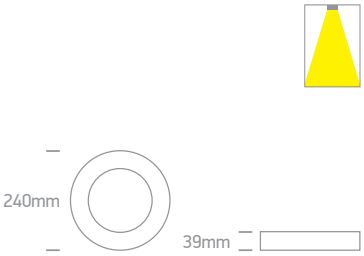



62130F/W/W

62130F | 30W | SMD 4014 | Die cast

Optional dimmable driver code 040060.

LED BUILT IN

80 CRI


CE

2 YEAR

IP40



62130F/B/W

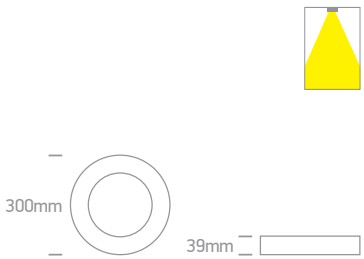

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62115F/W/C	White	Cool white	4000K	15W	1360lm	230V	☐	10	Complete with 500mA driver
62115F/W/W	White	Warm white	3000K	15W	1360lm	230V	☐	10	Complete with 500mA driver
62115F/B/C	Black	Cool white	4000K	15W	1360lm	230V	☐	10	Complete with 500mA driver
62115F/B/W	Black	Warm white	3000K	15W	1360lm	230V	☐	10	Complete with 500mA driver
62130F/W/C	White	Cool white	4000K	30W	2550lm	230V	☐	10	Complete with 700mA driver
62130F/W/W	White	Warm white	3000K	30W	2550lm	230V	☐	10	Complete with 700mA driver
62130F/B/W	Black	Warm white	3000K	30W	2550lm	230V	☐	10	Complete with 700mA driver

The LED Panel Plafo
Square



62122F/W/W

62130AF/W/W



62122F/W/W

62122F | 22W | SMD LED | Die cast

LED BUILT IN


80 CRI CE 2 YEAR

IP40



62122F/B/W





39mm



62130AF/W/W

62130AF | 30W | SMD 4014 | Die cast

LED BUILT IN


80 CRI CE 2 YEAR

IP40



62130AF/W/C





39mm

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62122F/W/W	White	Warm white	3000K	22W	1870lm	230V	☐	10	Complete with 700mA driver
62122F/B/W	Black	Warm white	3000K	22W	1870lm	230V	☐	10	Complete with 700mA driver
62130AF/W/C	White	Cool white	4000K	30W	2550lm	230V	☐	10	Complete with 700mA driver
62130AF/W/W	White	Warm white	3000K	30W	2550lm	230V	☐	10	Complete with 700mA driver



LED Die Cast Panel Range



62140F | 40W | SMD 4014 | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR

IP40



Suspension kit included.





62140RF | 40W | SMD 2016 | Die cast

LED BUILT IN


80 CRI

CE

2 YEAR

IP40



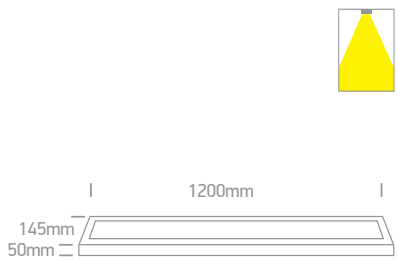

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140F/W/W	White	Warm white	3000K	40W	2520lm	230V	⧈	5	Complete with 1000mA driver
62140RF/W/C	White	Cool white	4000K	40W	2700lm	230V	⧈	5	Complete with 1000mA driver
62140RF/W/W	White	Warm white	3000K	40W	2700lm	230V	⧈	5	Complete with 1000mA driver




LED Aluminium Panel Range
Backlit



62140AE | 40W | SMD 2835 | Aluminium + steel — Backlit.

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20








62140BF | 30W | SMD 2835 | Aluminium + steel — Backlit.

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20



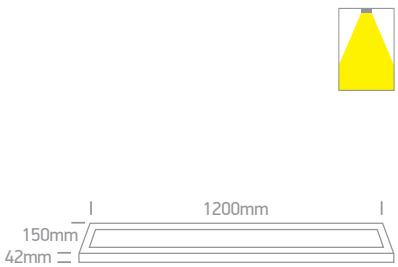




62140RE | 40W | SMD 2835 | Aluminium + steel — Backlit.

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20



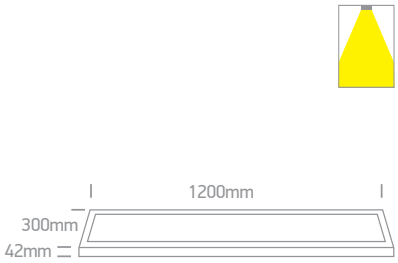

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140AE/W/C	White	Cool white	4000K	40W	4000lm	230V	☐	4	Complete with 1000mA driver
62140BF/W/C	White	Cool white	4000K	30W	3000lm	230V	☐	4	Complete with 800mA driver
62140RE/W/C	White	Cool white	4000K	40W	4000lm	230V	☐	4	Complete with 1000mA driver
62140RE/W/W	White	Warm white	3000K	40W	4000lm	230V	☐	4	Complete with 1000mA driver




UGR19 Backlit
CCT V




62140BAU | 40W | SMD 2835 | Aluminium + steel | Microprismatic — Backlit.

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · UGR19 · IP20






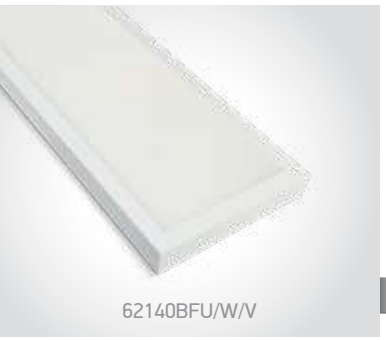

62140BFU | 30W | SMD 2835 | Aluminium + steel | Microprismatic — Backlit.

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · UGR19 · IP20



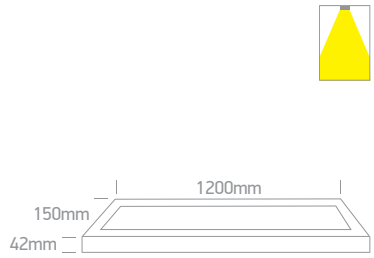




62150BFU | 40W | SMD 2835 | Aluminium + steel | Microprismatic — Backlit.

LED BUILT IN · 80 CRI · CCT V · CE · 3 YEAR · UGR19 · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140BAU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		4	Complete with 1000mA driver
62140BAU/B/V	Black	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		4	Complete with 1000mA driver
62140BFU/W/V	White	CCT V	3000K-4000K-5700K	30W	2700lm-3000lm-2850lm	230V		4	Complete with 800mA driver
62140BFU/B/V	Black	CCT V	3000K-4000K-5700K	30W	2700lm-3000lm-2850lm	230V		4	Complete with 800mA driver
62150BFU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		4	Complete with 1000mA driver
62150BFU/B/V	Black	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		4	Complete with 1000mA driver





62140BRU/W/V

62140BRU | 40W | SMD 2835 | Aluminium + steel | Microprismatic

Backlit.

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
UGR19
IP20


62140BRU/B/V

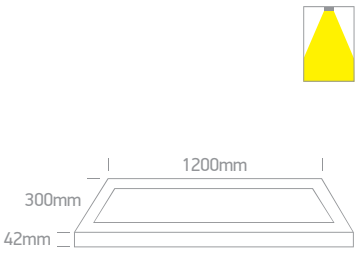



62150BRU/W/V

62150BRU | 50W | SMD 2835 | Aluminium + steel | Microprismatic

Backlit.

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
UGR19
IP20


62150BRU/B/V

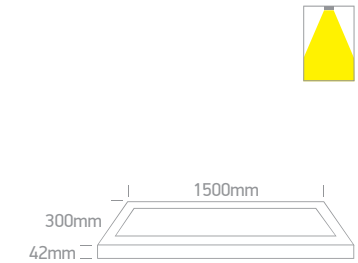

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140BRU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V	☐	4	Complete with 1000mA driver
62140BRU/B/V	Black	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V	☐	4	Complete with 1000mA driver
62150BRU/W/V	White	CCT V	3000K-4000K-5700K	50W	4500lm-5000lm-4750lm	230V	☐	4	Complete with 1200mA driver
62150BRU/B/V	Black	CCT V	3000K-4000K-5700K	50W	4500lm-5000lm-4750lm	230V	☐	4	Complete with 1200mA driver






67366 | 12W | SMD 2835 | PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP54








67366E | 12W | SMD 2835 | Emergency 3Hrs Maintained | PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP54








67368 | 18W | SMD 2835 | PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67366/W/W	White	Warm white	3000K	12W	960lm	230V	☐	20	Complete with 160mA driver
67366E/W/C	White	Cool white	4000K	12W	960lm	230V	☐	20	Emergency 3Hrs Maintained
67366E/W/W	White	Warm white	3000K	12W	960lm	230V	☐	20	Emergency 3Hrs Maintained
67368/W/C	White	Cool white	4000K	18W	1488lm	230V	☐	10	Complete with 225mA driver
67368/W/W	White	Warm white	3000K	18W	1350lm	230V	☐	10	Complete with 225mA driver




The LED Slim Plafo Range
PC



67370 | 25W | SMD 2835 | PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP54








67372 | 25W | SMD 2835 | PC

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67370/W/C	White	Cool white	4000K	25W	2000lm	230V	⧈	10	Complete with 300mA driver
67372/W/C	White	Cool white	4000K	25W	2000lm	230V	⧈	10	Complete with 300mA driver
67372/W/W	White	Warm white	3000K	25W	1875lm	230V	⧈	10	Complete with 300mA driver



Outdoor Project LED Plafo
Die cast



67384/AN/W

67384 | 30W | SMD LED | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR

IP54



67384/W/W





67384A/AN/W

67384A | 30W | SMD LED | Die cast

LED BUILT IN

80 CRI


CE

2 YEAR

IP54



67384A/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67384/W/W	White	Warm white	3000K	30W	2500lm	230V		4	Complete with 700mA driver
67384/AN/W	Anthracite	Warm white	3000K	30W	2500lm	230V		4	Complete with 700mA driver
67384A/W/W	White	Warm white	3000K	30W	2500lm	230V		4	Complete with 700mA driver
67384A/AN/W	Anthracite	Warm white	3000K	30W	2500lm	230V		4	Complete with 700mA driver




Outdoor Slim LED Plafo
Die cast


67362/AN/W

67362 | 20W | SMD LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67362/W/W





67363/AN/W

67363 | 30W | SMD LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67363/W/W





67362A/AN/W

67362A | 20W | SMD LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67362A/W/W





67363A/AN/W

67363A | 30W | SMD LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67363A/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67362/W/W	White	Warm white	3000K	20W	1600lm	230V		8	Complete with 500mA driver
67362/AN/W	Anthracite	Warm white	3000K	20W	1600lm	230V		8	Complete with 500mA driver
67363/W/W	White	Warm white	3000K	30W	2500lm	230V		6	Complete with 700mA driver
67363/AN/W	Anthracite	Warm white	3000K	30W	2500lm	230V		6	Complete with 700mA driver
67362A/W/W	White	Warm white	3000K	20W	1600lm	230V		8	Complete with 500mA driver
67362A/AN/W	Anthracite	Warm white	3000K	20W	1600lm	230V		8	Complete with 500mA driver
67363A/W/W	White	Warm white	3000K	30W	2500lm	230V		6	Complete with 700mA driver
67363A/AN/W	Anthracite	Warm white	3000K	30W	2500lm	230V		6	Complete with 700mA driver



The LED Plafo Outdoor Square
Plastic



67282N/W/W

67282N | 16W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65


67282N/G/W


67282N/AN/W





67282AN/W/W

67282AN | 24W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65


67282AN/G/W


67282AN/AN/W






67282BN | 30W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65








67282ANE | 16W | SMD 2835 | Emergency 3Hrs Maintained | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67282N/W/W	White	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67282N/AN/W	Anthracite	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67282N/G/W	Grey	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67282AN/W/W	White	Warm white	3000K	24W	1440lm	230V		10	Complete with 600mA driver
67282AN/AN/W	Anthracite	Warm white	3000K	24W	1440lm	230V		10	Complete with 600mA driver
67282AN/G/W	Grey	Warm white	3000K	24W	1440lm	230V		10	Complete with 600mA driver
67282BN/G/W	Grey	Warm white	3000K	30W	1800lm	230V		4	Complete with 700mA driver
67282ANE/G/W	Grey	Warm white	3000K	16W	1280lm	230V		10	Emergency 3Hrs Maintained



67280N/W/W

The LED Plafo Outdoor Round

67280N | 16W | SMD 2835 | ABS + PC



67280N/W/W


LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



67280N/G/W



67280N/AN/W



67280AN | 24W | SMD 2835 | ABS + PC




67280AN/W/W

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65




67280AN/AN/W



67280BN | 30W | SMD 2835 | ABS + PC



LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65




67280ANE | 15W | SMD 2835 | Emergency 3Hrs Maintained | ABS + PC



LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67280N/W/C	White	Cool white	4000K	16W	960lm	230V		10	Complete with 500mA driver
67280N/W/W	White	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67280N/AN/W	Anthracite	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67280N/G/W	Grey	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67280AN/W/W	White	Warm white	3000K	24W	1440lm	230V		10	Complete with 600mA driver
67280AN/AN/W	Anthracite	Warm white	3000K	24W	1440lm	230V		10	Complete with 600mA driver
67280BN/W/W	White	Warm white	3000K	30W	1800lm	230V		5	Complete with 700mA driver
67280ANE/G/W	Grey	Warm white	3000K	15W	1000lm	230V		10	Emergency 3Hrs Maintained



The E27 Plafo Outdoor Range
Square



67282E/B

67282E | 12W | E27 | ABS + PC







67282E/W



67282E/G



67282E/AN







67282EA/B

67282EA | 2x12W | E27 | ABS + PC







67282EA/W



67282EA/G




67282EA/AN





Order Code	Colour	Watts	Input	Class		Notes
67282E/W	White	12W	100-240V		10	-
67282E/AN	Anthracite	12W	100-240V		10	-
67282E/B	Black	12W	100-240V		10	-
67282E/G	Grey	12W	100-240V		10	-
67282EA/W	White	2x12W	100-240V		10	-
67282EA/AN	Anthracite	2x12W	100-240V		10	-
67282EA/B	Black	2x12W	100-240V		10	-
67282EA/G	Grey	2x12W	100-240V		10	-

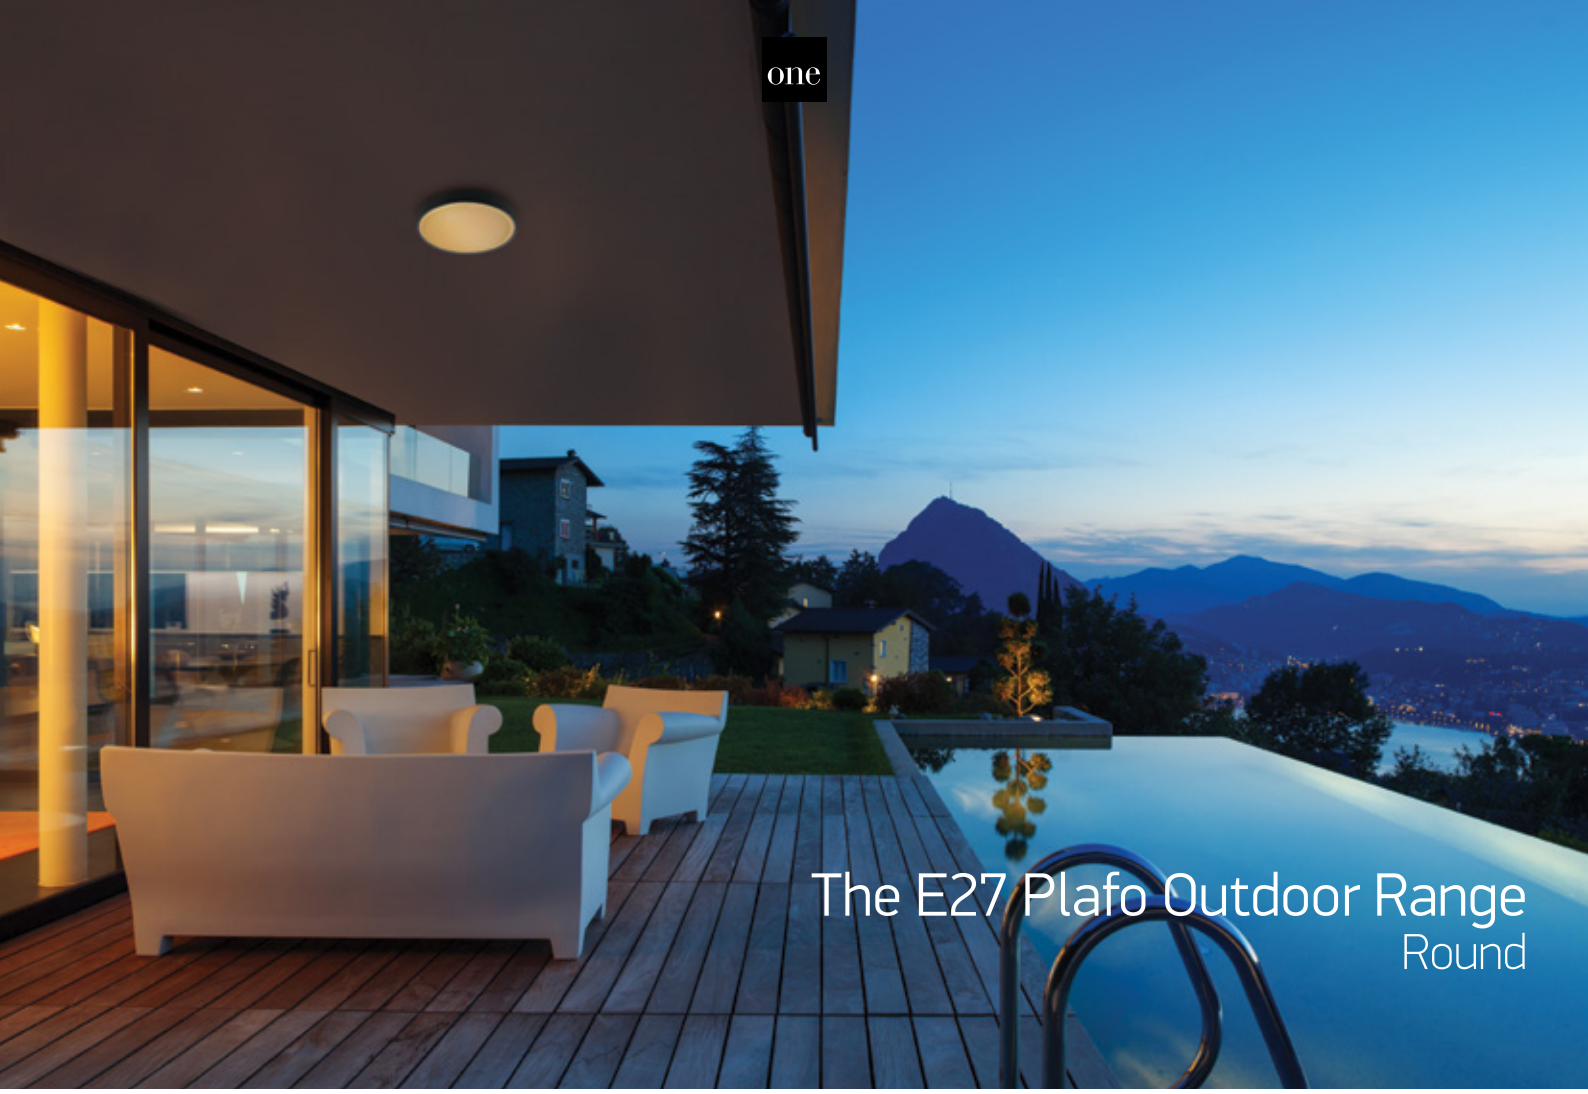


67280E/B

67280E | 12W | E27 | ABS + PC

IK08


CE 2 YEAR

IP65


67280E/W


67280E/G


67280E/AN




67280EA/B

67280EA | 2x12W | E27 | ABS + PC

IK08


CE 2 YEAR

IP65


67280EA/W


67280EA/G


67280EA/AN



Order Code	Colour	Watts	Input	Class		Notes
67280E/W	White	12W	100-240V		10	-
67280E/AN	Anthracite	12W	100-240V		10	-
67280E/B	Black	12W	100-240V		10	-
67280E/G	Grey	12W	100-240V		10	-
67280EA/W	White	2x12W	100-240V		10	-
67280EA/AN	Anthracite	2x12W	100-240V		10	-
67280EA/B	Black	2x12W	100-240V		10	-
67280EA/G	Grey	2x12W	100-240V		10	-



The IP65 Plafo Range



67390/W/C

67390 | 21W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI

IK08


CE

2 YEAR

IP65



67390/W/W





67390/AN/W

67390 | 21W | SMD 2835 | ABS + PC

LED BUILT IN


80 CRI

IK08

CE

2 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67390/W/C	White	Cool white	4000K	21W	1300lm	230V		10	Complete with 500mA driver
67390/W/W	White	Warm white	3000K	21W	1300lm	230V		10	Complete with 500mA driver
67390/AN/W	Anthracite	Warm white	3000K	21W	1300lm	230V		10	Complete with 500mA driver




The IP65 CCT V Plafo



67498 | 20W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK06 · CCT V · CE · 2 YEAR · IP65








67218 | 15W | SMD 2835 | Plastic

Emergency version 67218E/W.

LED BUILT IN · 80 CRI · IK10 · CCT V · CE · 3 YEAR · IP65



Optional ring.
Order code 67218R/B Black.






67218E | 15W | SMD 2835 | Emergency 3Hrs Maintained | Plastic

LED BUILT IN · 80 CRI · IK10 · CCT V · CE · 3 YEAR · IP65



Optional ring.
Order code 67218R/B Black.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67498/AN/V	Anthracite	CCT V	3000K-4000K-6500K	20W	1300lm	230V		10	Complete with 500mA driver
67218/W/V	White	CCT V	3000K-4000K-6500K	15W	1600lm	230V		6	Complete with 180mA driver
67218E/W/V	White	CCT V	3000K-4000K-6500K	15W	1600lm	230V		6	Supplied with battery





Pendants

Pages 531-548

15



Cylinder Pendants



63105M/W + 050112/GL

63105M | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

5 YEAR



63105M/B + 050112/W







63105M/BBS + 050112/B

63105M | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

5 YEAR



63105M/MG + 050112/B








050112/W White




050112/B Black



050112/G Grey



050112/BS Brass




050112/ABS Antique brass



050112/GL Gold



050112/CU Copper



050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
63105M/W	White	10W	100-240V		12	-
63105M/B	Black	10W	100-240V		12	-
63105M/BBS	Brushed brass	10W	100-240V		12	-
63105M/MG	Metal grey	10W	100-240V		12	-



63105MA/W + 050112/CU

63105MA/MG + 050112/DC

63105M/BBS + 050112/GL

63105M/B + 050112/G

Cylinder Pendants



63105MA/B + 050112/W

63105MA | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

CE 5 YEAR



63105MA/W + 050112/GL







63105MA/MG + 050112/DC


63105MA | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

CE 5 YEAR



63105MA/BBS + 050112/B








050112/W White




050112/B Black



050112/G Grey



050112/BS Brass



050112/ABS Antique brass



050112/GL Gold



050112/CU Copper



050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
63105MA/W	White	10W	100-240V	⏚	12	-
63105MA/B	Black	10W	100-240V	⏚	12	-
63105MA/BBS	Brushed brass	10W	100-240V	⏚	12	-
63105MA/MG	Metal grey	10W	100-240V	⏚	12	-

Cylinder Pendants




63105N/W

63105N | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

5 YEAR






63105N/B

63105N | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

5 YEAR





Order Code	Colour	Reflector	Watts	Input	Class		Notes
63105N/W	White	Black	10W	100-240V		24	-
63105N/B	Black	Brass	10W	100-240V		24	-



LED Pendant Tubes


63108A/W/W

63108A | 6W | COB LED | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR

IP20


63108A/B/W






63108B/W/W

63108B | 6W | COB LED | Die cast

LED BUILT IN

80 CRI


CE

3 YEAR


IP20


63108B/B/W





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
63108A/W/W	White	Black	Warm white	3000K	6W	420lm	30°	230V		12	Complete with 700mA driver
63108A/B/W	Black	Brass	Warm white	3000K	6W	420lm	30°	230V		12	Complete with 700mA driver
63108B/W/W	White	Black	Warm white	3000K	6W	420lm	30°	230V		12	Complete with 700mA driver
63108B/B/W	Black	Brass	Warm white	3000K	6W	420lm	30°	230V		12	Complete with 700mA driver

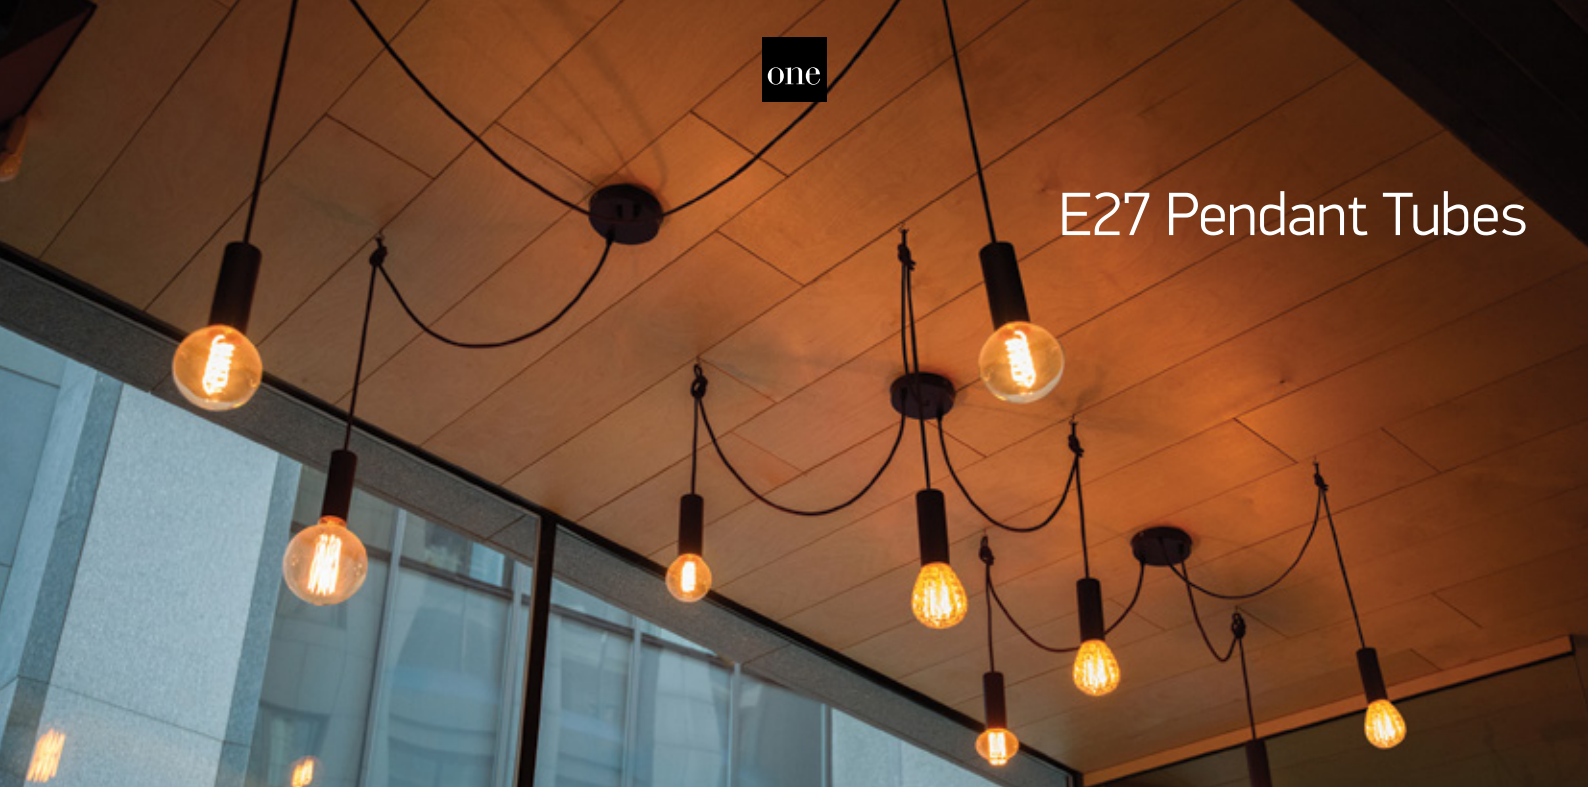

E27 Pendant Tubes



63124/B

63124 | 20W | E27 | Aluminium


IP20



63124/BBS



63124/CU






63124B/B

63124B | 3x20W | E27 | Aluminium

IP20



63124B/BBS






63124C/B

63124C | 5x20W | E27 | Aluminium

IP20




63124C/BBS



Order Code	Colour	Watts	Input	Class		Notes
63124/B	Black	20W	100-240V		20	-
63124/BBS	Brushed brass	20W	100-240V		20	-
63124/CU	Copper	20W	100-240V		20	-
63124B/B	Black	3x20W	100-240V		1	-
63124B/BBS	Brushed brass	3x20W	100-240V		1	-
63124C/B	Black	5x20W	100-240V		1	-
63124C/BBS	Brushed brass	5x20W	100-240V		1	-



E27 Pendant Cones

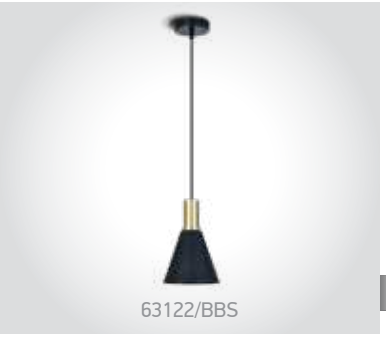


63122/BBS


63122 | 10W | E27 | Aluminium

IP20



63122/CU



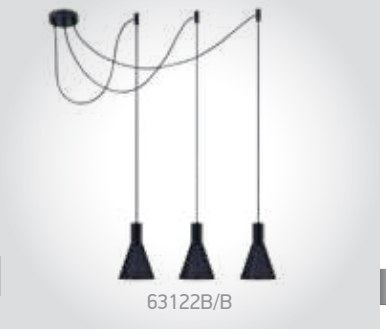

63122B/B

63122B | 3x10W | E27 | Aluminium


IP20




63122B/BBS



63122B/CU



Order Code	Colour	Watts	Input	Class		Notes
63122/BBS	Brushed brass	10W	100-240V		1	-
63122/CU	Copper	10W	100-240V		1	-
63122B/B	Black	3x10W	100-240V		1	-
63122B/BBS	Brushed brass	3x10W	100-240V		1	-
63122B/CU	Copper	3x10W	100-240V		1	-

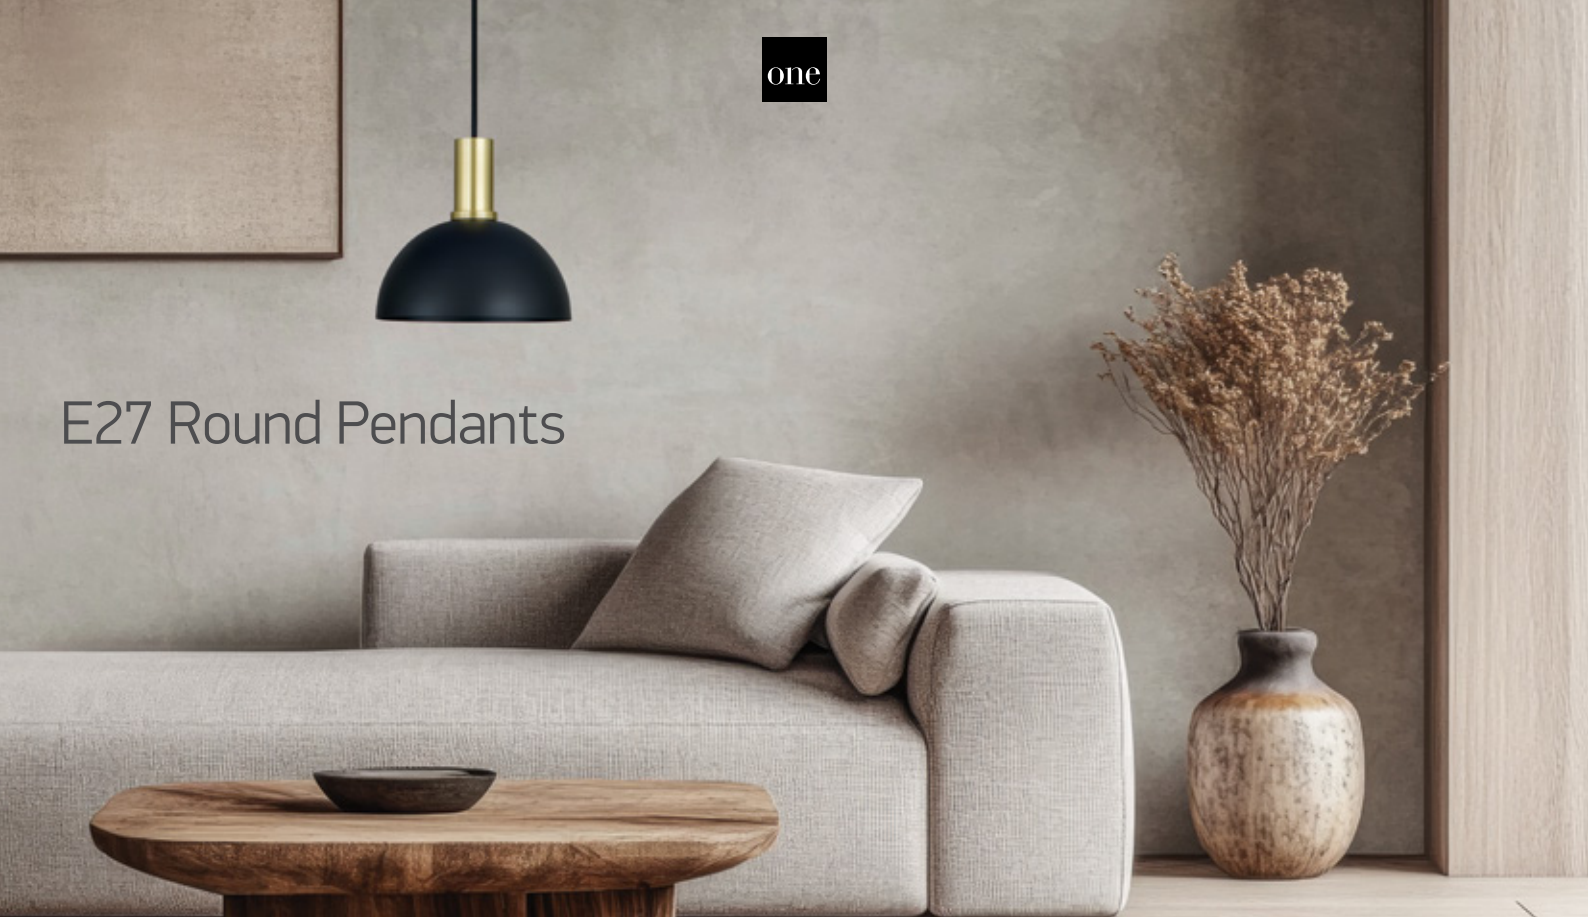

E27 Round Pendants



63140/BBS


63140 | 10W | E27 | Aluminium


CE 5 YEAR

IP20



Suitable for E27 LED lamp.



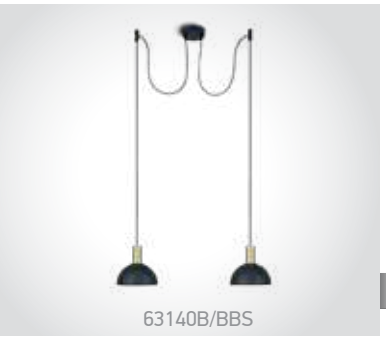

63140B/BBS

63140B | 2x10W | E27 | Aluminium

CE 5 YEAR


IP20



63140B/B



Suitable for E27 LED lamp.





63140C/BBS


63140C | 3x10W | E27 | Aluminium

CE 5 YEAR

IP20



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
63140/BBS	Brushed brass	10W	100-240V	⧈	1	-
63140B/B	Black	2x10W	100-240V	⧈	1	-
63140B/BBS	Brushed brass	2x10W	100-240V	⧈	1	-
63140C/BBS	Brushed brass	3x10W	100-240V	⧈	1	-



Retro Pendants



63072/MG


63072 | 20W | E27 | Aluminium

5 YEAR

IP20





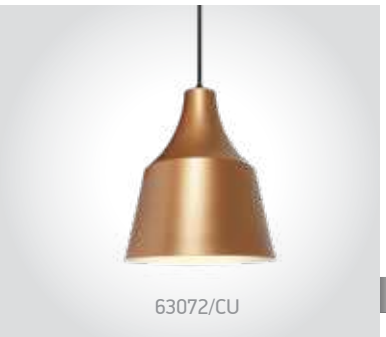

63072/CU

63072 | 20W | E27 | Aluminium

5 YEAR

IP20





Order Code	Colour	Watts	Input	Class		Notes
63072/MG	Metal grey	20W	100-240V	⏚	1	-
63072/CU	Copper	20W	100-240V	⏚	1	-



E27 Pendant Kit




63126/W

63126 | 20W | E27 | Aluminium


Suitable for shade or glass.

CE 5 YEAR

IP20

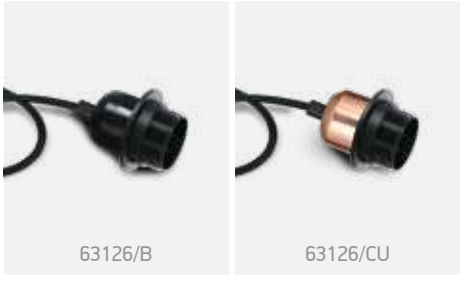

63126/B 63126/CU





63126A/W

63126A | 20W | E27 | Aluminium


Suitable for shade or glass.

CE 5 YEAR

IP20



63126A/B 63126A/BBS 63126A/CU



Order Code	Colour	Watts	Input	Class		Notes
63126/W	White	20W	100-240V	☐	20	-
63126/B	Black	20W	100-240V	☐	20	-
63126/CU	Copper	20W	100-240V	☐	20	-
63126A/W	White	20W	100-240V	☐	20	-
63126A/B	Black	20W	100-240V	☐	20	-
63126A/BBS	Brushed brass	20W	100-240V	☐	20	-
63126A/CU	Copper	20W	100-240V	☐	20	-



0990/BBS

0990/B

Decorative E27



0990/B

0990 | 20W | E27

IP20

5 YEAR



Suitable for E27 LED lamp.





0990/BBS


0990 | 20W | E27

IP20

5 YEAR



Suitable for E27 LED lamp.






0992 | 20W | E27

IP20


5 YEAR



Suitable for E27 LED lamp.



Order Code	Colour	Lampholder	Watts	Input	Class		Notes
0990/B	Black	E27	20W	100-240V	⏚	36	-
0990/BBS	Brushed brass	E27	20W	100-240V	⏚	36	-
0992/B	Black	E27	20W	100-240V	⏚	36	-

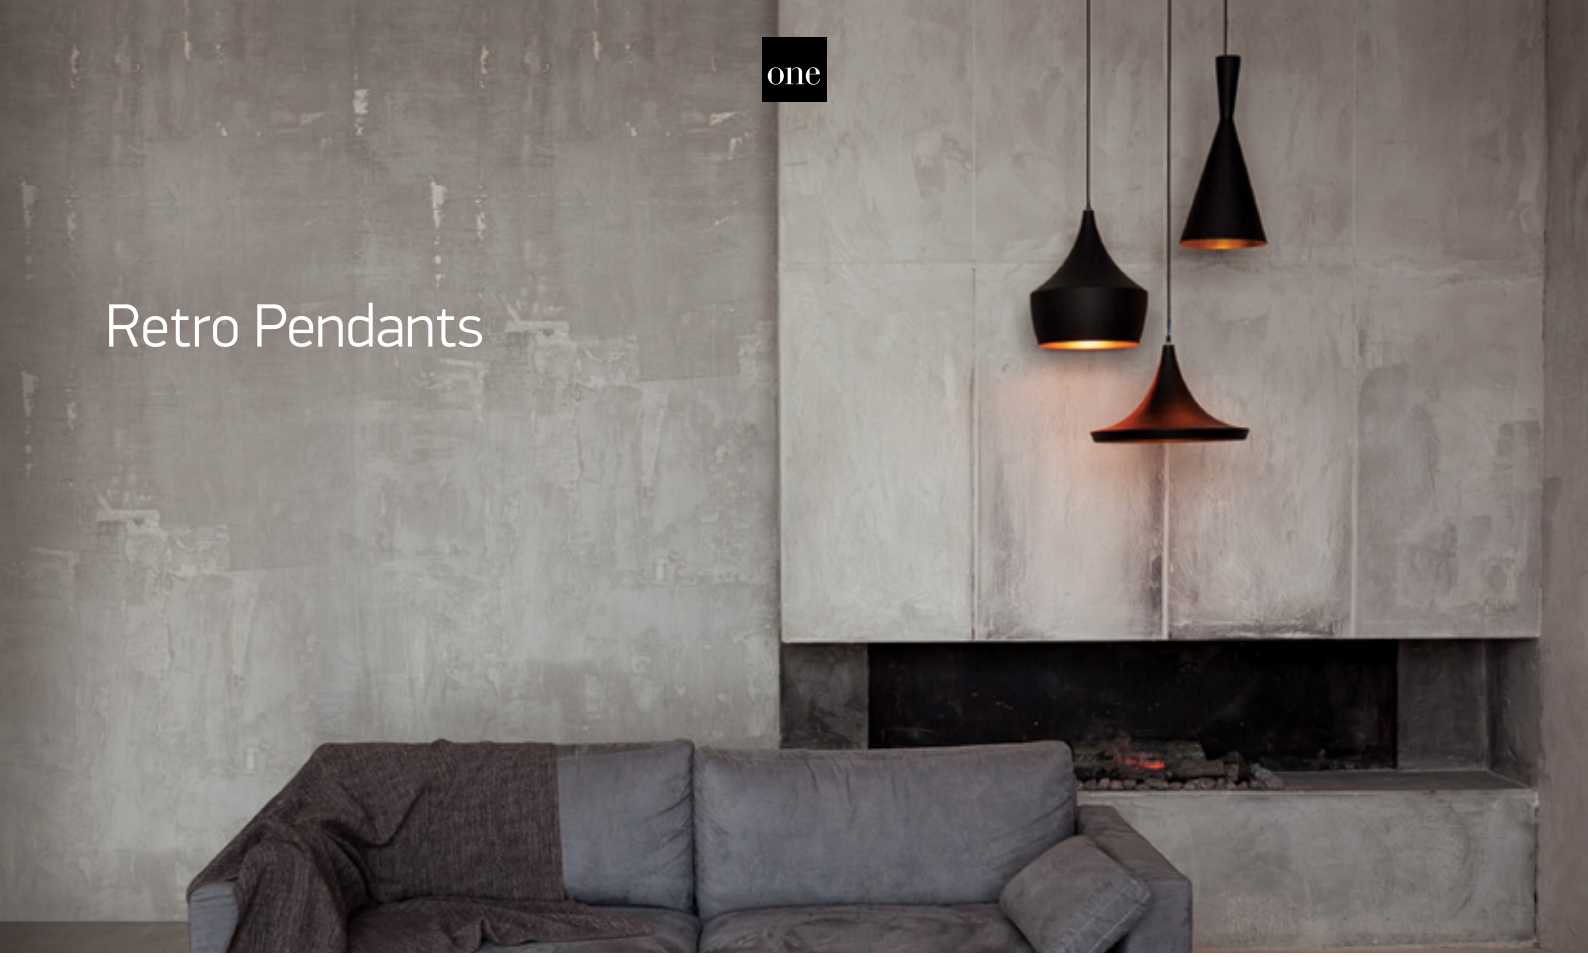

Retro Pendants




63040 | 12W | E27 | Aluminium

IP20










63042 | 12W | E27 | Aluminium

IP20










63044 | 12W | E27 | Aluminium

IP20







Order Code	Colour	Reflector	Watts	Input	Class		Notes
63040/B/BS	Black	Brass	12W	100-240V		1	-
63042/B/BS	Black	Brass	12W	100-240V		1	-
63044/B/BS	Black	Brass	12W	100-240V		1	-

Retro Pendants



63020/B/G


63020 | 20W | E27 | Aluminium

IP20



63020/B/BS





Order Code	Colour	Reflector	Watts	Input	Class		Notes
63020/B/G	Black	Grey	20W	100-240V	⏚	1	-
63020/B/BS	Black	Brass	20W	100-240V	⏚	1	-

Bowl Shade Pendant Range





63016A/W/G

63016A | 20W | E27 | Aluminium

IP20







63022/W/BS

63022 | 20W | E27 | Aluminium

IP20







63022A/W/BS

63022A | 20W | E27 | Aluminium

IP20







63022B/W/BS

63022B | 25W | E27 | Aluminium

IP20






Order Code	Colour	Reflector	Watts	Input	Class		Notes
63016A/W/G	White	Grey	20W	100-240V		1	-
63022/W/BS	White	Brass	20W	100-240V		1	-
63022A/W/BS	White	Brass	20W	100-240V		1	-
63022B/W/BS	White	Brass	25W	100-240V		1	-




Bowl Shade Pendant Range

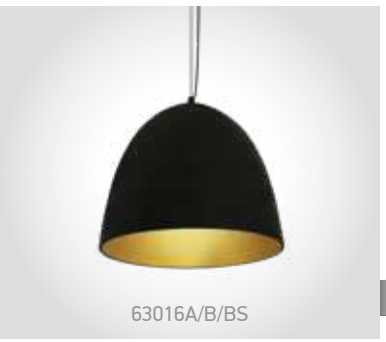


63016A/B/BS

63016A | 20W | E27 | Aluminium






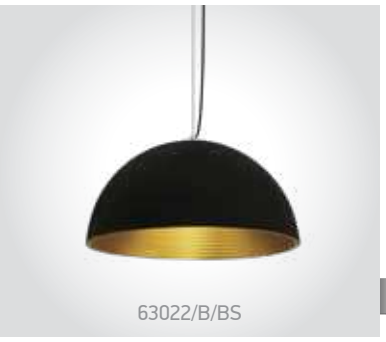


63022/B/BS

63022 | 20W | E27 | Aluminium






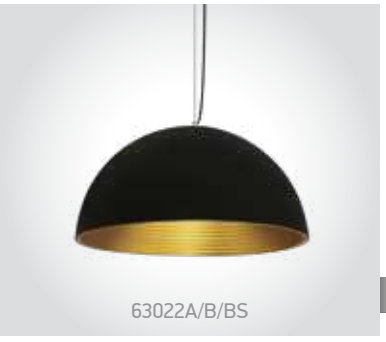


63022A/B/BS

63022A | 20W | E27 | Aluminium






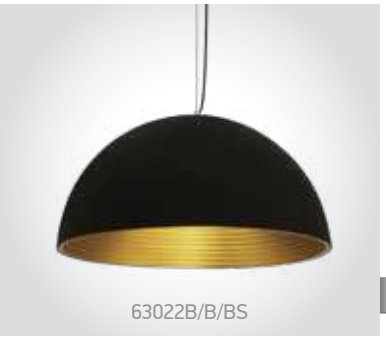

63022B/B/BS

63022B | 25W | E27 | Aluminium





Order Code	Colour	Reflector	Watts	Input	Class		Notes
63016A/B/BS	Black	Brass	20W	100-240V		1	-
63022/B/BS	Black	Brass	20W	100-240V		1	-
63022A/B/BS	Black	Brass	20W	100-240V		1	-
63022B/B/BS	Black	Brass	25W	100-240V		1	-

Gypsum Pendant



63038 | 7W | GX53 | Gypsum


IP20

offer

5 YEAR



Suitable for GX53 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
63038	White	7W	100-240V		12	-



Linear LED Bars




38018 | 6x1W | LED | Metal

LED BUILT IN

CE 2 YEAR

IP20 offer







38016/G/W

38016 | 16W | LED | Die cast


LED BUILT IN

CE 2 YEAR

IP20 offer



38016/W/D



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
38018/G/W	Grey	Warm white	3000K	6x1W	100-240V		1	Complete with driver
38016/W/D	White	Daylight	6000K	16W	100-240V		1	Complete with driver
38016/G/W	Grey	Warm white	3000K	16W	100-240V		1	Complete with driver


Colourful Pendant



63142/BL+63126/B



63142/BR+63126/B



63142/BL

63142/BL | Blue Pendant Shade | PMMA

5 YEAR

1


IP20



63142/BL+63142A/W
63126/W



63142/BL+63126/B





63142/BR

63142/BR | Brown Pendant Shade | PMMA

5 YEAR

1


IP20



63142/BR+63142A/W
63126/W



63142/BR+63126/B





63142/F

63142/F | Frosted Pendant Shade | PMMA

5 YEAR

1


IP20



63142/F+63142A/W
63126/W



63142/F+63126/B






63142/OR

63142/OR | Orange Pendant Shade | PMMA

5 YEAR


1

IP20


63142/OR+63142A/W
63126/W


63142/OR+63126/B






63142A/W


63142A/W | White Reflector for 63142

5 YEAR

1

IP20







Decorative

Pages 551-594

16



The LED Flickering Candles



9C004B | LED | Flickering candle | Plastic

ON/OFF and 5 hours timer functions.


LED BUILT IN

2 YEAR

IP20

offer





Order Code	Battery		Notes
9C004B/F	2xAA	24	-




The Oriental Range
Metal



61050A | 40W | E27 | Metal | Table lamp



Suitable for E27 LED lamp.






61050B | 40W | E27 | Metal | Floor lamp



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
61050A	Antique oriental	40W	100-240V		1	-
61050B	Antique oriental	40W	100-240V		1	-

Portable Trendy Lights



61082A/W



61082A/BR





Portable Trendy Lights




61082A | 3,3W | SMD LED | Touch switch | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · IK06 · CE · 2 YEAR · IP65



Charging time: 6Hrs
Working time: 9Hrs






61082A | 3,3W | SMD LED | Touch switch | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · IK06 · CE · 2 YEAR · IP65



Charging time: 6Hrs
Working time: 9Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61082A/W	White	Warm white	3000K	3,3W	200lm	III	6	2x2200mAh lithium batteries
61082A/BR	Brown	Warm white	3000K	3,3W	200lm	III	6	2x2200mAh lithium batteries

Portable Trendy Lights




61082B/W/W


61082B | 3,5W | SMD LED | Touch switch | Dimmable | Aluminium

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · new · IP54


61082B/B/W


Charging time: 3Hrs
Working time: 3-3.5Hrs




61082/W


61082 | 3.5W | SMD LED | Touch switch | Dimmable | Aluminium + steel

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP54


61082/B


Charging time: 3-5Hrs
Working time: 6-7 Hrs




61082/W/RGBW

61082 | 3.5W | SMD LED | Touch switch | Dimmable | Aluminium + steel


Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP54






Charging time: 3-5Hrs
Working time: 6-7 Hrs




61082/B/RGBW

61082 | 3.5W | SMD LED | Touch switch | Dimmable | Aluminium + steel


Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP54






Charging time: 3-5Hrs
Working time: 6-7 Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61082B/W/W	White	Warm white	3000K	3,5W	200lm	III	12	1800mAh lithium battery
61082B/B/W	Black	Warm white	3000K	3,5W	200lm	III	12	1800mAh lithium battery
61082/W	White	Warm white	3000K	3.5W	260lm	III	6	5200mAh lithium battery
61082/B	Black	Warm white	3000K	3.5W	260lm	III	6	5200mAh lithium battery
61082/W/RGBW	White	RGB + Warm white	RGB + 3000K	3.5W	260lm	III	6	5200mAh lithium battery
61082/B/RGBW	Black	RGB + Warm white	RGB + 3000K	3.5W	260lm	III	6	5200mAh lithium battery




61100/W

61100 | 3W | SMD LED | Touch switch | 3-Step Dimming | Metal


Rechargeable USB socket.

LED BUILT IN
80 CRI
3-STEP DIMMABLE
2 YEAR
IP54


61100/B


61100/BS

Charging time: 2,5Hrs
Working time: 8Hrs




61102/AL

61102 | 3W | SMD LED | Touch | 3-Step Dimming | Metal


Rechargeable USB socket.

LED BUILT IN
80 CRI
3-STEP DIMMABLE
2 YEAR
IP54


61102/BBS


61102/CU

Charging time: 2,5Hrs
Working time: 8Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61100/W	White	Warm white	3000K	3W	120lm	III	10	4000mAh lithium battery
61100/B	Black	Warm white	3000K	3W	120lm	III	10	4000mAh lithium battery
61100/BS	Brass	Warm white	3000K	3W	120lm	III	10	4000mAh lithium battery
61102/AL	Aluminium	Warm white	3000K	3W	120lm	III	10	2000mAh lithium battery
61102/BBS	Brushed brass	Warm white	3000K	3W	120lm	III	10	2000mAh lithium battery
61102/CU	Copper	Warm white	3000K	3W	120lm	III	10	2000mAh lithium battery



Portable Table Lights



61090/W

61090 | 2,5W | SMD LED | Dimmable | Die cast + PC diffuser


Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CCT V · CE · 2 YEAR · IP65



61090/B

Charging time: ≤6,5Hrs
Working time: ≥10Hrs
100% light intensity





61106/W/W

61106 | 2W | SMD LED | Touch switch | Dimmable | Aluminium


Rechargeable USB socket.

new · LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP44



61106/B/W

Charging time: 4 Hrs
Working time: 5 Hrs






61094 | 1,8W | SMD LED | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · CE · 2 YEAR · IP65



Charging time: ≤6,5Hrs
Working time: ≥10Hrs
100% light intensity



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61090/W	White	CCT V	2700K-3000K	2,5W	100lm		6	2x4400mAh lithium batteries
61090/B	Black	CCT V	2700K-3000K	2,5W	100lm		6	2x4400mAh lithium batteries
61106/W/W	White	Warm white	3000K	2W	200lm		12	2200mAh lithium battery
61106/B/W	Black	Warm white	3000K	2W	200lm		12	2200mAh lithium battery
61094/W/UW	White	Ultra warm white	2200K	1,8W	120lm		6	2x4400mAh lithium batteries

Portable Table Lights



61092/W


61092 | 2,5W | SMD LED | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CCT V · CE · 2 YEAR · IP65



Charging time: ≤6,5Hrs
Working time: ≥10Hrs
100% light intensity





61092/B

61092 | 2,5W | SMD LED | Dimmable | Die cast


Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CCT V · CE · 2 YEAR · IP65



Charging time: ≤6,5Hrs
Working time: ≥10Hrs
100% light intensity



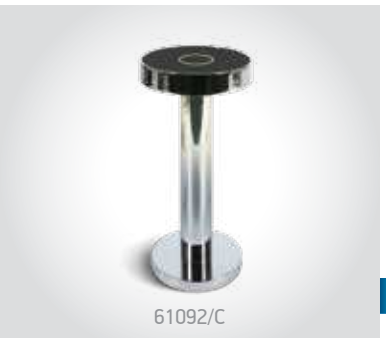

61092/C


61092 | 2,5W | SMD LED | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CCT V · CE · 2 YEAR · IP65



Charging time: ≤6,5Hrs
Working time: ≥10Hrs
100% light intensity





61092/GL

61092 | 2,5W | SMD LED | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CCT V · CE · 2 YEAR · IP65



Charging time: ≤6,5Hrs
Working time: ≥10Hrs
100% light intensity






61000 | Charging station for 61090 & 61092 | 100-240V

Charge up to 6 table lamps.

CE · 2 YEAR · IP20



Charging USB adaptor.
Order code 61000A.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61092/W	White	CCT V	2700K-3000K	2,5W	120lm		6	4400mAh lithium battery
61092/B	Black	CCT V	2700K-3000K	2,5W	120lm		6	4400mAh lithium battery
61092/C	Chrome	CCT V	2700K-3000K	2,5W	120lm		6	4400mAh lithium battery
61092/GL	Gold	CCT V	2700K-3000K	2,5W	120lm		6	4400mAh lithium battery





61084 | 2W | SMD LED | Touch switch | 3-Step Dimming | Metal + PC

Rechargeable USB socket.

LED BUILT IN


3-STEP DIMMABLE

2 YEAR

IP44



Charging time: 4Hrs
Working time: 8Hrs





61088/W

61088 | 3W | SMD LED | 3-Step Dimming | ABS

Rechargeable USB socket.

LED BUILT IN

80 CRI

3-STEP DIMMABLE


2 YEAR

IP65



61088/B

Charging time: 3,5Hrs
Working time:
4Hrs / 8Hrs / 15Hrs
100% / 50% / 25%



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61084/B	Black	Warm white	3000K	2W	80lm	III	8	2200mAh lithium battery
61088/W	White	Warm white	3000K	3W	120lm	III	9	2200mAh lithium battery
61088/B	Black	Warm white	3000K	3W	120lm	III	9	2200mAh lithium battery



Crystal Effect Table Lights




61096 | 1,2W | SMD LED | Touch switch | 3-Step Dimming | Plastic

Rechargeable USB socket.

LED BUILT IN · 80 CRI · 3-STEP DIMMABLE · CE · 2 YEAR · IP54

Charging time: 2,5Hrs
Working time: 8Hrs






61098 | 1,2W | SMD LED | Touch | 3-Step Dimming | Plastic

Rechargeable USB socket.

LED BUILT IN · 80 CRI · 3-STEP DIMMABLE · CE · 2 YEAR · IP54

Charging time: 2,5Hrs
Working time: 8Hrs






61104 | 1,2W | SMD LED | Touch | 3-Step Dimming | Plastic

Rechargeable USB socket.


LED BUILT IN · 80 CRI · 3-STEP DIMMABLE · CE · 2 YEAR · IP54

Charging time: 2,5Hrs
Working time: 8Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61096/W	Clear	Warm white	3000K	1,2W	60lm	III	10	2000mAh lithium battery
61098/W	Clear	Warm white	3000K	1,2W	60lm	III	10	2000mAh lithium battery
61104/W	Clear	Warm white	3000K	1,2W	60lm	III	10	2000mAh lithium battery



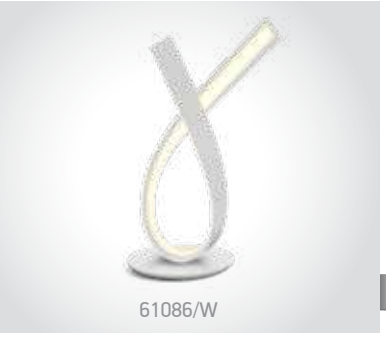


61086/W

61086 | 10W | SMD 2835 | Steel + aluminium + acrylic — With ON/OFF Switch / EU Plug.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20









61086/B

61086 | 10W | SMD 2835 | Steel + aluminium + acrylic — With ON/OFF Switch / EU Plug.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





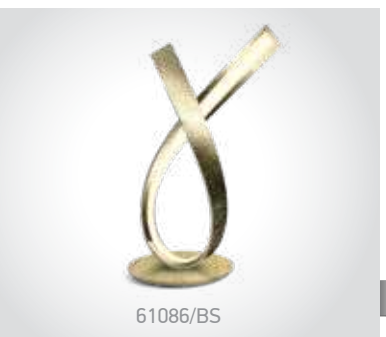


61086/BS

61086 | 10W | SMD 2835 | Steel + aluminium + acrylic — With ON/OFF Switch / EU Plug.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61086/W	White	Warm white	3000K	10W	550lm	230V	☐	5	Complete with 24V DC driver
61086/B	Black	Warm white	3000K	10W	550lm	230V	☐	5	Complete with 24V DC driver
61086/BS	Brass	Warm white	3000K	10W	550lm	230V	☐	5	Complete with 24V DC driver



The Ribbon Floor Lights




61086A/W

61086A | 29W | SMD 2835 | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20








61086A/B


61086A | 29W | SMD 2835 | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





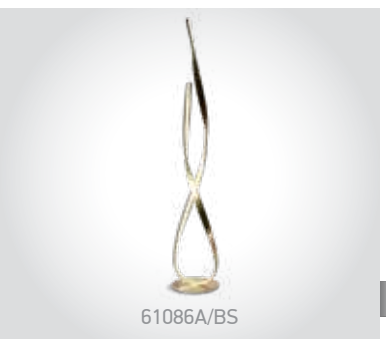


61086A/BS

61086A | 29W | SMD 2835 | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61086A/W	White	Warm white	3000K	29W	1740lm	230V	☐	1	Complete with 24V DC driver
61086A/B	Black	Warm white	3000K	29W	1740lm	230V	☐	1	Complete with 24V DC driver
61086A/BS	Brass	Warm white	3000K	29W	1740lm	230V	☐	1	Complete with 24V DC driver

The Wood Nostalgia





61118 | 12W | E27 | Wood + beige fabric shade


EU Plug.





61118A | 12W | E27 | Wood + beige fabric shade

EU Plug.

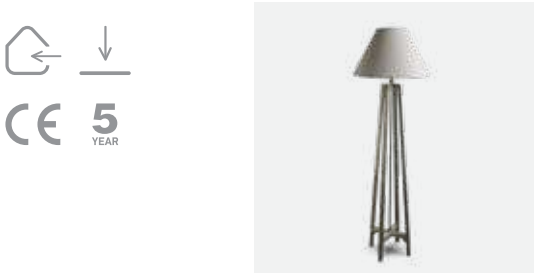

Order Code	Colour	Watts	Input	Class		Notes
61118	Wood	12W	100-240V	⧈	4	With ON/OFF Switch
61118A	Wood	12W	100-240V	⧈	1	With ON/OFF Switch





62156C/B/W

62156C | 65W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP20


62156C/BBS/W






62156D | 100W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62156C/B/W	Black	Warm white	3000K	65W	4300lm	230V		1	Complete with 1600mA driver
62156C/BBS/W	Brushed brass	Warm white	3000K	65W	4300lm	230V		1	Complete with 1600mA driver
62156D/B/W	Black	Warm white	3000K	100W	6500lm	230V		1	Complete with 2x1200mA drivers



LED Pendant Rings




63046 | 25W | SMD 2835 | Steel + aluminium

Oval shape.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20



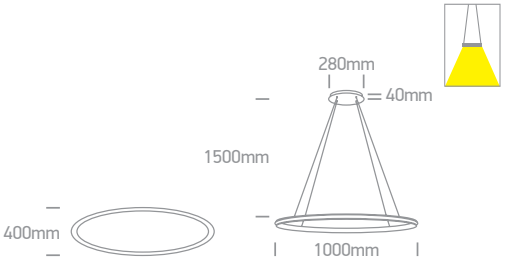




63046A/W


63046A | 45W | SMD 2835 | Steel + aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20




63046A/B




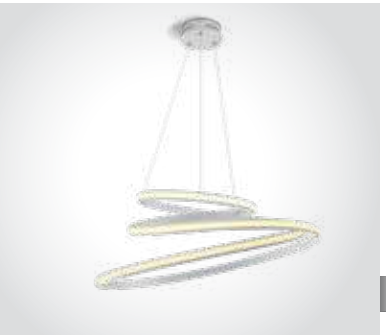

63046B | 50W | SMD 2835 | Steel + aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63046/W	White	Warm white	3000K	25W	1540lm	230V		1	Complete with 24V DC driver
63046A/W	White	Warm white	3000K	45W	2700lm	230V		1	Complete with 24V DC driver
63046A/B	Black	Warm white	3000K	45W	2700lm	230V		1	Complete with 24V DC driver
63046B/W	White	Warm white	3000K	50W	3000lm	230V		1	Complete with 24V DC driver



LED Pendant Rings



63048/B


63048 | 19W | SMD 2835 | Steel + aluminium

LED BUILT IN

80 CRI CE 2 YEAR

IP20








63048/C


63048 | 19W | SMD 2835 | Steel + aluminium

LED BUILT IN

80 CRI CE 2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63048/B	Black	Warm white	3000K	19W	1000lm	230V	⏚	1	Complete with 24V DC driver
63048/C	Chrome	Warm white	3000K	19W	1000lm	230V	⏚	1	Complete with 24V DC driver



LED Pendant Rings



63050/W

63050 | 40W | SMD 2835 | Steel + aluminium


LED BUILT IN

80 CRI CE 2 YEAR

IP20



63050/B





62144NB/W/W

62144NB | 50W | SMD 2835 | Aluminium


LED BUILT IN

80 CRI CE 3 YEAR

IP20



62144NB/B/W





62144NB/BBS/W

62144NB | 50W | SMD 2835 | Aluminium


LED BUILT IN

80 CRI CE 3 YEAR

IP20



62144NB/BGL/W





63114/W/W

63114 | 40W | SMD 2835 | Metal + ABS


LED BUILT IN

80 CRI CE 2 YEAR

IP20



63114/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63050/W	White	Warm white	3000K	40W	2250lm	230V		1	Complete with 24V DC driver
63050/B	Black	Warm white	3000K	40W	2250lm	230V		1	Complete with 24V DC driver
62144NB/W/W	White	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver
62144NB/B/W	Black	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver
62144NB/BBS/W	Brushed brass	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver
62144NB/BGL/W	Brushed gold	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver
63114/W/W	White	Warm white	3000K	40W	2400lm	230V		1	Complete with 1000mA driver
63114/B/W	Black	Warm white	3000K	40W	2400lm	230V		1	Complete with 1000mA driver





63144A/W/W

63144A | 40W | SMD 2835 | Steel + aluminium + acrylic

LED BUILT IN
80 CRI
CE
2 YEAR
IP20


63144A/B/W


63144A/BS/W





63144B/W/W

63144B | 60W | SMD 2835 | Steel + aluminium + acrylic

LED BUILT IN
80 CRI
CE
2 YEAR
IP20


63144B/B/W


63144B/BS/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63144A/W/W	White	Warm white	3000K	40W	4350lm	230V		1	Complete with 650mA driver
63144A/B/W	Black	Warm white	3000K	40W	4350lm	230V		1	Complete with 650mA driver
63144A/BS/W	Brass	Warm white	3000K	40W	4350lm	230V		1	Complete with 650mA driver
63144B/W/W	White	Warm white	3000K	60W	6800lm	230V		1	Complete with 1050mA driver
63144B/B/W	Black	Warm white	3000K	60W	6800lm	230V		1	Complete with 1050mA driver
63144B/BS/W	Brass	Warm white	3000K	60W	6800lm	230V		1	Complete with 1050mA driver



The Swirl Range



63066A/W

63066A | 30W | SMD 2835 | Steel + aluminium


LED BUILT IN

80 CRI CE 2 YEAR

IP20



63066A/B





63066/W

63066 | 30W | SMD 2835 | Steel + aluminium


LED BUILT IN

80 CRI CE 2 YEAR

IP20



63066/B



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63066A/W	White	Warm white	3000K	30W	1800lm	230V		1	Complete with 24V DC driver
63066A/B	Black	Warm white	3000K	30W	1800lm	230V		1	Complete with 24V DC driver
63066/W	White	Warm white	3000K	30W	1500lm	230V		1	Complete with 24V DC driver
63066/B	Black	Warm white	3000K	30W	1500lm	230V		1	Complete with 24V DC driver




The Swirl Range



63062 | 36W | SMD 2835 | Steel + aluminium + acrylic

LED BUILT IN
80 CRI
CE
2 YEAR
IP20








63068A | 40W | SMD 2835 | Steel + aluminium + acrylic

LED BUILT IN
80 CRI
CE
2 YEAR
IP20








63068 | 30W | SMD 2835 | Steel + aluminium + acrylic

LED BUILT IN
80 CRI
CE
2 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63062/BS	Brass	Warm white	3000K	36W	1800lm	230V		1	Complete with 24V DC driver
63068A/BS	Brass	Warm white	3000K	40W	2400lm	230V		1	Complete with 24V DC driver
63068/BS	Brass	Warm white	3000K	30W	1500lm	230V		1	Complete with 24V DC driver



The Crystal Swirl Range



63054A | 20W | SMD 2835 | Steel + aluminium + acrylic crystal look

LED BUILT IN


80 CRI

CE

2 YEAR

IP20







63054C | 150W | SMD 2835 | Steel + aluminium + acrylic crystal look

LED BUILT IN


80 CRI

CE

2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63054A/B	Black	Warm white	3000K	20W	1000lm	230V	⏚	1	Complete with 24V DC driver
63054C/B	Black	Warm white	3000K	150W	8500lm	230V	⏚	1	Complete with 24V DC driver

The Light Bars



63056 | 65W | SMD 2835 | Steel + aluminium + acrylic

LED BUILT IN


80 CRI

CE

2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63056/BBS	Brushed brass	Warm white	3000K	65W	3900lm	230V	⏚	1	Complete with 24V DC driver

Mushroom Pendants



63058/BGL/W

63058 | 60W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR


IP20



63058/BAN/W



63058/BBR/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63058/BAN/W	Brushed anthracite	Warm white	3000K	60W	4200lm	230V		1	Complete with 1400mA driver
63058/BGL/W	Brushed gold	Warm white	3000K	60W	4200lm	230V		1	Complete with 1400mA driver
63058/BBR/W	Brushed brown	Warm white	3000K	60W	4200lm	230V		1	Complete with 1400mA driver



LED Pendant Rings



62142NB/AN/V

62142NB | 42W | SMD 2835 | Aluminium

LED BUILT IN

90 CRI

CCT V

CE


new

IP20

3 YEAR



62142NB/W/V





62142NB/W/W

62142NB | 42W | SMD 2835 | Aluminium


LED BUILT IN

80 CRI

CE

3 YEAR

IP20





62180NB/B/W

62180NB | 80W | SMD 2835 | Metal base + aluminium + PMMA

LED BUILT IN

80 CRI


CE

2 YEAR


IP20



62180NB/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62142NB/W/V	White	CCT V	2700K-3000K-4000K	42W	3570lm	230V		1	Complete with 1050mA driver
62142NB/AN/V	Anthracite	CCT V	2700K-3000K-4000K	42W	3570lm	230V		1	Complete with 1050mA driver
62142NB/W/W	White	Warm white	3000K	42W	3570lm	230V		1	Complete with 1050mA driver
62180NB/W/W	White	Warm white	3000K	80W	5600lm	230V		1	Complete with 2x1000mA drivers
62180NB/B/W	Black	Warm white	3000K	80W	5600lm	230V		1	Complete with 2x1000mA drivers

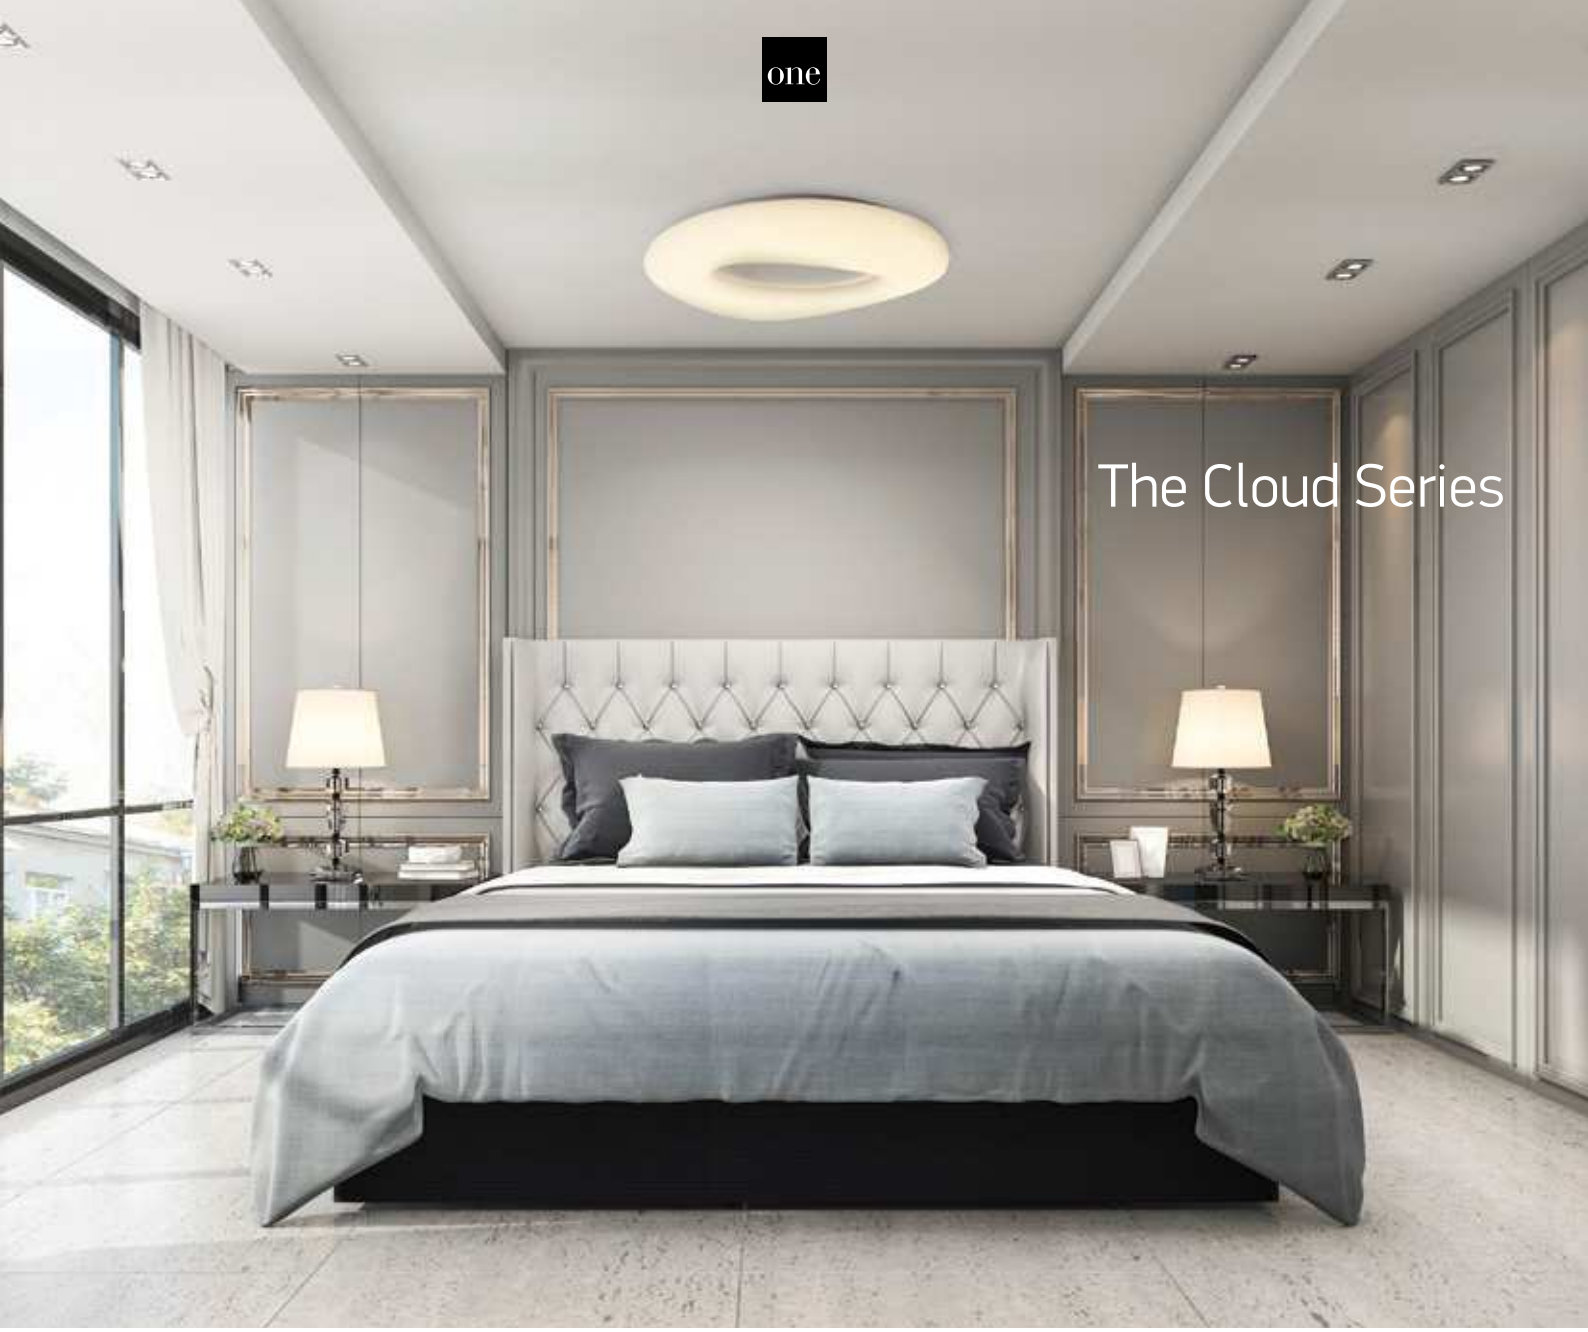




62148A | 23W | SMD 2835 | Metal base + PC

LED BUILT IN
80 CRI
CE
3 YEAR
IP20








62148B | 40W | SMD 2835 | Metal base + PC

LED BUILT IN
80 CRI
CE
3 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62148A/W	White	Warm white	3000K	23W	1900lm	230V		1	Complete with 500mA driver
62148B/W	White	Warm white	3000K	40W	3200lm	230V		1	Complete with 1000mA driver





63110C | 80W | SMD 2835 | Metal base + PC

LED BUILT IN


80 CRI

CE

3 YEAR

IP20







63112 | 60W | SMD 2835 | Metal + Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63110C/W	White	Warm white	3000K	80W	6400lm	230V		1	Complete with 2x1000mA drivers
63112/W	White	Warm white	3000K	60W	4800lm	230V		1	Complete with 1300mA driver





62184A | 24W | SMD 2835 | Metal + glass

LED BUILT IN


80 CRI

CE

3 YEAR

IP20







62184B | 24W | SMD 2835 | Metal + glass

LED BUILT IN


80 CRI

CE

3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62184A/C/W	Chrome	Warm white	3000K	24W	1300lm	230V	⏚	1	Complete with 300mA driver
62184B/C/W	Chrome	Warm white	3000K	24W	1300lm	230V	⏚	1	Complete with 300mA driver

The Glass Stone Series



63184C | 24W | SMD 2835 | Metal + glass

LED BUILT IN


80 CRI

CE


3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63184C/C/W	Chrome	Warm white	3000K	24W	1300lm	230V	⏚	1	Complete with 600mA driver

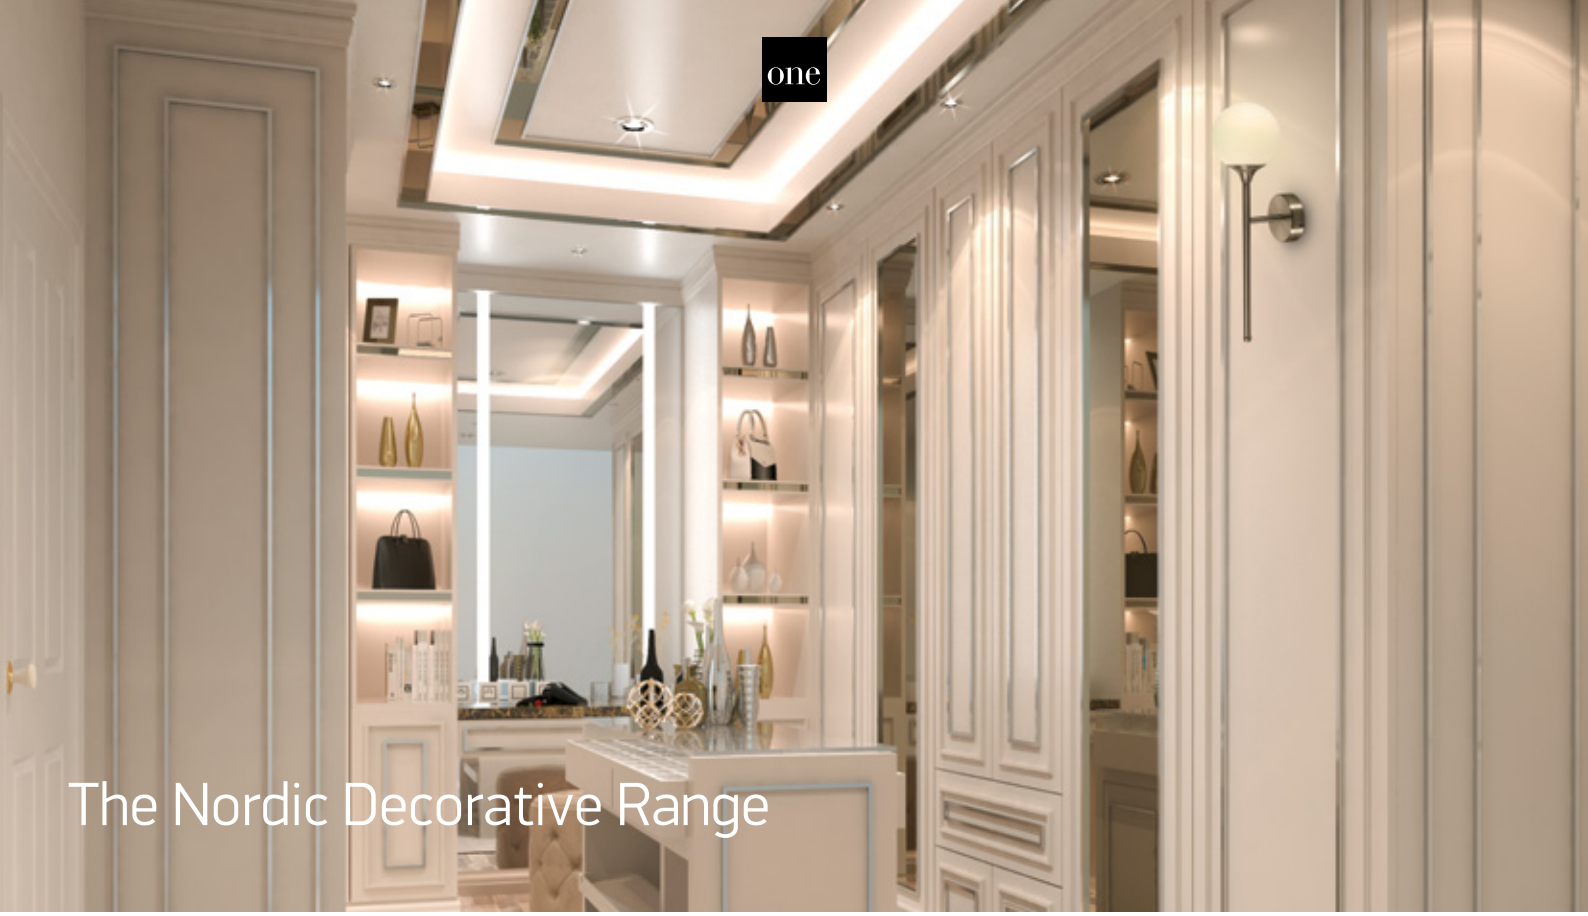

The Nordic Decorative Range




62116A | 5x9W | G9 | Steel

IP20



Suitable for G9 LED lamp.







60116 | 9W | G9 | Steel

IP20



Suitable for G9 LED lamp.



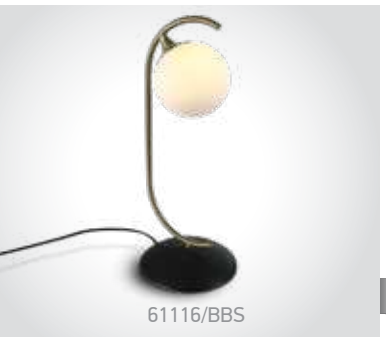

61116/BBS


61116 | 9W | G9 | Steel

EU Schuko Plug.

IP20



61116/B



Order Code	Colour	Watts	Input	Class			Notes
62116A/BBS	Brushed brass	5x9W	100-240V		-	2	-
60116/BBS	Brushed brass	9W	100-240V		-	4	-
61116/B	Black	9W	100-240V		150cm	4	With ON/OFF Switch
61116/BBS	Brushed brass	9W	100-240V		150cm	4	With ON/OFF Switch






63116 | 9W | G9 | Steel


CE 5 YEAR

IP20



Suitable for G9 LED lamp.



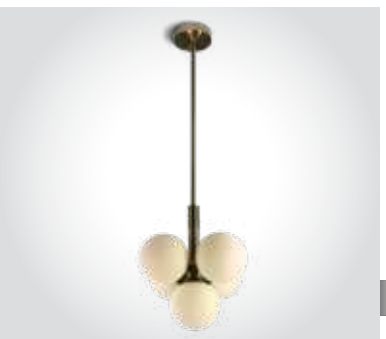


63116A | 5x9W | G9 | Steel

CE 5 YEAR

IP20



Suitable for G9 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
63116/BBS	Brushed brass	9W	100-240V		4	-
63116A/BBS	Brushed brass	5x9W	100-240V		2	-

The Nordic Decorative Range




63174C | 3x8W | E14 | Metal + glass


IP20



Suitable for E14 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
63174C/BS	Brass	3x8W	100-240V		1	-

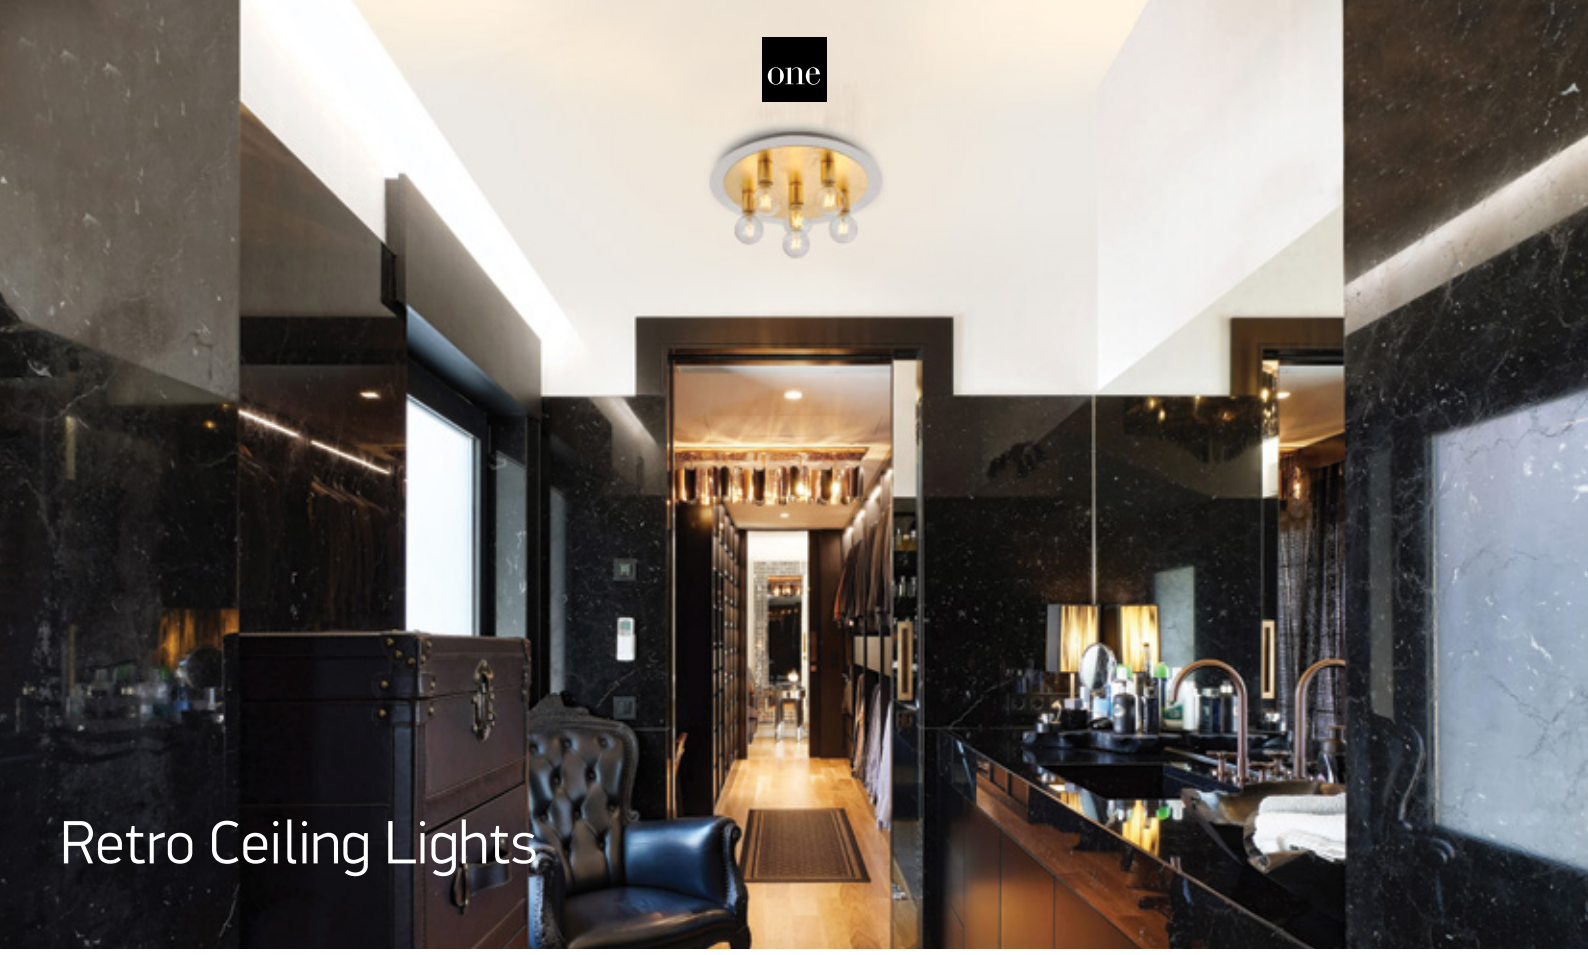

Retro Ceiling Lights




62172A | 12W | E27 | Metal

3 YEAR

IP20



Suitable for E27 LED lamp.






62172B | 3x12W | E27 | Metal

3 YEAR

IP20



Suitable for E27 LED lamp.






62172C | 6x12W | E27 | Metal

3 YEAR

IP20



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
62172A/BS	Brass	12W	100-240V		10	-
62172B/BS	Brass	3x12W	100-240V		5	-
62172C/BS	Brass	6x12W	100-240V		5	-

Retro Classic Pendants




63134P | 4x8W | E14 | Fabric + glass

IP20



Suitable for E14 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
63134P	Dark grey	4x8W	100-240V		1	-






63132P | 8x8W | E14 | Aluminium + glass




IP20



Suitable for E14 LED lamps.



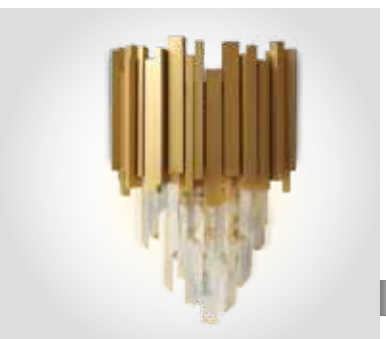


60132 | 2x8W | E14 | Aluminium + glass



IP20



Suitable for E14 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
63132P	Brass	8x8W	100-240V		1	-
60132	Brass	2x8W	100-240V		8	-






63136 | 12W | E27 | Metal + glass

IP20

3 YEAR



Suitable for E27 LED lamp.






63138 | 12W | E27 | Metal + glass

IP20

3 YEAR




Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
63136/DC	Dark chrome	12W	100-240V	⏚	2	-
63138/A	Amber	12W	100-240V	⏚	4	-



Modern Glass Art Range

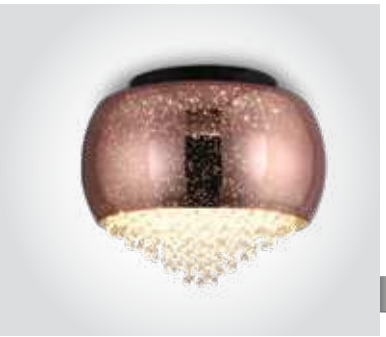


62170A | 4x9W | G9 | Metal + glass




IP20



Suitable for G9 LED lamps.



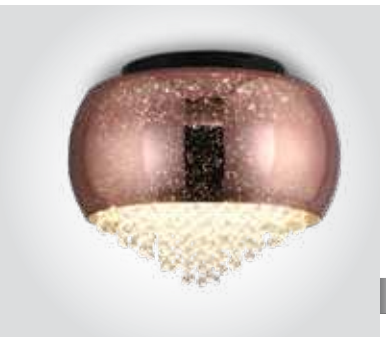


62170B | 6x9W | G9 | Metal + glass



IP20



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62170A	Copper	4x9W	100-240V		1	-
62170B	Copper	6x9W	100-240V		1	-

The Classic Retro Range
Ceiling Lights




62162A | 6x9W | G9 | Metal + plastic beads + glass

IP20

3 YEAR



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62162A	Chrome	6x9W	100-240V	⏚	1	-



The Classic Retro Range
Wall Lights




60158 | 2x9W | G9 | Metal + aluminium rods + glass

CE 3 YEAR

IP20



Suitable for G9 LED lamps.






60162 | 2x9W | G9 | Metal + Plastic beads + glass

CE 3 YEAR

IP20



Suitable for G9 LED lamps.






60168 | 2x9W | G9 | Metal + aluminium tubes

CE 3 YEAR

IP20



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
60158	Chrome	2x9W	100-240V		8	-
60162	Chrome	2x9W	100-240V		8	-
60168	Chrome	2x9W	100-240V		8	-



The Classic Range
Ceiling Lights




62164A | 4x9W | G9 | Metal + glass rods + glass

IP20

3 YEAR



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62164A	Chrome	4x9W	100-240V		5	-

The Classic Range






63130P | 9x9W | G9 | Metal + glass rods + glass


IP20



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
63130P	Chrome	9x9W	100-240V		1	-

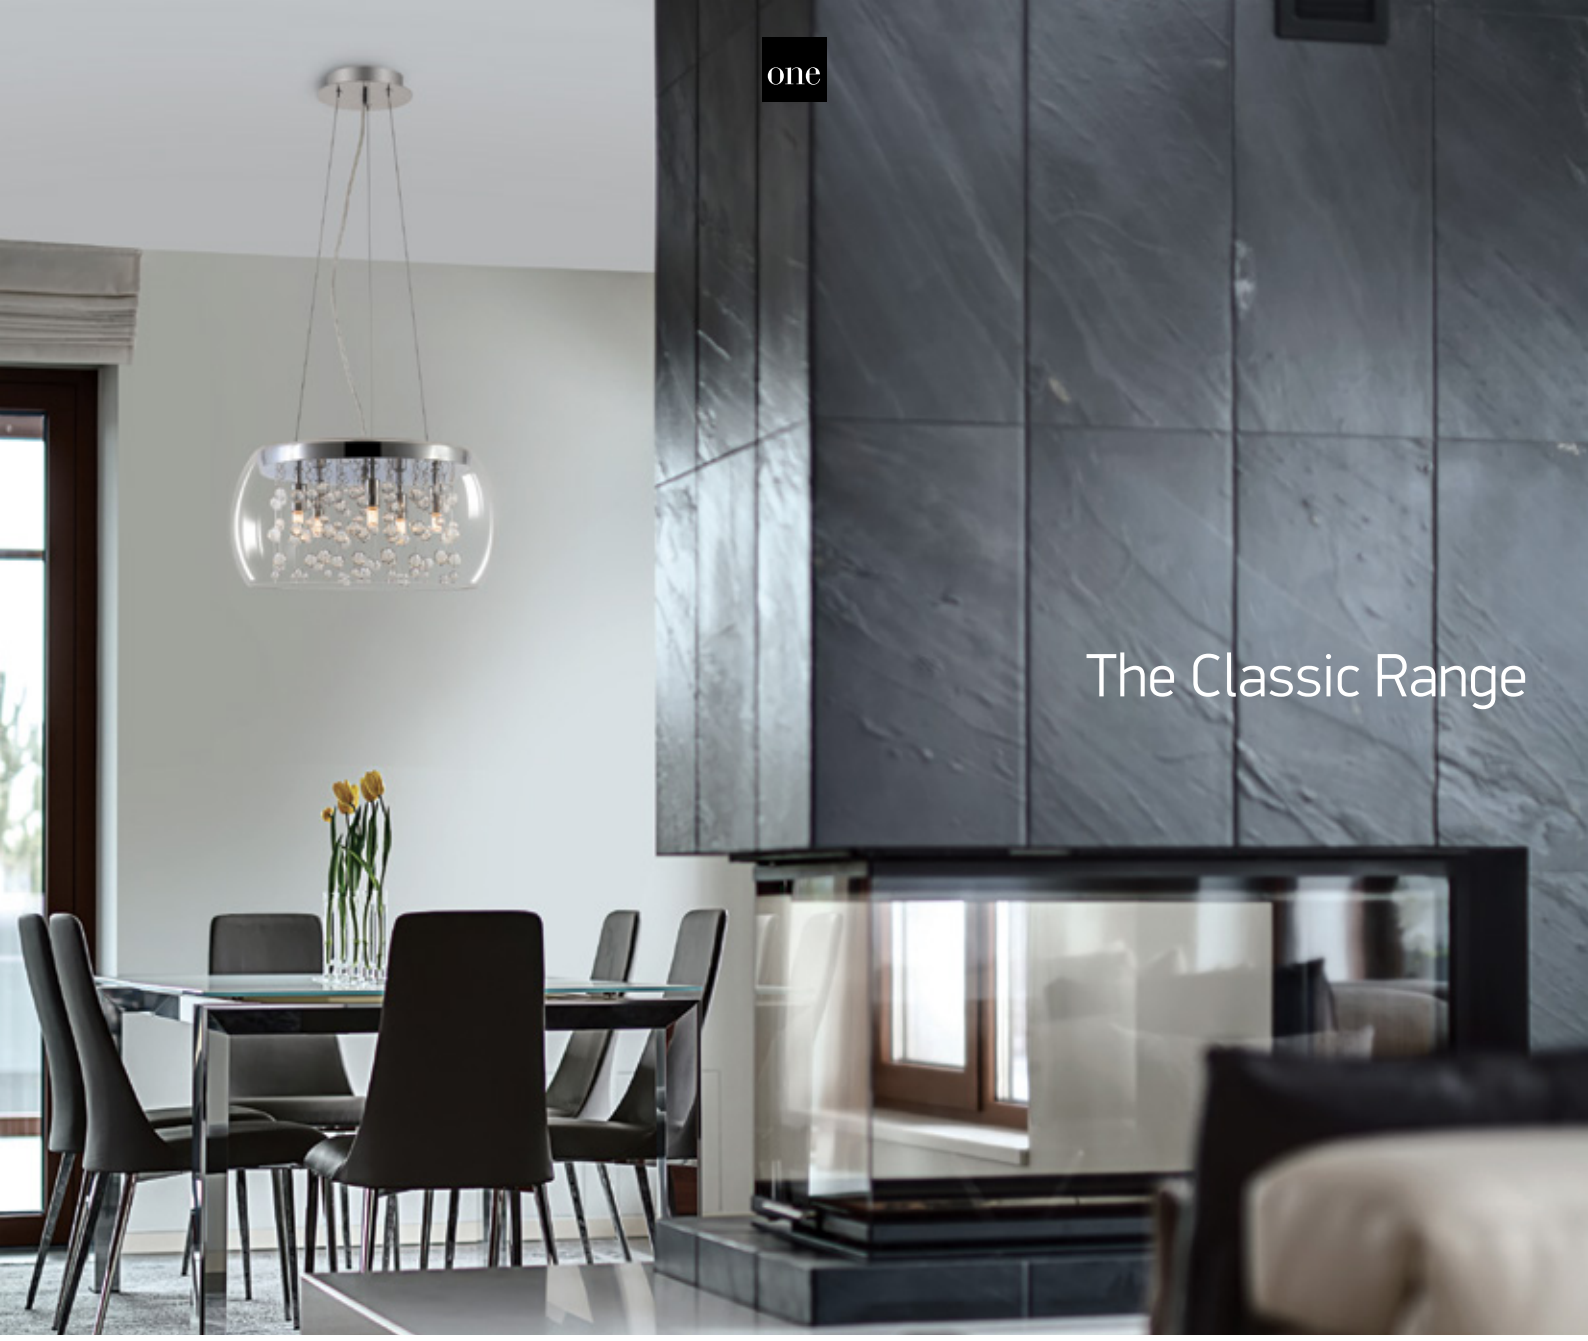




62166B | 5x9W | G9 | Metal + glass

IP20

3 YEAR



Suitable for G9 LED lamps.






63166P | 5x9W | G9 | Metal + glass

IP20

3 YEAR



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62166B	Chrome	5x9W	100-240V		2	-
63166P	Chrome	5x9W	100-240V		2	-



The Cube Range




60178B | 4x9W | G9 | Metal + glass

IP20

3 YEAR



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
60178B/C	Chrome	4x9W	100-240V	⏚	1	-

Crystal Recessed

Die cast + crystal




10105C4 | 50W | MR16 | GU5,3 | Die cast + crystal


CE 3 YEAR

IP20 offer





Order Code	Colour	Watts	Input	Class					Notes
10105C4/C	Chrome	50W	12V	III	40cm	72mm	50mm	4	-

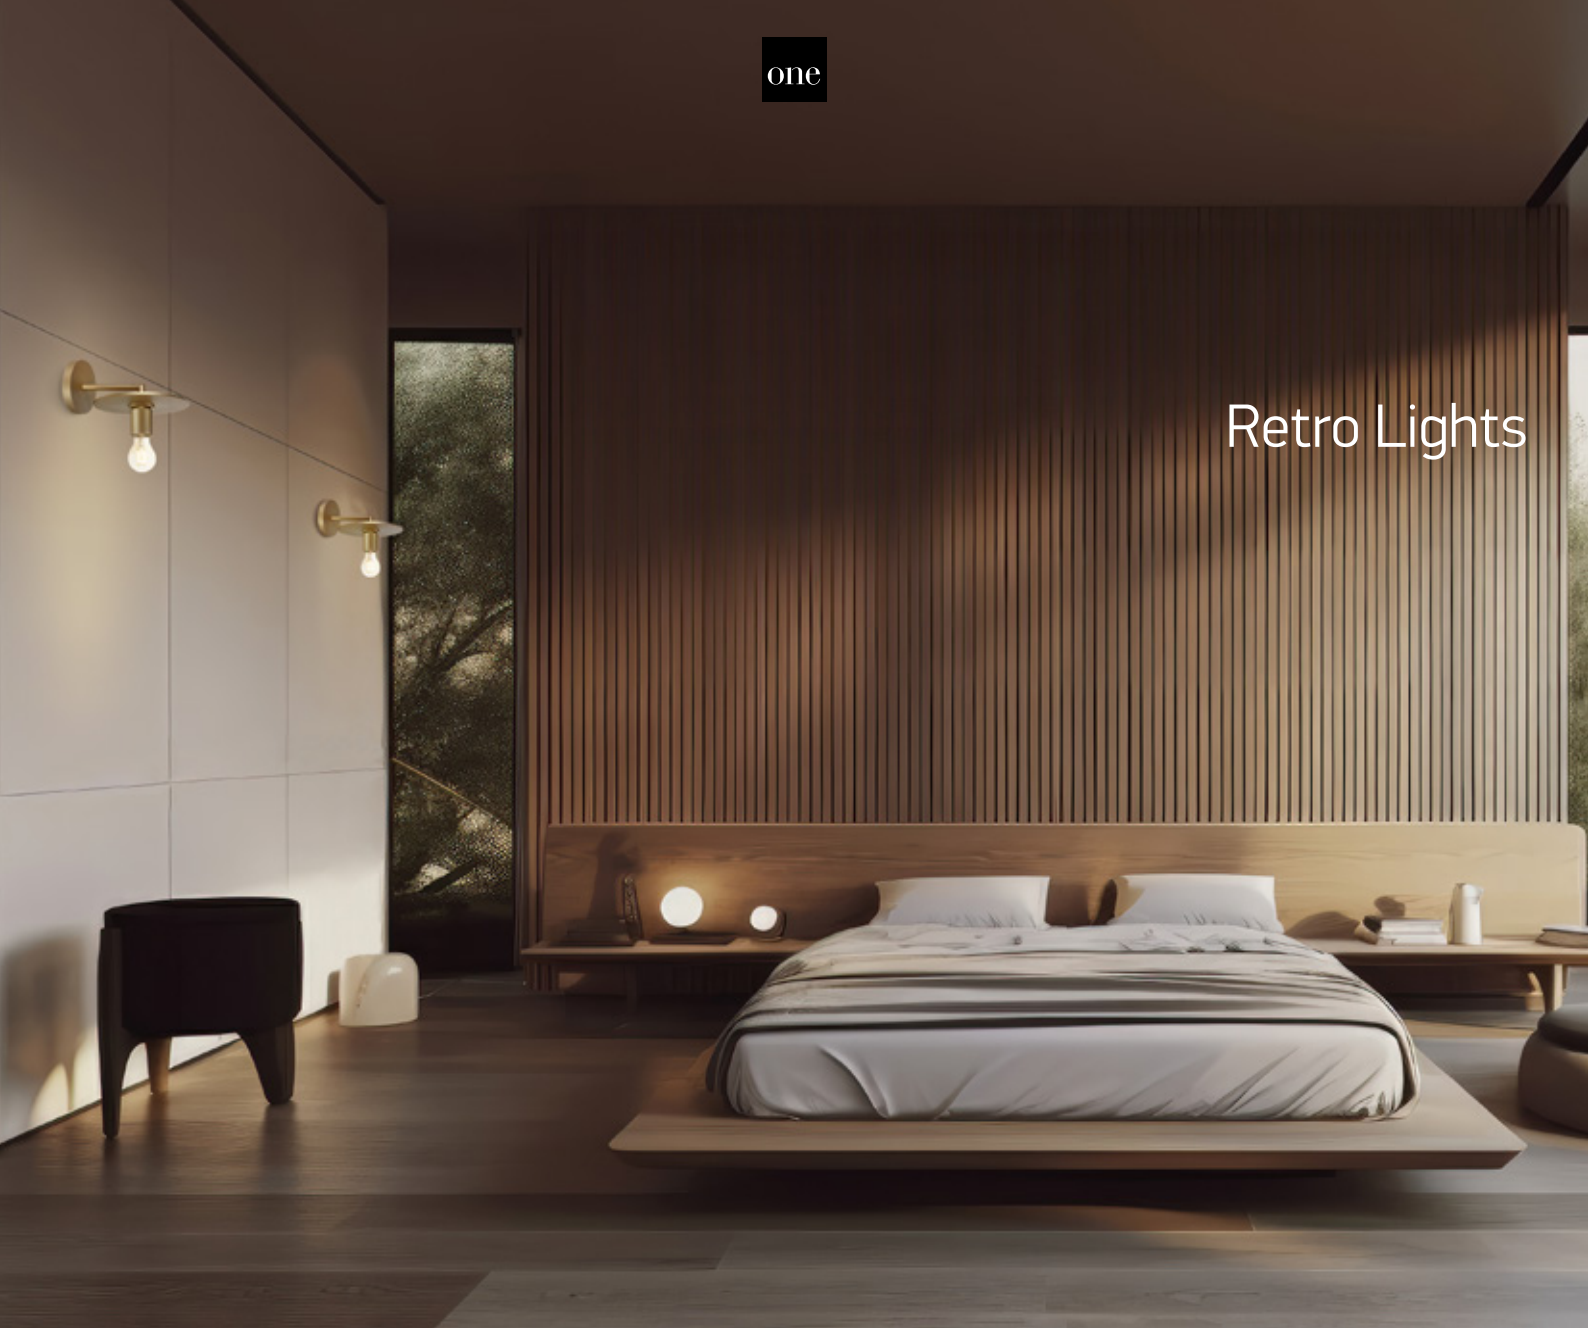




62120 | 12W | E27 | Surface | Recessed | Aluminium






IP20










62120A | 12W | E27 | Aluminium





IP20





Order Code	Colour	Watts	Input	Class				Notes
62120/BBS	Brushed brass	12W	100-240V		150mm	50mm	4	-
62120A/BBS	Brushed brass	12W	100-240V		-	-	2	-



Hotel & Bedroom

Pages 597-608

17





The Hotel Range
Metal



61046 | 12W | E27 | Metal + white fabric shade


ADJUSTABLE

2 YEAR

IP20



Suitable for E27 LED lamp.





61076 | 12W | E27 | Metal + white fabric shade

2 YEAR

IP20



Order Code	Colour	Watts	Input	Class		Notes
61046/MC	Brushed chrome	12W	100-240V	⏚	8	With ON/OFF Switch
61076/C	Chrome	12W	100-240V	⏚	12	With ON/OFF Switch



61080/W/W

The Hotel Range
Metal



61080 | 3W LED + 12W E27 | USB socket | Metal + white fabric shade

With 2 x ON/OFF Switches.


LED BUILT IN

ADJUSTABLE

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61080/W/W	White	Warm white	3000K	3W LED + 12W E27	150lm	230V	⏚	4	Complete with 700mA driver



The Hotel Range
Metal



61120 | 3W LED + 12W E27 | Metal + black fabric shade

With USB charger and 2 x ON/OFF Switches.


LED BUILT IN

ADJUSTABLE CE 2 YEAR

IP20



Suitable for E27 LED lamp.





61122 | 3W LED + 8W E14 | Metal + black fabric shade

With 2 x ON/OFF Switches.


LED BUILT IN

ADJUSTABLE CE 2 YEAR

IP20



Suitable for E14 LED lamp.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61120/B/W	Black	Warm white	3000K	3W LED + 12W E27	150lm	230V		4	Complete with 500mA driver
61122/C/W	Chrome	Warm white	3000K	3W LED + 8W E14	150lm	230V		4	Complete with 500mA driver



The Hotel Retro Range
Steel




60118/B

60118 | 10W | E27 | Steel



Suitable for E27 LED lamp.






60118/BBS

60118 | 10W | E27 | Steel



Suitable for E27 LED lamp.






61116A/B

61116A | 10W | E27 | Steel

EU Schuko Plug.



Suitable for E27 LED lamp.






61116A/BBS

61116A | 10W | E27 | Steel

EU Schuko Plug.



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class			Notes
60118/B	Black	10W	100-240V		-	4	-
60118/BBS	Brushed brass	10W	100-240V		-	4	-
61116A/B	Black	10W	100-240V		150cm	4	With ON/OFF Switch
61116A/BBS	Brushed brass	10W	100-240V		150cm	4	With ON/OFF Switch




Reading Spots
Aluminium


65746/C/W

65746 | 3W | LED | Aluminium — With ON/OFF Switch.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP20





65746/W/W

65746 | 3W | LED | Aluminium — With ON/OFF Switch.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20


65746/B/W


Complete with Black & Brass reflectors.





65746A/W/W

65746A | 3W | LED | USB | Aluminium — With USB charger and ON/OFF Switch.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20


65746A/B/W


Complete with Black & Brass reflectors.





65746R/W/W

65746R | 3W | LED | Wall recessed | Aluminium — With ON/OFF Switch.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20


65746R/B/W



Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
65746/W/W	White	Warm white	3000K	3W	150lm	36°	230V		-	-	24	Complete with 700mA driver
65746/C/W	Chrome	Warm white	3000K	3W	150lm	36°	230V		-	-	24	Complete with 700mA driver
65746/B/W	Black	Warm white	3000K	3W	150lm	36°	230V		-	-	24	Complete with 700mA driver
65746A/W/W	White	Warm white	3000K	3W	150lm	36°	230V		-	-	24	Complete with 700mA driver
65746A/B/W	Black	Warm white	3000K	3W	150lm	36°	230V		-	-	24	Complete with 700mA driver
65746R/W/W	White	Warm white	3000K	3W	150lm	36°	230V		115x50mm	50mm	24	Complete with 700mA driver
65746R/B/W	Black	Warm white	3000K	3W	150lm	36°	230V		115x50mm	50mm	24	Complete with 700mA driver

Reading Spots
Aluminium



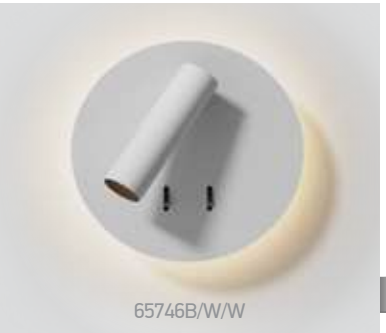

65746B/W/W

65746B | 3W + 6W Backlight | LED | Aluminium

With 2 x ON/OFF Switches.

LED BUILT IN

90 CRI


ADJUSTABLE

CE


2 YEAR

IP20





Complete with Black, Brass & White reflectors.





65746B/B/W

65746B | 3W + 6W Backlight | LED | Aluminium

With 2 x ON/OFF Switches.

LED BUILT IN

90 CRI


ADJUSTABLE

CE


2 YEAR

IP20





Complete with Black, Brass & White reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65746B/W/W	White	Warm white	3000K	3W+6W	150lm+420lm	36°	230V	⏚	20	Complete with 700mA + 350mA drivers
65746B/B/W	Black	Warm white	3000K	3W+6W	150lm+420lm	36°	230V	⏚	20	Complete with 700mA + 350mA drivers




Reading Spots
Aluminium


65738/W/W

65738 | 3W | LED | Aluminium — With ON/OFF Switch.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20







65738/B/W

65738 | 3W | LED | Aluminium — With ON/OFF Switch.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20







65738/AL/W

65738 | 3W | LED | Aluminium — With ON/OFF Switch.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20







65738/BBS/W

65738 | 3W | LED | Aluminium — With ON/OFF Switch.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65738/W/W	White	Black	Warm white	3000K	3W	160lm	36°	230V	⏚	24	Complete with 700mA driver
65738/B/W	Black	Black	Warm white	3000K	3W	160lm	36°	230V	⏚	24	Complete with 700mA driver
65738/AL/W	Aluminium	Black	Warm white	3000K	3W	160lm	36°	230V	⏚	24	Complete with 700mA driver
65738/BBS/W	Brushed brass	Black	Warm white	3000K	3W	160lm	36°	230V	⏚	24	Complete with 700mA driver



Reading Spots
Aluminium



65738A/W/W

65738A | 3W | LED | Aluminium

With ON/OFF Switch.

LED BUILT IN

90 CRI


ADJUSTABLE

2 YEAR

IP20



65738A/B/W





65744 | 3W | COB LED | Aluminium

With USB charger and ON/OFF Switch.

LED BUILT IN

85 CRI


ADJUSTABLE

2 YEAR

IP20



USB charging socket.



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65738A/W/W	White	-	Warm white	3000K	3W	160lm	36°	230V		24	Complete with 700mA driver
65738A/B/W	Black	-	Warm white	3000K	3W	160lm	36°	230V		24	Complete with 700mA driver
65744/B/W	Black	Brass	Warm white	3000K	3W	150lm	36°	230V		12	Complete with 700mA driver



Reading Spots


65146/W/W


65146 | 3W + 6W Sidelight | LED | Metal + aluminium

With 2 x ON/OFF Switches.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20


65146/B/W


Complete with Black, Brass & White reflectors.




65146A/W/W


65146A | 3W + 6W Sidelight | LED | Metal + aluminium

With 2 x ON/OFF Switches.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20


65146A/B/W


Complete with Black, Brass & White reflectors.





65147/W/W

65147 | 6W + 4W Uplight | SMD 2835 | Aluminium + acrylic

With 2X ON/OFF switches.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · new · 2 YEAR · IP20


65147/B/W





65147A/W/W

65147A | 6W + 4W Uplight | SMD 2835 | Aluminium + acrylic

With 2X ON/OFF switches.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · new · 2 YEAR · IP20


65147A/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65146/W/W	White	Warm white	3000K	3W+6W	150lm+420lm	230V		20	Complete with 700mA + 500mA drivers
65146/B/W	Black	Warm white	3000K	3W+6W	150lm+420lm	230V		20	Complete with 700mA + 500mA drivers
65146A/W/W	White	Warm white	3000K	3W+6W	150lm+420lm	230V		20	Complete with 700mA + 500mA drivers
65146A/B/W	Black	Warm white	3000K	3W+6W	150lm+420lm	230V		20	Complete with 700mA + 500mA drivers
65147/W/W	White	Warm white	3000K	6W+4W	500lm+340lm	230V		12	Complete with 2 x 300mA drivers
65147/B/W	Black	Warm white	3000K	6W+4W	500lm+340lm	230V		12	Complete with 2 x 300mA drivers
65147A/W/W	White	Warm white	3000K	6W+4W	500lm+340lm	230V		12	Complete with 2 x 300mA drivers
65147A/B/W	Black	Warm white	3000K	6W+4W	500lm+340lm	230V		12	Complete with 2 x 300mA drivers



Reading Spots

65144 | 3W + 6W Backlight | SMD LED | Metal + aluminium

With 2 x ON/OFF Switches.



65144/W/W


LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20



65144/B/W



Complete with Black, Brass & White reflectors.




61132A | 3W + 6W Base light | SMD LED | Metal + aluminium

EU Plug / With 2 x ON/OFF Switches.



61132A/W/W


LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20



61132A/B/W




Complete with Black, Brass & White reflectors.




61132B | 3W + 8W Base light | LED | Metal + aluminium

EU Plug / With 2 x ON/OFF Switches.

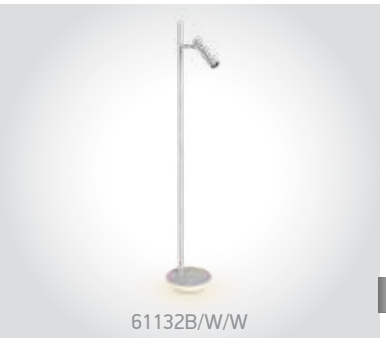

61132B/W/W


LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · IP20



61132B/B/W



Complete with Black, Brass & White reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65144/W/W	White	Warm white	3000K	3W+6W	150lm+420lm	230V		10	Complete with 700mA + 150mA drivers
65144/B/W	Black	Warm white	3000K	3W+6W	150lm+420lm	230V		10	Complete with 700mA + 150mA drivers
61132A/W/W	White	Warm white	3000K	3W+6W	150lm+420lm	230V		6	Complete with 700mA + 150mA drivers
61132A/B/W	Black	Warm white	3000K	3W+6W	150lm+420lm	230V		6	Complete with 700mA + 150mA drivers
61132B/W/W	White	Warm white	3000K	3W+8W	150lm+560lm	230V		1	Complete with 700mA + 350mA drivers
61132B/B/W	Black	Warm white	3000K	3W+8W	150lm+560lm	230V		1	Complete with 700mA + 350mA drivers




Hotel Reading Spots
Aluminium



65740 | 6W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20








65740A | 2x6W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65740/W/W	White	Warm white	3000K	6W	500lm	230V		12	Complete with 300mA driver
65740A/W/W	White	Warm white	3000K	2x6W	2x500lm	230V		12	Complete with 300mA driver



65105NA/W

The Retro GU10 Spots
Aluminium



65105NA/B

65105NA | 10W | MR16 | GU10 | Aluminium — With switch.

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



65105NA/W





65105NA/BBS

65105NA | 10W | MR16 | GU10 | Aluminium — With switch.

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



65105NA/MG





65105NBA/B

65105NBA | 10W | MR16 | GU10 | Aluminium — With switch.

ADJUSTABLE


5 YEAR

DARK LIGHT

IP20



65105NBA/W



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NA/W	White	Black	10W	100-240V		12	-
65105NA/B	Black	Brass	10W	100-240V		12	-
65105NA/BBS	Brushed brass	Black	10W	100-240V		12	-
65105NA/MG	Metal grey	Black	10W	100-240V		12	-
65105NBA/W	White	Black	10W	100-240V		12	-
65105NBA/B	Black	Brass	10W	100-240V		12	-




Bathroom

Pages 611-622

18



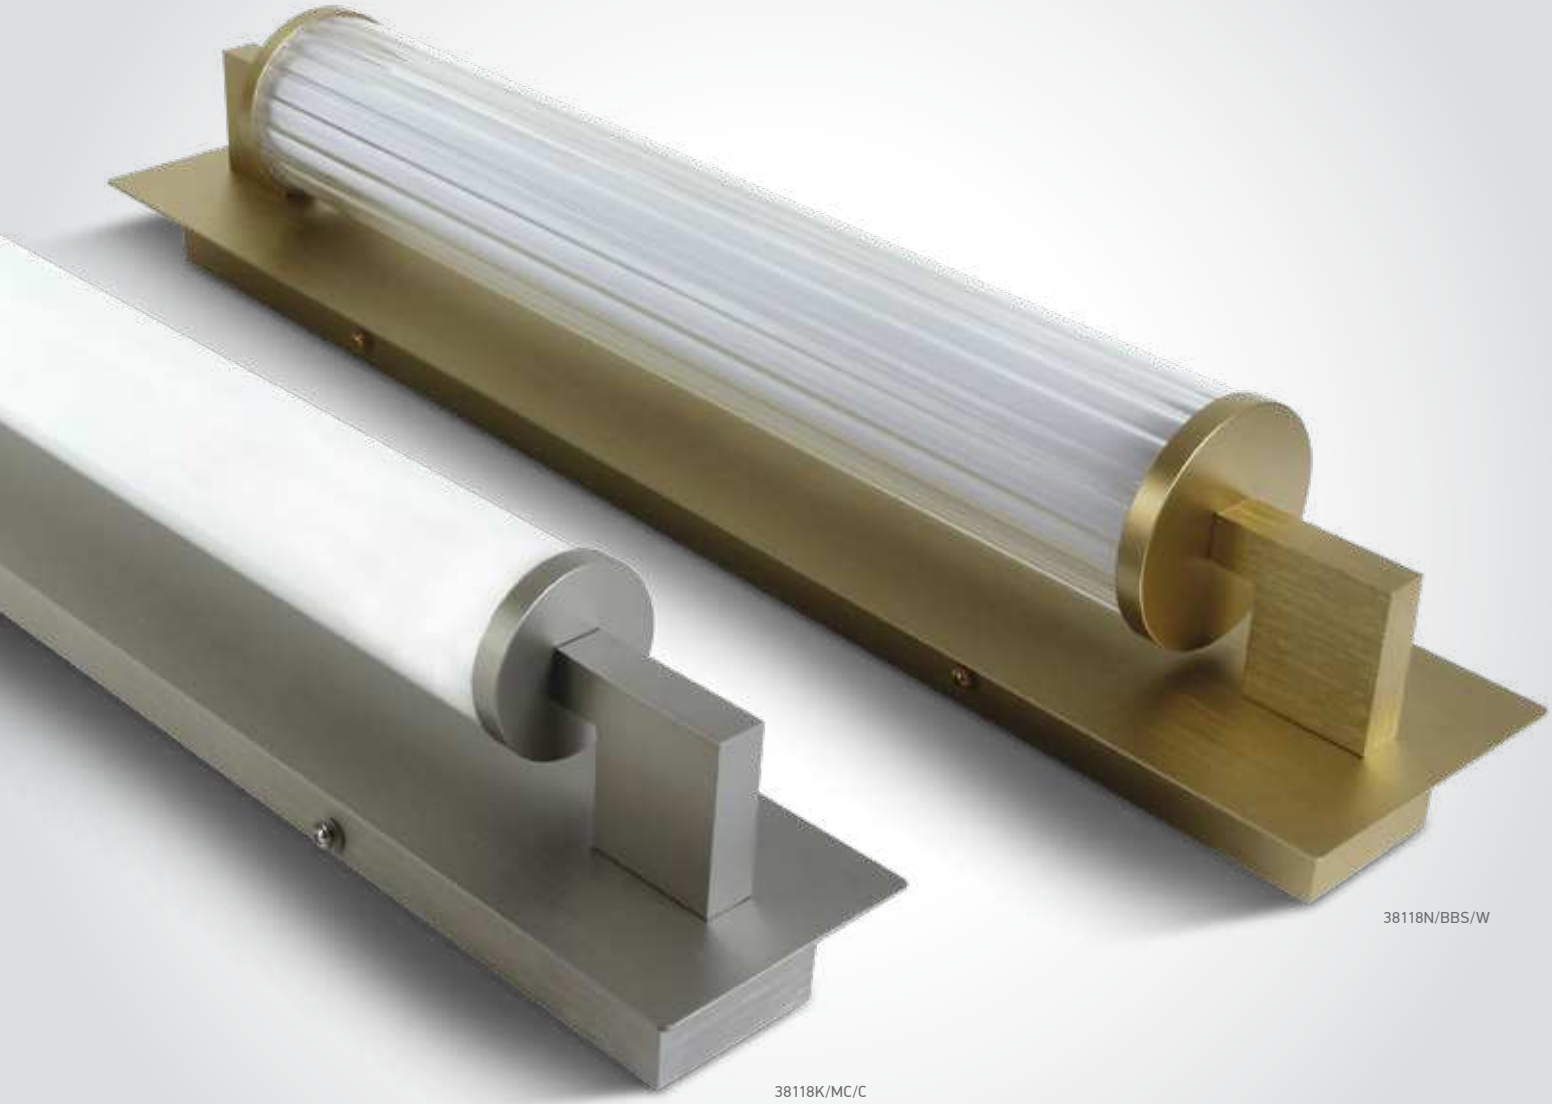

Classic Mirror Lights



38118K | 18W | SMD 2835 | Aluminium + glass

LED BUILT IN


80 CRI

CE

2 YEAR

IP44






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38118K/C/C	Chrome	Cool white	4000K	18W	1225lm	230V	⏚	6	Complete with 700mA driver
38118K/MC/C	Brushed chrome	Cool white	4000K	18W	1225lm	230V	⏚	6	Complete with 500mA driver

Classic Mirror Lights

38118N | 18W | SMD 2835 | Aluminium + glass







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38118N/C/W	Chrome	Warm white	3000K	18W	1225lm	230V		6	Complete with 500mA driver
38118N/BBS/W	Brushed brass	Warm white	3000K	18W	1225lm	230V		6	Complete with 500mA driver


Mirror Lights




38114R | 14W | SMD 2835 | Aluminium + acrylic



LED BUILT IN · 80 CRI · CE · 2 YEAR · new · IP44







38120R | 20W | SMD 2835 | Aluminium + acrylic



LED BUILT IN · 80 CRI · CE · 2 YEAR · new · IP44




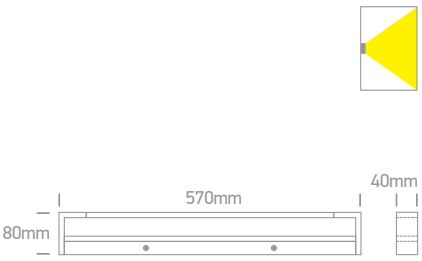


38120D | 20W | SMD 2835 | Aluminium + acrylic



LED BUILT IN · 80 CRI · CE · 2 YEAR · new · IP44



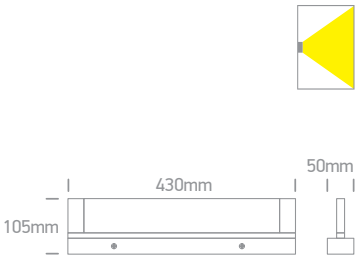

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38114R/W/W	White	Warm white	3000K	14W	1000lm	230V	⏚	10	Complete with 600mA driver
38120R/W/W	White	Warm white	3000K	20W	1400lm	230V	⏚	6	Complete with 600mA driver
38120D/W/W	White	Warm white	3000K	20W	1600lm	230V	⏚	6	Complete with 600mA driver



Mirror Lights
Adjustable

38112C | 12W | SMD 2835 | Aluminium + acrylic



new
IP44

LED BUILT IN
80 CRI
ADJUSTABLE
2 YEAR






38118C | 18W | SMD 2835 | Aluminium + acrylic




new
IP44

LED BUILT IN
80 CRI
ADJUSTABLE
2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38112C/W/W	White	Warm white	3000K	12W	1000lm	230V	⏚	10	Complete with 600mA driver
38112C/B/W	Black	Warm white	3000K	12W	1000lm	230V	⏚	10	Complete with 600mA driver
38118C/W/W	White	Warm white	3000K	18W	1500lm	230V	⏚	6	Complete with 600mA driver
38118C/B/W	Black	Warm white	3000K	18W	1500lm	230V	⏚	6	Complete with 600mA driver

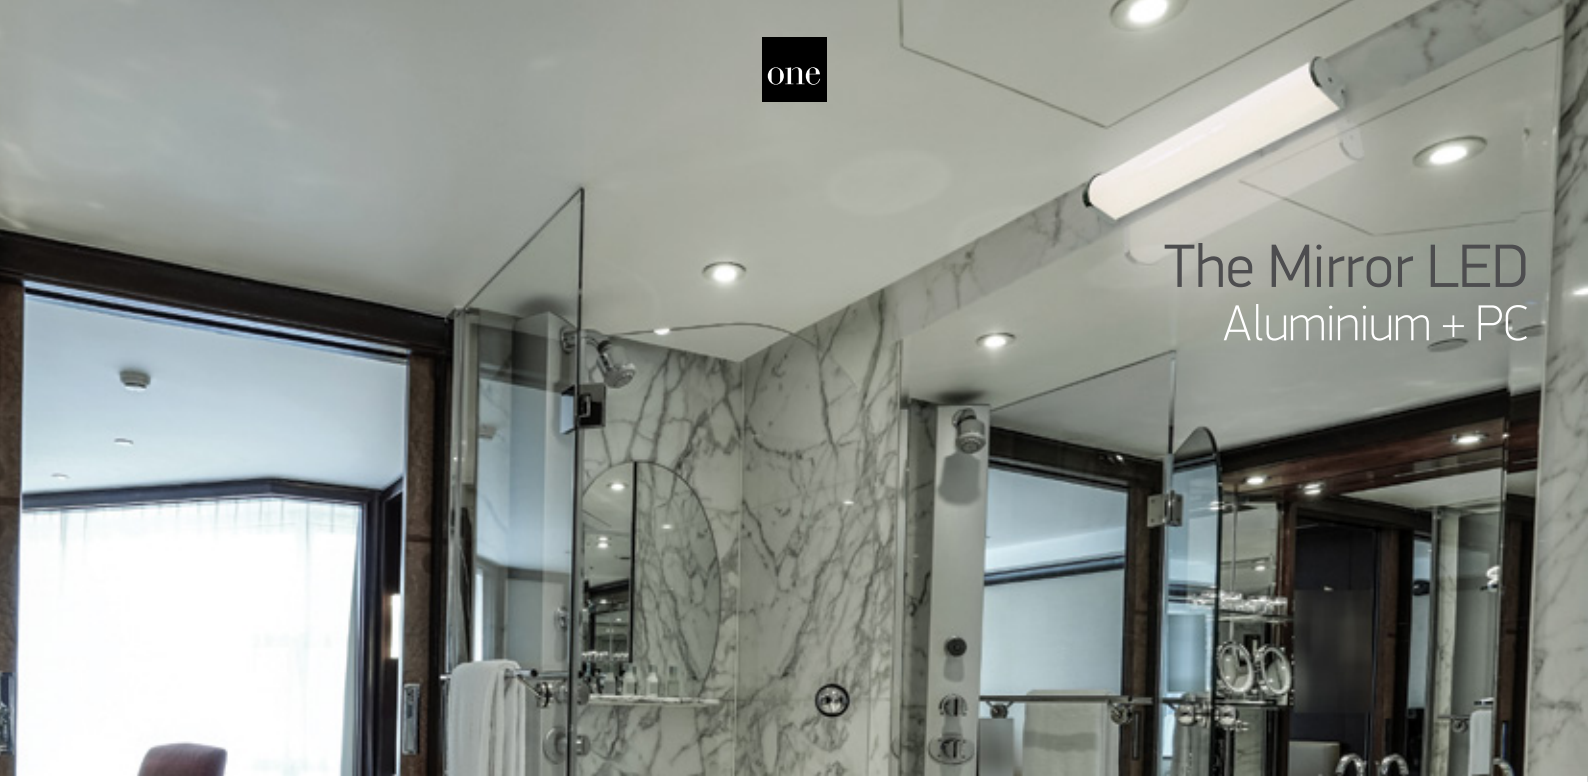


The Mirror LED
Aluminium + PC



38115C | 15W | SMD 2835 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP44








38120C | 20W | SMD 2835 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP44



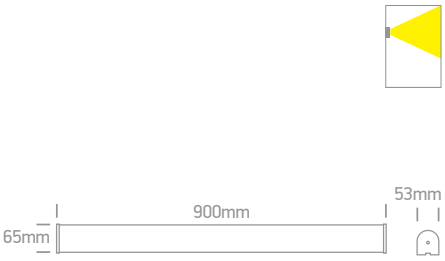




38114M | 15W | SMD 2835 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38115C/C	Chrome	Cool white	4000K	15W	1300lm	230V		10	Complete with 350mA driver
38115C/W	Chrome	Warm white	3000K	15W	1300lm	230V		10	Complete with 350mA driver
38120C/C	Chrome	Cool white	4000K	20W	1700lm	230V		10	Complete with 500mA driver
38120C/W	Chrome	Warm white	3000K	20W	1700lm	230V		10	Complete with 500mA driver
38114M/C	Chrome	Cool white	4000K	15W	1200lm	230V		12	Complete with 130mA driver
38114M/W	Chrome	Warm white	3000K	15W	1200lm	230V		12	Complete with 130mA driver
38114M/EW	Chrome	Extra warm white	2700K	15W	1200lm	230V		12	Complete with 130mA driver

The Mirror LED Range



38114EL/C



38114EL | 23W | SMD 2835 | Aluminium + acrylic

LED BUILT IN


80 CRI

CE

2 YEAR

IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38114EL/C	Chrome	Cool white	4000K	23W	1650lm	230V	⏚	8	Complete with 700mA driver
38114EL/W	Chrome	Warm white	3000K	23W	1650lm	230V	⏚	8	Complete with 700mA driver






38115D | 15W | SMD 2835 | Clip on mirror | Plastic

Can be installed on walls, mirrors & cabinets.

LED BUILT IN · 80 CRI · IK07 · CE · 2 YEAR · IP44



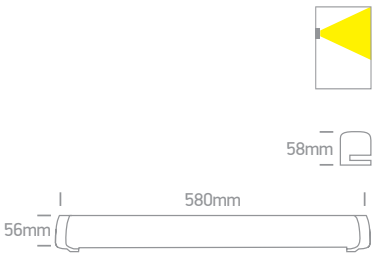




38116P/W

38116P | 16W | SMD 2835 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP44



38116P/C

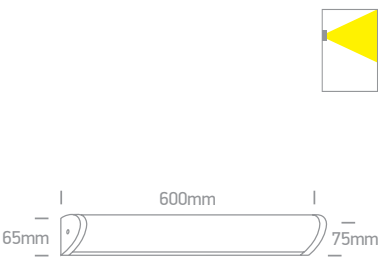

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38115D/C	Chrome	Cool white	4000K	15W	1500lm	230V	⧈	100cm	25	Complete with 150mA driver
38116P/C	Chrome	Cool white	4000K	16W	1280lm	230V	⧈	-	12	Complete with 120mA driver
38116P/W	Chrome	Warm white	3000K	16W	1280lm	230V	⧈	-	12	Complete with 120mA driver

The Mirror 60cm Range
For T8 LED Tubes






38114DE | T8 LED 60cm | Aluminium + acrylic — Use 9009L lamp.

IP44








38114EE | T8 LED 60cm | Aluminium + acrylic — Use 9009L lamp.

IP44









38114GE | T8 LED 60cm | Aluminium + acrylic — Use 9009L lamp.

IP44





Order Code	Colour	Input	Class		Notes
38114DE/C	Chrome	100-240V		6	Only suitable for T8 LED tubes
38114EE/C	Chrome	100-240V		6	Only suitable for T8 LED tubes
38114GE/C	Chrome	100-240V		6	Only suitable for T8 LED tubes

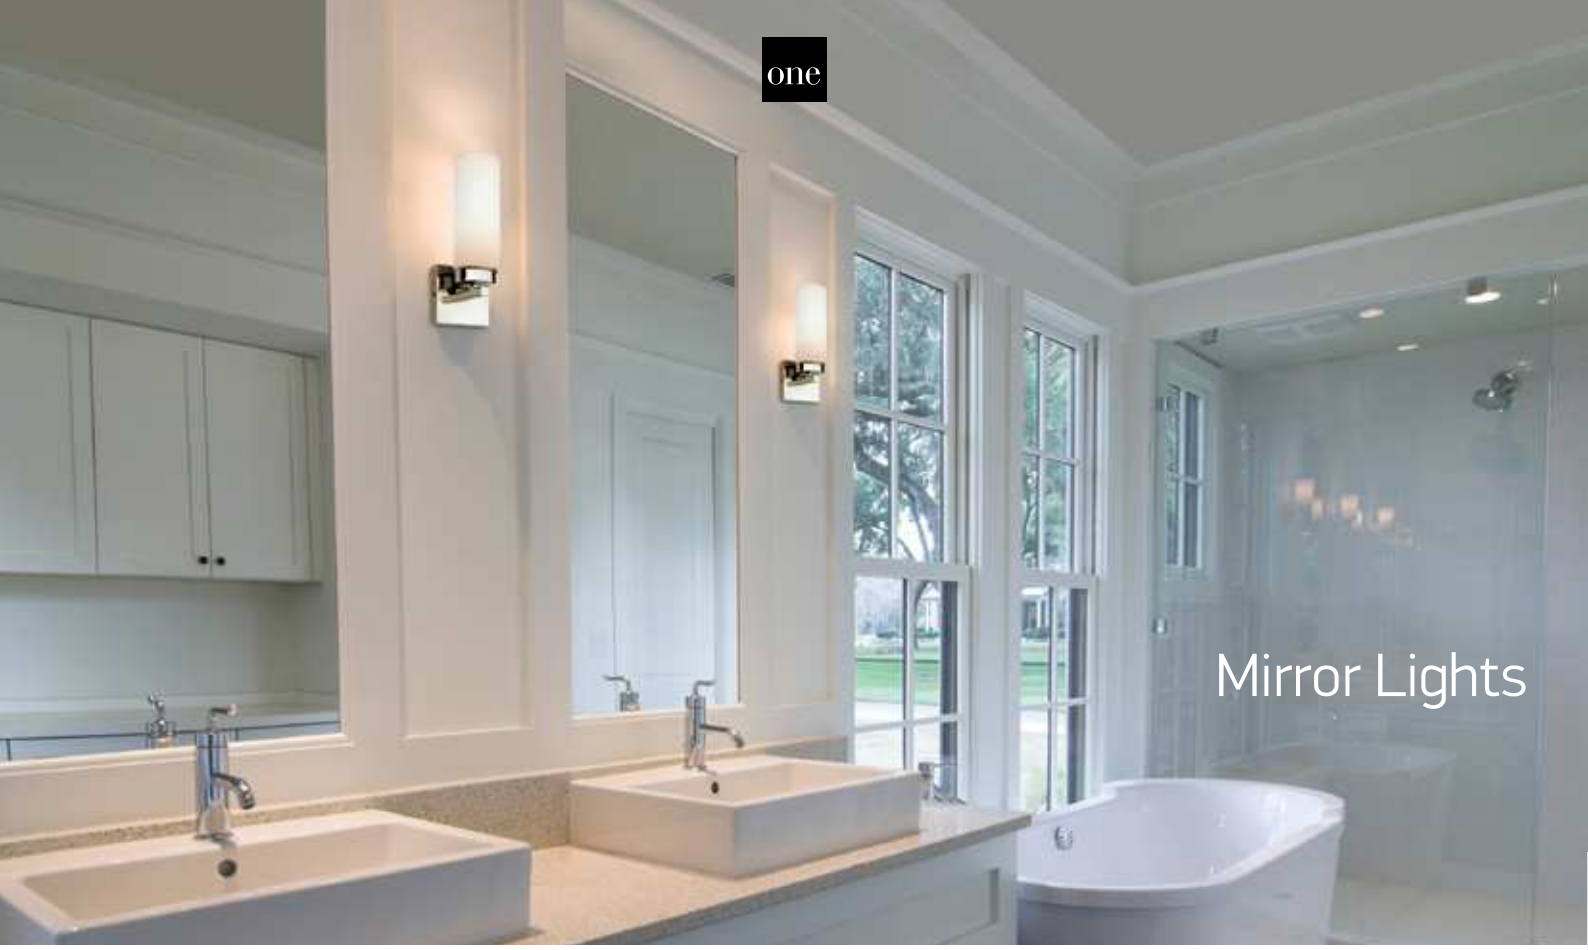

Mirror Lights



38110BD | 10W | SMD 2835 | PC

IP20

offer

LED BUILT IN


80 CRI

DIMMABLE

CCT V

3 YEAR



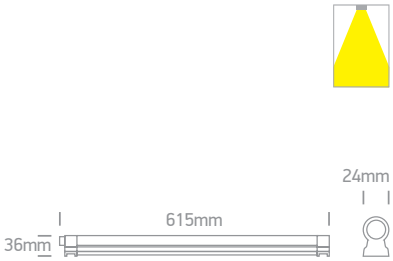




60106 | 40W | E14 | Metal + glass

3 YEAR

IP44








60106A | 2x40W | E14 | Metal + glass


3 YEAR

IP44






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38110BD	White	CCT V	2700K - 6500K	10W	700lm	230V		150cm	20	Complete with dimmable driver
60106/C	Chrome	-	-	40W	-	100-240V		-	10	-
60106A/C	Chrome	-	-	2x40W	-	100-240V		-	10	-

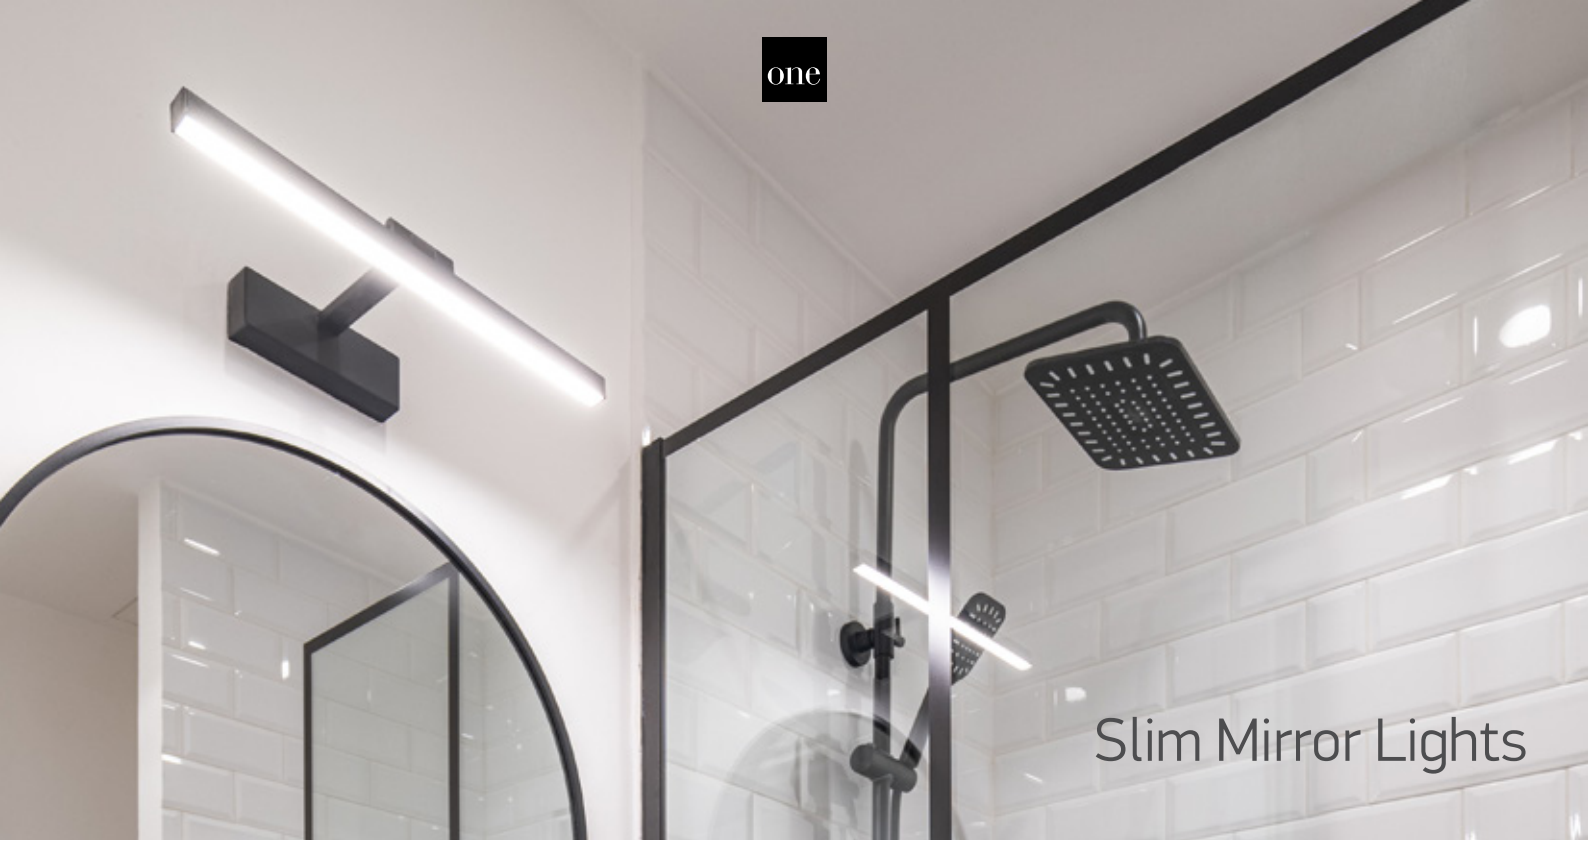

Slim Mirror Lights

38108N | 8W | SMD 2835 | Aluminium + PC

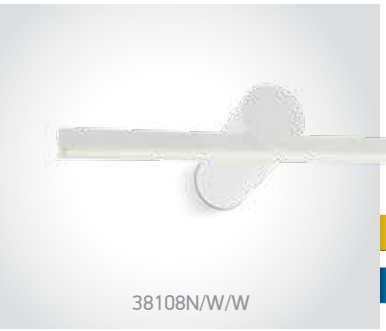

38108N/W/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · new · IP44



38108N/B/W



38114N | 14W | SMD 2835 | Aluminium + PC



38114N/W/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · new · IP44



38114N/B/W



38114T | 14W | SMD 2835 | Aluminium + acrylic




38114T/W/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · new · IP44



38114T/B/W

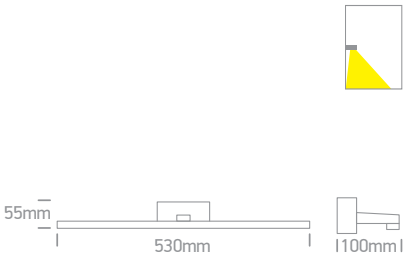

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38108N/W/W	White	Warm white	3000K	8W	700lm	230V		12	Complete with 300mA driver
38108N/B/W	Black	Warm white	3000K	8W	700lm	230V		12	Complete with 300mA driver
38114N/W/W	White	Warm white	3000K	14W	1200lm	230V		6	Complete with 300mA driver
38114N/B/W	Black	Warm white	3000K	14W	1200lm	230V		6	Complete with 300mA driver
38114T/W/W	White	Warm white	3000K	14W	1200lm	230V		6	Complete with 300mA driver
38114T/B/W	Black	Warm white	3000K	14W	1200lm	230V		6	Complete with 300mA driver

Mirrors





61126 | 7W | SMD 2835 | Touch switch | ABS + glass


Rechargeable USB socket.

LED BUILT IN · DIMMABLE · ADJUSTABLE · CCT V · CE · 2 YEAR · IP20



Complete with magnifying mirror.

Charging time: 3Hrs






60204 | 7W | SMD LED | Die cast + Mirror


LED BUILT IN · ADJUSTABLE · CE · 2 YEAR · IP44



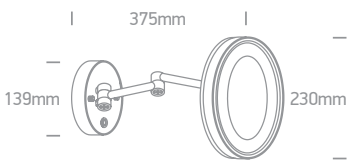

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61126/W	White	CCT V	3000K - 4000K - 6000K	7W	-	-		20	1x1500mAh lithium battery
60204/C	Chrome	Cool white	4000K	7W	490lm	100-240V		6	Complete with driver




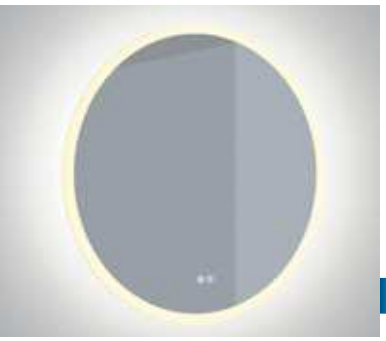


60208 | 20W LED / 16W DEFOG | Dimmable | Glass + aluminium frame

LED BUILT IN
80 CRI
DIMMABLE
CCT V
CE
3 YEAR
IP44

ON/OFF Dimming
CCT Variable Defog

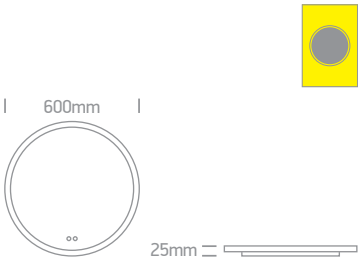


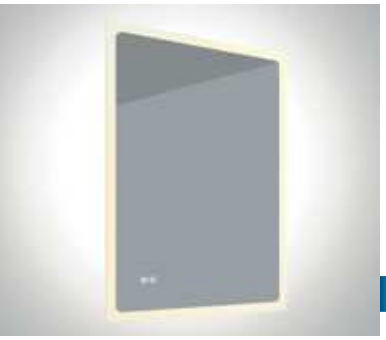

60208A | 20W LED / 16W DEFOG | Dimmable | Glass + aluminium frame

LED BUILT IN
80 CRI
DIMMABLE
CCT V
CE
3 YEAR
IP44

ON/OFF Dimming
CCT Variable Defog

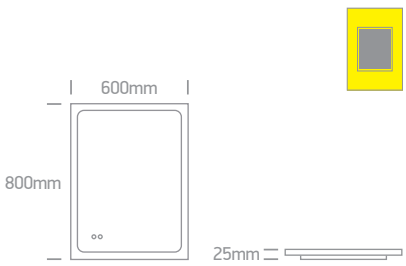

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
60208	CCT V	3000K - 6500K	20W LED / 16W DEFOG	1600lm	230V	⧈	1	Complete with dimmable driver
60208A	CCT V	3000K - 6500K	20W LED / 16W DEFOG	1600lm	230V	⧈	1	Complete with dimmable driver




Wall Recessed & Inground

Pages 625-656

19



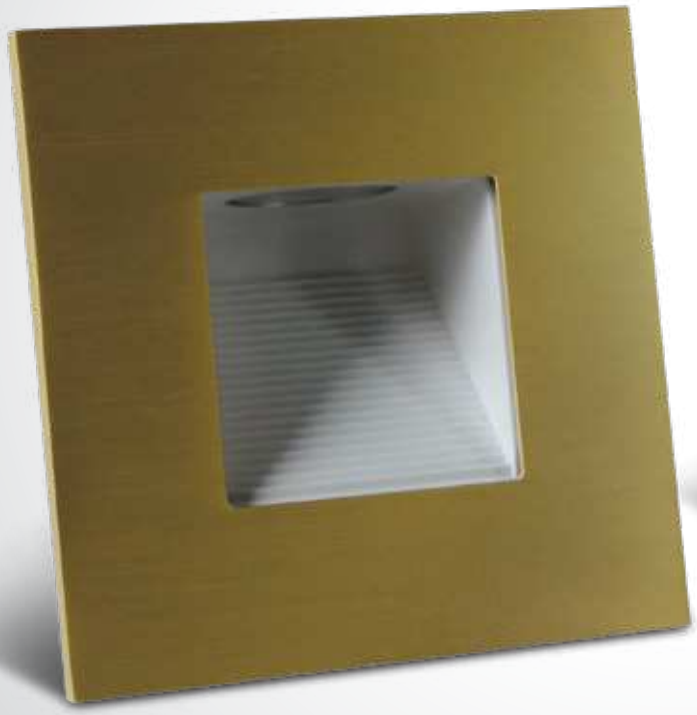

68006N/W + 050176/BBS



68007/W/W

Indoor Square Wall Recessed



68007/W/W

68007 | 1,5W | LED | Plastic

Supplied with box for concrete installation.


LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP20







68007/B/W

68007 | 1,5W | LED | Plastic

Supplied with box for concrete installation.


LED BUILT IN

CE 2 YEAR


DARK LIGHT

IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
68007/W/W	White	Warm white	3000K	1,5W	100lm	100-240V		86x86mm	40mm	50	Complete with driver
68007/B/W	Black	Warm white	3000K	1,5W	70lm	100-240V		86x86mm	40mm	50	Complete with driver

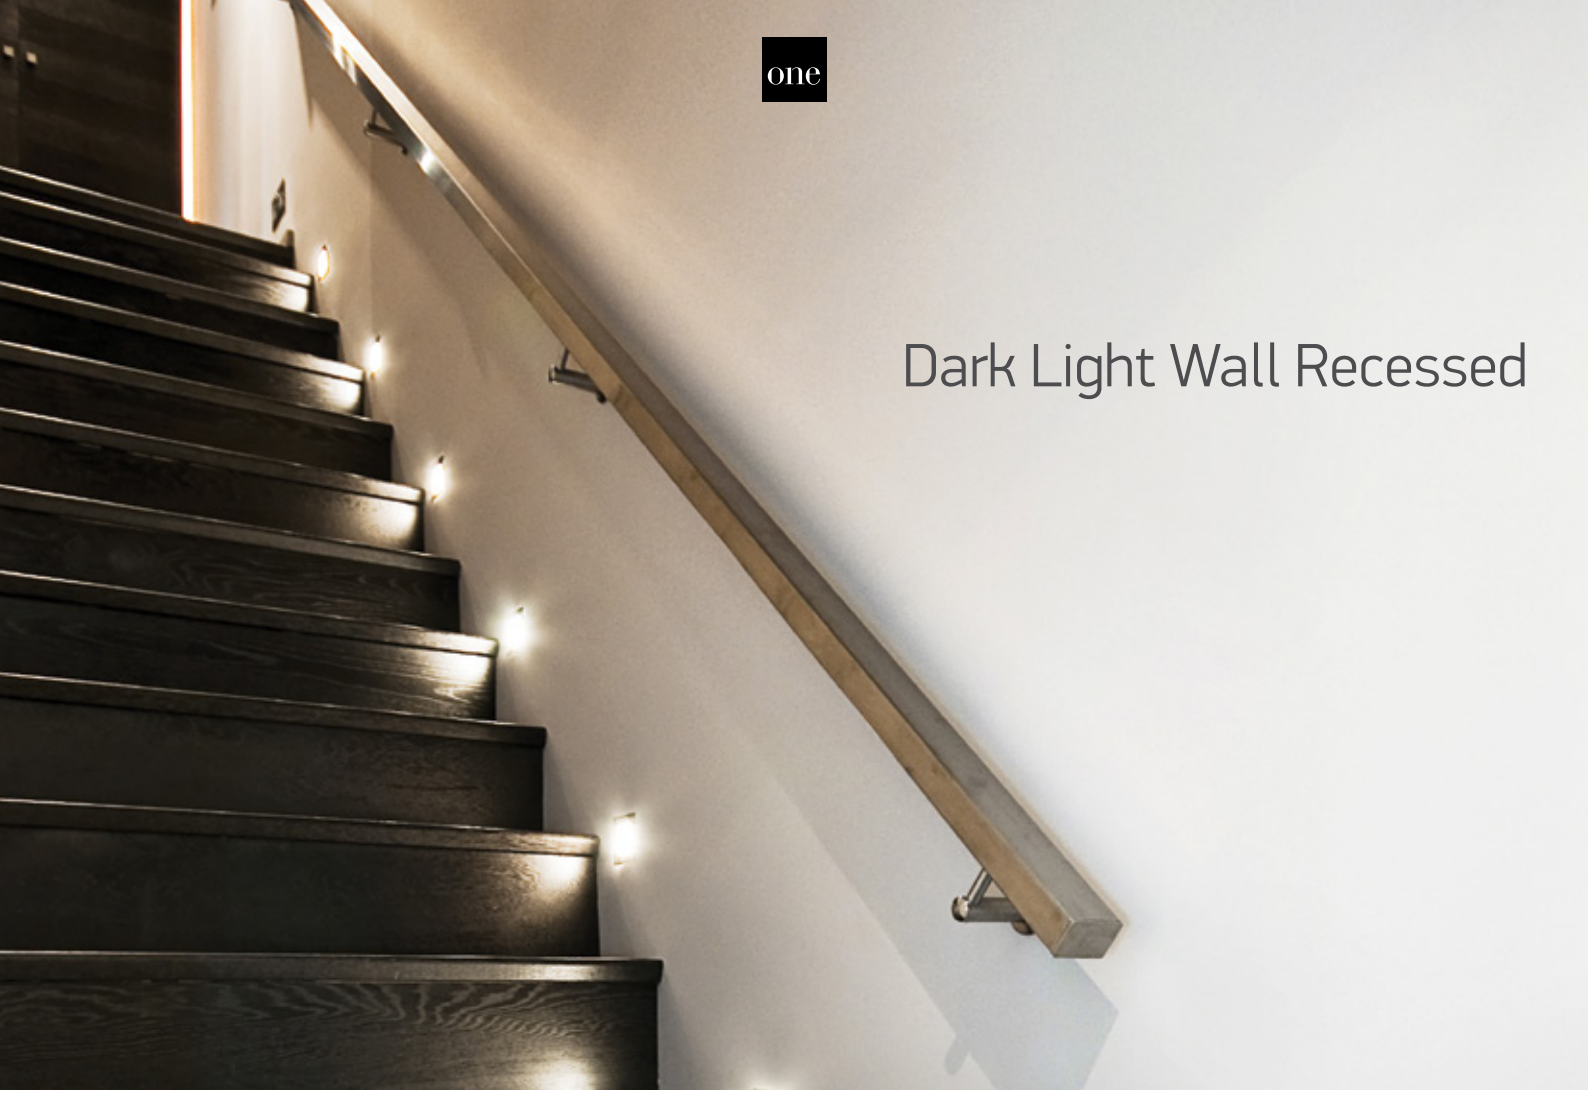

Dark Light Wall Recessed

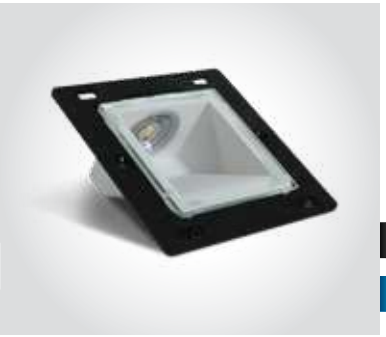

68006N | 1W | SMD 3535 | Die cast

Cover plate must be ordered separately.

LED BUILT IN

90 CRI


CE


3 YEAR

DARK LIGHT


IP44






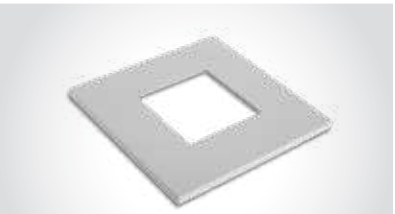


050176/W White

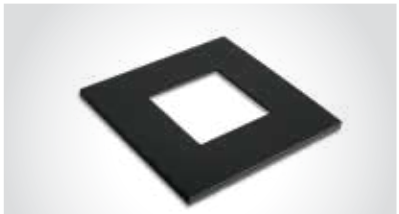

050176/B Black

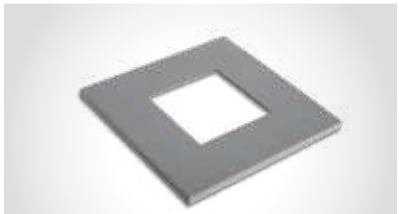

050176/G Grey

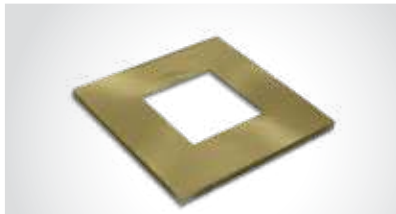

050176/BBS Brushed brass




68006N/BOX | Suitable for 68006N/W | Plastic

Gypsum installation.

CE

5

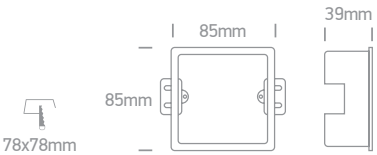

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
68006N/W	White	Warm white	3000K	1W	80lm	230V		12cm	70x70mm	60mm	20	Complete with 350mA driver

Indoor Dark Light Wall Recessed






68008 | 1W | LED | Die cast










68008 | 1W | LED | Die cast










68008 | 1W | LED | Die cast








Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class					Notes
68008/G/D	Grey	Daylight	6000K	1W	350mA	III	50cm	65x212mm	90mm	20	Requires 350mA driver
68008/G/W	Grey	Warm white	3000K	1W	350mA	III	50cm	65x212mm	90mm	20	Requires 350mA driver
68008/G/BL	Grey	Blue	-	1W	350mA	III	50cm	65x212mm	90mm	20	Requires 350mA driver




Indoor/Outdoor Decorative Wall Recessed
Aluminium

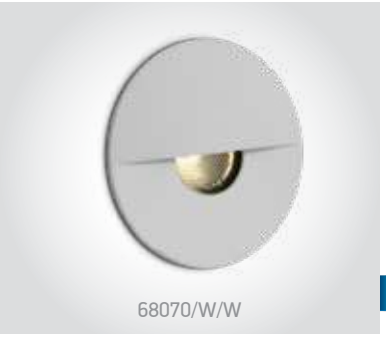
68070/W/W

68070 | 1W | COB LED | Aluminium

Driver can not pass through the cutout hole.
Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IK08 · CE · 2 YEAR · IP65


68070/B/W


68070/AL/W







68004/W/W


68004 | 3W | COB LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP54 · CE · 2 YEAR


68004/AL/W






68004A/W/W


68004A | 1W | COB LED | Aluminium

Driver can not pass through the cutout hole.
Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP54 · CE · 2 YEAR


68004A/AL/W






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Concrete	installation	Gypsum	installation		Notes
68070/W/W	White	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	35mm	60mm	30mm	60mm	100	Requires 350mA driver
68070/B/W	Black	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	35mm	60mm	30mm	60mm	100	Requires 350mA driver
68070/AL/W	Aluminium	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	35mm	60mm	30mm	60mm	100	Requires 350mA driver
68004/W/W	White	Warm white	3000K	3W	120lm	24°	350mA	III	200cm	52mm	110mm	49mm	70mm	36	Requires 350mA driver
68004/AL/W	Aluminium	Warm white	3000K	3W	120lm	24°	350mA	III	200cm	52mm	110mm	49mm	70mm	36	Requires 350mA driver
68004A/W/W	White	Warm white	3000K	1W	40lm	60°	350mA	III	200cm	35mm	50mm	33mm	30mm	60	Requires 350mA driver
68004A/AL/W	Aluminium	Warm white	3000K	1W	40lm	60°	350mA	III	200cm	35mm	50mm	33mm	30mm	60	Requires 350mA driver



Indoor/Outdoor Dark Light Wall Recessed

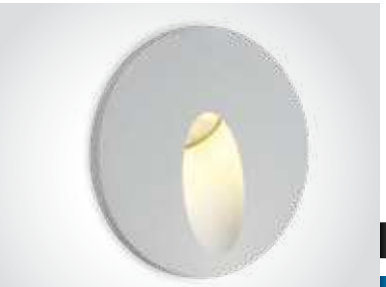

68030/W/W

68030 | 3W | LED | Aluminium

LED BUILT IN


CE 2 YEAR


DARK LIGHT

IP54



Supplied with box for concrete installation.



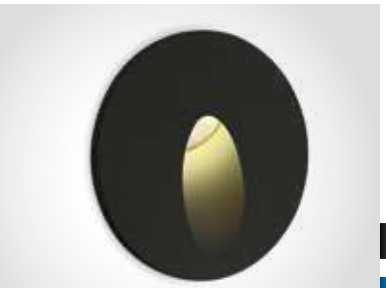

68030/B/W

68030 | 3W | LED | Aluminium

LED BUILT IN


CE 2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation.





68030/AL/W

68030 | 3W | LED | Natural aluminium

LED BUILT IN


CE 2 YEAR

DARK LIGHT

IP54




Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Concrete installation	Gypsum installation		Notes
68030/W/W	White	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68030/B/W	Black	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68030/AL/W	Aluminium	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver



Indoor/Outdoor Dark Light Wall Recessed

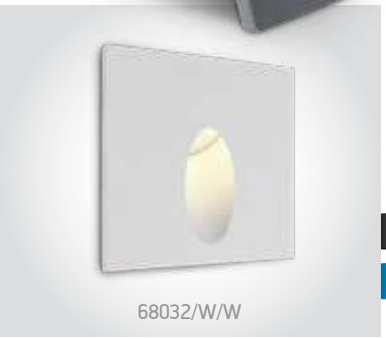

68032/W/W

68032 | 3W | LED | Die Cast

LED BUILT IN


CE 2 YEAR


DARK LIGHT

IP54



Supplied with box for concrete installation.



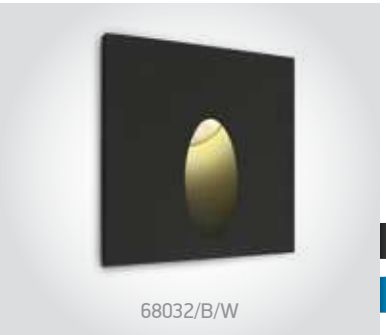

68032/B/W

68032 | 3W | LED | Die cast

LED BUILT IN


CE 2 YEAR


DARK LIGHT

IP54



Supplied with box for concrete installation.



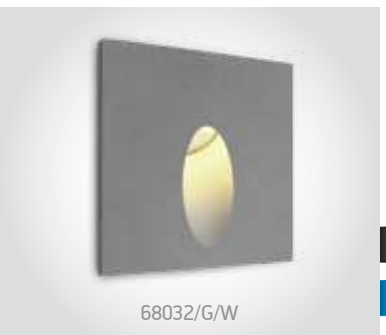

68032/G/W

68032 | 3W | LED | Die cast

LED BUILT IN


CE 2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation.





68032/AL/W

68032 | 3W | LED | Natural aluminium

LED BUILT IN


CE 2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Concrete installation	Gypsum installation		Notes
68032/W/W	White	Warm white	3000K	3W	100-240V	☐	52mm	110mm	50mm	30	Complete with 700mA driver
68032/B/W	Black	Warm white	3000K	3W	100-240V	☐	52mm	110mm	50mm	30	Complete with 700mA driver
68032/G/W	Grey	Warm white	3000K	3W	100-240V	☐	52mm	110mm	50mm	30	Complete with 700mA driver
68032/AL/W	Aluminium	Warm white	3000K	3W	100-240V	☐	52mm	110mm	50mm	30	Complete with 700mA driver




Dark Light Step Series
Aluminium




68074 | 2W | COB LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · IK08 · CE · 2 YEAR






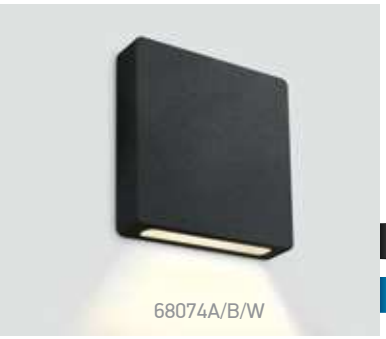

68074A | 2W | COB LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · IK08 · CE · 2 YEAR








68074B | 2W | COB LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · IK08 · CE · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
68074/W/W	White	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074/B/W	Black	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074A/W/W	White	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074A/B/W	Black	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074B/W/W	White	Warm white	3000K	2W	110lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074B/B/W	Black	Warm white	3000K	2W	110lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver



68076 | 3W | SMD LED | Glass + metal

Supplied with box for concrete installation.



68076/W/W

LED BUILT IN

80 CRI

CE


2 YEAR

DARK LIGHT

IP65



68076/B/W

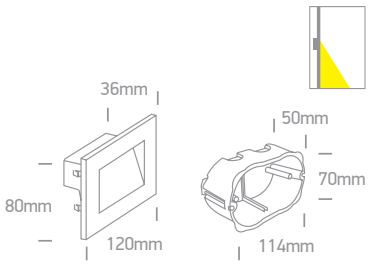

68076A | 4W | SMD LED | Glass + metal

Supplied with box for concrete installation.



68076A/W/W

LED BUILT IN

80 CRI

CE


2 YEAR

DARK LIGHT

IP65



68076A/B/W

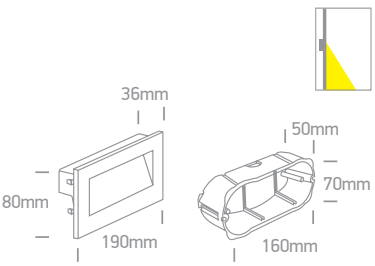

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68076/W/W	White	Warm white	3000K	3W	200lm	230V	☐	115x70mm	2x68mm	55mm	12	AC LED
68076/B/W	Black	Warm white	3000K	3W	200lm	230V	☐	115x70mm	2x68mm	55mm	12	AC LED
68076A/W/W	White	Warm white	3000K	4W	270lm	230V	☐	160x70mm	3x68mm	55mm	12	AC LED
68076A/B/W	Black	Warm white	3000K	4W	270lm	230V	☐	160x70mm	3x68mm	55mm	12	AC LED

Wall Recessed Pro Range






68072A | 5W | SMD 2835 | Stainless steel 316 + tempered glass

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP65



Supplied with box
for concrete installation.






68072C | 10W | SMD 2835 | Stainless steel 316 + tempered glass

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP65



Supplied with box
for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68072A/W	Stainless steel	Warm white	3000K	5W	100lm	230V		112x42mm	98x35mm	75mm	24	Complete with 350mA driver
68072C/W	Stainless steel	Warm white	3000K	10W	200lm	230V		253x55mm	240x45mm	75mm	12	Complete with 350mA driver



Outdoor Dark Light Wall Recessed
Die cast


68068/W/W


68068 | 3W | SMD 2835 | Die cast

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65


68068/AN/W


68068/G/W




68068A/W/W

68068A | 4W | SMD 2835 | Die cast


Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65


68068A/AN/W


68068A/B/W


68068A/G/W




68068C/W/W

68068C | 7W | SMD 2835 | Die cast


Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65


68068C/AN/W


68068C/B/W


68068C/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68068/W/W	White	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with 350mA driver
68068/AN/W	Anthracite	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with 350mA driver
68068/G/W	Grey	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with 350mA driver
68068A/W/W	White	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/AN/W	Anthracite	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/B/W	Black	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/G/W	Grey	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068C/W/W	White	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/AN/W	Anthracite	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/B/W	Black	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/G/W	Grey	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver



68048/AN/W



68062/W/W

Outdoor Wall Recessed
Die cast



68048/AN/W


68048 | 4x1W | LED | Die cast

Supplied with box for concrete installation.


LED BUILT IN

CE 2 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
68048/AN/W	Anthracite	Warm white	3000K	4x1W	280lm	100-240V	⏚	170x90mm	100mm	12	Complete with 350mA driver

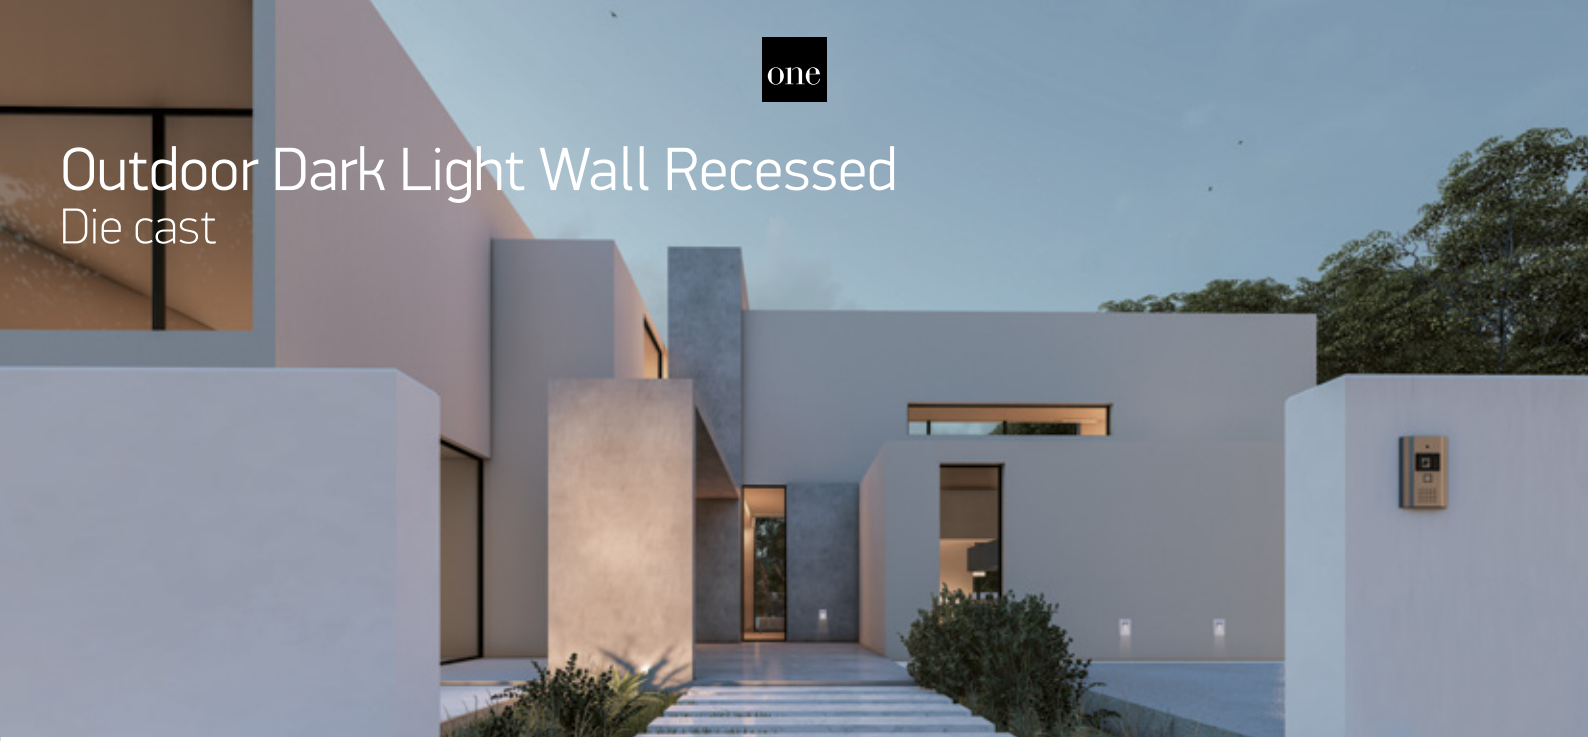

Outdoor Dark Light Wall Recessed
Die cast



68062/W/W

68062 | 3,6W | LED | Die cast

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

CE


2 YEAR

DARK LIGHT

IP65



68062/AN/W





68064/W/W

68064 | 3,6W | LED | Die cast

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT


IP65



68064/AN/W



68064/G/W





68066/W/W

68066 | 8,5W | SMD LED | Die cast

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT


IP65




68066/AN/W



68066/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Concrete installation	Gypsum installation			Notes
68062/W/W	White	Warm white	3000K	3,6W	100lm	53°	100-240V		62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68062/AN/W	Anthracite	Warm white	3000K	3,6W	100lm	53°	100-240V		62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68064/W/W	White	Warm white	3000K	3,6W	85lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/AN/W	Anthracite	Warm white	3000K	3,6W	85lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/G/W	Grey	Warm white	3000K	3,6W	85lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68066/W/W	White	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/AN/W	Anthracite	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/G/W	Grey	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with 500mA driver

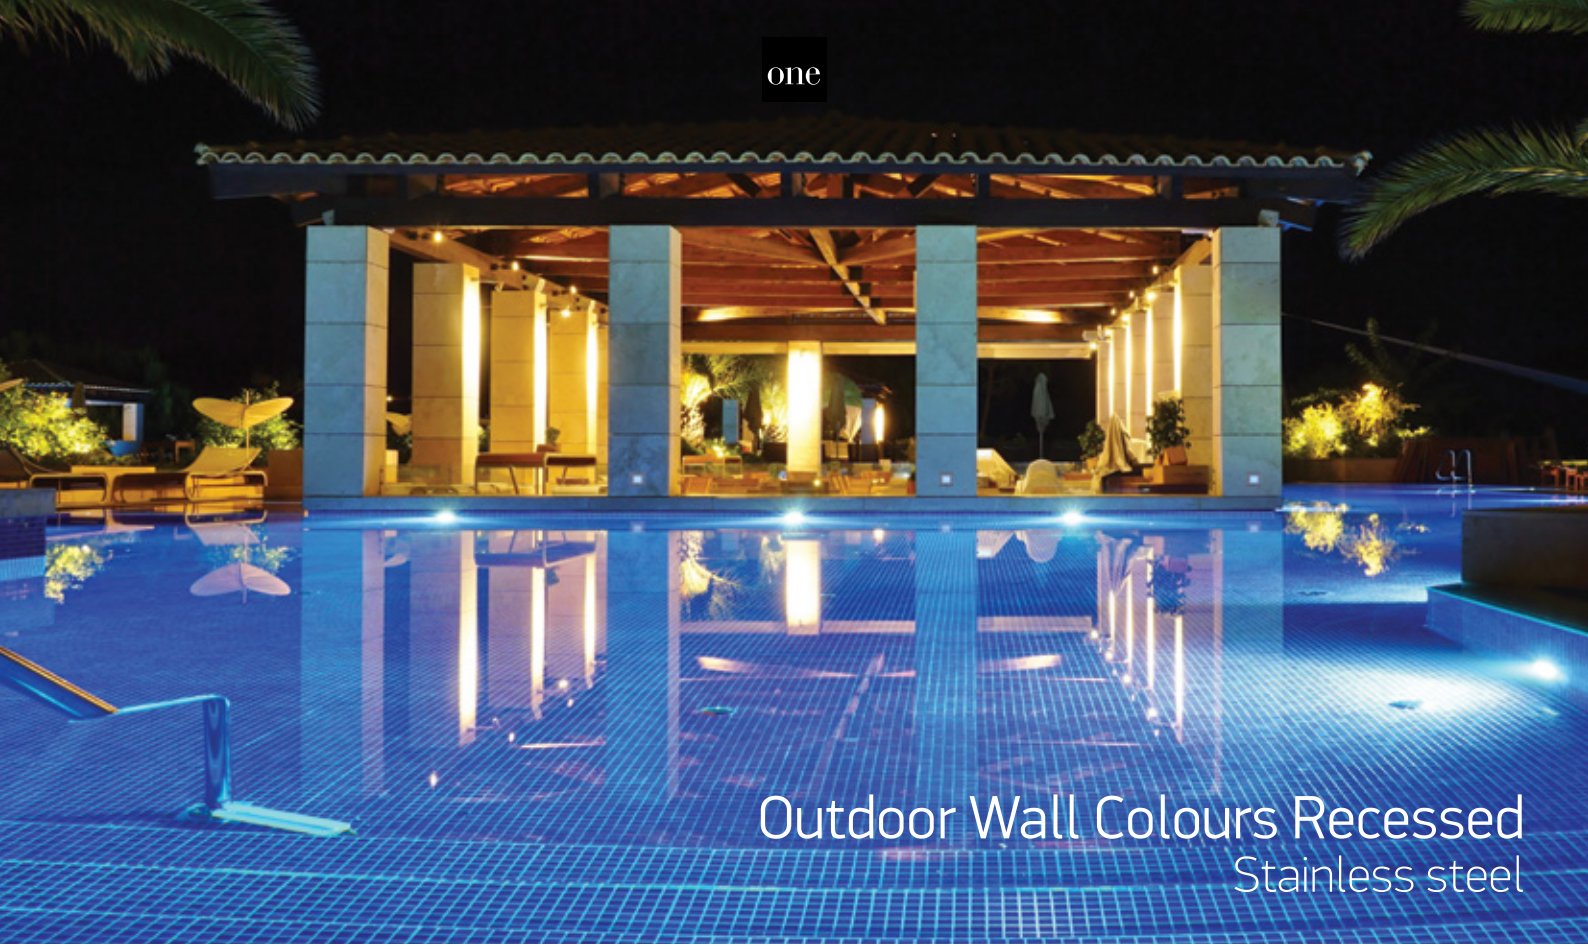

Outdoor Wall Colours Recessed
Stainless steel



68001/BL

68001 | 1,6W | LED | Stainless steel


LED BUILT IN

CE 2 YEAR

IP54 offer



Supplied with box for concrete installation & kit for gypsum installation.





68001/R

68001 | 1,6W | LED | Stainless steel


LED BUILT IN

CE 2 YEAR

IP54 offer



Supplied with box for concrete installation & kit for gypsum installation.





68002 | 1,2W | LED | Stainless steel


LED BUILT IN

CE 2 YEAR

IP54 offer



Supplied with box for concrete installation & kit for gypsum installation.



Order Code	Colour	Light Colour	Watts	Input	Class	Concrete installation	Gypsum installation			Notes
68001/BL	Stainless steel	Blue	1,6W	230V		97x97mm	90x90mm	65mm	18	Complete with driver
68001/R	Stainless steel	Red	1,6W	230V		97x97mm	90x90mm	65mm	18	Complete with driver
68002/R	Stainless steel	Red	1,2W	230V		105x35mm	100x35mm	65mm	40	Complete with driver

Outdoor Wall Recessed



68080B | 3W | SMD 2835 | ABS + PC


Supplied with box for concrete installation.

LED BUILT IN

80 CRI

3 YEAR

IP65

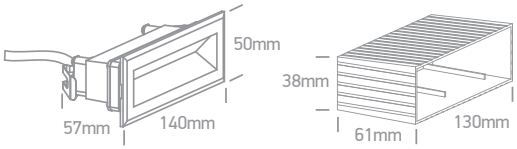


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68080B/B/W	Black	Warm white	3000K	3W	150lm	230V		131x39mm	125x35mm	70mm	40	AC LED



The Inground Mini Series

Natural aluminium

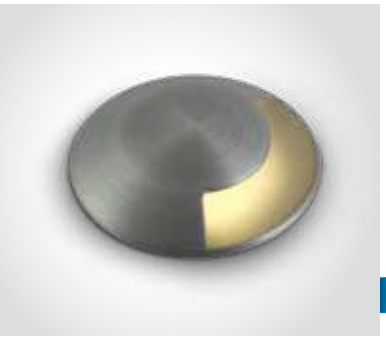



69042A | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · CE · 2 YEAR · IP67



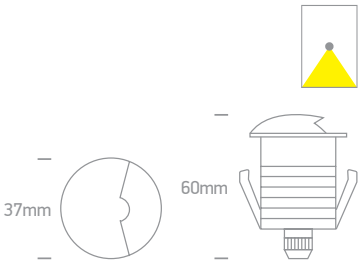

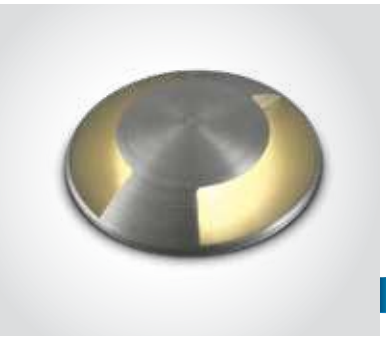



69042B | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · CE · 2 YEAR · IP67



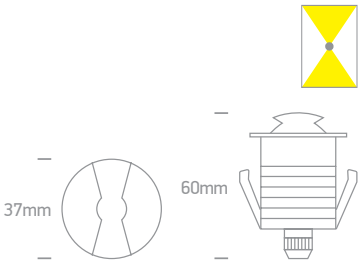

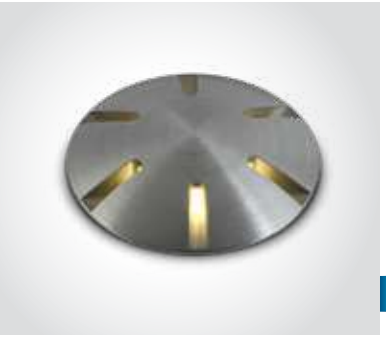


69044 | 1W | LED | Natural aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · CE · 2 YEAR · IP67




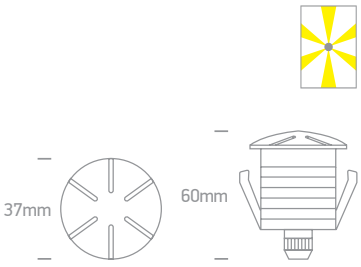

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Decking	Concrete	Decking	Concrete		Notes
69042A/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50	Requires 350mA driver
69042B/AL/W	Aluminium	Warm white	3000K	1W	50lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50	Requires 350mA driver
69044/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50	Requires 350mA driver



The Inground Midi Series
Natural aluminium

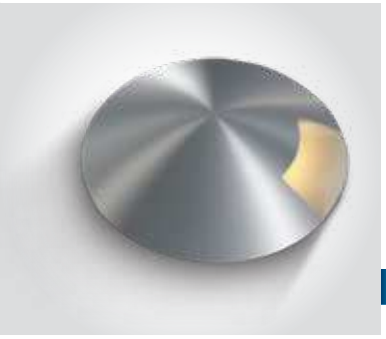



69015A | 3W | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · IK08 · CE · 2 YEAR · IP67





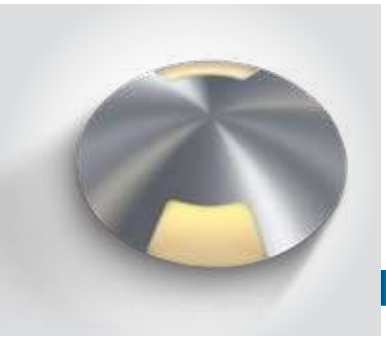



69015B | 3W | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · IK08 · CE · 2 YEAR · IP67





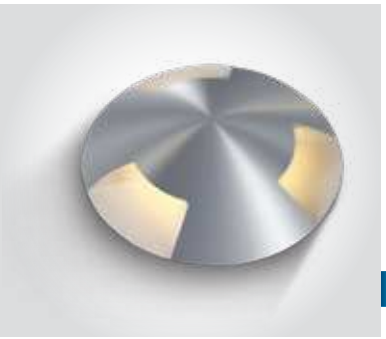


69015C | 3W | Aluminium


Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · IK08 · CE · 2 YEAR · IP67






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69015A/AL/W	Aluminium	Warm white	3000K	3W	30lm	24V DC	III	200cm	52mm	90mm + 300mm drainage	32	Requires 24V DC driver
69015B/AL/W	Aluminium	Warm white	3000K	3W	60lm	24V DC	III	200cm	52mm	90mm + 300mm drainage	32	Requires 24V DC driver
69015C/AL/W	Aluminium	Warm white	3000K	3W	80lm	24V DC	III	200cm	52mm	90mm + 300mm drainage	32	Requires 24V DC driver

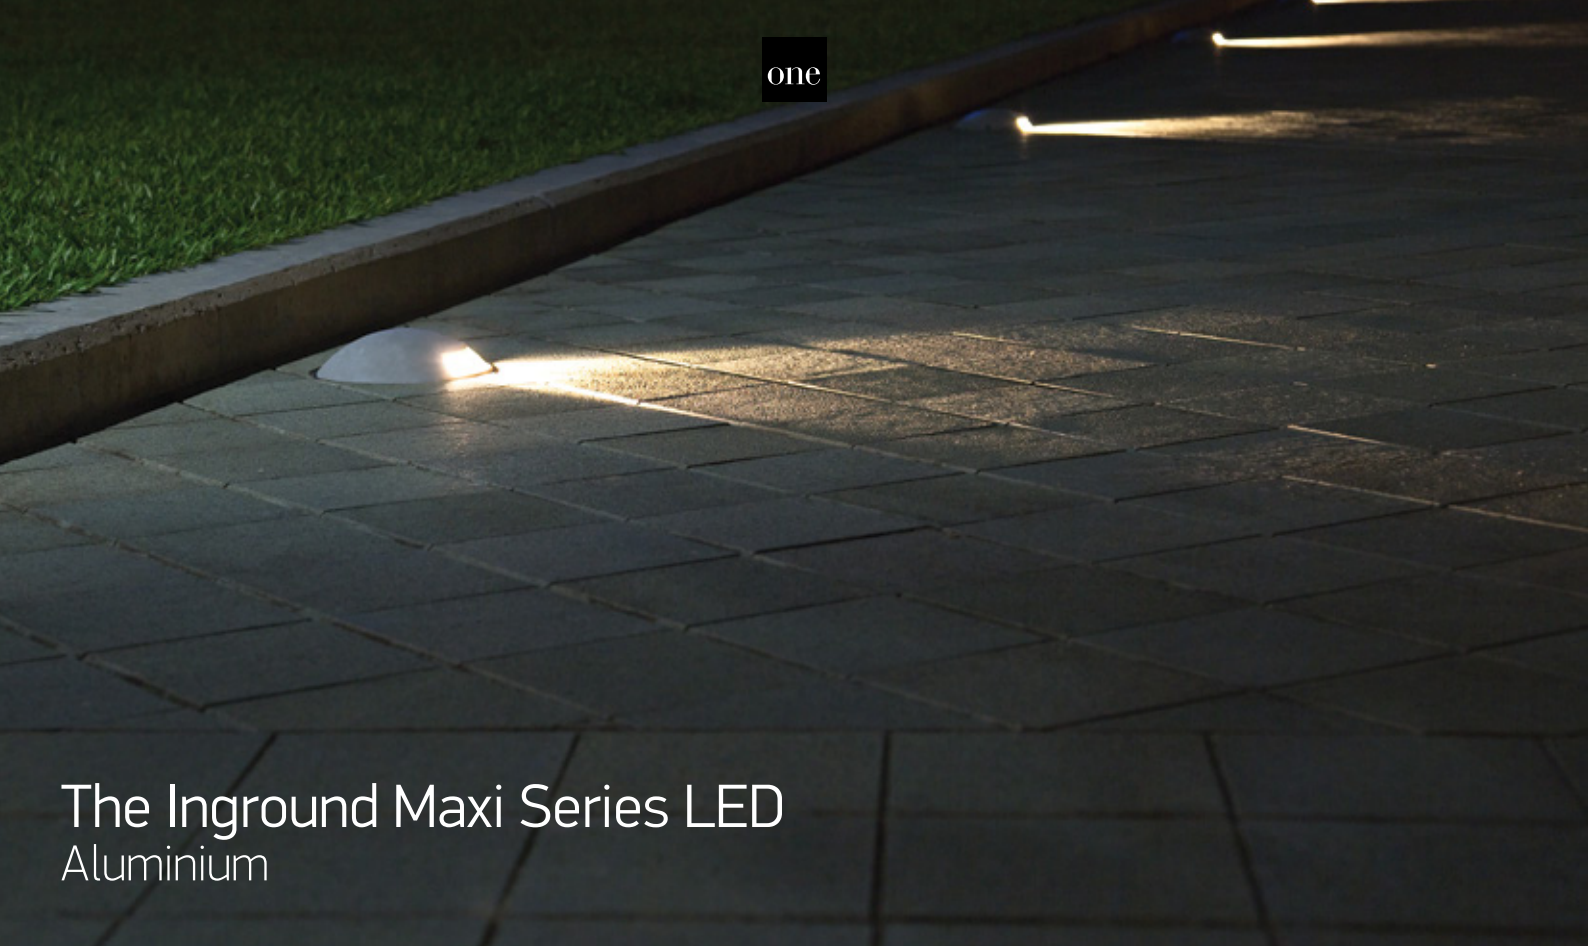

The Inground Maxi Series LED
Aluminium

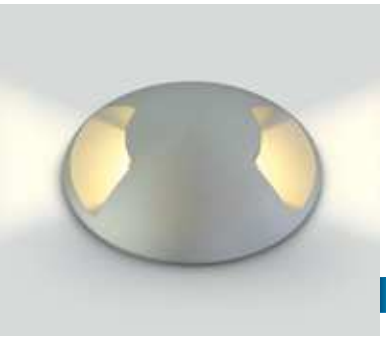



69016 | 3W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP67





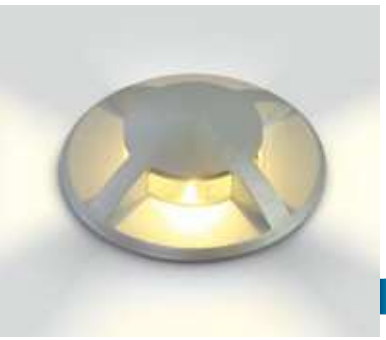



69016A | 3W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP67





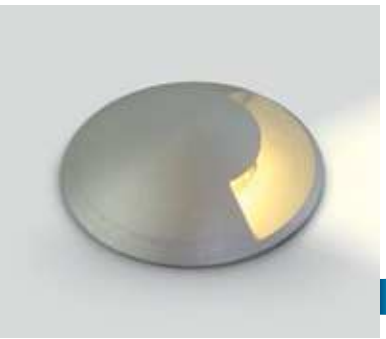


69016B | 3W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP67






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69016/W	Aluminium	Warm white	3000K	3W	120lm	100-240V		200cm	77mm	130mm+300mm drainage	18	Complete with 350mA driver
69016A/W	Aluminium	Warm white	3000K	3W	150lm	100-240V		200cm	77mm	130mm+300mm drainage	18	Complete with 350mA driver
69016B/W	Aluminium	Warm white	3000K	3W	100lm	100-240V		200cm	77mm	130mm+300mm drainage	18	Complete with 350mA driver



The Inground Maxi Series GU10
Aluminium

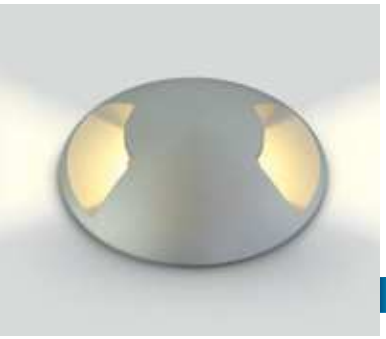



69016G | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.

IP67





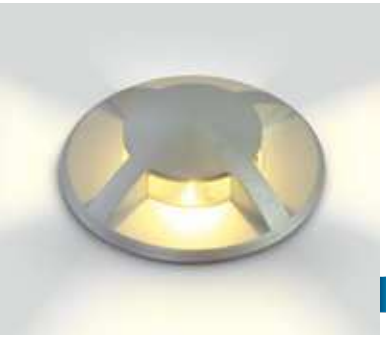



69016AG | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.

IP67





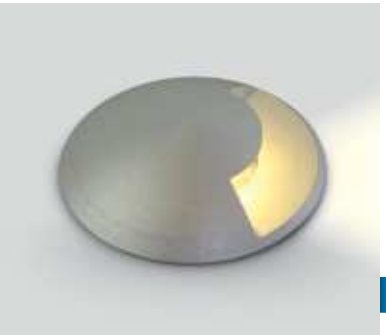


69016BG | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.

IP67





Order Code	Colour	Watts	Input	Class					Notes
69016G	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland
69016AG	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland
69016BG	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland






69042M | 1W/2W | LED | 1W@350mA / 2W@700mA | Aluminium

Supplied with box for concrete installation.










69042 | 1W/2W | SMD LED | 1W@350mA / 2W@700mA | Natural Aluminium

Supplied with box for concrete installation.







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Gypsum/Decking	Concrete	Decking	Concrete		Notes
69042M/AL/W	Aluminium	Warm white	3000K	1W/2W	150lm	24°	350mA/700mA	III	200cm	22mm	26mm	60mm	95+300mm drainage	50	Requires 350mA/700mA driver
69042/AL/W	Aluminium	Warm white	3000K	1W/2W	150lm	36°	350mA/700mA	III	200cm	30mm	35mm	80mm	95+300mm drainage	50	Requires 350mA/700mA driver



69052/W

69052A/W

The COB Honeycomb Range




69052 | 3W | COB LED | Stainless steel 316 + tempered glass

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · CE · 2 YEAR · IP67



1 gland + Removable honeycomb.






69052A | 13W | COB LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · DIMMABLE · IK08 · CE · 2 YEAR · IP67



1 gland + Removable honeycomb.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69052/W	Stainless steel	Warm white	3000K	3W	240lm	36°	24V DC	III	200cm	52mm	100mm+300mm drainage	50	Requires 24V DC driver
69052A/W	Aluminium	Warm white	3000K	13W	1000lm	36°	350mA	III	200cm	75mm	140mm+300mm drainage	24	Requires 350mA driver



The Dark Light Inground Range
Aluminium




69056A | 3W | COB LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · CE · 3 YEAR · DARK LIGHT · IP67








69056B | 7W | COB LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · CE · 3 YEAR · DARK LIGHT · IP67








69056C | 9W | COB LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · CE · 3 YEAR · DARK LIGHT · IP67





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69056A/W	Aluminium	Warm white	3000K	3W	240lm	38°	24V DC	III	200cm	50mm	100mm+300mm drainage	50	Requires 24V DC driver
69056B/W	Aluminium	Warm white	3000K	7W	560lm	38°	24V DC	III	200cm	60mm	100mm+300mm drainage	36	Requires 24V DC driver
69056C/W	Aluminium	Warm white	3000K	9W	720lm	38°	24V DC	III	200cm	70mm	135mm+300mm drainage	24	Requires 24V DC driver



The Dark Light Inground Range



69070A | 3,5W | COB LED | Stainless steel 316L + Die cast aluminium body


Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR

new · DARK LIGHT · IP67









69070B | 10W | COB LED | Stainless steel 316L + Die cast aluminium body


Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR

new · DARK LIGHT · IP67









69070C | 15W | COB LED | Stainless steel 316L + Die cast aluminium body


Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR

new · DARK LIGHT · IP67







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69070A/W	Stainless steel	Warm white	3000K	3,5W	300lm	20°	230V		200cm	100mm	120mm + 300mm drainage	18	Complete with driver
69070B/W	Stainless steel	Warm white	3000K	10W	800lm	20°	230V		200cm	137mm	140mm + 300mm drainage	8	Complete with driver
69070C/W	Stainless steel	Warm white	3000K	15W	1200lm	20°	230V		200cm	165mm	155mm + 300mm drainage	6	Complete with driver




The COB Inground Range
Stainless steel



69040 | 10W | COB LED | Stainless steel 316

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR · IP67








69050 | 20W | COB LED | Dimmable | Stainless steel 316 + tempered glass

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · IK08 · CE · 2 YEAR · IP67



1 gland + Removable honeycomb.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69040/W	Stainless steel	Warm white	3000K	10W	700lm	40°	230V		200cm	106mm	185mm+300mm drainage	6	Complete with 500mA driver
69050/C	Stainless steel	Cool white	4000K	20W	1800lm	25°	230V		200cm	132mm	200mm+300mm drainage	6	AC LED
69050/W	Stainless steel	Warm white	3000K	20W	1800lm	25°	230V		200cm	132mm	200mm+300mm drainage	6	AC LED





69060 | 6W | LED | Trimless | Die cast + Glass

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

IK08

CE


2 YEAR

IP67



Complete with honeycomb.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69060/B/W	Black	Warm white	3000K	6W	460lm	25°	100-240V	⏚	200cm	136mm	150mm+300mm drainage	6	Complete with 500mA driver



The COB Inground Adjustable Range
Stainless steel




69054 | 15W | COB LED | Dimmable | Stainless steel 316 + tempered glass

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · ±15° ADJUSTABLE · TRIAC DIMMABLE · IK10 · CE · 2 YEAR · IP67



1 gland + connection box.

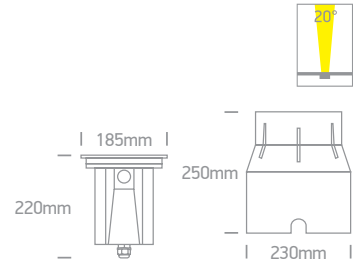




69054A | 30W | COB LED | Dimmable | Stainless steel 316 + tempered glass

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · ±15° ADJUSTABLE · TRIAC DIMMABLE · IK10 · CE · 2 YEAR · IP67



1 gland + connection box.

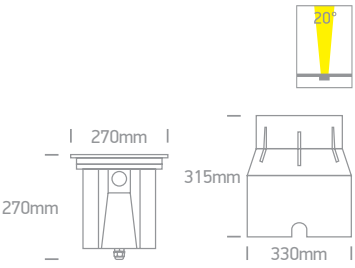

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69054/W	Stainless steel	Warm white	3000K	15W	840lm	20°	230V	⏚	200cm	230mm	270mm+300mm drainage	2	AC LED
69054A/W	Stainless steel	Warm white	3000K	30W	2000lm	20°	230V	⏚	200cm	330mm	330mm+300mm drainage	1	AC LED



The Inground Tiltable Range




69072 | 3W | COB LED | Stainless steel 316L + Die cast aluminium body | Tiltable beam

new IP67 | LED BUILT IN | 80 CRI | IK10 | ADJUSTABLE | CE | 2 YEAR



Supplied with box for concrete installation.








69074A | 3x1,5W | COB LED | Stainless steel 316L + Die cast aluminium body | Tiltable beam

new DARK LIGHT IP67 | LED BUILT IN | 80 CRI | IK10 | ADJUSTABLE | CE | 2 YEAR



Supplied with box for concrete installation.








69074B | 9x1,5W | COB LED | Stainless steel 316L + Die cast aluminium body | Tiltable beam

new DARK LIGHT IP67 | LED BUILT IN | 80 CRI | IK10 | ADJUSTABLE | CE | 2 YEAR



Supplied with box for concrete installation.








69074C | 12x1,5W | COB LED | Stainless steel 316L + Die cast aluminium body | Tiltable beam

new DARK LIGHT IP67 | LED BUILT IN | 80 CRI | IK10 | ADJUSTABLE | CE | 2 YEAR



Supplied with box for concrete installation.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69072/W	Stainless steel	Warm white	3000K	3W	210lm	5°	230V	⏚	200cm	90mm	135mm + 300mm drainage	18	Complete with driver
69074A/W	Stainless steel	Warm white	3000K	3x1,5W	320lm	36°	230V	⏚	200cm	140mm	185mm + 300mm drainage	8	Complete with driver
69074B/W	Stainless steel	Warm white	3000K	9x1,5W	1000lm	36°	230V	⏚	200cm	170mm	210mm + 300mm drainage	4	Complete with driver
69074C/W	Stainless steel	Warm white	3000K	12x1,5W	1250lm	36°	230V	⏚	200cm	200mm	270mm + 300mm drainage	2	Complete with driver

The Asymmetric Inground
Stainless steel



69062 | 8W | SMD 2835 | Asymmetrical | Stainless steel 316 + Die cast

Supplied with box for concrete installation.

LED BUILT IN

80 CRI


IK08

CE

2 YEAR

IP67



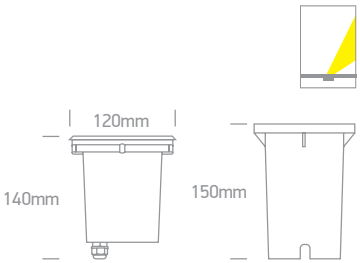

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69062/W	Stainless steel	Warm white	3000K	8W	180lm	230V		200cm	115mm	170mm+300mm drainage	12	Complete with 350mA driver



Ground Surface Mounted Range
Die cast





69058A | 6W | COB LED | Die cast

Surface mounted - No hole required.

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR · IP67





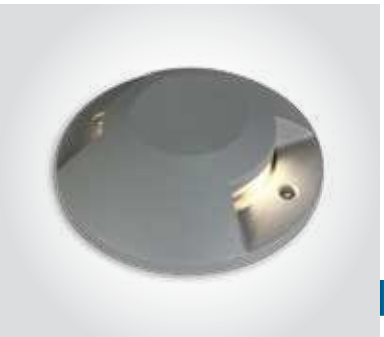



69058B | 2x6W | COB LED | Die cast

Surface mounted - No hole required.

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR · IP67





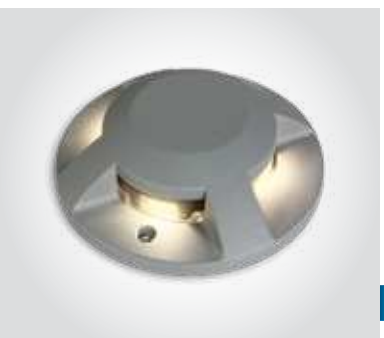


69058C | 4x3W | COB LED | Die cast

Surface mounted - No hole required.

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR · IP67





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
69058A/G/W	Grey	Warm white	3000K	6W	300lm	230V		12	Complete with 500mA driver
69058B/G/W	Grey	Warm white	3000K	2x6W	600lm	230V		12	Complete with 500mA driver
69058C/G/W	Grey	Warm white	3000K	4x3W	600lm	230V		12	Complete with 300mA driver

The GU10 Inground Range
Stainless steel 316



69006G | 10W | MR16 | GU10 | Stainless steel 316


Supplied with box for concrete installation.

IP67

IK08

2 YEAR



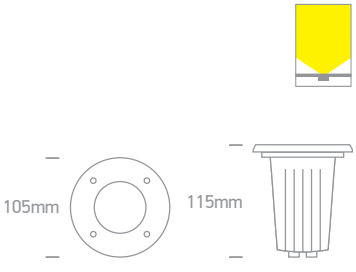

Order Code	Colour	Watts	Input	Class				Notes
69006G	Stainless steel	10W	100-240V		101mm	160mm+300mm drainage	20	2 glands



The GU10 Inground Adjustable Range

Stainless steel 316



69046G | 10W | MR16 | GU10 | Stainless steel 316

Supplied with box for concrete installation.


ADJUSTABLE

CE 2 YEAR

IP67



Removable light guide.

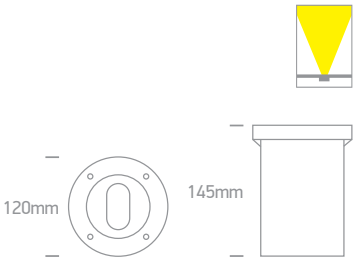



69048G | 10W | MR16 | GU10 | Stainless steel 316

Supplied with box for concrete installation.


ADJUSTABLE

CE 2 YEAR

IP67



Removable light guide.

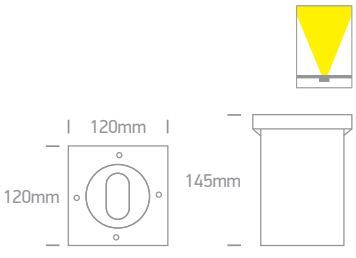

Order Code	Colour	Watts	Input	Class					Notes
69046G	Stainless steel	10W	100-240V		200cm	115mm	160mm+300mm drainage	12	2 glands
69048G	Stainless steel	10W	100-240V		200cm	115mm	160mm+300mm drainage	12	2 glands



The GX53 Inground Range
Stainless steel




69006 | 9W | GX53 | Stainless steel

Supplied with box for concrete installation.



Suitable for GX53 LED lamp.

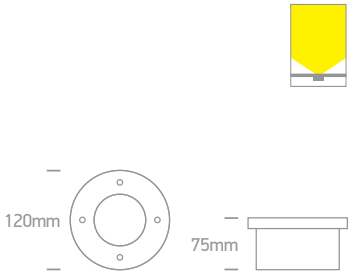




69008 | 9W | GX53 | Stainless steel

Supplied with box for concrete installation.



Suitable for GX53 LED lamp.

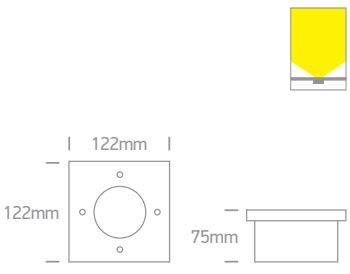

Order Code	Colour	Watts	Input	Class				Notes
69006	Stainless steel	9W	100-240V		110mm	90mm+300mm drainage	20	-
69008	Stainless steel	9W	100-240V		110mm	90mm+300mm drainage	20	-

Inground Decking Sets



69002A | 6x0,5W | SMD 2835 | Stainless steel 316

Decking set lights.

LED BUILT IN


QUICK FIX

2 YEAR

IP67



EU Plug with driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69002A/W	Stainless steel	Warm white	3000K	6x0,5W	40lm/LED	230V		2m/2m	30mm	60mm	6	Complete with 12V DC driver





Garden & Underwater

Pages 659-696

20





7070/W

7070 | 5W | SMD 2835 | Plastic

Supplied with spike & base.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65


7070/C






7068 | 6W | COB LED | Die cast


Supplied with spike.

LED BUILT IN · 80 CRI · ADJUSTABLE · IK07 · CE · 2 YEAR · IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7070/C	Black	Cool white	4000K	5W	400lm	38°	100-240V		200cm	40	Complete with driver
7070/W	Black	Warm white	3000K	5W	400lm	38°	100-240V		200cm	40	Complete with driver
7068/B/W	Black	Warm white	3000K	6W	380lm	40°	230V		200cm	30	Complete with driver

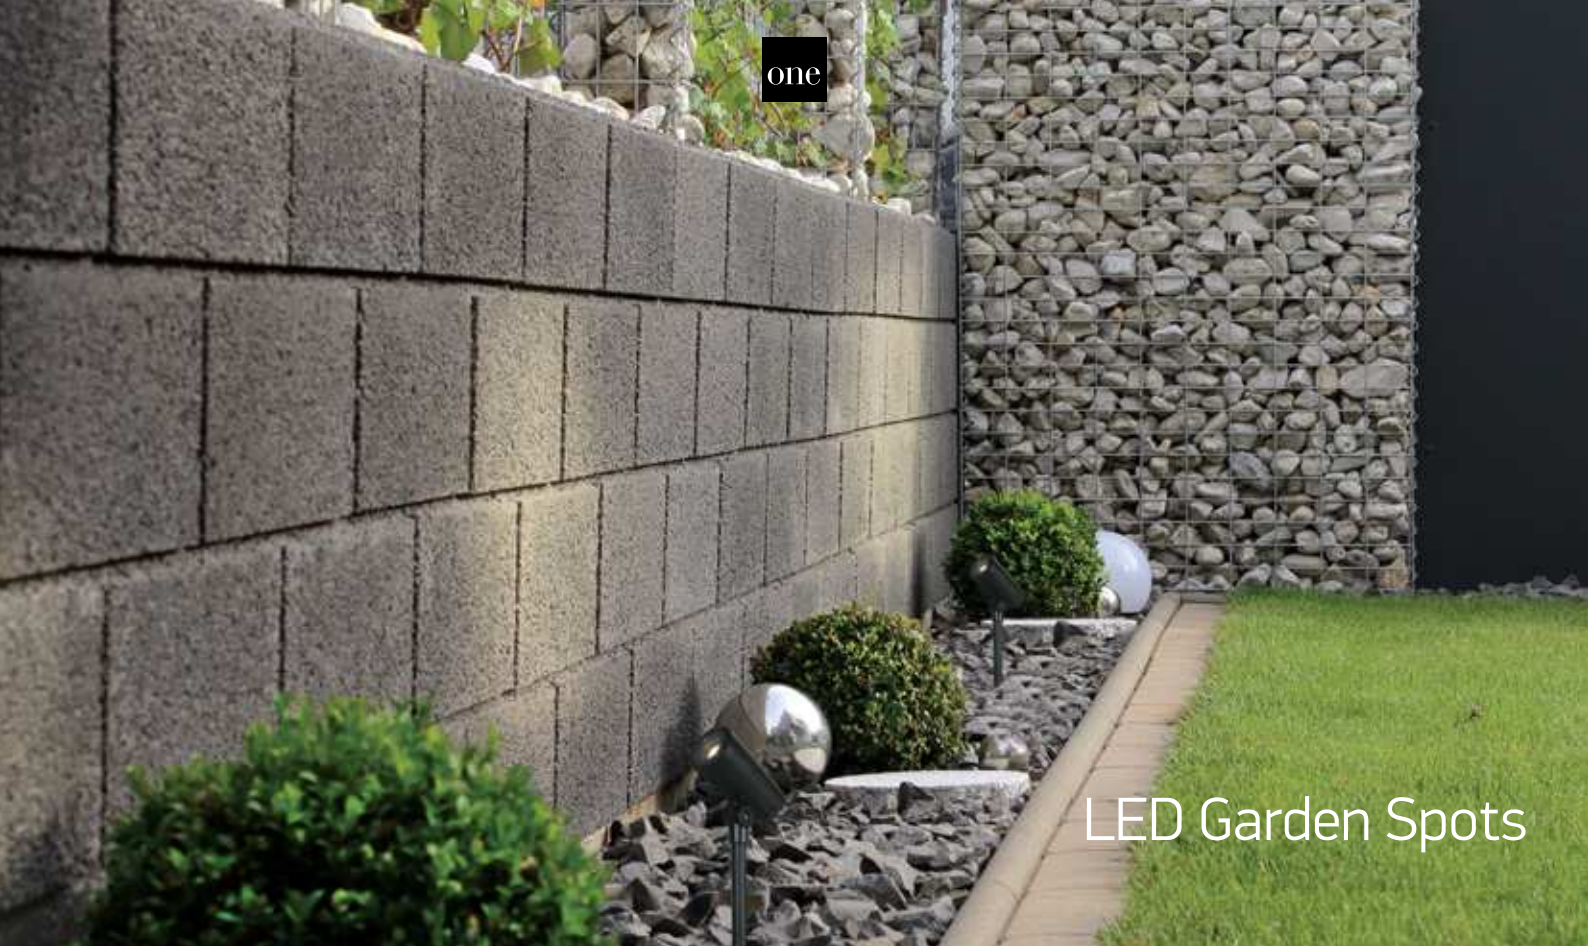

LED Garden Spots




67456 | 3W | COB LED | Aluminium

Supplied with spike.

LED BUILT IN · 90 CRI · ADJUSTABLE · DIMMABLE · CE · 3 YEAR · IP67








67458 | 8W | SMD 2835 | Aluminium

Supplied with spike.

LED BUILT IN · 80 CRI · ADJUSTABLE · DIMMABLE · CE · 2 YEAR · IP65







67482 | 11W | COB LED | Adjustable beam 20°-60° | Die cast


LED BUILT IN · 80 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65



Zoomable lens



Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67456/B/W	Black	Warm white	3000K	3W	170lm	36°	350mA		200cm	36	Requires 350mA driver
67458/B/W	Black	Warm white	3000K	8W	520lm	38°	24V DC		200cm	50	Requires 24V DC driver
67482/AN/W	Anthracite	Warm white	3000K	11W	500lm	20°-60°	100-240V		150cm	6	Complete with 500mA driver



67198G/W


67198G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE | CE | 2 YEAR

IP65



Supplied with spike.





67198G/AN


67198G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE | CE | 2 YEAR

IP65



Supplied with spike.





67198G/B

67198G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE | CE | 2 YEAR


IP65



67198G/BR



Supplied with spike.






67198AG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE | CE | 2 YEAR

IP65



Supplied with spike & 400mm pole stand.





67464G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE | CE | 2 YEAR

IP65



Supplied with spike.



Order Code	Colour	Watts	Input	Class			Notes
67198G/W	White	10W	100-240V		150cm	12	-
67198G/AN	Anthracite	10W	100-240V		150cm	12	-
67198G/B	Black	10W	100-240V		150cm	12	-
67198G/BR	Brown	10W	100-240V		150cm	12	-
67198AG/AN	Anthracite	10W	100-240V		150cm	6	-
67464G/B	Black	10W	100-240V		200cm	12	-




GU10 Garden Spots
Plastic


67200G/W

67200G | 6W | MR16 | GU10 | ABS + PC

ADJUSTABLE · IK06 · CE · 3 YEAR · IP65


Supplied with spike.





67200G/AN

67200G | 6W | MR16 | GU10 | ABS + PC

ADJUSTABLE · IK06 · CE · 3 YEAR · IP65


Supplied with spike.






67202G | 6W | MR16 | GU10 | ABS + PC

ADJUSTABLE · IK06 · CE · 3 YEAR · IP65


Supplied with spike.



Order Code	Colour	Watts	Input	Class			Notes
67200G/W	White	6W	100-240V	⧈	200cm	20	-
67200G/AN	Anthracite	6W	100-240V	⧈	200cm	20	-
67202G/B	Black	6W	100-240V	⧈	200cm	20	-



The GU10 Garden Round Spots
Die cast



67196BG/W

67196BG | 10W | MR16 | GU10 | Die cast

ADJUSTABLE | CE | 2 YEAR

IP65


Supplied with spike.





67196BG/AN

67196BG | 10W | MR16 | GU10 | Die cast

ADJUSTABLE | CE | 2 YEAR

IP65


Supplied with spike.



Order Code	Colour	Watts	Input	Class			Notes
67196BG/W	White	10W	100-240V		150cm	6	-
67196BG/AN	Anthracite	10W	100-240V		150cm	6	-



The COB Garden Round Spots
Die cast




67196A | 3W | COB LED | Die cast

LED BUILT IN · 85 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65



Supplied with spike.






67196B | 6W | COB LED | Die cast

LED BUILT IN · 85 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65



Supplied with spike.






67196C | 9W | COB LED | Die cast

LED BUILT IN · 85 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65



Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67196A/AN/W	Anthracite	Warm white	3000K	3W	240lm	35°	100-240V		150cm	12	Complete with 350mA driver
67196B/AN/W	Anthracite	Warm white	3000K	6W	450lm	35°	230V		150cm	6	Complete with 500mA driver
67196C/AN/W	Anthracite	Warm white	3000K	9W	700lm	35°	230V		150cm	6	Complete with 250mA driver

The 10W COB Garden Spots
Aluminium





7046/W/W

7046 | 10W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR


Supplied with spike.





7046/AN/W

7046 | 10W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR


Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7046/W/W	White	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with 500mA driver
7046/AN/W	Anthracite	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with 500mA driver



The 20W COB Garden Spots
Aluminium




7047/W/W

7047 | 20W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65



Supplied with spike.






7047/AN/W

7047 | 20W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65



Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7047/W/W	White	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with 500mA driver
7047/AN/W	Anthracite	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with 500mA driver



67488C/AN/W

67488B/AN/W

The Garden Round Spots




67488A | 5W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65



Supplied with spike.






67488B | 11W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65



Supplied with spike.






67488C | 14W | COB LED | Die cast


LED BUILT IN · 80 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65



Supplied with spike.




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67488A/AN/W	Anthracite	Warm white	3000K	5W	200lm	30°	100-240V		150cm	12	Complete with 350mA driver
67488B/AN/W	Anthracite	Warm white	3000K	11W	680lm	20°	230V		150cm	8	Complete with 250mA driver
67488C/AN/W	Anthracite	Warm white	3000K	14W	800lm	20°	230V		150cm	4	Complete with 300mA driver

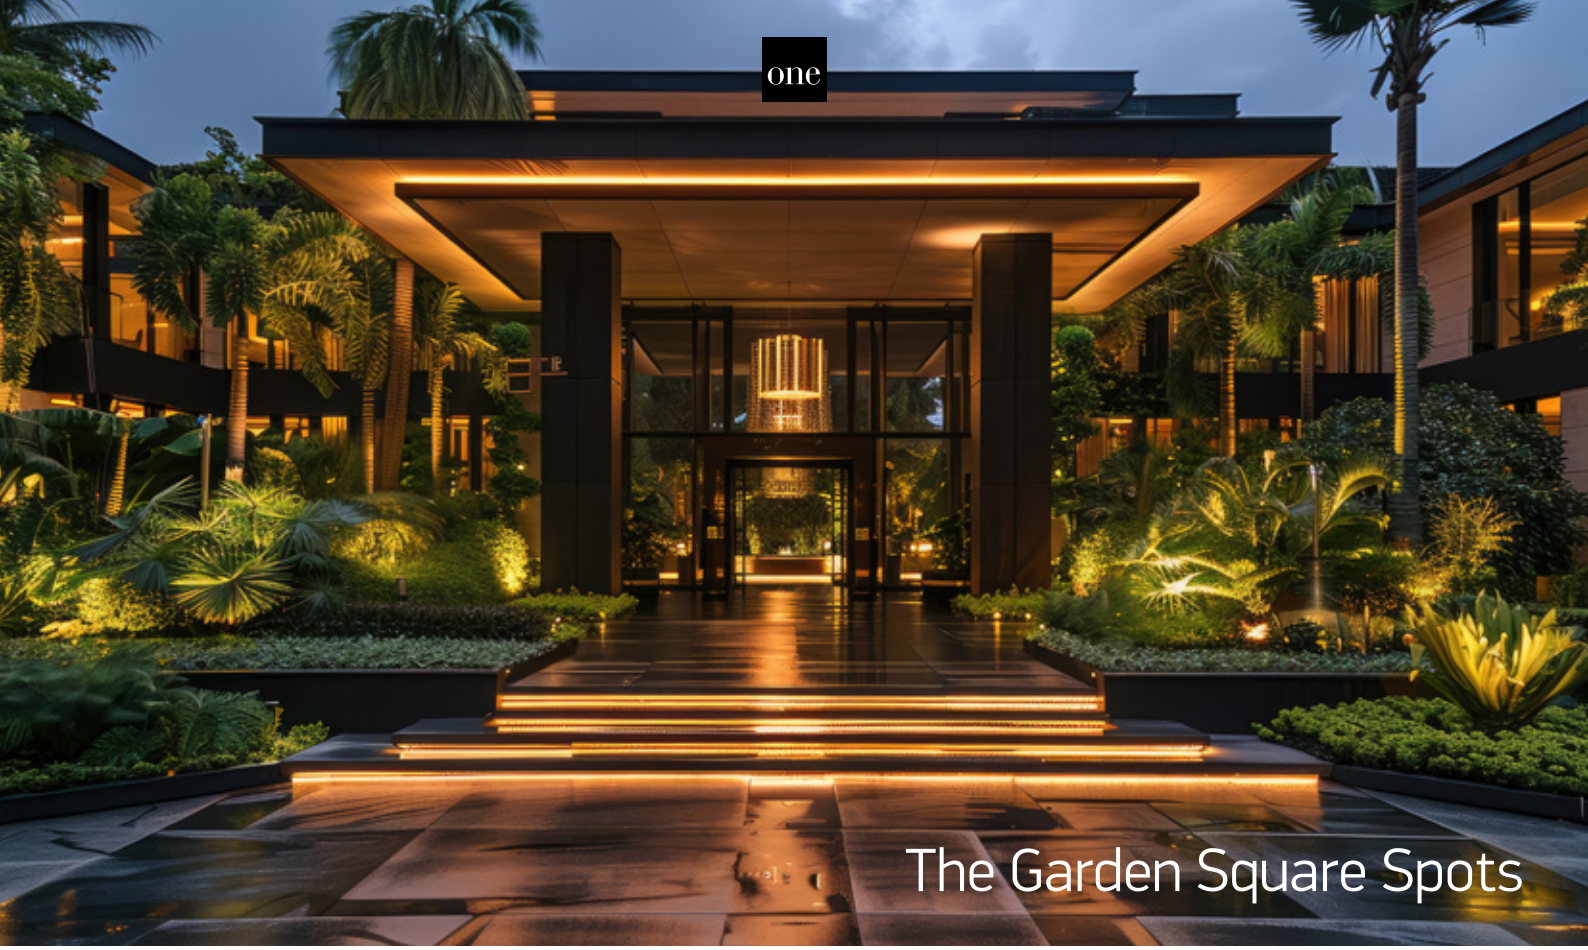

The Garden Square Spots




7052B | 1W | COB LED | Die cast






Optional spike.
Order code 7010P.






67514 | 6W | SMD 3030 | Aluminium






Supplied with spike.






7052 | 7W | COB LED | Die cast





Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7052B/AN/W	Anthracite	Warm white	3000K	1W	80lm	40°	24V DC		100cm	36	Requires 24V DC driver
67514/AN/W	Anthracite	Warm white	3000K	6W	550lm	30°	230V		200cm	12	Complete with 700mA driver
7052/AN/W	Anthracite	Warm white	3000K	7W	550lm	47°	100-240V		100cm	12	Complete with 700mA driver

Garden Spot
Stainless steel



7008A | 10W | MR16 | GU10 | Stainless steel 316


ADJUSTABLE

2 YEAR

IP65



Supplied with base & spike.



Order Code	Colour	Watts	Input	Class			Notes
7008A	Stainless steel	10W	100-240V		200cm	20	-

Garden Spots
ABS



67204E/B

67204G/B




67204G | 10W | MR16 | GU10 | ABS + PC



IP65



Supplied with spike.






67204E | 10W | PAR30 | E27 | ABS + PC



IP65



Supplied with spike.



Order Code	Colour	Watts	Input	Class	Cable		Notes
67204G/B	Black	10W	100-240V	⧈	200cm	16	-
67204E/B	Black	10W	100-240V	⧈	200cm	16	-



The E27 Tube Lights
Die cast


67094/AN

67094 | 20W | E27 | Die cast


67094/B


67094/G


67094/BR






67098/AN

67098 | 2x20W | E27 | Die cast


67098/G


67098/BR





Order Code	Colour	Watts	Input	Class		Notes
67094/AN	Anthracite	20W	100-240V		12	-
67094/B	Black	20W	100-240V		12	-
67094/G	Grey	20W	100-240V		12	-
67094/BR	Rust brown	20W	100-240V		12	-
67098/AN	Anthracite	2x20W	100-240V		12	-
67098/G	Grey	2x20W	100-240V		12	-
67098/BR	Rust brown	2x20W	100-240V		12	-



The E27 Tube Lights
Die cast


67100/B

67100 | 20W | E27 | Die cast


CE 2 YEAR

IP54


67100/AN


67100/G


67100/BR




67102/B

67102 | 20W | E27 | Die cast


CE 2 YEAR

IP54



67102/AN


67102/G


67102/BR



Order Code	Colour	Watts	Input	Class		Notes
67100/AN	Anthracite	20W	100-240V		4	-
67100/B	Black	20W	100-240V		4	-
67100/G	Grey	20W	100-240V		4	-
67100/BR	Rust brown	20W	100-240V		4	-
67102/AN	Anthracite	20W	100-240V		4	-
67102/B	Black	20W	100-240V		4	-
67102/G	Grey	20W	100-240V		4	-
67102/BR	Rust brown	20W	100-240V		4	-

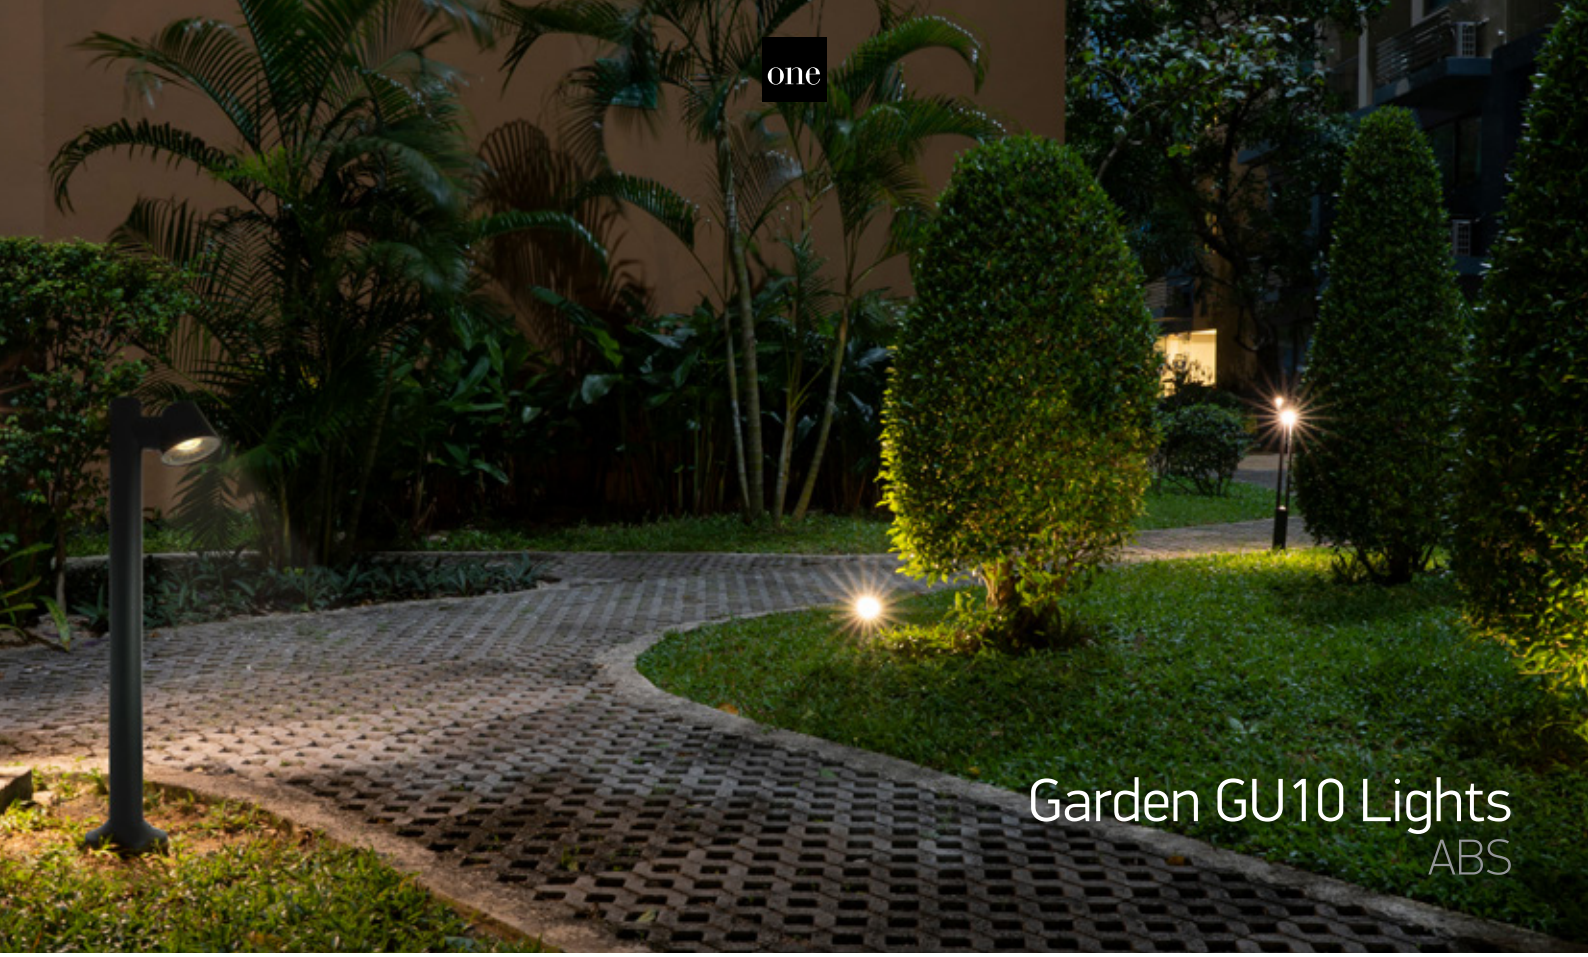

Garden GU10 Lights
ABS




67534A | 6W | MR16 | GU10 | ABS + PC

ADJUSTABLE

IK06 CE 3 YEAR

IP65






67534B | 6W | MR16 | GU10 | ABS + PC

ADJUSTABLE

CE 3 YEAR

IP65






67534C | 2x6W | MR16 | GU10 | ABS + PC

ADJUSTABLE

CE 3 YEAR

IP65



Order Code	Colour	Watts	Input	Class		Notes
67534A/AN	Anthracite	6W	100-240V	⧈	20	-
67534B/AN	Anthracite	6W	100-240V	⧈	6	-
67534C/AN	Anthracite	2x6W	100-240V	⧈	4	-




Charging Sockets Bollards



67494 | Bollard with 2xSchuko Sockets 1000W each | Die cast

IP44








67494A | 3W | SMD LED | LED Bollard with 2xSchuko Sockets 1000W each | Die cast

IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67494/AN	Anthracite	-	-	-	-	230V		4	-
67494A/AN/W	Anthracite	Warm white	3000K	3W	240lm	230V		4	Complete with 350mA driver




LED Garden Path Lights
Die cast



67470 | 10W | LED | Die cast








67470A | 10W | LED | Die cast





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67470/B/W	Black	Warm white	3000K	10W	500lm	230V		6	Complete with 250mA driver
67470A/B/W	Black	Warm white	3000K	10W	500lm	230V		6	Complete with 250mA driver




LED Garden Path Lights
Aluminium



67460A | 8W | LED | Aluminium — 1-side light.

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR · IP54








67460B | 2x6W | LED | Aluminium — 2-side light.

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR · IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67460A/AN/W	Anthracite	Warm white	3000K	8W	640lm	100-240V	⏚	4	Complete with 350mA driver
67460B/AN/W	Anthracite	Warm white	3000K	2x6W	2x500lm	100-240V	⏚	4	Complete with 300mA driver

LED Mushroom Bollards
ABS + PC



67490A/B/W



67490/B/W



67490 | 6,5W | SMD LED | ABS + PC

LED BUILT IN

80 CRI


IK06

CE

2 YEAR

IP54







67490A | 6,5W | SMD LED | ABS + PC

LED BUILT IN

80 CRI

IK06

CE

2 YEAR

IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67490/B/W	Black	Warm white	3000K	6,5W	600lm	230V	⧈	6	Complete with 300mA driver
67490A/B/W	Black	Warm white	3000K	6,5W	600lm	230V	⧈	6	Complete with 300mA driver



LED Bollards Lights
Die cast





67358 | 7W | COB LED | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP65








67034/AN/W

67034 | 15W | COB LED | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP54






67034/G/W

67034 | 15W | COB LED | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Beam Angle	Lumen (lm)	Input	Class		Notes
67358/AN/W	Anthracite	Warm white	3000K	7W	-	262lm	100-240V		8	Complete with 700mA driver
67034/AN/W	Anthracite	Warm white	3000K	15W	50°	450lm	100-240V		4	Complete with driver
67034/G/W	Grey	Warm white	3000K	15W	50°	450lm	100-240V		4	Complete with driver




The Cage Light Bollards
Die cast


67506/AN/C

67506 | 22W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
IK10
CE
2 YEAR
IP65


67506/AN/W





67506A/AN/C

67506A | 22W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
IK10
CE
2 YEAR
IP65


67506A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67506/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67506/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver
67506A/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67506A/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver



The Cage Light Bollards
Die cast


67504/AN/C

67504 | 22W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


IK10

CE

2 YEAR

IP65


67504/AN/W




67504A/AN/C

67504A | 22W | SMD 2835 | Die cast

LED BUILT IN

80 CRI


IK10

CE


2 YEAR

IP65


67504A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67504/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67504/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver
67504A/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67504A/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver

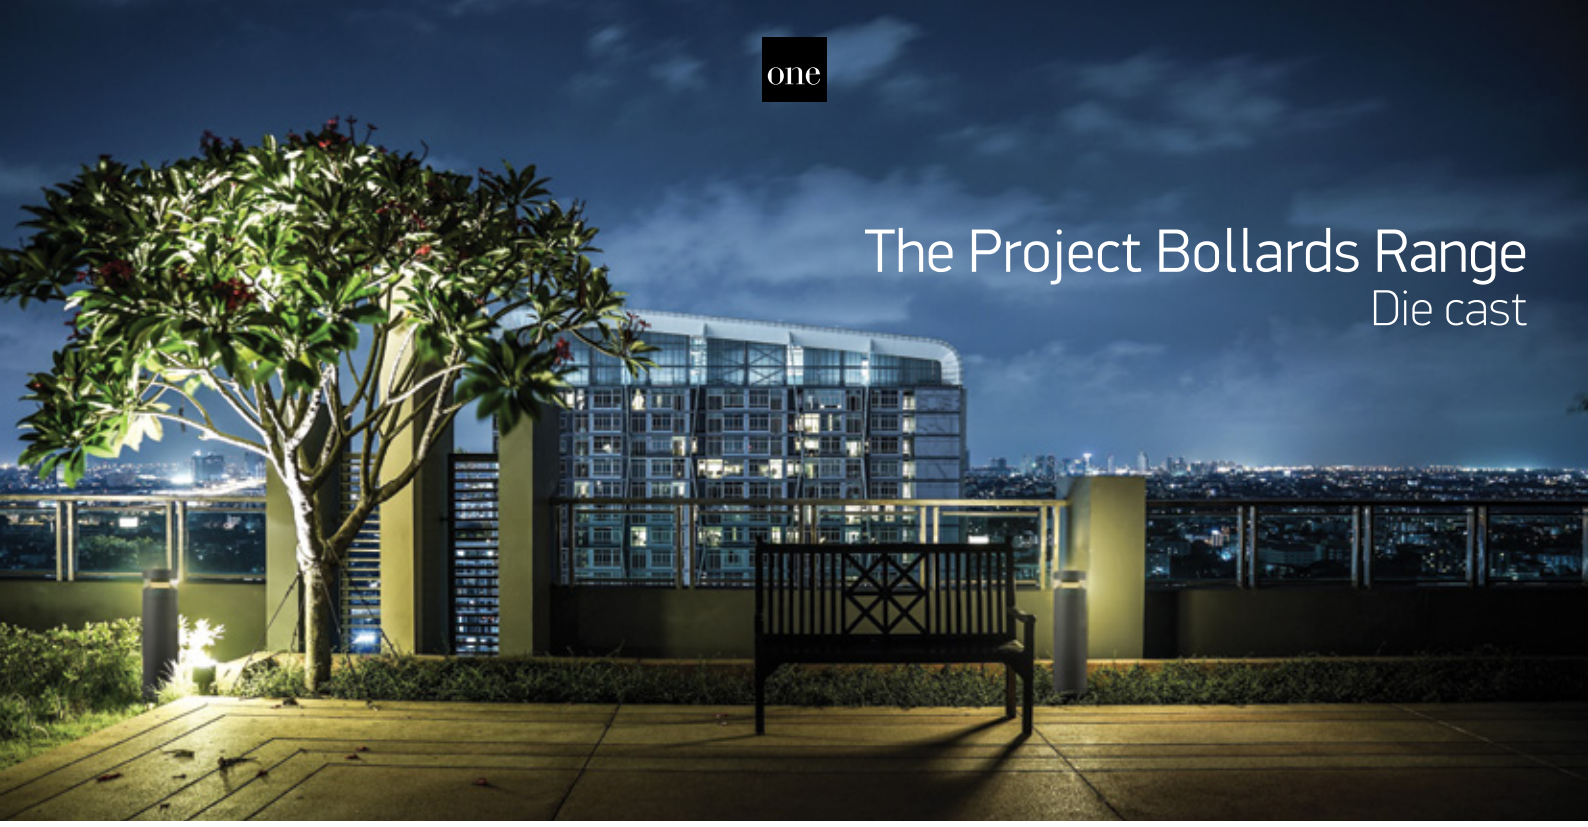

The Project Bollards Range
Die cast




67510 | 20W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR · IP65



Light stop accessory.
Order code 050210/AN.






67510A | 20W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR · IP65



Light stop accessory.
Order code 050210/AN.






67510B | 20W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR · IP65



Light stop accessory.
Order code 050210/AN.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67510/AN/C	Anthracite	Cool white	4000K	20W	2000lm	230V		4	Complete with 500mA driver
67510/AN/W	Anthracite	Warm white	3000K	20W	2000lm	230V		4	Complete with 500mA driver
67510A/AN/C	Anthracite	Cool white	4000K	20W	2000lm	230V		2	Complete with 500mA driver
67510A/AN/W	Anthracite	Warm white	3000K	20W	2000lm	230V		2	Complete with 500mA driver
67510B/AN/C	Anthracite	Cool white	4000K	20W	2000lm	230V		1	Complete with 500mA driver
67510B/AN/W	Anthracite	Warm white	3000K	20W	2000lm	230V		1	Complete with 500mA driver



The LED Bollards Range

Cone reflector



67410 | 12W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

IK08

CE

2 YEAR

IP65







67410A | 20W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

IK08

CE

2 YEAR

IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67410/AN/C	Anthracite	Cool white	4000K	12W	1000lm	230V		2	Complete with 500mA driver
67410/AN/W	Anthracite	Warm white	3000K	12W	1000lm	230V		2	Complete with 500mA driver
67410A/AN/C	Anthracite	Cool white	4000K	20W	1600lm	230V		2	Complete with 500mA driver
67410A/AN/W	Anthracite	Warm white	3000K	20W	1600lm	230V		2	Complete with 500mA driver



The Romantic Outdoor Range




67406 | 12W | E27 | Stainless steel 201 + tempered glass

IP43

2 YEAR



Suitable for E27 LED lamps.






67406A | 12W | E27 | Stainless steel 201 + tempered glass

IP43

2 YEAR



Suitable for E27 LED lamp.






67406B | 2x12W | E27 | Stainless steel 201 + tempered glass

IP43

2 YEAR



Suitable for E27 LED lamps.






67406C | 12W | E27 | Stainless steel 201 + tempered glass

IP43

2 YEAR



Suitable for E27 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
67406/B	Black	12W	100-240V		4	-
67406A/B	Black	12W	100-240V		4	-
67406B/B	Black	2x12W	100-240V		4	-
67406C/B	Black	12W	100-240V		4	-






67406D | 2x12W | E27 | Stainless steel 201 + tempered glass



Suitable for E27 LED lamps.






67406E | 12W | E27 | Stainless steel 201 + tempered glass



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67406D/B	Black	2x12W	100-240V		2	-
67406E/B	Black	12W	100-240V		4	-



Rechargeable Path Lights




67530A | 2,2W | SMD 2835 | Touch switch | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · IK06 · CCT V · CE · 2 YEAR · IP65



Charging time: 6Hrs
Working time: 9Hrs
(at 100% intensity)






67530B | 2,2W | SMD 2835 | Touch switch | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · IK06 · CCT V · CE · 2 YEAR · IP65



Charging time: 6Hrs
Working time: 9Hrs
(at 100% intensity)






67462 | 3W | Rechargeable | Die cast

EU charger included.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54



Charging time: 5-7Hrs
Working time: 9Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
67530A/W	White	CCT V	2700K-3000K	2,2W	130lm	III	6	4400mAh lithium battery
67530B/W	White	CCT V	2700K-3000K	2,2W	130lm	III	2	4400mAh lithium battery
67462/B/W	Black	Warm white	3000K	3W	190lm	III	4	2x2200mAh lithium batteries



67530B/W




67520A/B/W

Solar Path Lights



67520 | 2,2W | SMD 2835 | Solar powered | Night sensor | Die cast


Hybrid charging (USB & Solar).





Night Sensor (ON/OFF)
Dimmer switch: 5-100%
Solar charging time: 20Hrs
USB charging time: 6Hrs


Working time:
9Hrs in 100% Light intensity
20Hrs in 50% Light intensity





67520A | 2,2W | SMD 2835 | Solar powered | Night sensor | Die cast


Hybrid charging (USB & Solar).





Night Sensor (ON/OFF)
Dimmer switch: 5-100%
Solar charging time: 20Hrs
USB charging time: 6Hrs

Working time:
9Hrs in 100% Light intensity
20Hrs in 50% Light intensity






050250/B | Wall bracket for 67520 & 67520A | Die cast







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
67520/B/W	Black	Warm white	3000K	2,2W	150lm	III	4	2x2200mAh lithium batteries
67520A/B/W	Black	Warm white	3000K	2,2W	150lm	III	2	2x2200mAh lithium batteries

Solar Wall Light



67496 | 2W | Solar powered | Sensor | Aluminium

3 Modes operation.


LED BUILT IN

80 CRI

Solar

IP65

2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)		Notes
67496/B/EW	Black	Extra warm white	2700K	2W	120lm	4	2200mAh lithium battery



Retro Wall Lights




67050 | 15W | E27 | Stainless steel 304

IP44

offer

2 YEAR








67408 | 12W | E27 | Metal + glass

IP44

2 YEAR



Suitable for E27 LED lamp.




Order Code	Colour	Watts	Input	Class		Notes
67050	Stainless steel	15W	100-240V		6	-
67408/B	Black	12W	100-240V		4	-



Moonlights
PC




63028 | 15W | E27 | PC








63028A | 20W | E27 | PC







63028B | 30W | E27 | PC





Order Code	Colour	Watts	Input	Class		Notes
63028	White	15W	100-240V		1	Pendant / Ground / Spike
63028A	White	20W	100-240V		1	Pendant / Ground / Spike
63028B	White	30W	100-240V		1	Pendant / Ground / Spike





Stone Moonlights



7072 | 20W | E27 | Plastic

Complete with SCHUKO plug.

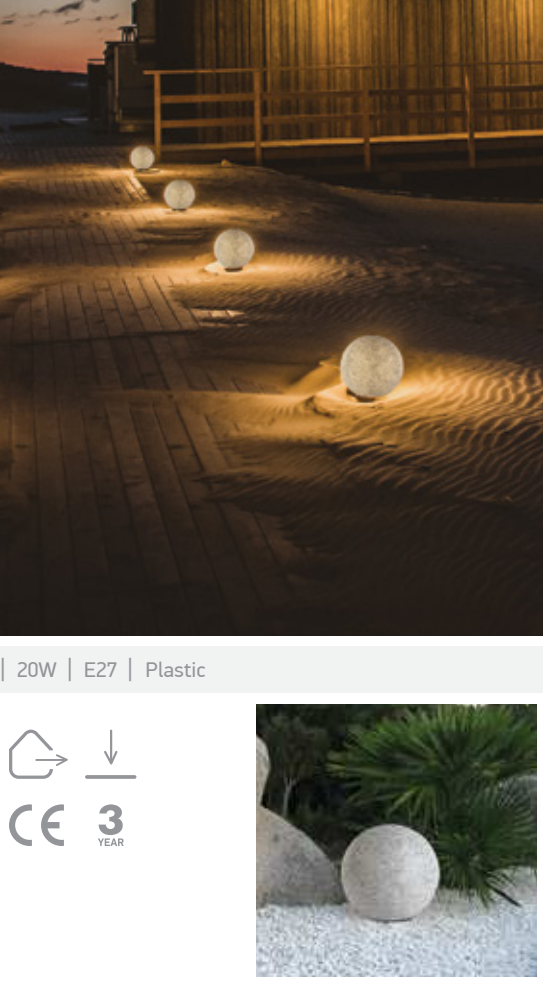






7072A | 20W | E27 | Plastic

Complete with SCHUKO plug.





Order Code	Colour	Lampholder	Watts	Input	Class			Notes
7072	Stone	E27	20W	100-240V		200cm	4	-
7072A	Stone	E27	20W	100-240V		200cm	1	-

Outdoor E27 String Lights



0994 | 12W | E27 | 15xT-lampholders



Order Code	Colour	Watts	Input	Class			Notes
0994/B	Black	12W	100-240V		850cm	8	50cm spacing

Outdoor Solar String Lights



0996 | 1W | 12xLEDs | Solar powered

50cm spacing.

2 YEAR

Solar

IP67



Supplied with spike.



Supplied with mounting accessory.

Order Code	Colour	Watts	Light colour	CCT (K)	Class			Notes
0996/B	Black	1W	Extra warm white	2700K	III	850cm	8	2000mAh lithium battery

The LED Underwater Range
Stainless steel



69064A/C



69064B/C



69064C/C



The LED Underwater Range

Stainless steel




69064A | 3x1W | LED | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · ADJUSTABLE · IK08 · CE · 2 YEAR · IP68








69064B | 6x1W | LED | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · ADJUSTABLE · IK08 · CE · 2 YEAR · IP68








69064C | 9x1W | LED | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · ADJUSTABLE · IK08 · CE · 2 YEAR · IP68






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
69064A/C	Stainless steel	Cool white	4000K	3x1W	200lm	24V DC	III	500cm	18	Requires 24V DC driver
69064A/W	Stainless steel	Warm white	3000K	3x1W	200lm	24V DC	III	500cm	18	Requires 24V DC driver
69064B/C	Stainless steel	Cool white	4000K	6x1W	400lm	24V DC	III	500cm	10	Requires 24V DC driver
69064B/W	Stainless steel	Warm white	3000K	6x1W	400lm	24V DC	III	500cm	10	Requires 24V DC driver
69064C/C	Stainless steel	Cool white	4000K	9x1W	600lm	24V DC	III	500cm	8	Requires 24V DC driver
69064C/W	Stainless steel	Warm white	3000K	9x1W	600lm	24V DC	III	500cm	8	Requires 24V DC driver



The LED Underwater Range
Stainless steel

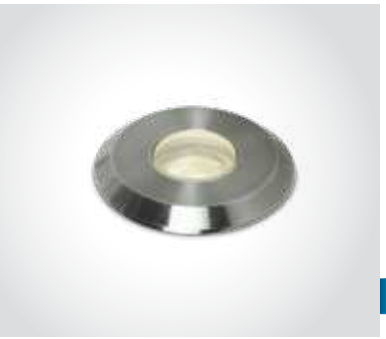



69066M | 0,3W | SMD 2835 | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IK08 · CE · 2 YEAR · IP68





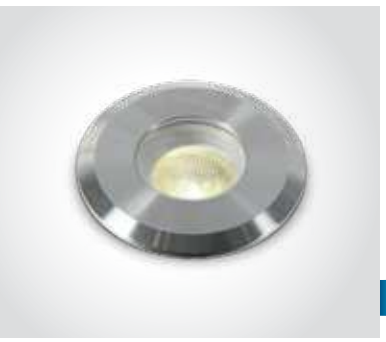


69066 | 1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IK10 · CE · 2 YEAR · IP68








69066A/C

69066A | 3x1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IK10 · CE · 2 YEAR · IP68



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69066M/C	Stainless steel	Cool white	4000K	0,3W	30lm	24V DC	III	500cm	22mm	45mm	50	Requires 24V DC driver
69066M/W	Stainless steel	Warm white	3000K	0,3W	30lm	24V DC	III	500cm	22mm	45mm	50	Requires 24V DC driver
69066/C	Stainless steel	Cool white	4000K	1W	70lm	24V DC	III	500cm	46mm	90mm	20	Requires 24V DC driver
69066/W	Stainless steel	Warm white	3000K	1W	70lm	24V DC	III	500cm	46mm	90mm	20	Requires 24V DC driver
69066A/C	Stainless steel	Cool white	4000K	3x1W	210lm	24V DC	III	500cm	88mm	85mm	20	Requires 24V DC driver
69066A/W	Stainless steel	Warm white	3000K	3x1W	210lm	24V DC	III	500cm	88mm	85mm	20	Requires 24V DC driver






69066B/C

69066B | 6x1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IK10 · CE · 2 YEAR · IP68





69066D/C


69066D | 12x1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IK10 · CE · 2 YEAR · IP68



69066D/BL



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69066B/C	Stainless steel	Cool white	4000K	6x1W	420lm	24V DC	III	500cm	140mm	110mm	8	Requires 24V DC driver
69066B/W	Stainless steel	Warm white	3000K	6x1W	420lm	24V DC	III	500cm	140mm	110mm	8	Requires 24V DC driver
69066D/C	Stainless steel	Cool white	4000K	12x1W	850lm	24V DC	III	500cm	175mm	130mm	6	Requires 24V DC driver
69066D/BL	Stainless steel	Blue	-	12x1W	-	24V DC	III	500cm	175mm	130mm	6	Requires 24V DC driver






Industrial & Floodlights

Pages 699-724

21

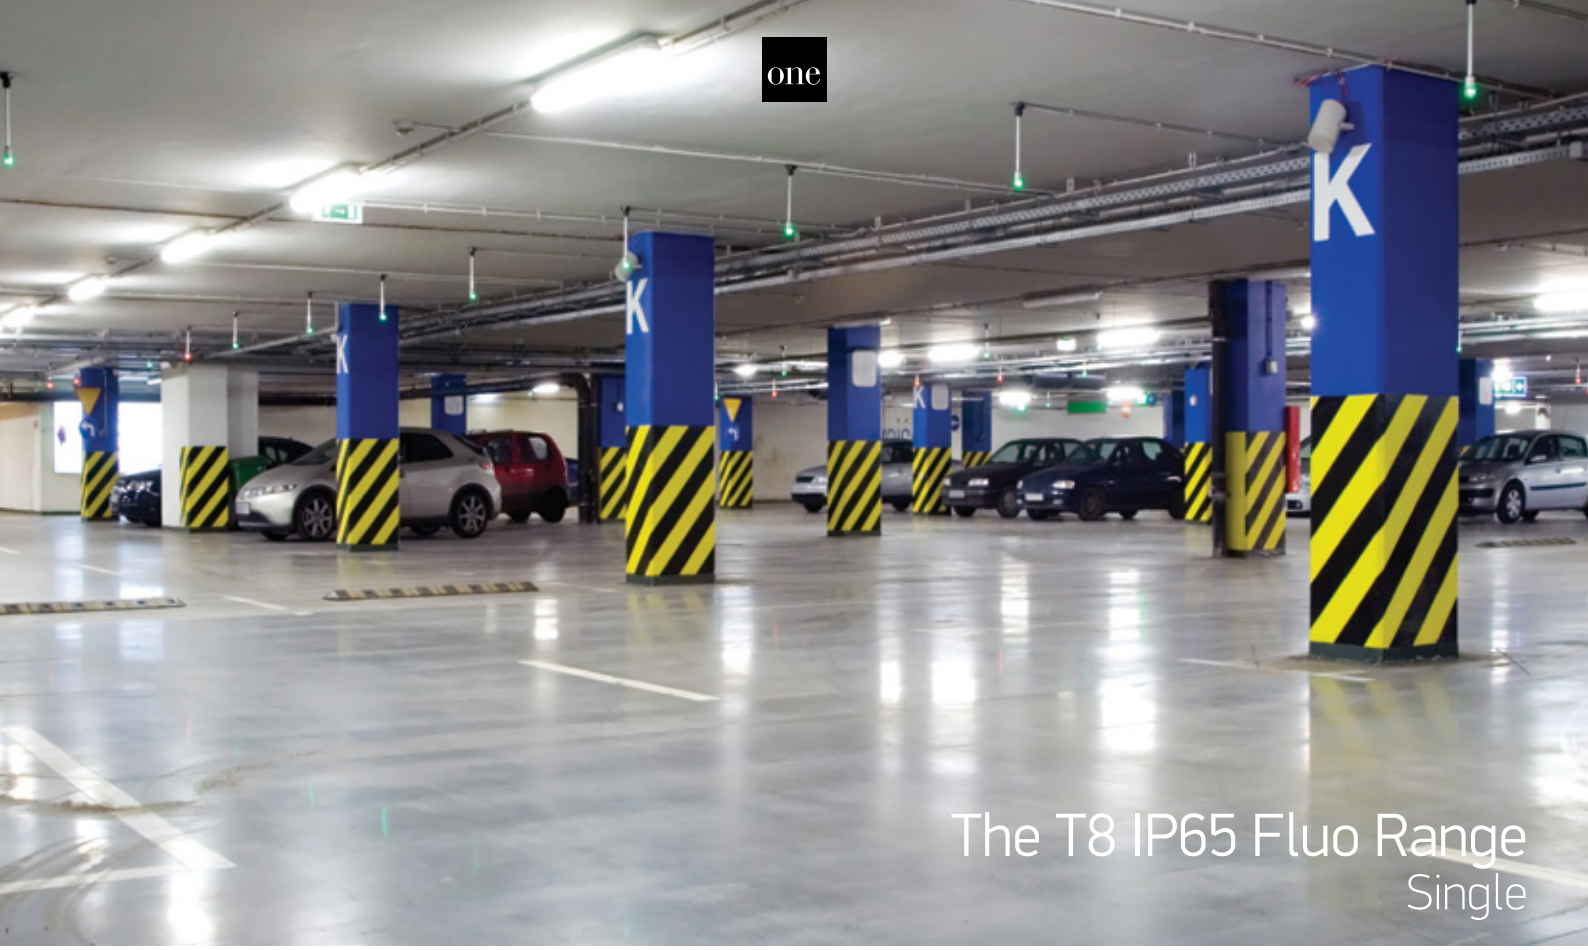

The T8 IP65 Fluo Range
Single




38118E | T8 LED 60cm | PC + PC

IK08

CE 5 YEAR

IP65

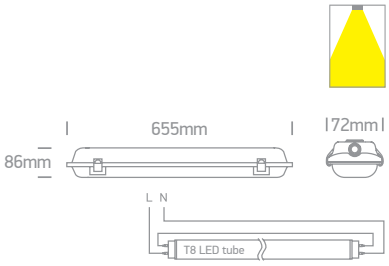




38136E | T8 LED 120cm | PC + PC

IK08

CE 5 YEAR

IP65

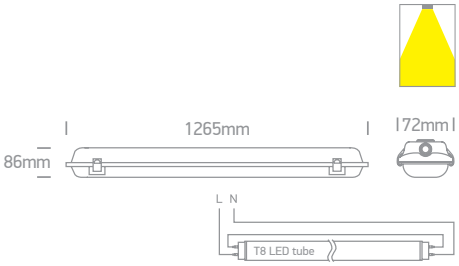




38158E | T8 LED 150cm | PC + PC

IK08

CE 5 YEAR

IP65

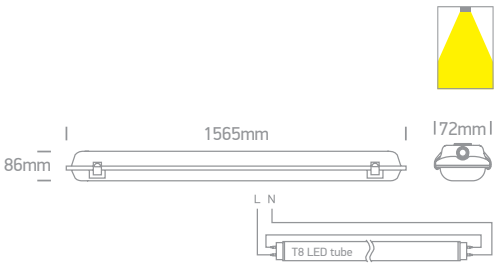

Order Code	Colour	Input	Class		Notes
38118E	Grey	100-240V		15	Only suitable for T8 LED tubes
38136E	Grey	100-240V		9	Only suitable for T8 LED tubes
38158E	Grey	100-240V		9	Only suitable for T8 LED tubes



The IP65 Range For T8 LED Tubes
Double




38218E | 2xT8 LED 60cm | PC + PC

IK08

CE 5 YEAR

IP65

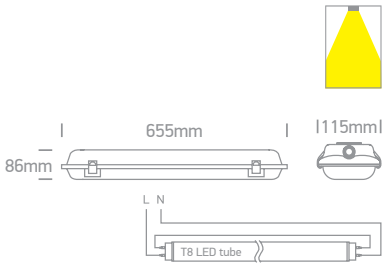




38236E | 2xT8 LED 120cm | PC + PC

IK08

CE 5 YEAR

IP65

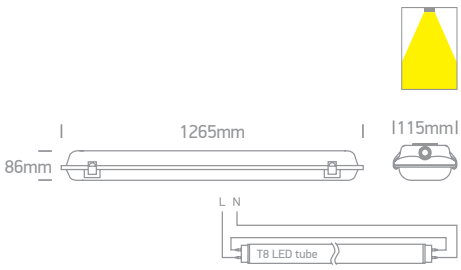




38258E | 2xT8 LED 150cm | PC + PC

IK08

CE 5 YEAR

IP65

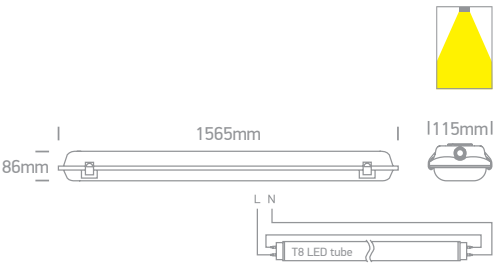

Order Code	Colour	Input	Class		Notes
38218E	Grey	100-240V	⏚	9	Only suitable for T8 LED tubes
38236E	Grey	100-240V	⏚	6	Only suitable for T8 LED tubes
38258E	Grey	100-240V	⏚	6	Only suitable for T8 LED tubes



38236M/C

38136ME/C

The High Power IP65 LED Range
Single




38118M | 15W | SMD 2835 | PC + opal PC diffuser

LED BUILT IN · 80 CRI · IK08 · CE · 3 YEAR · IP65



Stainless steel clips.








38136ME | 30W | SMD 2835 | Emergency 3Hrs Maintained | PC + opal PC diffuser

LED BUILT IN · 80 CRI · IK08 · CE · 3 YEAR · IP65



Stainless steel clips.



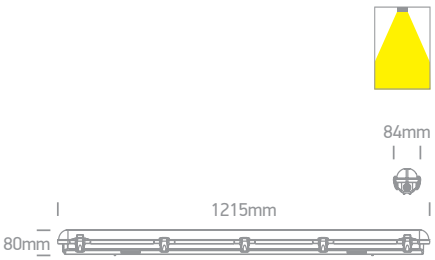




38158M | 40W | SMD 2835 | PC + opal PC diffuser

LED BUILT IN · 80 CRI · IK08 · CE · 3 YEAR · IP65



Stainless steel clips.



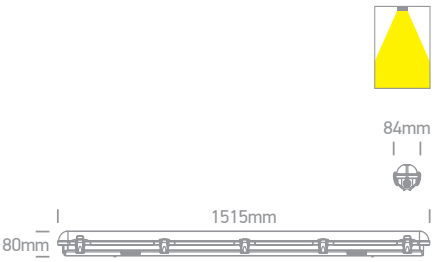

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration		Notes
38118M/C	Grey	Cool white	4000K	15W	1500lm	230V		-	12	Complete with 350mA driver
38136ME/C	Grey	Cool white	4000K	30W	3000lm	230V		3Hrs	9	Supplied with battery
38158M/C	Grey	Cool white	4000K	40W	4000lm	230V		-	9	Complete with 700mA driver



The High Power IP65 LED Range
Double



38236M | 60W | SMD 2835 | PC + opal PC diffuser

LED BUILT IN

80 CRI

IK08

CE


3 YEAR

IP65









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38236M/C	Grey	Cool white	4000K	60W	6000lm	230V	⏚	6	Complete with 1050mA driver / Stainless steel clips



The IP65 LED Connectable Range
Single



38118LC | 18W | SMD 2835 | Connectable | PC

Supermarket linear range.

LED BUILT IN | 80 CRI | IK08 | CE | 2 YEAR | IP65



Optional suspension kit. Order code 050084.



Connect 20 fittings maximum.





38136LC | 36W | SMD 2835 | Connectable | PC

Supermarket linear range.

LED BUILT IN | 80 CRI | IK08 | CE | 2 YEAR | IP65



Optional suspension kit. Order code 050084.



Connect 10 fittings maximum.





38145LC | 45W | SMD 2835 | Connectable | PC

Supermarket linear range.

LED BUILT IN | 80 CRI | IK08 | CE | 2 YEAR | IP65



Optional suspension kit. Order code 050084.



Connect 10 fittings maximum.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38118LC/C	White	Cool white	4000K	18W	1550lm	100-240V		50cm	20	Complete with driver
38118LC/W	White	Warm white	3000K	18W	1500lm	100-240V		50cm	20	Complete with driver
38136LC/C	White	Cool white	4000K	36W	3100lm	100-240V		50cm	20	Complete with driver
38136LC/W	White	Warm white	3000K	36W	3000lm	100-240V		50cm	20	Complete with driver
38145LC/C	White	Cool white	4000K	45W	4000lm	100-240V		50cm	20	Complete with driver



The IP65 LED Connectable Range

Double



38236LC | 36W | SMD 2835 | Connectable | PC

Supermarket linear range.

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



Optional suspension kit. Order code 050084.



Connect 10 fittings maximum.





38245LC | 45W | SMD 2835 | Connectable | PC

Supermarket linear range.


LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65




Optional suspension kit. Order code 050084.



Connect 10 fittings maximum.

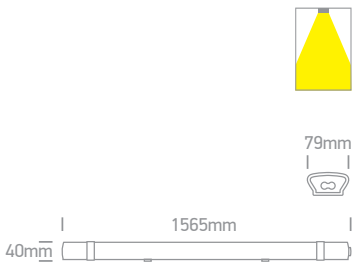

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38236LC/D	White	Daylight	6000K	36W	3100lm	100-240V	☐	50cm	10	Complete with driver
38236LC/C	White	Cool white	4000K	36W	3100lm	100-240V	☐	50cm	10	Complete with driver
38245LC/D	White	Daylight	6000K	45W	4000lm	100-240V	☐	50cm	10	Complete with driver
38245LC/C	White	Cool white	4000K	45W	4000lm	100-240V	☐	50cm	10	Complete with driver

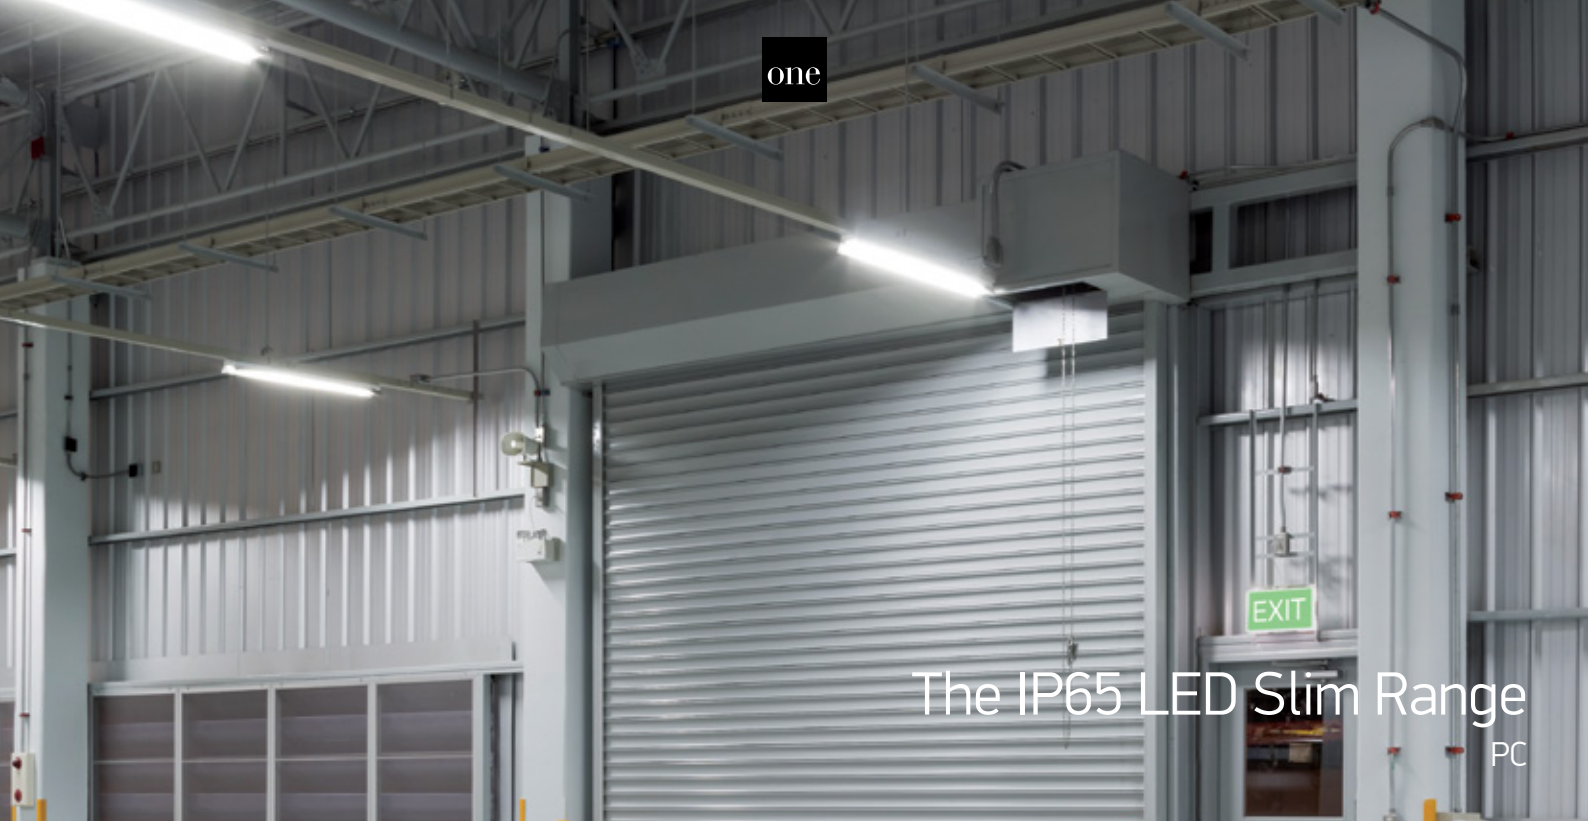

The IP65 LED Slim Range

PC



38118LA | 18W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



Optional suspension kit. Order code 050084.



Complete with 2pcs fixing clips.





38136LA | 36W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



Optional suspension kit. Order code 050084.



Complete with 3pcs fixing clips.





38145LA | 45W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



Optional suspension kit. Order code 050084.



Complete with 4pcs fixing clips.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38118LA/D	White	Daylight	6000K	18W	1600lm	100-240V	☐	50cm	20	Complete with driver
38118LA/C	White	Cool white	4000K	18W	1600lm	100-240V	☐	50cm	20	Complete with driver
38136LA/D	White	Daylight	6000K	36W	3200lm	100-240V	☐	50cm	20	Complete with driver
38136LA/C	White	Cool white	4000K	36W	3200lm	100-240V	☐	50cm	20	Complete with driver
38145LA/D	White	Daylight	6000K	45W	4100lm	100-240V	☐	50cm	20	Complete with driver
38145LA/C	White	Cool white	4000K	45W	4100lm	100-240V	☐	50cm	20	Complete with driver



The IP66 Industrial LED Range




38115LB | 15W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · IP66 · 2 YEAR



Complete with 2pcs fixing clips.








38130LB | 30W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · IP66 · 2 YEAR



Complete with 3pcs fixing clips.








38150LB | 50W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · IP66 · 2 YEAR



Complete with 3pcs fixing clips.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38115LB/C	White	Cool white	4000K	15W	1725lm	230V		15	Complete with 140mA driver
38130LB/C	White	Cool white	4000K	30W	3450lm	230V		12	Complete with 230mA driver
38150LB/C	White	Cool white	4000K	50W	5750lm	230V		9	Complete with 300mA driver

The Supermarket LED Linear Range

Aluminium



38280 | 80W | SMD 3030 & SMD 2835 | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

3 YEAR

IP20



Complete with 2 Fixing clips & 2 connectors.



Complete with 3m suspension kit.



Adjustable sides




50mm

1200mm

140mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38280/W/C	White	Cool white	4000K	80W	7400lm	230V	⏚	4	Complete with 600mA & 1500mA drivers

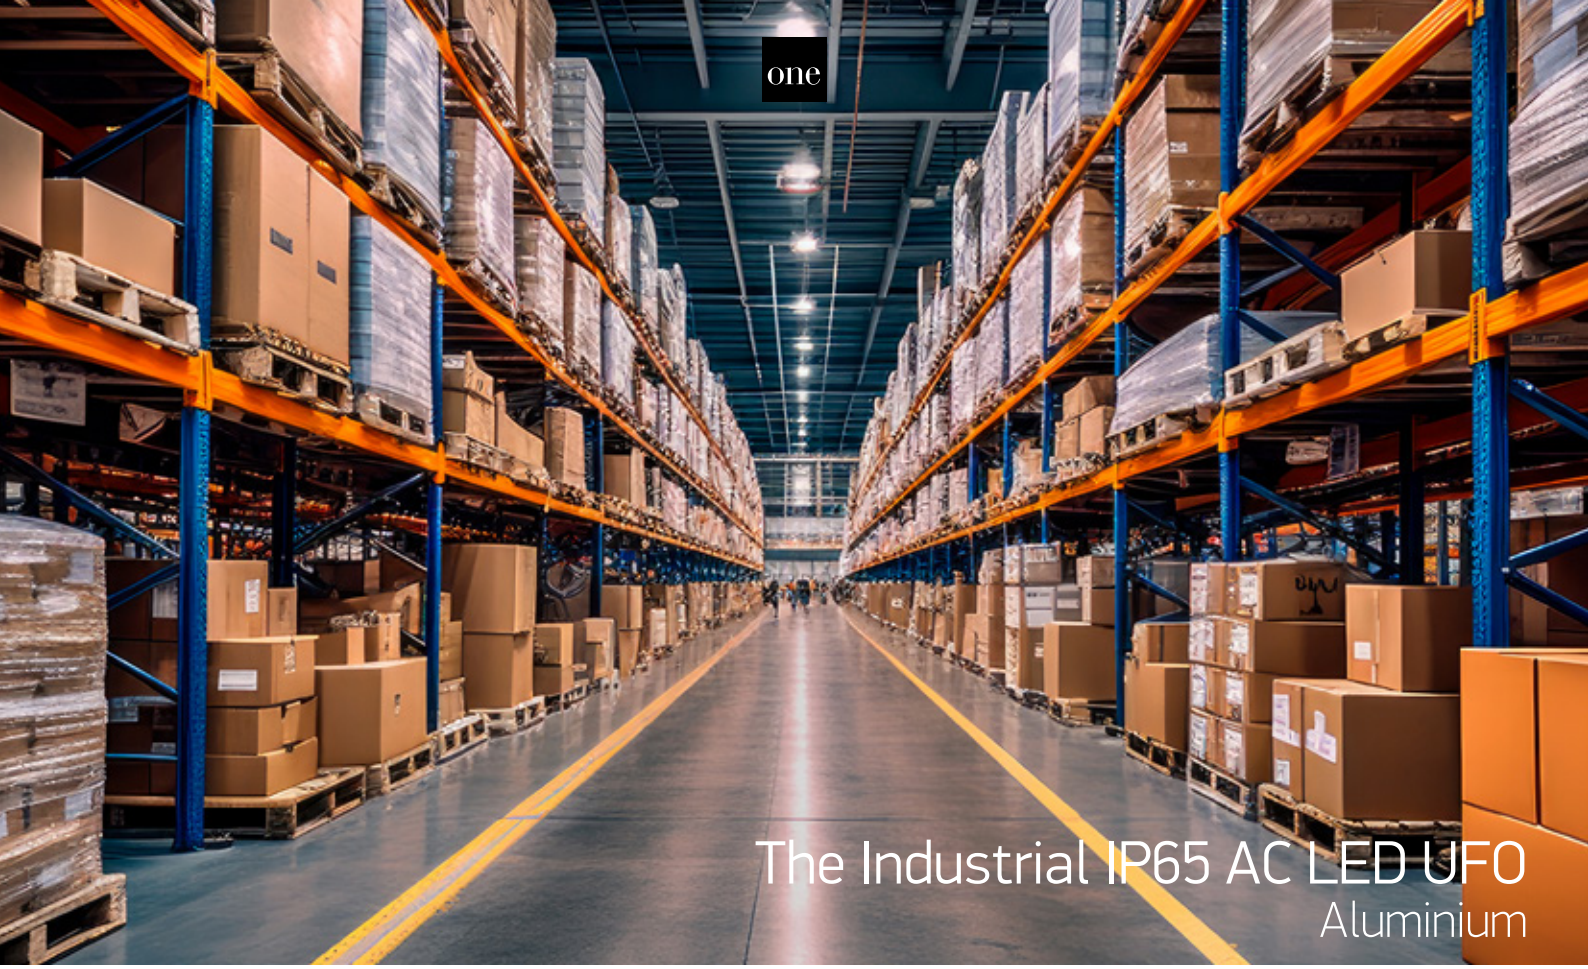


The Industrial IP65 AC LED UFO
Aluminium



63100NA | 100W | SMD 2835 | AC LED | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP65








63150NA | 150W | SMD 2835 | AC LED | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP65








63200NA | 200W | SMD 2835 | AC LED | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100NA/C	Black	Cool white	4000K	100W	10000lm	90°	230V	⏚	150cm	10	AC LED
63150NA/C	Black	Cool white	4000K	150W	15000lm	90°	230V	⏚	150cm	10	AC LED
63200NA/C	Black	Cool white	4000K	200W	20000lm	90°	230V	⏚	150cm	10	AC LED



63150N/C



63150N/C + 050114HA

The Industrial IP65 LED UFO Range


Aluminium



63100N | 100W | SMD 2835 | Dimmable | Aluminium

LED BUILT IN · 80 CRI · 1-10V DIMMABLE · CE · 5 YEAR · IP65








63150N | 150W | SMD 2835 | Dimmable | Aluminium

LED BUILT IN · 80 CRI · 1-10V DIMMABLE · CE · 5 YEAR · IP65








050114HA | Reflector for 63100N & 63150N | Aluminium

CE · 1





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100N/C	Black	Cool white	4000K	100W	13000lm	90°	230V	⏚	150cm	1	Complete with 400mA dimmable driver
63150N/C	Black	Cool white	4000K	150W	19500lm	90°	230V	⏚	150cm	1	Complete with 620mA dimmable driver

The Industrial IP65 LED UFO Range

Aluminium




63200N/C + 050114GB



63200N | 200W | SMD 2835 | Dimmable | Aluminium

LED BUILT IN | 80 CRI | 1-10V DIMMABLE | CE | 5 YEAR | IP65








050114GB | Diffuser for 63200N | PC

CE | 1








050114HB | Reflector for 63200N | Aluminium

CE | 1








050114FA | Reflector for 63200N | Aluminium

CE | 1






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63200N/C	Black	Cool white	4000K	200W	26000lm	90°	230V	⏚	150cm	1	Complete with 800mA dimmable driver





63150NL | 150W | SMD 2835 | DALI | Aluminium + PC


LED BUILT IN
80 CRI
DALI DIMMABLE
CE
5 YEAR
new
IP65





63240NL | 240W | SMD 2835 | DALI | Aluminium + PC

LED BUILT IN
80 CRI
DALI DIMMABLE
CE
5 YEAR
new
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63150NL/C	Black	Cool white	4000K	150W	22500lm	90°	230V	⏚	150cm	1	Complete with DALI 2 driver
63240NL/C	Black	Cool white	4000K	240W	36000lm	90°	230V	⏚	150cm	1	Complete with DALI 2 driver



63200N/V



63100N/V

The Industrial IP65 UFO Range


CCT V & PV



63100N | 60W / 80W / 100W | SMD 2835 | Aluminium + PC

new IP65

LED BUILT IN · 80 CRI · 3-STEP DIMMABLE · CCT V · PV · CE · 5 YEAR






63150N | 90W / 120W / 150W | SMD 2835 | Aluminium + PC

new IP65

LED BUILT IN · 80 CRI · 3-STEP DIMMABLE · CCT V · PV · CE · 5 YEAR






63200N | 120W / 160W / 200W | SMD 2835 | Aluminium + PC

new IP65

LED BUILT IN · 80 CRI · 3-STEP DIMMABLE · CCT V · PV · CE · 5 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100N/V	Black	CCT V	4000K-4700K-5700K	60W-80W-100W	15000lm@100W	90°	230V		150cm	1	Complete with driver
63150N/V	Black	CCT V	4000K-4700K-5700K	90W-120W-150W	22500lm@150W	90°	230V		150cm	1	Complete with driver
63200N/V	Black	CCT V	4000K-4700K-5700K	120W-160W-200W	30000lm@200W	90°	230V		150cm	1	Complete with driver



7030/AN/C

7022/G/D


The Floodlights



7020 | 150W | Rx7s 76mm | Die cast

ADJUSTABLE · CE · 2 YEAR · IP54 offer








7030 | 8x1W | LED | Die cast

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR · IP54 offer








7022 | 15x1W | LED | Die cast

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR · IP65 offer








7040 | 30W | COB LED | Die cast

LED BUILT IN · 70 CRI · ADJUSTABLE · CE · 2 YEAR · IP65 offer






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7020/G/5	Grey	-	-	150W	-	-	230V	⏚	-	8	-
7030/AN/C	Anthracite	Cool white	4000K	8x1W	600lm	20°	230V	⏚	-	12	Complete with driver
7022/G/D	Grey	Daylight	6000K	15x1W	1125lm	40°	100-240V	⏚	200cm	4	Complete with driver
7040/G/D	Grey	Daylight	6000K	30W	2100lm	120°	100-240V	⏚	100cm	5	Complete with driver






7028A | 10W | COB LED | Die cast








Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028A/AN/C	Anthracite	Cool white	4000K	10W	700lm	120°	100-240V	⏚	100cm	20	Complete with driver
7028A/AN/W	Anthracite	Warm white	3000K	10W	700lm	120°	100-240V	⏚	100cm	30	Complete with driver




AC LED Floodlights
30-50W



7028CB | 30W | SMD 2835 | Die cast + tempered glass











7028CC | 50W | SMD 2835 | Die cast + tempered glass







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028CB/B/C	Black	Cool white	4000K	30W	2700lm	110°	230V	⏚	30cm	20	AC LED
7028CC/B/C	Black	Cool white	4000K	50W	4500lm	110°	230V	⏚	30cm	10	AC LED




AC LED Floodlights
100-250W



7028CD | 100W | SMD 2835 | Die cast + tempered glass

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65








7028CE | 150W | SMD 2835 | Die cast + tempered glass

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65








7028CF/B/D

7028CF | 250W | SMD 2835 | Die cast + tempered glass

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65



7028CF/B/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028CD/B/C	Black	Cool white	4000K	100W	9000lm	110°	230V		30cm	5	AC LED
7028CE/B/C	Black	Cool white	4000K	150W	13500lm	110°	230V		30cm	4	AC LED
7028CF/B/C	Black	Cool white	4000K	250W	22500lm	110°	230V		30cm	2	AC LED
7028CF/B/D	Black	Daylight	6000K	250W	22500lm	110°	230V		30cm	4	AC LED

The Glass Face AC LED Floodlights




7028AG/B/C




7028AG/W/C


7028AG | 10W | SMD 3030 | Die cast + tempered glass



IP65 offer


CE 2 YEAR



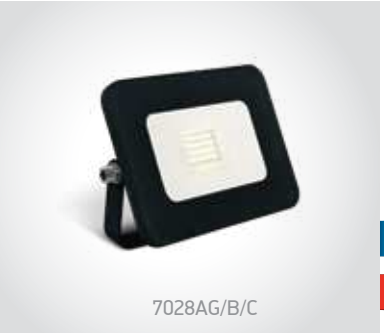


7028AG/B/C

7028AG | 10W | SMD 3030 | Die cast + tempered glass




IP65 offer

CE 2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028AG/W/C	White	Cool white	4000K	10W	800lm	100°	230V	⏚	50cm	20	AC LED
7028AG/B/C	Black	Cool white	4000K	10W	800lm	100°	230V	⏚	50cm	20	AC LED

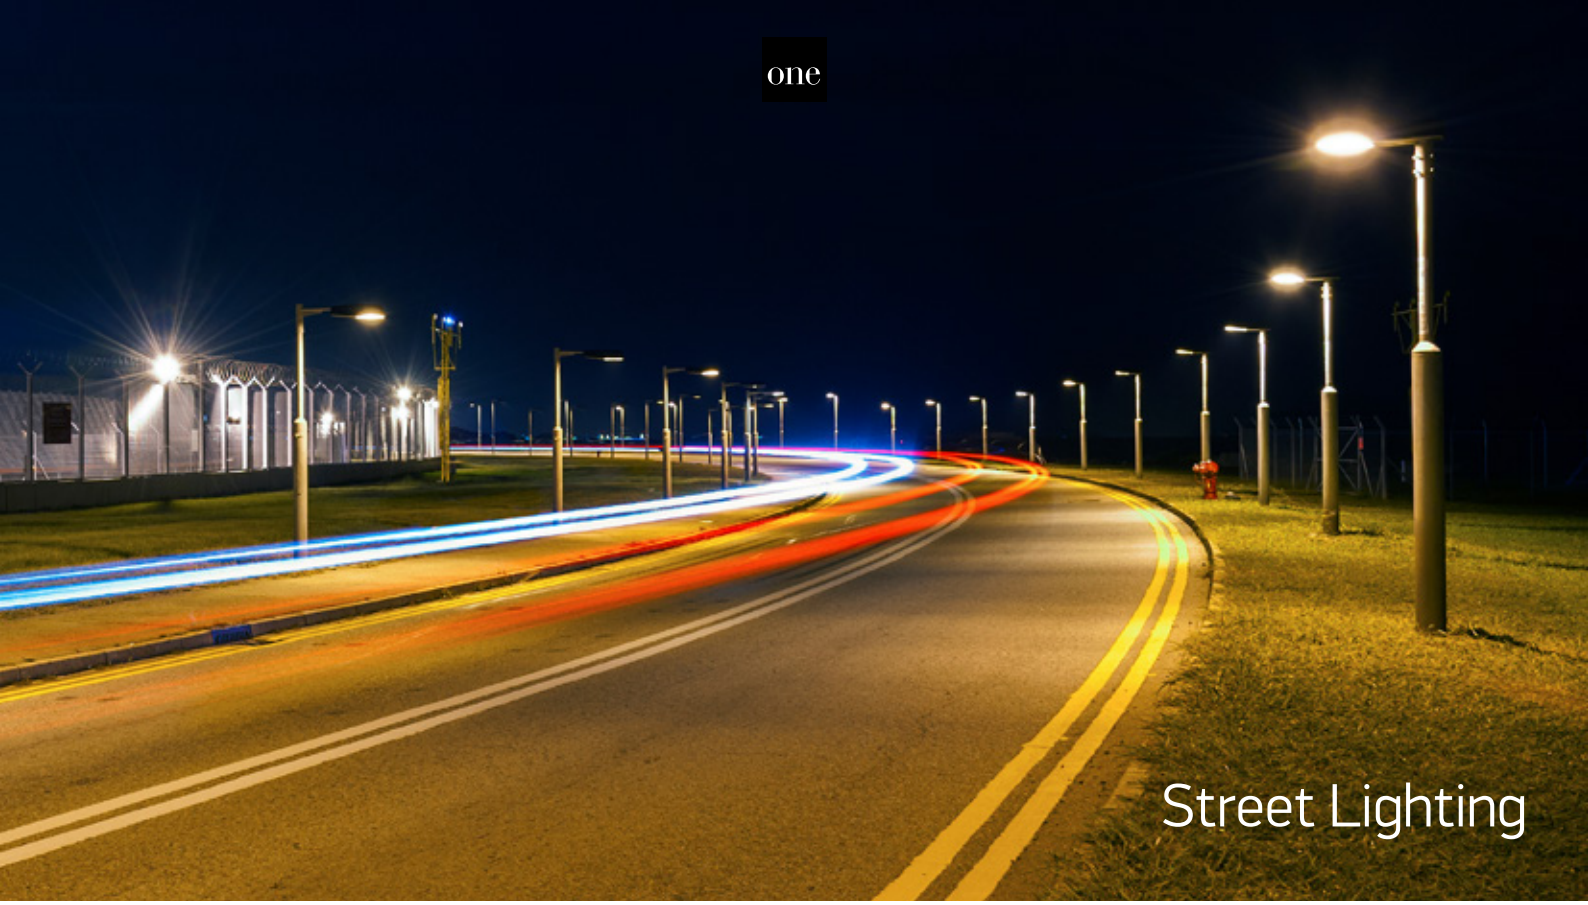




70114 | 50W | 64xSMD 2835 | Plastic + Glass

LED BUILT IN 80 CRI
IK08 CE 5 YEAR
IP66



Optional 90° adaptor.
Order code 050326.

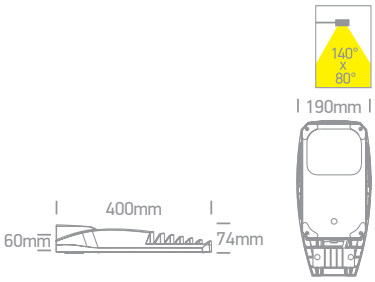




70116B | 75W | 96xSMD 3030 | Aluminium + glass

LED BUILT IN 80 CRI
IK08 CE 5 YEAR
IP66



Optional 90° adaptor.
Order code 050326.

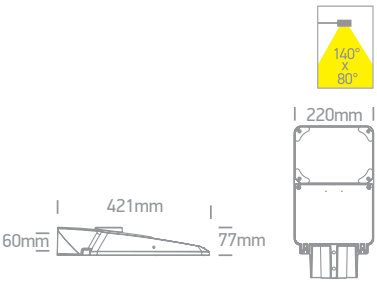




70116C | 120W | 126xSMD 3030 | Aluminium + glass

LED BUILT IN 80 CRI
IK08 CE 5 YEAR
IP66



Optional 90° adaptor.
Order code 050326.

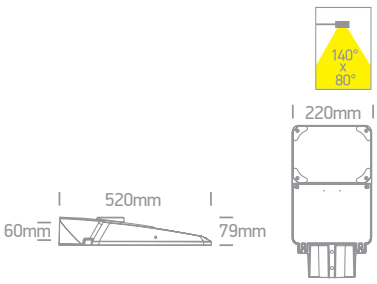

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70114/B/C	Black	Cool white	4000K	50W	6800lm	140°x80°	100-240V		500cm	6	Complete with 950mA driver
70114/B/W	Black	Warm white	3000K	50W	6800lm	140°x80°	100-240V		200cm	6	Complete with 950mA driver
70116B/G/C	Grey	Cool white	4000K	75W	10500lm	140°x80°	100-240V		200cm	1	Complete with 968mA driver
70116C/G/C	Grey	Cool white	4000K	120W	16800lm	140°x80°	100-240V		200cm	1	Complete with 1020mA driver

The LED Wall Washers
RGB



7055B/RGB | 24x1,5W | LED | RGB | Aluminium


Connect maximum 5pcs.

LED BUILT IN · DIMMABLE · ADJUSTABLE · CE · 5 YEAR · IP66



89100LP
DALI LED Controller 4 channel.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7055B/RGB	Grey	RGB	-	24x1,5W	-	30°	24V DC		100cm	12	Requires 24V DC driver



The LED Wall Washers
Single Colour




7055A | 12x1W | LED | Aluminium

Connect maximum 10pcs.

LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · CE · 5 YEAR · IP66










7055B | 24x1W | LED | Aluminium

Connect maximum 5pcs.

LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · CE · 5 YEAR · IP66







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7055A/C	Grey	Cool white	4000K	12x1W	850lm	60°x20°	24V DC		100cm	12	Requires 24V DC driver
7055A/W	Grey	Warm white	3000K	12x1W	850lm	60°x20°	24V DC		100cm	12	Requires 24V DC driver
7055B/C	Grey	Cool white	4000K	24x1W	1700lm	60°x20°	24V DC		100cm	12	Requires 24V DC driver
7055B/W	Grey	Warm white	3000K	24x1W	1700lm	60°x20°	24V DC		100cm	12	Requires 24V DC driver






7058A | 36W / 60W / 90W / 120W | SMD 2835 | Surface mounted | Aluminium

LED BUILT IN
80 CRI
IK08
CCT V
PV
CE
5 YEAR
IP65



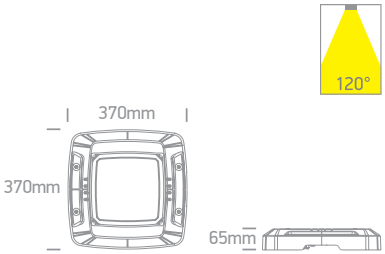




7058 | 120W | SMD 3030 | Surface mounted | Aluminium

Ideal for petrol stations, showrooms & warehouses.

LED BUILT IN
70 CRI
CE
5 YEAR
IP65



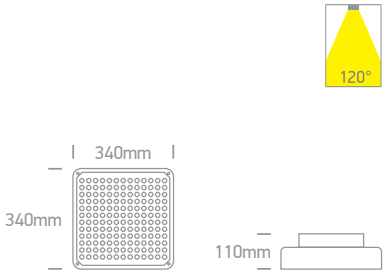




7058R | 120W | SMD 3030 | Recessed mounted | Aluminium

Ideal for petrol stations, showrooms & warehouses.

LED BUILT IN
70 CRI
CE
5 YEAR
IP65



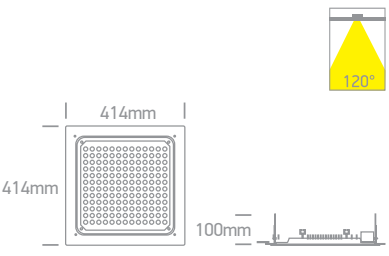

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
7058A/W/V	White	CCT V	3000K-4000K-5000K	36W-60W-90W-120W	18000lm@120W	120°	230V		-	-	1	Complete with PV driver
7058/W/D	White	Daylight	6000K	120W	10800lm	120°	100-240V		-	-	1	Complete with driver
7058R/W/C	White	Cool white	4000K	120W	10200lm	120°	100-240V		380x380mm	130mm	1	Complete with driver

The Industrial LED Lights
Die cast



7056A | 50W | SMD LED | Die cast

LED BUILT IN


80 CRI

CE

3 YEAR

IP65






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7056A/C	Black	Cool white	4000K	50W	4250lm	230V		6	Complete with driver


The LED Park Light
Die cast



70112 | 75W | LED | Die cast

LED BUILT IN · 80 CRI · IK08 · CE · 5 YEAR · IP66









70112 | 75W PV | LED | Die cast

new · LED BUILT IN · 80 CRI · IK08 · CCT V · PV · CE · 5 YEAR · IP66





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
70112/B/C	Black	Cool white	4000K	75W	9000lm	100-240V		150cm	1	Complete with 1730mA driver
70112/B/W	Black	Warm white	3000K	75W	9000lm	100-240V		150cm	1	Complete with 1730mA driver
70112/B/V	Black	CCT V	2700K-3300K-4000K	25W-40W-60W-75W	8250lm@75W	120-240V		150cm	1	Complete with PV driver



The LED Park Lantern
Die cast



70110 | 60W | LED | Die cast

LED BUILT IN


70 CRI

CE

5 YEAR

IP66









70105 | 50W | COB LED | Die cast

LED BUILT IN


70 CRI

CE

5 YEAR

IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70110/AN/C	Anthracite	Cool white	4000K	60W	4500lm	Assymetric	100-240V		100cm	1	Complete with driver
70105/AN/C	Anthracite	Cool white	4000K	50W	4000lm	60°	100-240V		500cm	1	Complete with driver


Exit

one

Emergency Lights

Pages 727-736

22



Ceiling Emergency Point



89412 | 3W | LED | Emergency 3Hrs Non-Maintained | Plastic

Self-test.


LED BUILT IN

2 YEAR

new

IP20





Order Code	Colour	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
89412/W	White	3W	300lm	155°	230V		20	Supplied with battery



Emergency LED Plafo




67366E/W/C

67366E | 12W | SMD 2835 | Emergency 3Hrs Maintained | PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP54



67366E/W/W






67280ANE | 15W | SMD 2835 | Emergency 3Hrs Maintained | Plastic

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65








67282ANE | 16W | SMD 2835 | Emergency 3Hrs Maintained | Plastic

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration		Notes
67366E/W/C	White	Cool white	4000K	12W	960lm	230V	⧈	3Hrs	20	Supplied with battery
67366E/W/W	White	Warm white	3000K	12W	960lm	230V	⧈	3Hrs	20	Supplied with battery
67280ANE/G/W	Grey	Warm white	3000K	15W	1000lm	230V	⧈	3Hrs	10	Supplied with battery
67282ANE/G/W	Grey	Warm white	3000K	16W	1280lm	230V	⧈	3Hrs	10	Supplied with battery

Emergency CCT V LED Plafo



67218E | 15W | SMD 2835 | Emergency 3Hrs Maintained | Plastic

LED BUILT IN

80 CRI

IK10


CCT V

3 YEAR

IP65



Optional ring.
Order code 67218R/B Black.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration		Notes
67218E/W/V	White	CCT V	3000K-4000K-6500K	15W	1600lm	230V	⧈	3Hrs	6	Supplied with battery



Emergency LED Recessed Spot



89002B | 1,5W | LED | Emergency 3Hrs Non-Maintained | Plastic

Self-test.


new

IP20

LED BUILT IN

2 YEAR







89002C | 3W | LED | Emergency 3Hrs Non-Maintained | Plastic

Self-test.


new

IP20

LED BUILT IN

2 YEAR








89002 | 3W | LED | Emergency 3Hrs Maintained | Recessed | Plastic + aluminium

IP20

LED BUILT IN

2 YEAR



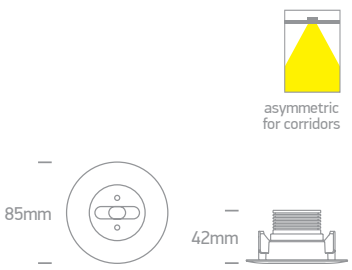

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Battery Duration				Notes
89002B	White	Cool light	4000K	1,5W	150lm	125°	230V		3Hrs	35mm	120mm	20	Supplied with battery
89002C	White	Cool light	4000K	3W	300lm	155°	230V		3Hrs	45mm	130mm	20	Supplied with battery
89002	White	Daylight	6000K	3W	150lm	Asymmetric	230V		3Hrs	72mm	120mm	12	Supplied with battery




Emergency LED Wall & Ceiling Signs




89408 | 3W | LED | Emergency 3Hrs Maintained | Auto monthly test | PC — Wall mounted.

LED BUILT IN · 2 YEAR · IP20



Supplied with 2 stickers.






89410 | 1,8W | LED | Emergency 3Hrs Maintained | Auto monthly test | PC — Ceiling/Wall mounted.

LED BUILT IN · 2 YEAR · IP20




Supplied with 4 stickers.






89406 | 1W | LED | Emergency 3Hrs Maintained — Ceiling/Wall mounted.

LED BUILT IN · 2 YEAR · IP44




Supplied with 3 stickers.






89406R | 1W | LED | Emergency 3Hrs Maintained | Recessed — Ceiling recessed.

LED BUILT IN · 2 YEAR · IP44



Supplied with 3 stickers.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Type	Battery Duration				Notes
89408/W	White	Daylight	6000K	3W	55lm	230V	□	LifePO4 3,2V 1,5Ah	3Hrs	-	-	10	Supplied with battery
89410/W	White	Daylight	6000K	1,8W	40lm	230V	□	LifePO4 3,2V 1,5Ah	3Hrs	-	-	6	Supplied with battery
89406/W	White	Daylight	6000K	1W	50lm	230V	□	Ni-Cd 3,6V 1,5Ah	3Hrs	-	-	12	Supplied with battery
89406R/W	White	Daylight	6000K	1W	50lm	230V	□	Ni-Cd 3,6V 1,5Ah	3Hrs	300x45mm	120mm	16	Supplied with battery

Emergency LED Wall & Ceiling





89404 | 5W | LED | Emergency 3Hrs Maintained | PC

LED BUILT IN


2 YEAR

IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class	Battery Type	Battery Duration		Notes
89404	White	Daylight	6000K	5W	230V		Li-FePO4 3,2V 1,5Ah	3Hrs	12	Supplied with battery

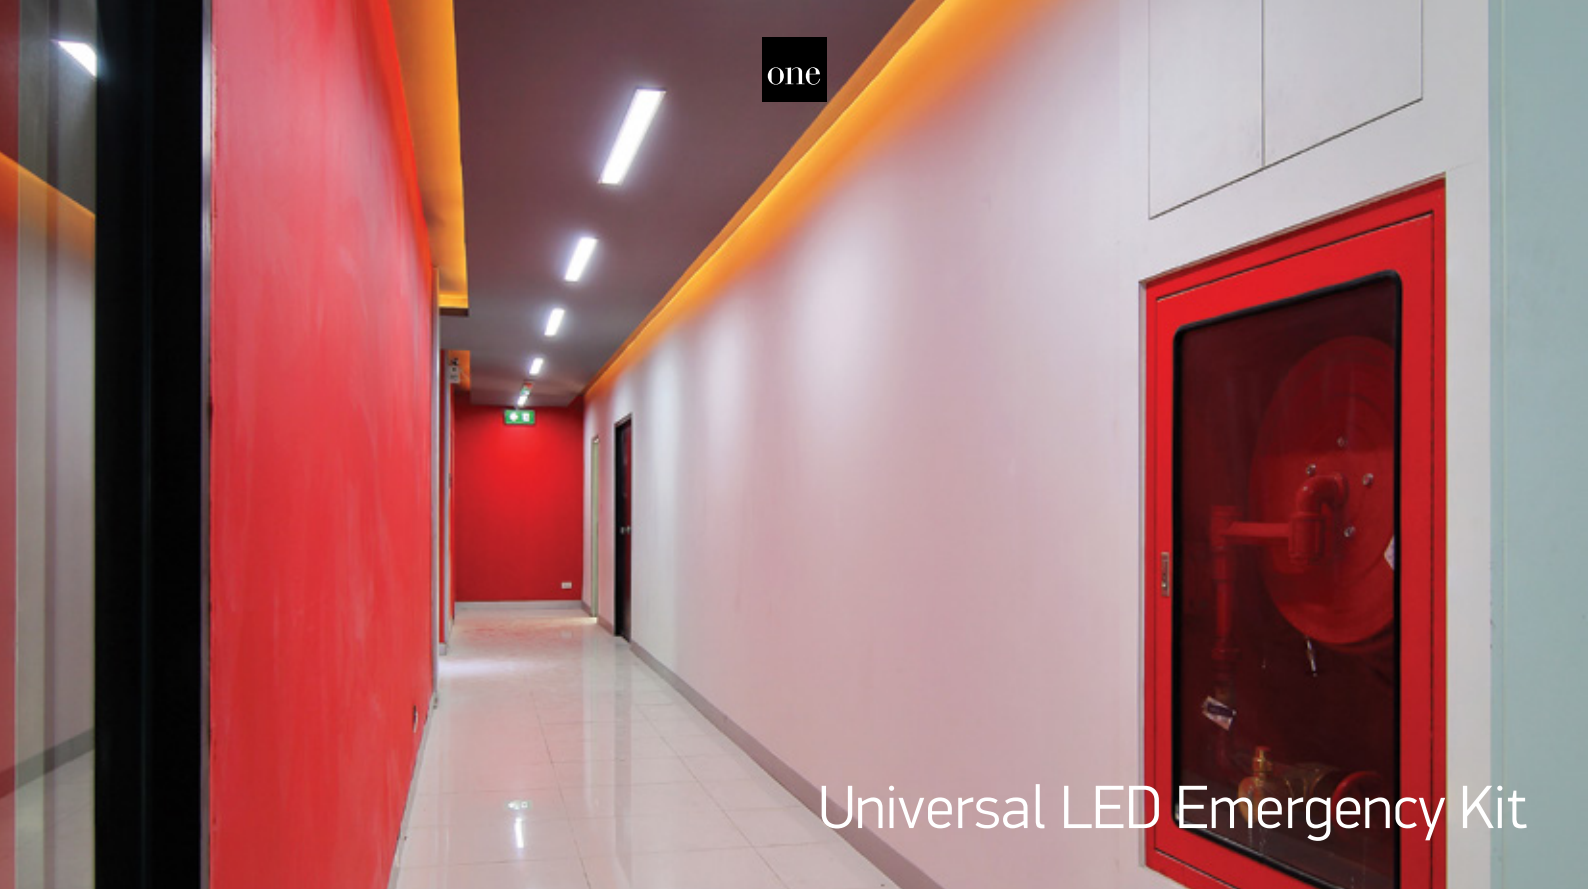

Universal LED Emergency Kit



89005A/EME | 5-50W | Built-in Emergency kit for LED fittings | Emergency 3Hrs Maintained


Use inside fittings.

2 YEAR

IP20



WIRING DIAGRAM

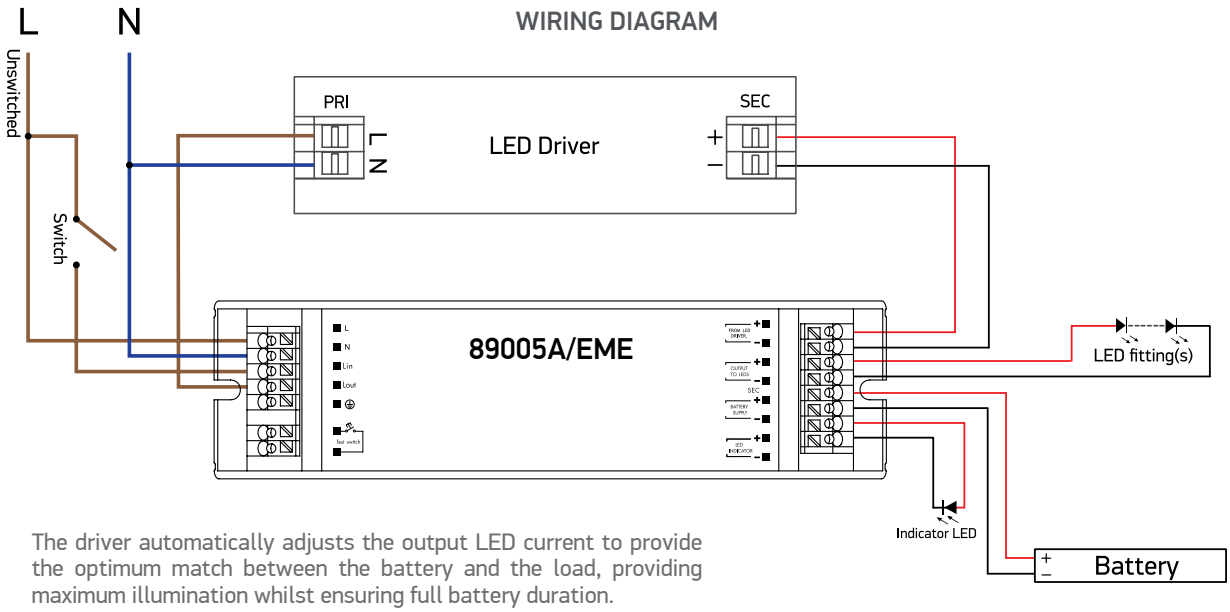

The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	60%	43%	30%	25%	20%	15%	12%	10%	9%	8%	7%	6%

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89005A/EME	230V	5-50W		Ni-Cd 3,6V 4,0Ah	24Hrs	3Hrs	12	Supplied with battery



Universal LED Emergency Kit




89005/EME | 5-50W | Emergency kit for LED Downlights and LED strips | Emergency 3Hrs Maintained

2 YEAR

IP20



WIRING DIAGRAM

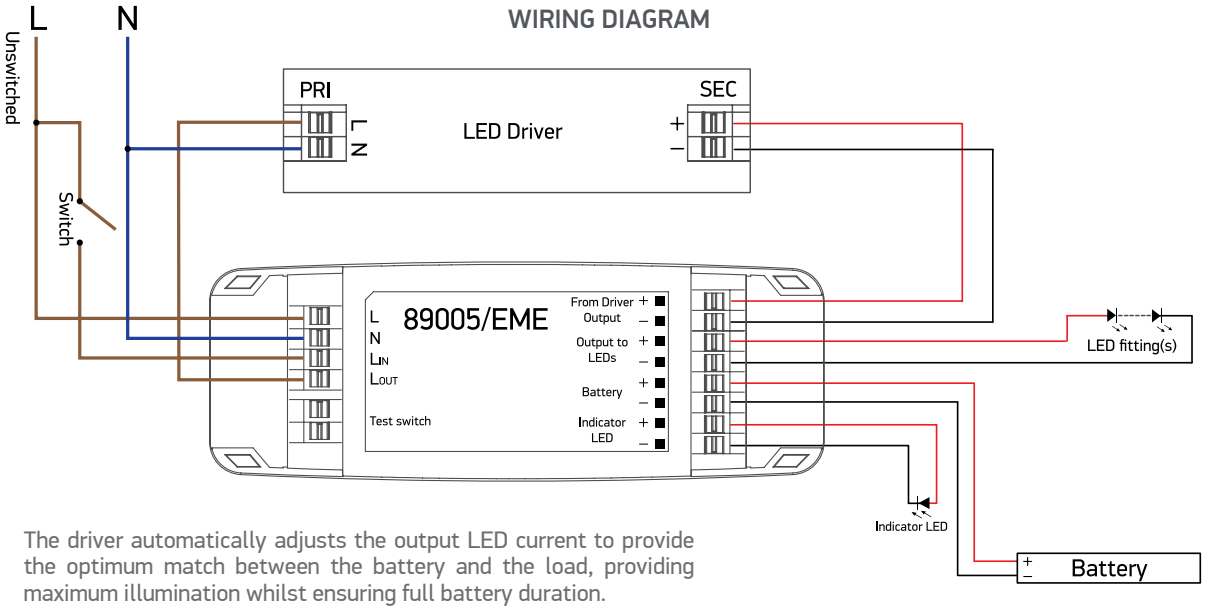


The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	60%	43%	30%	25%	20%	15%	12%	10%	9%	8%	7%	6%

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89005/EME	230V	5-50W		Ni-Mh 3,6V 4,0Ah	24Hrs	3Hrs	12	Supplied with battery

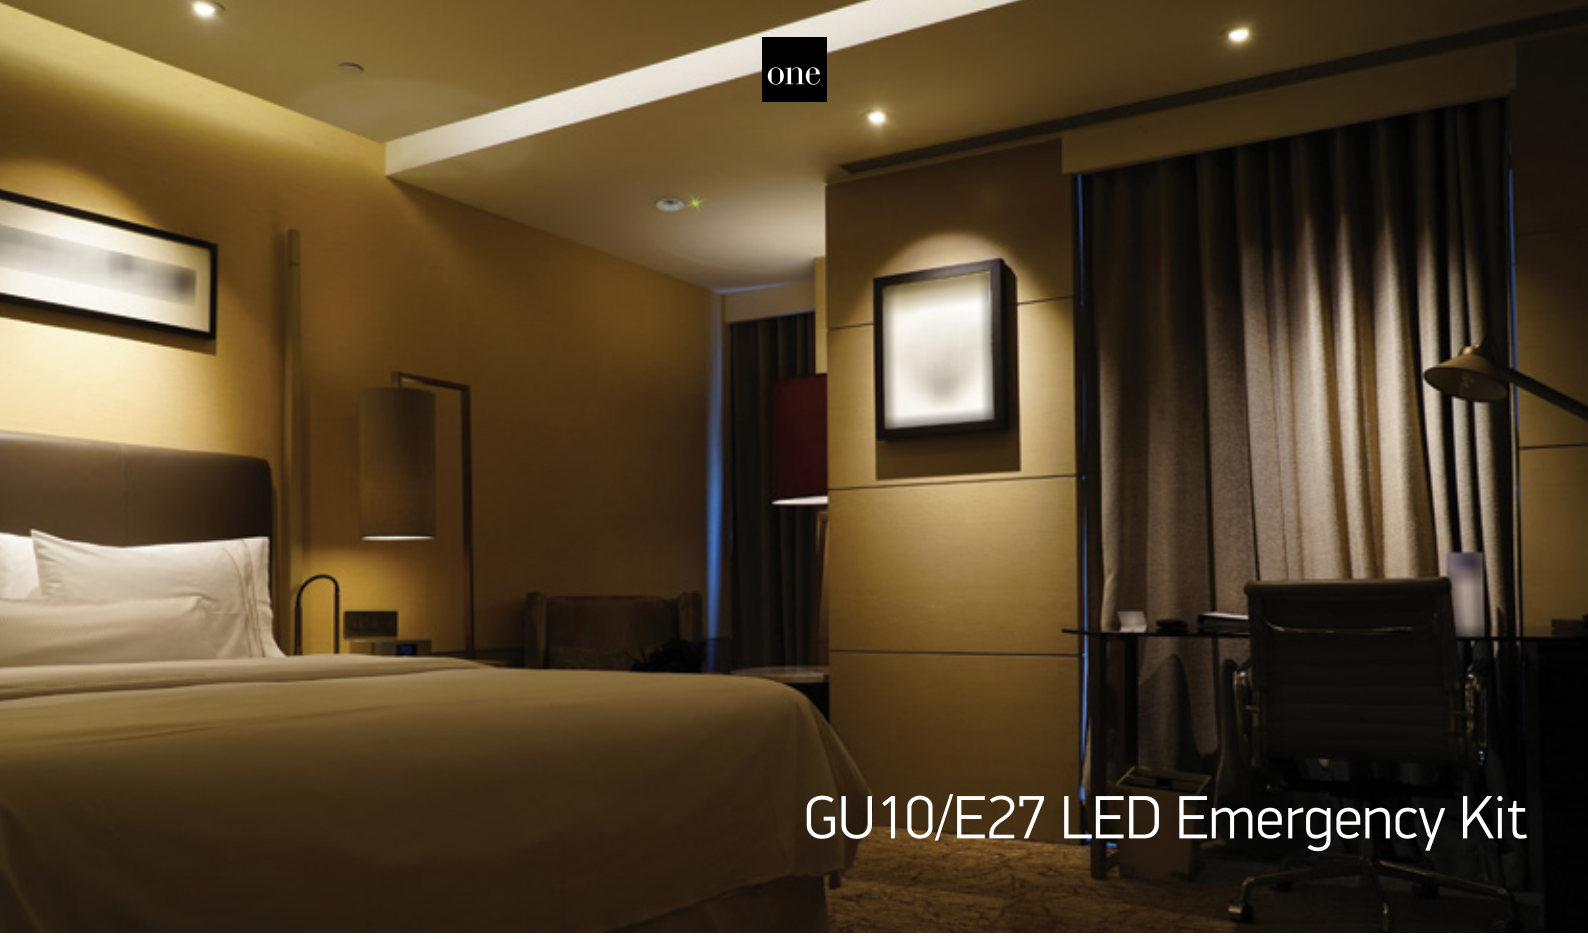

GU10/E27 LED Emergency Kit




89009/EME | 3-7W | Emergency kit for GU10/E27 LED | Emergency 3Hrs Maintained

Suitable for 7306CG lamp.


2 YEAR

IP20

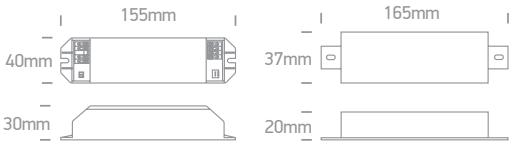


WIRING DIAGRAM

Maintained mode (Controlled by a switch)

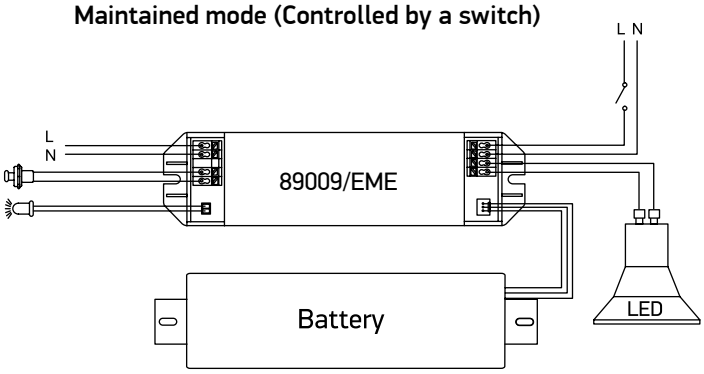

Non-maintained mode (Emergency only)

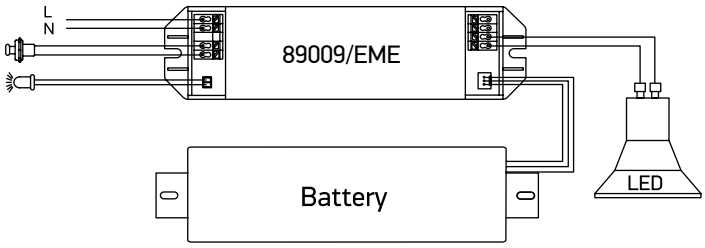

* This kit will only operate with GU10 & E27 LED lamps suitable for 180V DC power supply. Most of the lamps in the market today are compatible however we recommend to test suitability before purchasing the lamps. Suitable for 7306CG lamp.

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89009/EME	230V	3-7W	⧈	Ni-Cd 6,4V 3,0Ah	Max. 24Hrs	3Hrs	24	Supplied with battery




MR16 LED Emergency Kit



89002A | 3W | Emergency kit with MR16 LED module | Emergency 3Hrs Maintained


2 YEAR

IP20

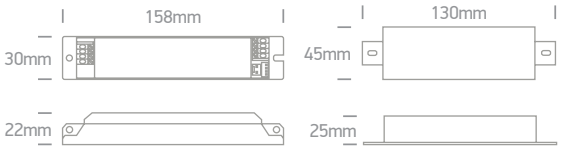


MAINTAINED MODE


* Driver 89004 must be ordered separately

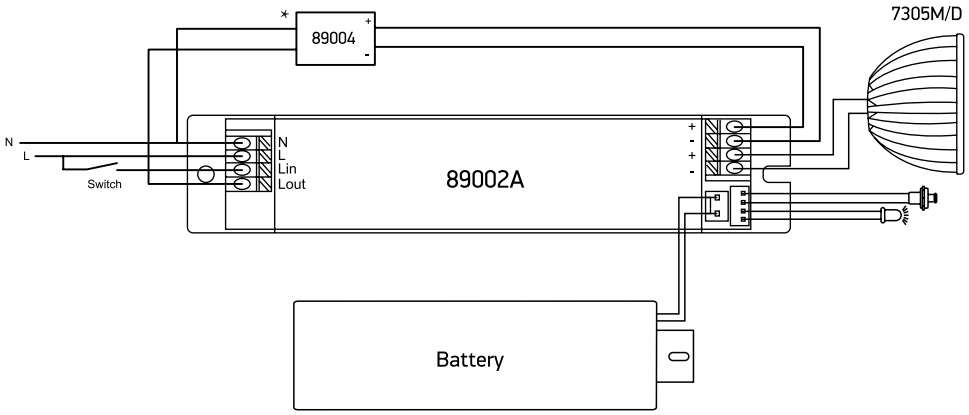


NON-MAINTAINED MODE

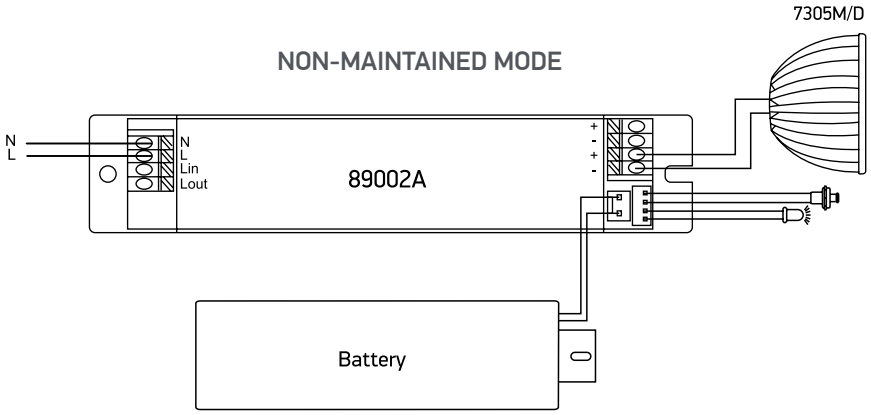

Order Code	Light Colour	CCT (K)	Watts	Input	Battery Type	Charge Period	Battery Duration		Notes
89002A	Daylight	6000K	3W	230V	Ni-Cd 4,8V 2,0Ah	24Hrs	3Hrs	24	Supplied with battery & MR16 LED module 7305M/D

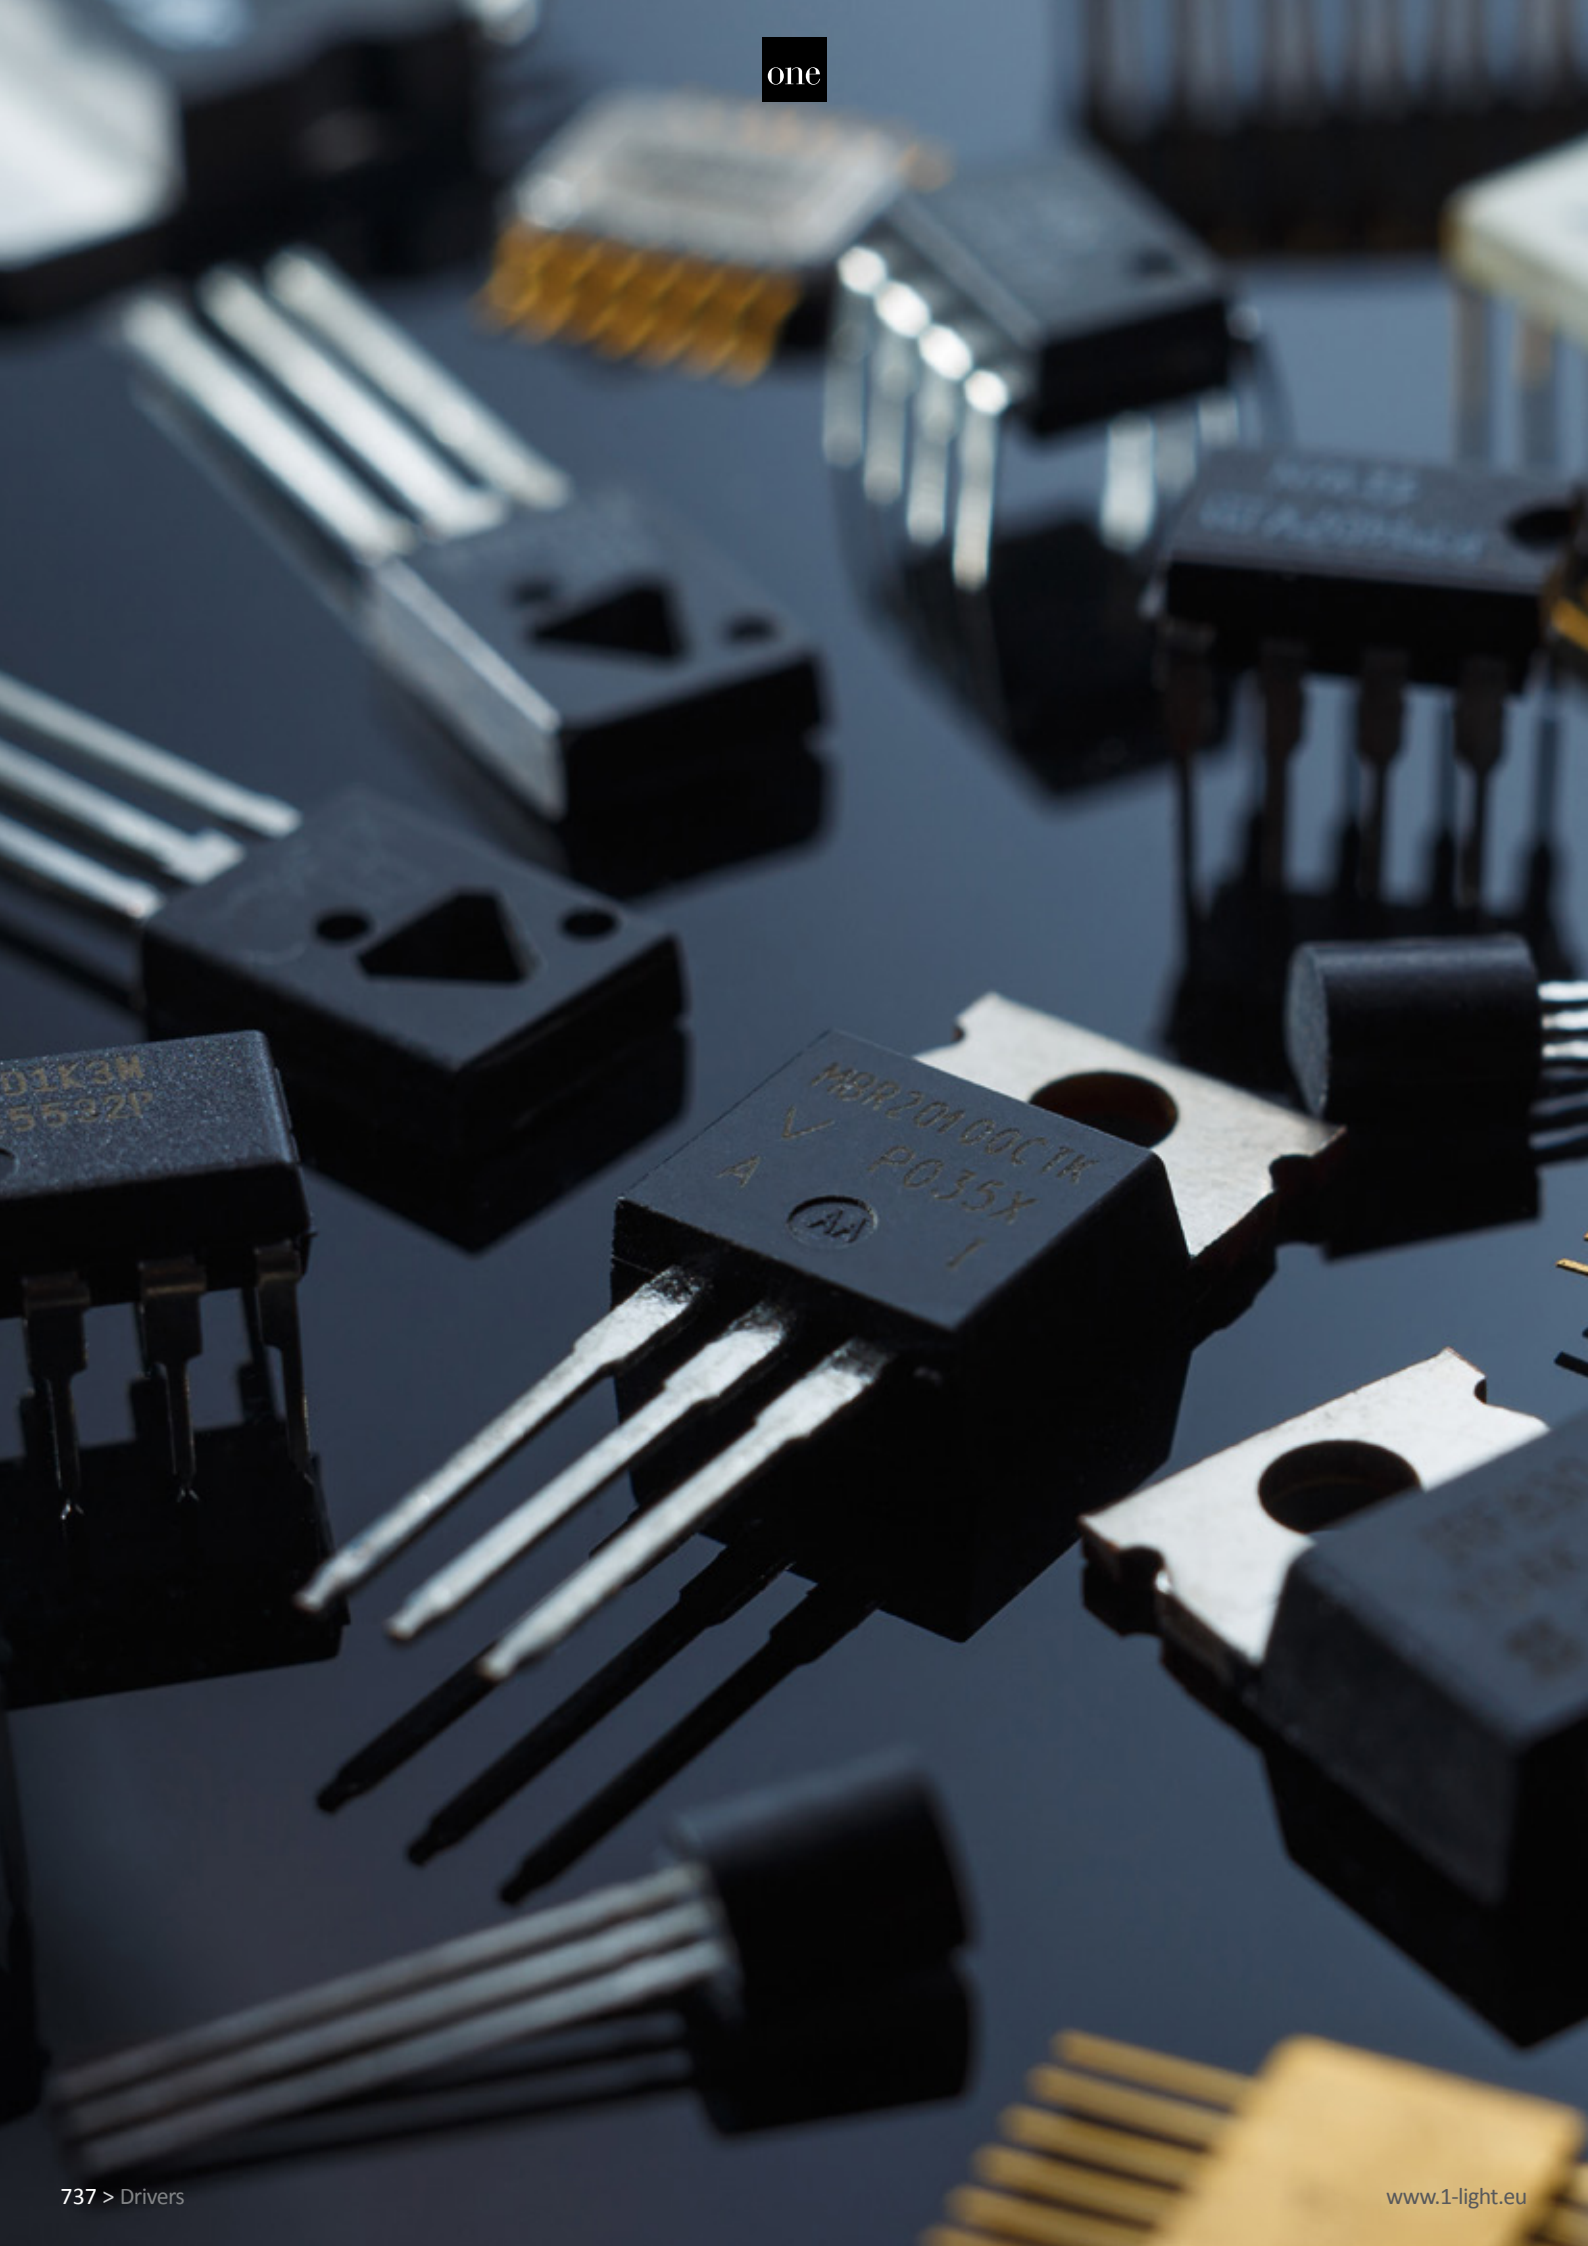
MBR20100CTK
V
A
P035X

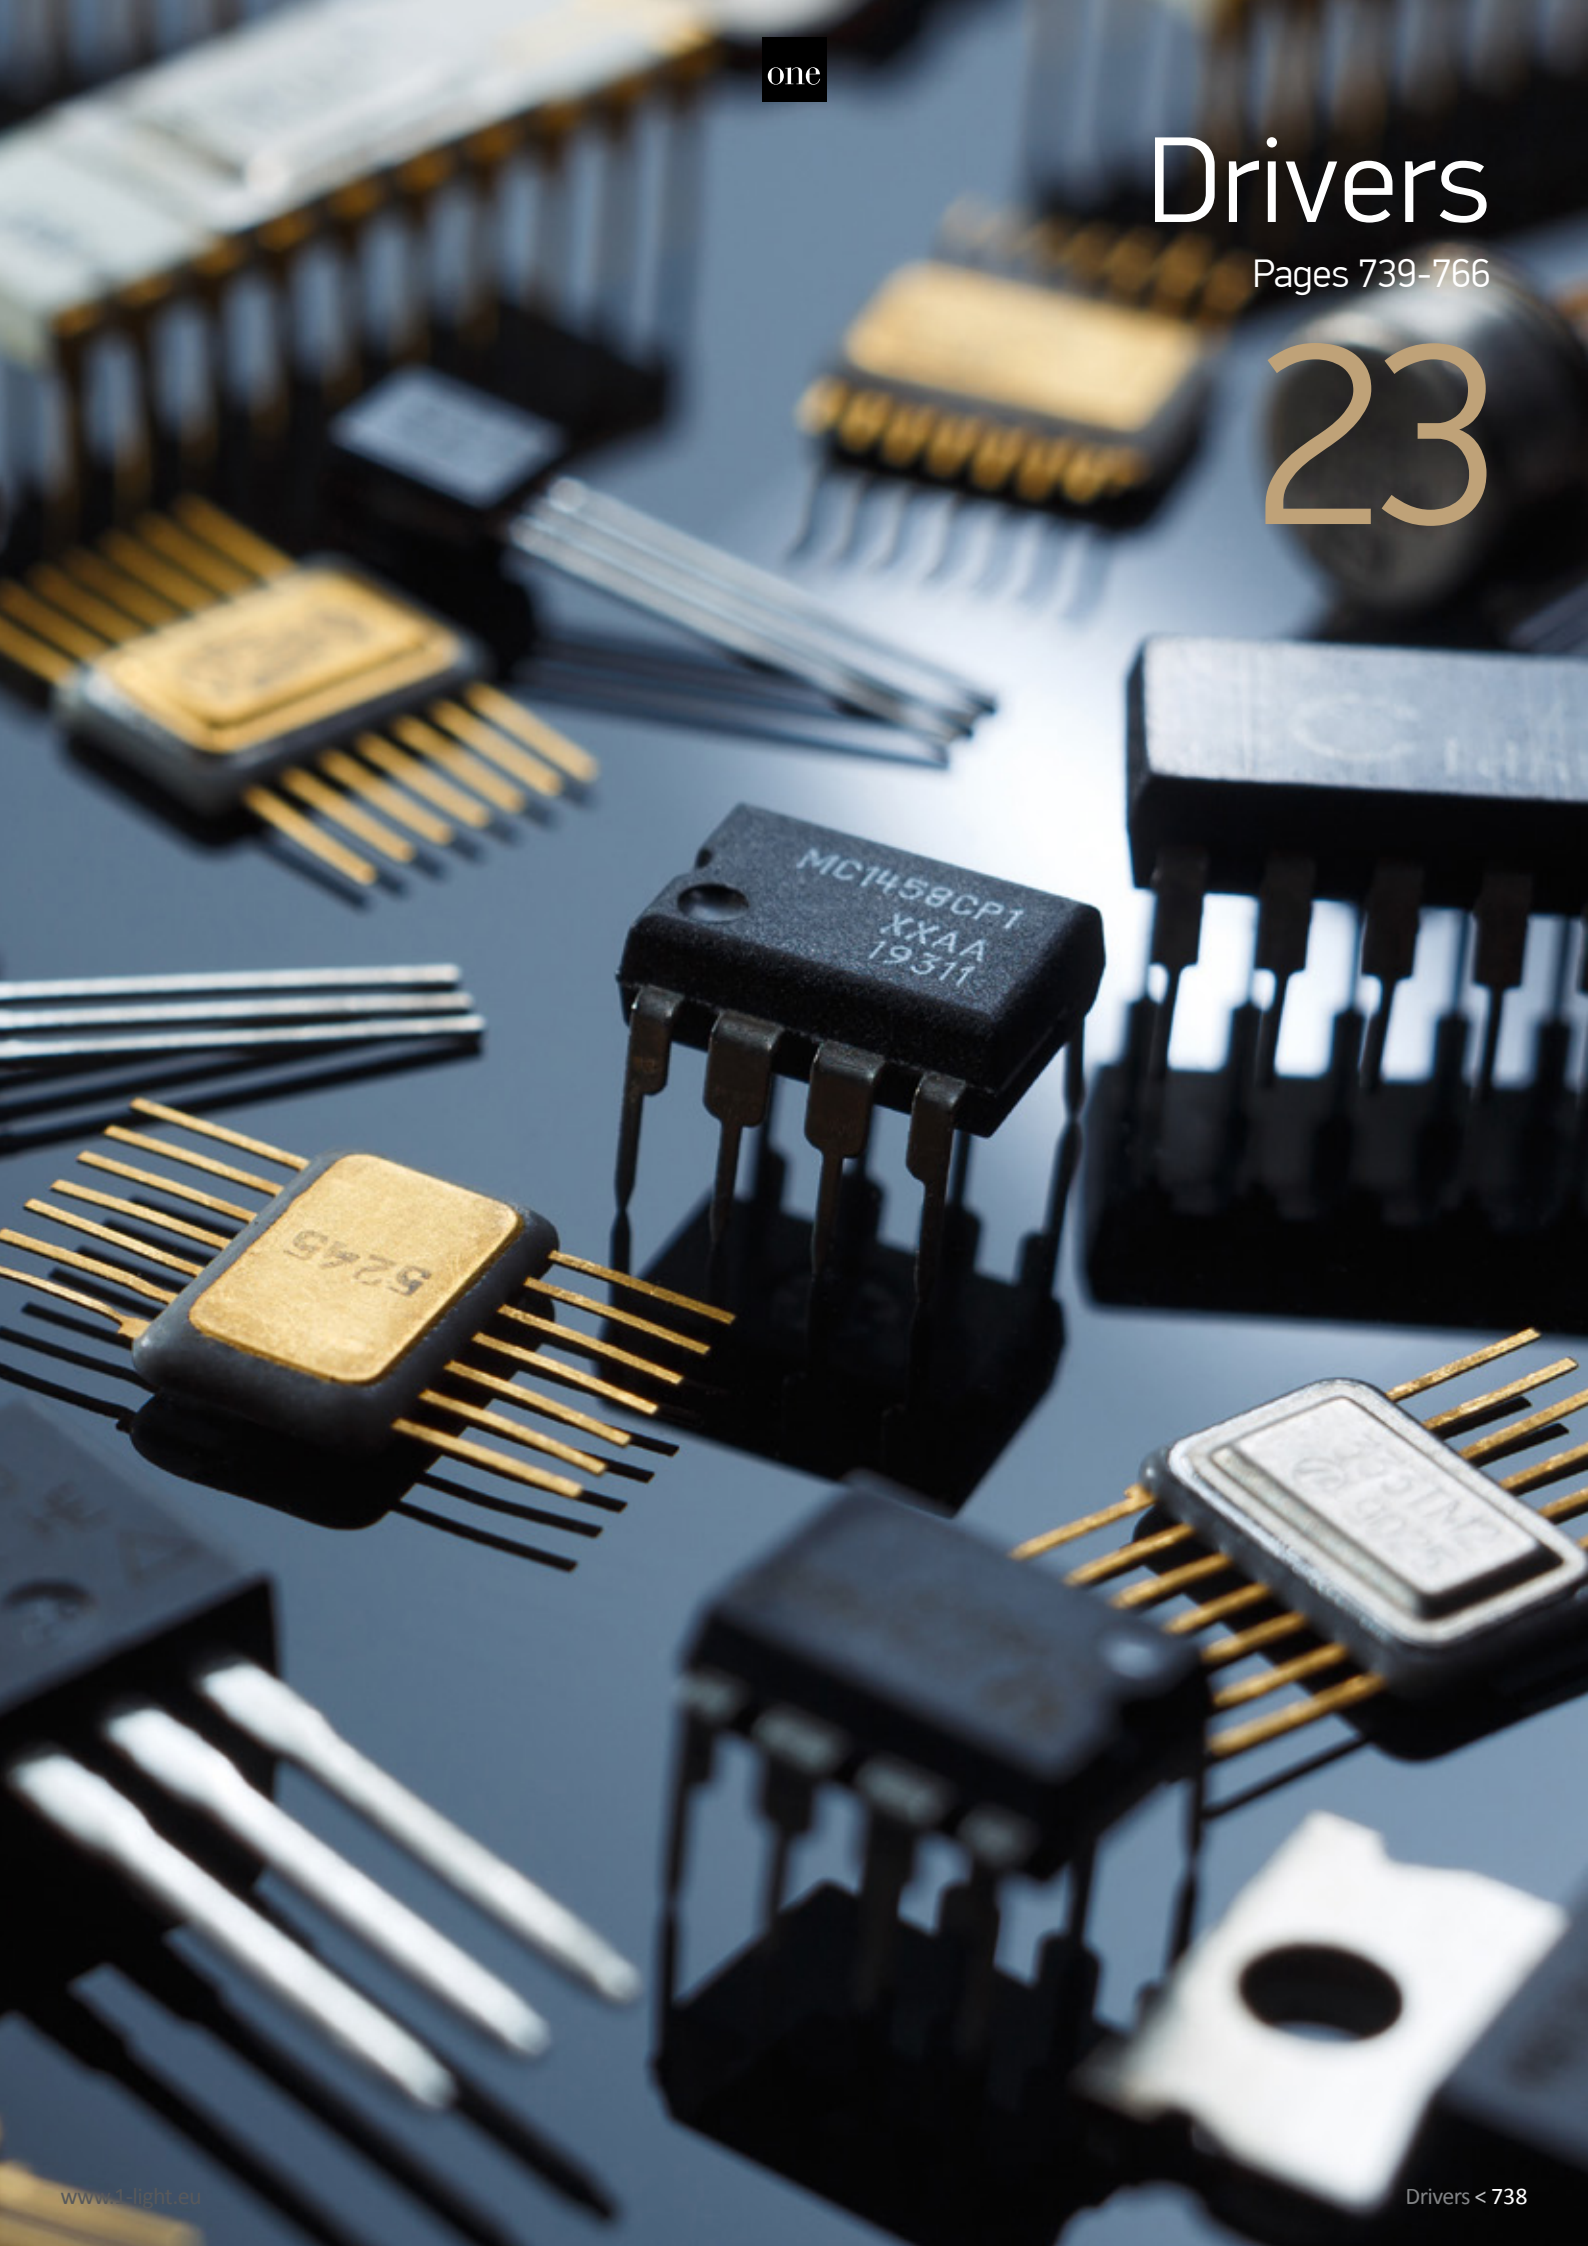
one
Drivers
Pages 739-766
23
MC1458CP1
XXAA
19311
5245

Mini Series
Constant current



89004 | 1-4W | 350mA

QUICK FIX · CE · 5 YEAR

IP66





89006P | 2-6W | 350mA

QUICK FIX · CE · 5 YEAR

IP66





89006PC | 1,5-6W | 500mA

QUICK FIX · CE · 5 YEAR

IP66





89004A | 2-4W | 700mA

QUICK FIX · CE · 5 YEAR

IP66





89006PA | 2-6W | 700mA

QUICK FIX · CE · 5 YEAR

IP66



Order Code	Input	Power	Output	Class	Dimmable		Notes
89004	230V	1-4W	350mA	⧈	NO	200	-
89006P	230V	2-6W	350mA	⧈	NO	100	-
89006PC	230V	1,5-6W	500mA	⧈	NO	100	-
89004A	230V	2-4W	700mA	⧈	NO	200	-
89006PA	230V	2-6W	700mA	⧈	NO	100	-

TRIAC Dimmable Mini Series

Constant current





89004T | 2-4W | 350mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP66





89007T | 3,5-7W | 350mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

new

IP20





89004AT | 2-4W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP66






89010AT | 5-10W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89004T	230V	2-4W	350mA	⧈	YES	200	Use TRIAC dimmer
89007T	230V	3,5-7W	350mA	⧈	YES	100	Use TRIAC dimmer
89004AT	230V	2-4W	700mA	⧈	YES	200	Use TRIAC dimmer
89010AT	230V	5-10W	700mA	⧈	YES	100	Use TRIAC dimmer

The 350mA Range

Constant current



89020

89015



89008 | 4-8W | 350mA

QUICK FIX 5 YEAR

IP20






89015 | 7-15W | 350mA

QUICK FIX 5 YEAR

IP20






89020 | 13-20W | 350mA

QUICK FIX 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89008	230V	4-8W	350mA	⧈	NO	100	-
89015	230V	7-15W	350mA	⧈	NO	100	-
89020	230V	13-20W	350mA	⧈	NO	100	-

The 500mA Range

Constant current



89015C



89020C



89015C | 7,5-15W | 500mA

QUICK FIX | CE | 5 YEAR

IP20





89020C | 10-20W | 500mA

QUICK FIX | CE | 5 YEAR

IP20





89030C | 20-30W | 500mA

QUICK FIX | CE | 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89015C	230V	7,5-15W	500mA	⧈	NO	100	-
89020C	230V	10-20W	500mA	⧈	NO	100	-
89030C	230V	20-30W	500mA	⧈	NO	100	-

The 700mA Range
Constant current





89008A | 4-8W | 700mA

QUICK FIX 5 YEAR

IP20





89015A | 7-15W | 700mA

QUICK FIX 5 YEAR

IP20






89030A | 15-30W | 700mA

QUICK FIX 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89008A	230V	4-8W	700mA	⧈	NO	100	-
89015A	230V	7-15W	700mA	⧈	NO	100	-
89030A	230V	15-30W	700mA	⧈	NO	100	-



High Power
Constant current



89048T | 32-50W | 1200mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20





89060 | 33-55W | 1300mA

QUICK FIX · CE · 3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89048T	230V	32-50W	1200mA	⧈	YES	1	Use TRIAC dimmer
89060	230V	33-55W	1300mA	⧈	NO	1	-

The TRIAC Dimmable Range
Adjustable constant current



89008UT | TRIAC Dimmable

Adjustable output using DIP switch.

TRIAC DIMMABLE · CE · 3 YEAR



IP20

Output Current	300mA	350mA
Output Power	3,6-6,6W	4,2-7,7W



89009UT | TRIAC Dimmable

Adjustable output using DIP switch.

TRIAC DIMMABLE · CE · 3 YEAR



new

IP20

Output Current	100mA	150mA	200mA	250mA	300mA	350mA
Output Power	0,9-4,2W	1,35-6,3W	1,8-8,4W	2,25-8,25W	2,7-8,1W	3,15-8,4W



89016UT | TRIAC Dimmable

Adjustable output using DIP switches.

TRIAC DIMMABLE · CE · 3 YEAR



IP20

Output Current	200mA	250mA	300mA	350mA
Output Power	5-8,4W	6,25-10,5W	7,5-12,6W	8,75-14W



89024UT | TRIAC Dimmable

Adjustable output using DIP switches.

TRIAC DIMMABLE · CE · 3 YEAR



IP20

Output Current	400mA	450mA	500mA	550mA
Output Power	10-16W	11,25-18W	12,5-20W	13,75-22W



89030UT | TRIAC Dimmable

Adjustable output using DIP switches.

TRIAC DIMMABLE · CE · 3 YEAR



IP20

Output Current	550mA	600mA	650mA	700mA
Output Power	13,75-22W	15-24W	16,25-26W	17,5-28W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89008UT	230V	Refer to table	Adjustable	⧈	YES	90	Use TRIAC dimmer
89009UT	230V	Refer to table	Adjustable	⧈	YES	126	Use TRIAC dimmer
89016UT	230V	Refer to table	Adjustable	⧈	YES	90	Use TRIAC dimmer
89024UT	230V	Refer to table	Adjustable	⧈	YES	72	Use TRIAC dimmer
89030UT	230V	Refer to table	Adjustable	⧈	YES	72	Use TRIAC dimmer


TRIAC Dimmable Range
Constant current



89015T | 7-15W | 350mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20





89015CT | 7,5-15W | 500mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20






89006AT | 3,5-6W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20






89008AT | 6-8W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

new

IP20





89015AT | 7-15W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20





89040AT | 21-40W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR


IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89015T	230V	7-15W	350mA	☐	YES	100	Use TRIAC dimmer
89015CT	230V	7,5-15W	500mA	☐	YES	100	Use TRIAC dimmer
89006AT	230V	3,5-6W	700mA	☐	YES	100	Use TRIAC dimmer
89008AT	230V	6-8W	700mA	☐	YES	100	Use TRIAC dimmer
89015AT	230V	7-15W	700mA	☐	YES	100	Use TRIAC dimmer
89040AT	230V	21-40W	700mA	☐	YES	50	Use TRIAC dimmer




Marine Drivers for Yachts
Constant current

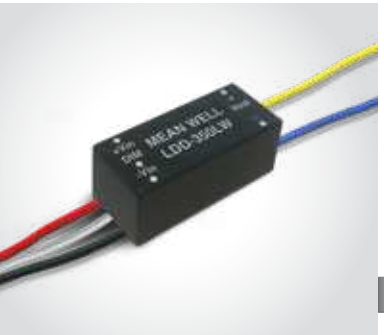


89028M | 9-36V DC | LED Marine driver | 350mA | PWM Dimmable

DIMMABLE · 3 YEAR

IP20




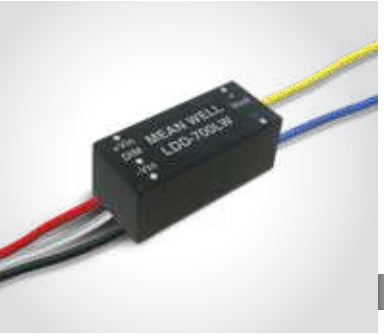

89028AM | 9-36V DC | LED Marine driver | 700mA | PWM Dimmable

DIMMABLE · 3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89028M	9-36V DC	4,2W@12V / 8,4W@24V / 11,2W@36V	350mA	III	YES	240	-
89028AM	9-36V DC	8,4W@12V / 16,8W@24V / 22,4W@36V	700mA	III	YES	240	-



89075W

89030W


The 12V DC Range
Constant voltage



89015W | 15W | 12V DC

CE 5 YEAR

IP20





89030W | 30W | 12V DC

CE 5 YEAR

IP20





89075W | 75W | 12V DC

CE 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89015W	230V	15W	12V DC	⧈	NO	100	-
89030W	230V	30W	12V DC	⧈	NO	50	-
89075W	230V	75W	12V DC	⧈	NO	25	-

The 24V DC Range
Constant voltage



89030V

89015V



89015V | 15W | 24V DC

5 YEAR

IP20






89030V | 30W | 24V DC

5 YEAR

IP20





89075V | 75W | 24V DC

5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89015V	230V	15W	24V DC	⧈	NO	100	-
89030V	230V	30W	24V DC	⧈	NO	50	-
89075V	230V	75W	24V DC	⧈	NO	25	-

The 24V DC Range High Power
Constant voltage





89100V | 100W | 24V DC

5 YEAR

IP20





89150V | 150W | 24V DC

5 YEAR

IP20





89200V | 200W | 24V DC

5 YEAR

IP20







89320V | 320W | 24V DC

5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100V	230V	100W	24V DC	⧈	NO	20	-
89150V	230V	150W	24V DC	⧈	NO	25	-
89200V	230V	200W	24V DC	⧈	NO	20	-
89320V	230V	320W	24V DC	⧈	NO	20	-

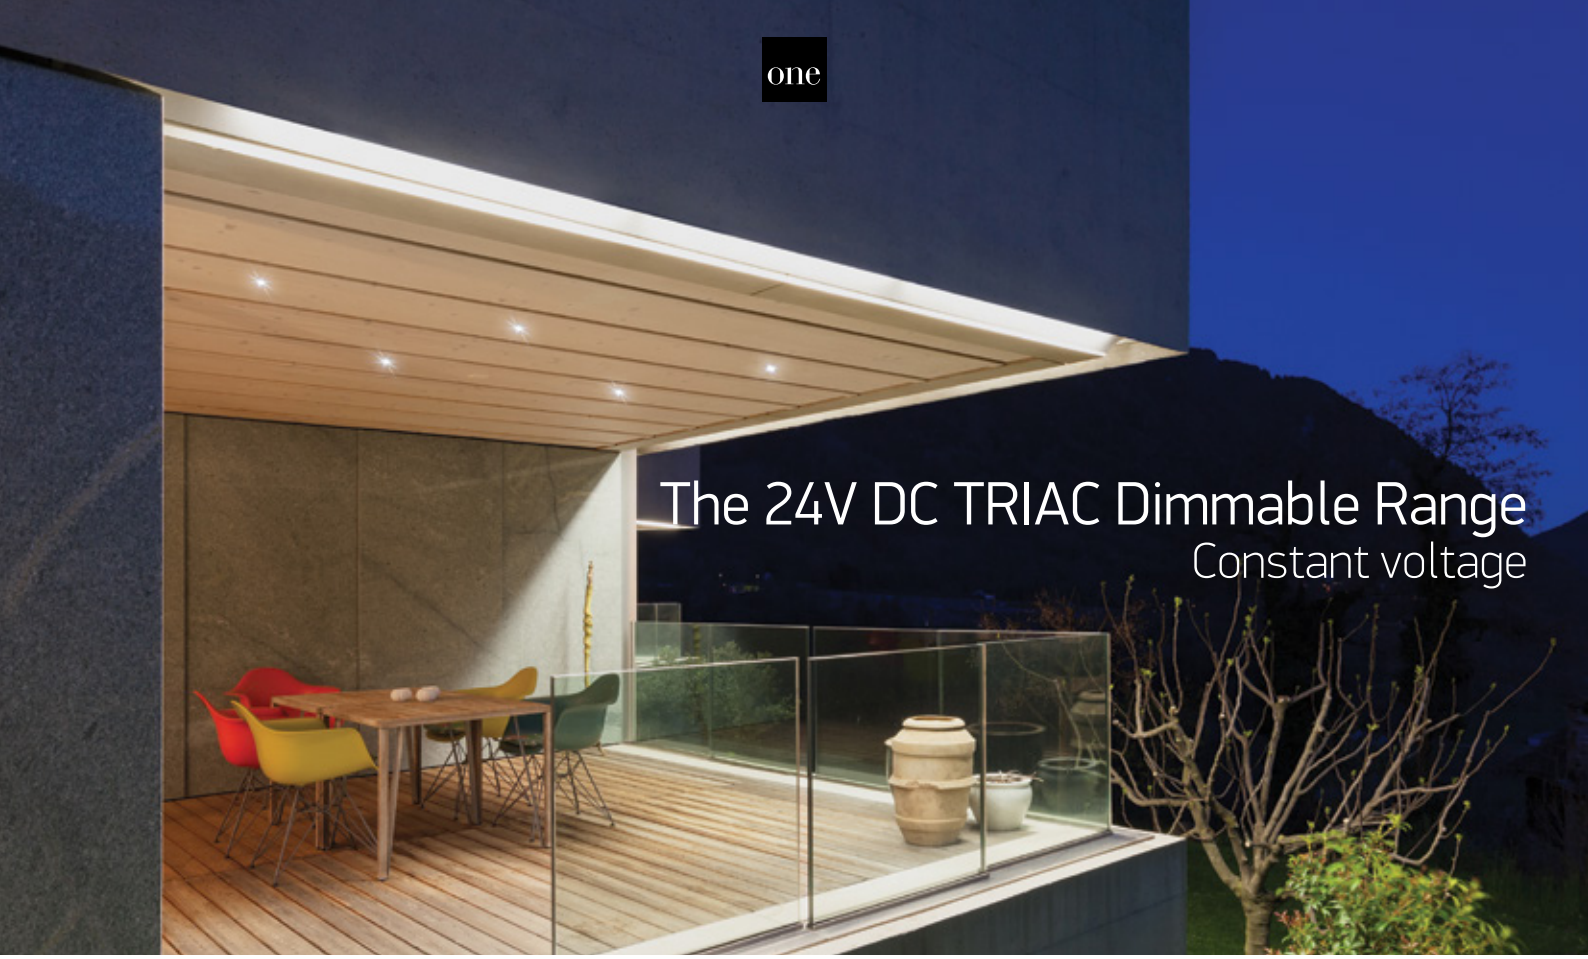

The 24V DC TRIAC Dimmable Range
Constant voltage



89040VT | 40W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

IP20





89050VT | 12-50W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

new

IP20





89075VT | 10-75W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89040VT	230V	40W	24V DC	⧈	YES	50	Use TRIAC dimmer
89050VT	230V	12-50W	24V DC	⧈	YES	20	Use TRIAC dimmer
89075VT	230V	10-75W	24V DC	⧈	YES	20	Use TRIAC dimmer



89100VT

89040VT

The 24V DC TRIAC Dimmable Range

Constant voltage



89100VT | 20-100W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE | CE | 5 YEAR

IP20





89150VT | 20-150W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE | CE | 5 YEAR

new

IP20





89200VT | 75-200W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE | CE | 5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100VT	230V	20-100W	24V DC	⧈	YES	20	Use TRIAC dimmer
89150VT	230V	20-150W	24V DC	⧈	YES	15	Use TRIAC dimmer
89200VT	230V	75-200W	24V DC	⧈	YES	15	Use TRIAC dimmer


The 24V DC Open Range
Constant voltage




89060VN | 60W | 24V DC

CE 3 YEAR

IP20




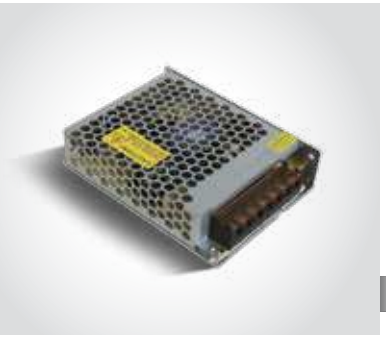

89100VN | 100W | 24V DC

CE 3 YEAR

IP20






89150VN | 150W | 24V DC

CE 3 YEAR

IP20






89200VN | 200W | 24V DC

CE 3 YEAR

IP20






89350VN | 350W | 24V DC

Cooling fan.

CE 3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89060VN	100-240V	60W	24V DC	⏚	NO	66	-
89100VN	100-240V	100W	24V DC	⏚	NO	42	-
89150VN	100-240V	150W	24V DC	⏚	NO	40	-
89200VN	230V	200W	24V DC	⏚	NO	40	-
89350VN	100-240V	350W	24V DC	⏚	NO	27	Cooling fan



89200VND

89100VND

The 24V DC Open Range Dimmable
Constant voltage



89100VND | 100W | 24V DC | TRIAC & 1-10V Dimmable

TRIAC DIMMABLE · 1-10V DIMMABLE · CE · 3 YEAR

IP20





89200VND | 200W | 24V DC | TRIAC & 1-10V Dimmable

TRIAC DIMMABLE · 1-10V DIMMABLE · CE · 3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100VND	230V	100W	24V DC	⏚	YES	60	TRIAC & 1-10V
89200VND	230V	200W	24V DC	⏚	YES	40	TRIAC & 1-10V



89030VL | 30W | 24V DC

Suitable for LED profiles on page 246, 247, 248.

5 YEAR

IP20





89060VL | 60W | 24V DC

Suitable for LED profiles on page 246, 247, 248.

5 YEAR

IP20





89075VL | 75W | 24V DC

Suitable for LED profiles on page 246, 247, 248.

5 YEAR

IP20





89100VL | 100W | 24V DC

Suitable for LED profiles on page 246, 247, 248.

5 YEAR

IP20






89150VL | 150W | 24V DC

Suitable for LED profiles on page 246, 247, 248.

5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89030VL	230V	30W	24V DC	☐	NO	100	-
89060VL	230V	60W	24V DC	☐	NO	50	-
89075VL	230V	75W	24V DC	☐	NO	50	-
89100VL	230V	100W	24V DC	☐	NO	50	-
89150VL	230V	150W	24V DC	☐	NO	25	-

The 24V DC Slim Range
Constant voltage



89240VL | 240W | 24V DC

Suitable for LED profiles on page 246, 247, 248.

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89240VL	230V	240W	24V DC		NO	50	-


The 24V DC Slim
Push to DIM



89060VLD | 60W | 24V DC | Push to DIM Dimmable

Suitable for LED profiles on page 246, 247, 248.

IP20



Order Code	Input	Power	Output	Dimmable		Notes
89060VLD	230V	60W	24V DC	YES	50	Push to DIM

The 24V DC Slim Range
TRIAC Dimmable



89100VLT | 20-100W | 24V DC | TRIAC Dimmable

Suitable for LED profiles on page 246, 247, 248.

new

IP20





89150VLT | 30-150W | 24V DC | TRIAC Dimmable

Suitable for LED profiles on page 246, 247, 248.

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100VLT	230V	20-100W	24V DC		YES	20	Use TRIAC dimmer
89150VLT	230V	30-150W	24V DC		YES	20	Use TRIAC dimmer

The 24V DC Slim DALI Dimmable
Constant voltage



89150VLL

89100VLL



89100VLL | 10-100W | 24V DC | DALI & Push to DIM Dimmable

Suitable for LED profiles on page 246, 247, 248.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

IP20





89150VLL | 15-150W | 24V DC | DALI & Push to DIM Dimmable

Suitable for LED profiles on page 246, 247, 248.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

IP20





89240VLL | 24-240W | 24V DC | DALI & Push to DIM Dimmable

Suitable for LED profiles on page 248.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100VLL	230V	10-100W	24V DC	⧈	YES	20	DALI & Push to DIM
89150VLL	230V	15-150W	24V DC	⧈	YES	20	DALI & Push to DIM
89240VLL	230V	24-240W	24V DC	⧈	YES	20	DALI & Push to DIM




The DIN RAIL Drivers



89060VR | 60W | DIN RAIL driver 24V DC

3 YEAR

IP20






89090VR | 90W | DIN RAIL driver 24V DC

3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89060VR	100-240V	60W	24V DC	⧈	NO	50	-
89090VR	100-240V	90W	24V DC	⧈	NO	50	-

The 24V DC Dimmable Range
Push to DIM & 1-10V



89030VD | 30W | 24V DC | Push to DIM & 1-10V Dimmable

PUSH TO DIM | 1-10V DIMMABLE | 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89030VD	230V	30W	24V DC	⧈	YES	20	Push to DIM & 1-10V



The 24V DC Waterproof IP67 Range

Constant voltage



89100VP | 100W | 24V DC

3 YEAR

IP67





89150VP | 150W | 24V DC

3 YEAR

IP67






89200VP | 200W | 24V DC

3 YEAR

IP67






89300VP | 300W | 24V DC

3 YEAR

IP67



Order Code	Input	Power	Output	Class		Dimmable		Notes
89100VP	230V	100W	24V DC		100cm	NO	36	-
89150VP	230V	150W	24V DC		100cm	NO	35	-
89200VP	230V	200W	24V DC		100cm	NO	32	-
89300VP	230V	300W	24V DC		100cm	NO	20	-



The 24V DC Waterproof IP67 Range
DALI & Push to DIM



89150VPL | 15-150W | 24V DC | DALI & Push to DIM Dimmable

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR


new · IP67




89240VPL | 24-240W | 24V DC | DALI & Push to DIM Dimmable


PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

new · IP67





Order Code	Input	Power	Output	Class		Dimmable		Notes
89150VPL	230V	15-150W	24V DC		100cm	YES	10	-
89240VPL	230V	24-240W	24V DC		100cm	YES	10	-

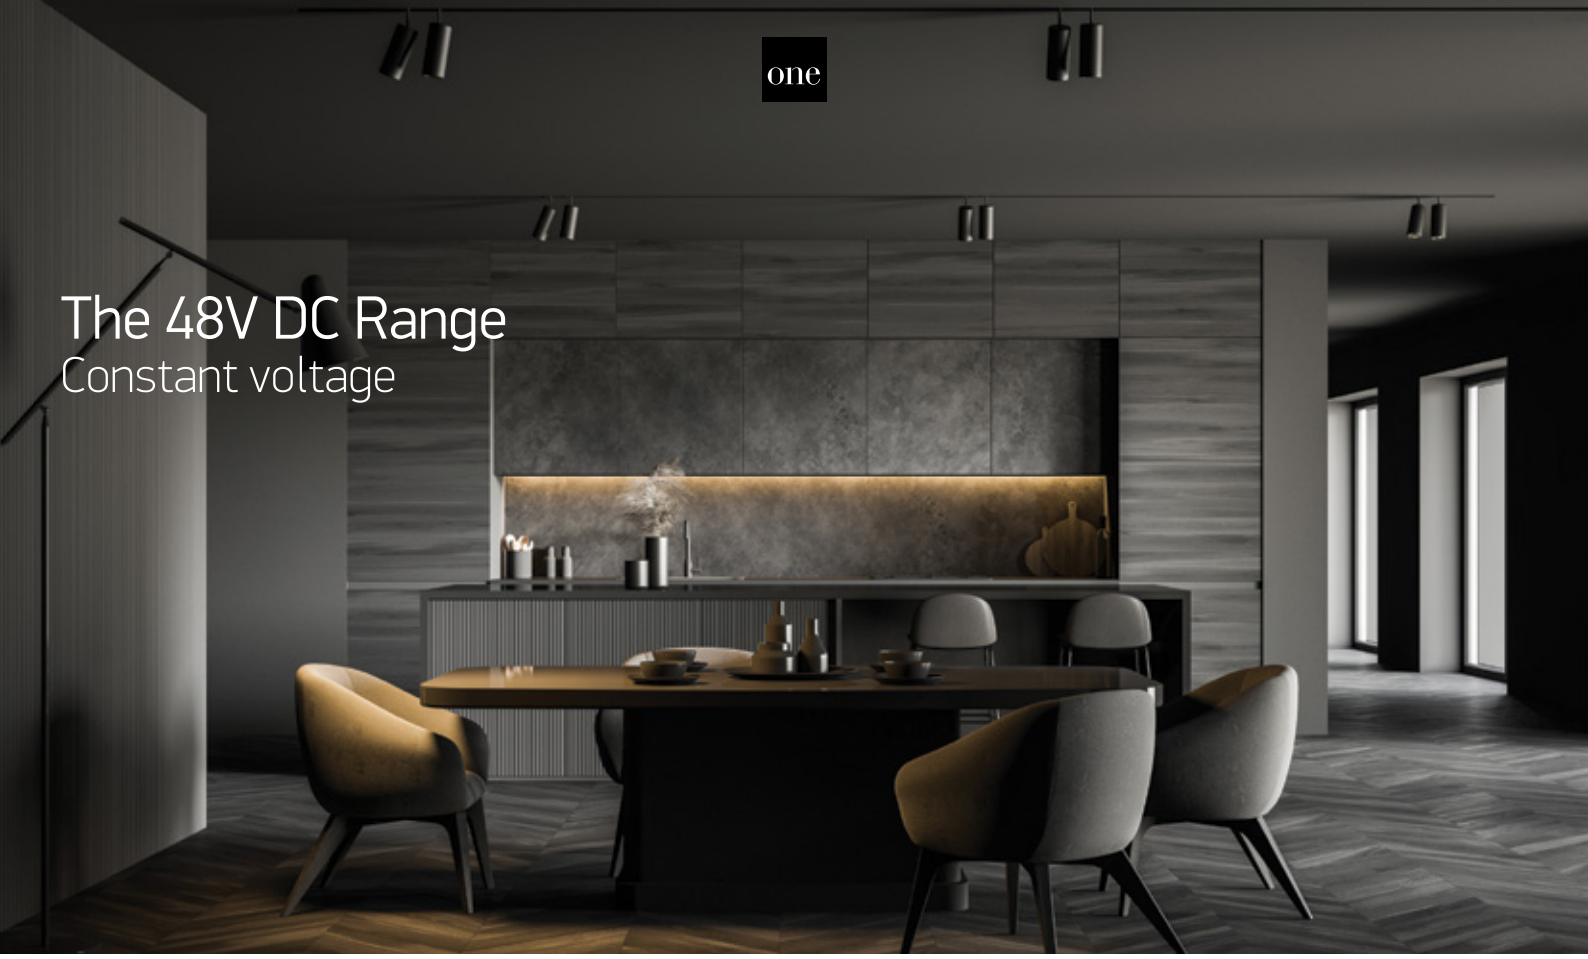


The 48V DC Range
Constant voltage



89200X | 200W | 48V DC

5 YEAR

IP20





89320X | 320W | 48V DC

5 YEAR

IP20





89240XL | 240W | 48V DC

5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89200X	230V	200W	48V DC	⧈	NO	25	-
89320X	230V	320W	48V DC	⧈	NO	20	-
89240XL	230V	240W	48V DC	⧈	NO	50	-



The 48V DC Open Range


Constant voltage



89200XN | 200W | 48V DC

3 YEAR

IP20






89350XN | 350W | 48V DC

Cooling fan.

3 YEAR

IP20






89240XR | 240W | DIN RAIL driver 48V DC

5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89200XN	100-240V	200W	48V DC	⏚	NO	40	-
89350XN	100-240V	350W	48V DC	⏚	NO	27	Cooling fan
89240XR	100-240V	240W	48V DC	⏚	NO	10	-

Adjustable Constant Current DALI Dimmable Range

DALI & Push to DIM



89025L



89009L | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.

PUSH TO DIM

DALI DIMMABLE

5 YEAR

IP20

LED Current Selection

700mA ● ●
600mA ○ ●
450mA ● ○
350mA ○ ○
1 2



Output Current	350mA	450mA	600mA	700mA
Output Power	2,1-8,75W	2,7-9W	3,6-9W	4,2-9,1W



89050LL | DALI & Push to DIM Dimmable

Adjustable outpout using DIP switches.

PUSH TO DIM


DALI DIMMABLE

5 YEAR

IP20

LED Current Selection

550mA	●	●	●	●	950mA	●	●	●	○
600mA	○	●	●	●	1000mA	●	●	○	○
650mA	●	○	●	●	1050mA	●	○	●	○
700mA	○	○	●	●	1100mA	○	○	●	○
750mA	●	●	○	●	1150mA	●	●	○	○
800mA	○	●	○	●	1200mA	○	●	○	○
850mA	●	○	○	●	1250mA	●	○	○	○
900mA	○	○	○	●	1300mA	○	○	○	○
	1	2	3	4		1	2	3	4



Output Current	550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA
Output Power	3,3-23,1W	3,6-25,2W	3,9-27,3W	4,2-29,4W	4,5-31,5W	4,8-33,6W	5,1-35,7W	5,4-37,8W
Output Current	950mA	1000mA	1050mA	1100mA	1150mA	1200mA	1250mA	1300mA
Output Power	5,7-39,9W	6-42W	6,3-44,1W	6,6-46,2W	6,9-48,3W	7,2-50,4W	7,5-50W	7,8-49,4W



89025L | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.

PUSH TO DIM

DALI DIMMABLE

5 YEAR

IP20


LED Current Selection

450mA ● ● ●
400mA ○ ● ●
350mA ● ○ ●
300mA ○ ○ ●
250mA ○ ● ○
200mA ● ○ ○
150mA ○ ○ ○



Output Current	150mA	200mA	250mA	300mA	350mA	400mA	450mA
Output Power	1-8,4W	1,2-11,2W	1,5-14W	1,8-16,8W	2,1-19,6W	2,4-22,4W	2,7-25,2W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89009L	230V	Refer to table	Adjustable	⧈	YES	100	DALI & Push to DIM
89050LL	230V	Refer to table	Adjustable	⏚	YES	20	DALI & Push to DIM
89025L	230V	Refer to table	Adjustable	⧈	YES	40	DALI & Push to DIM

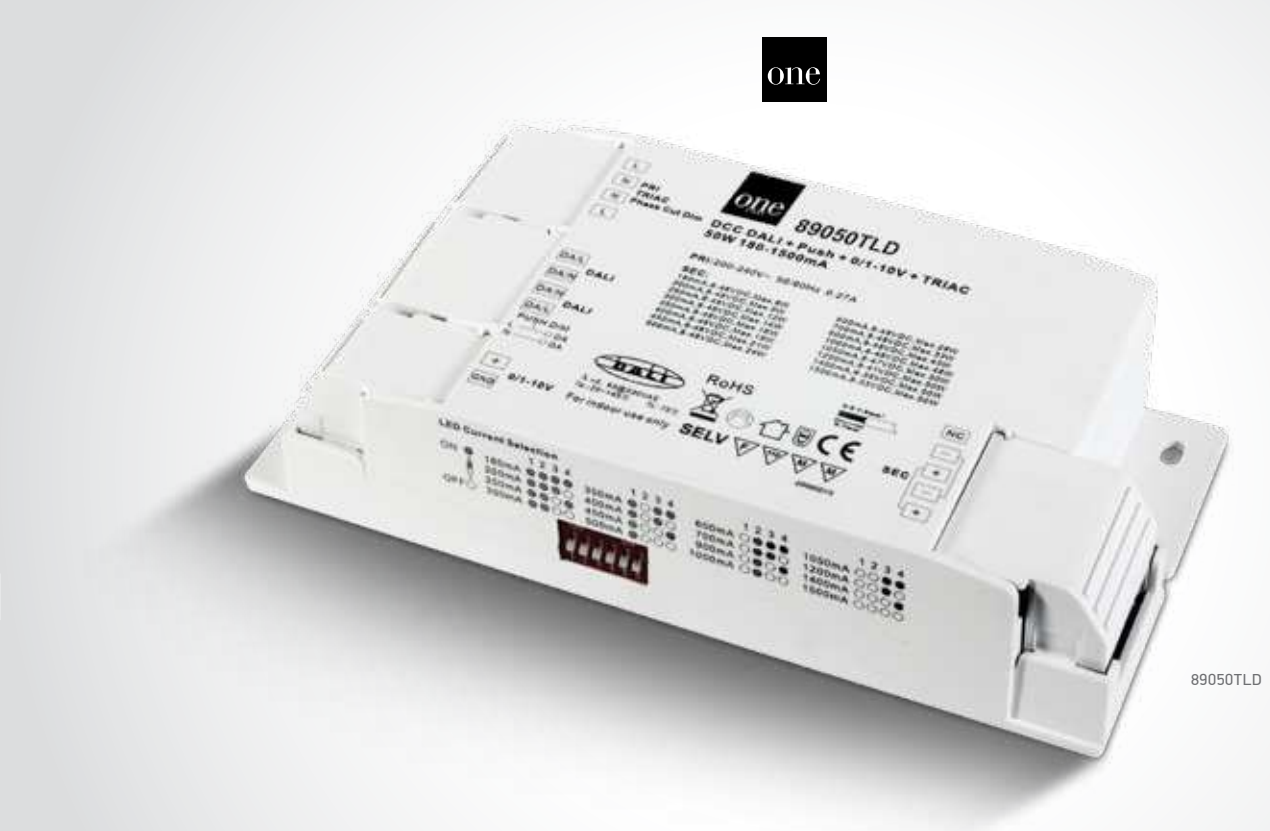

89050TLD

Adjustable Constant Current DALI Dimmable Range

DALI, Push to DIM, 1-10V & TRIAC




89040L | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR · IP20

LED Current Selection

300mA	○	○	○	○	700mA	●	●	●	●								
350mA	○	○	○	○	750mA	●	●	●	●								
400mA	○	○	○	○	800mA	●	○	○	○								
450mA	○	○	○	○	850mA	●	○	○	○								
500mA	○	●	●	●	900mA	●	●	●	●								
550mA	○	●	●	●	950mA	●	●	●	●								
600mA	○	●	●	●	1000mA	●	●	●	●								
650mA	○	●	●	●	1050mA	●	●	●	●								
	1	2	3	4		1	2	3	4								



Output Current	300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA	950mA	1000mA	1050mA
Output Power	3-12,6W	3,5-14,7W	4-16,8W	4,5-18,9W	5-21W	5,5-23,1W	6-25,2W	6,5-27,3W	7-29,4W	7,5-31,5W	8-33,6W	8,5-34W	9-36W	9,5-38W	10-40W	10,5-42W



89050TLD | DALI, Push to DIM, 1-10V, TRIAC Dimmable

Adjustable output using DIP switches.


PUSH TO DIM · DALI DIMMABLE · 1-10V DIMMABLE · TRIAC DIMMABLE · CE · 3 YEAR · IP20

LED Current Selection

180mA	●	●	●	●	600mA	○	●	●	●								
200mA	●	●	●	●	700mA	○	●	●	○								
250mA	●	●	●	○	900mA	○	●	○	●								
300mA	●	●	○	●	1000mA	○	●	○	○								
350mA	●	●	○	○	1050mA	○	○	●	●								
400mA	●	○	●	●	1200mA	○	○	●	○								
450mA	●	○	●	○	1400mA	○	○	○	●								
500mA	●	○	○	●	1500mA	○	○	○	○								
	1	2	3	4		1	2	3	4								

Operation Current Selection






Output Current	180mA	200mA	250mA	300mA	350mA	400mA	450mA	500mA
Output Power	1,44-8,64W	1,6-9,6W	2-12W	2,4-14,4W	2,8-16,8W	3,2-19,2W	3,6-21,6W	4-24W
Output Current	600mA	700mA	900mA	1000mA	1050mA	1200mA	1400mA	1500mA
Output Power	4,8-28,8W	5,6-33,6W	7,2-43,2W	8-48W	8,4-49,35W	9,6-49,2W	11,2-49W	12-49,5W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89040L	230V	Refer to table	Adjustable	⧈	YES	20	DALI & Push to DIM
89050TLD	230V	Refer to table	Adjustable	⧈	YES	36	DALI, Push to DIM, 1-10V, TRIAC Dimmer

Adjustable Constant Current DALI Dimmable


DALI & Push to DIM

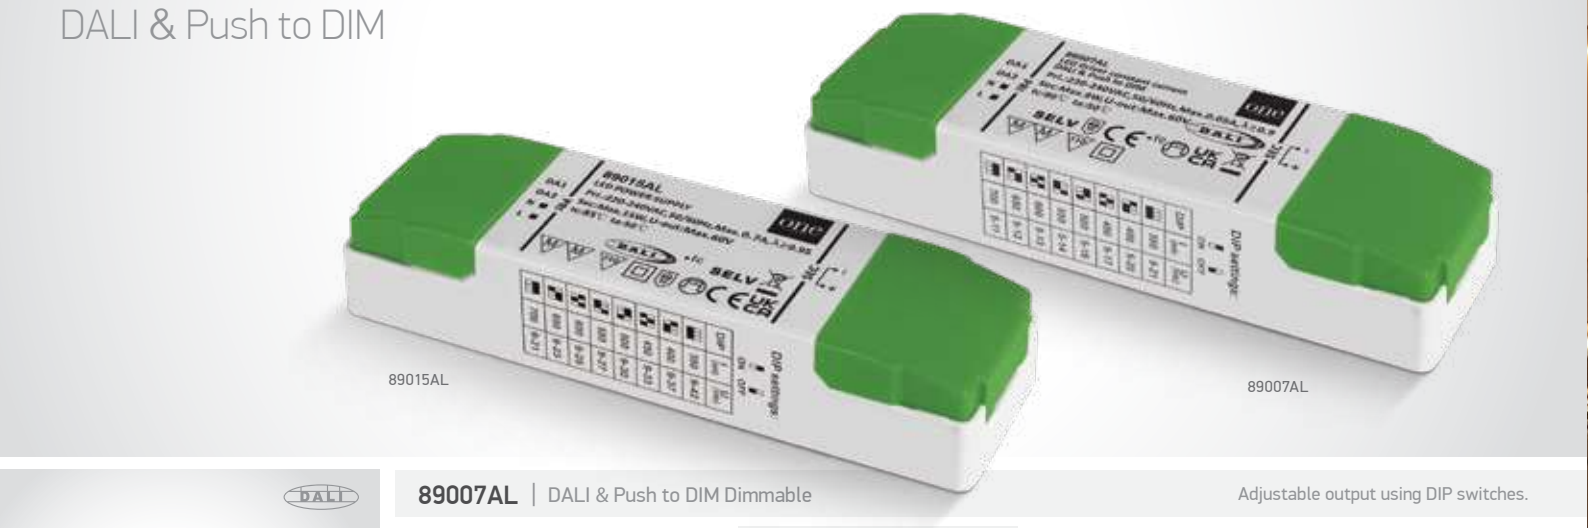




89007AL | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.







new


IP20


Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Power	1,75-7W	2-8W	2,25-7,65W	2,5-8W	2,75-7,7W	3-7,8W	3,25-7,8W	3,5-7,7W



89015L | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.







new


IP20


Output Current	120mA	150mA	180mA	210mA	250mA	280mA	320mA	350mA
Output Power	1,08-5,76W	1,35-7,20W	1,62-8,64W	1,89-10W	2,25-12W	2,52-13,44W	2,88-15W	3,15-14,7W



89015AL | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.








new

IP20

Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Power	3,15-14,7W	3,6-14,8W	4,05-14,85W	4,5-15W	4,95-14,85W	5,4-15W	5,85-14,95W	6,3-14,7W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89007AL	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM
89015L	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM
89015AL	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM

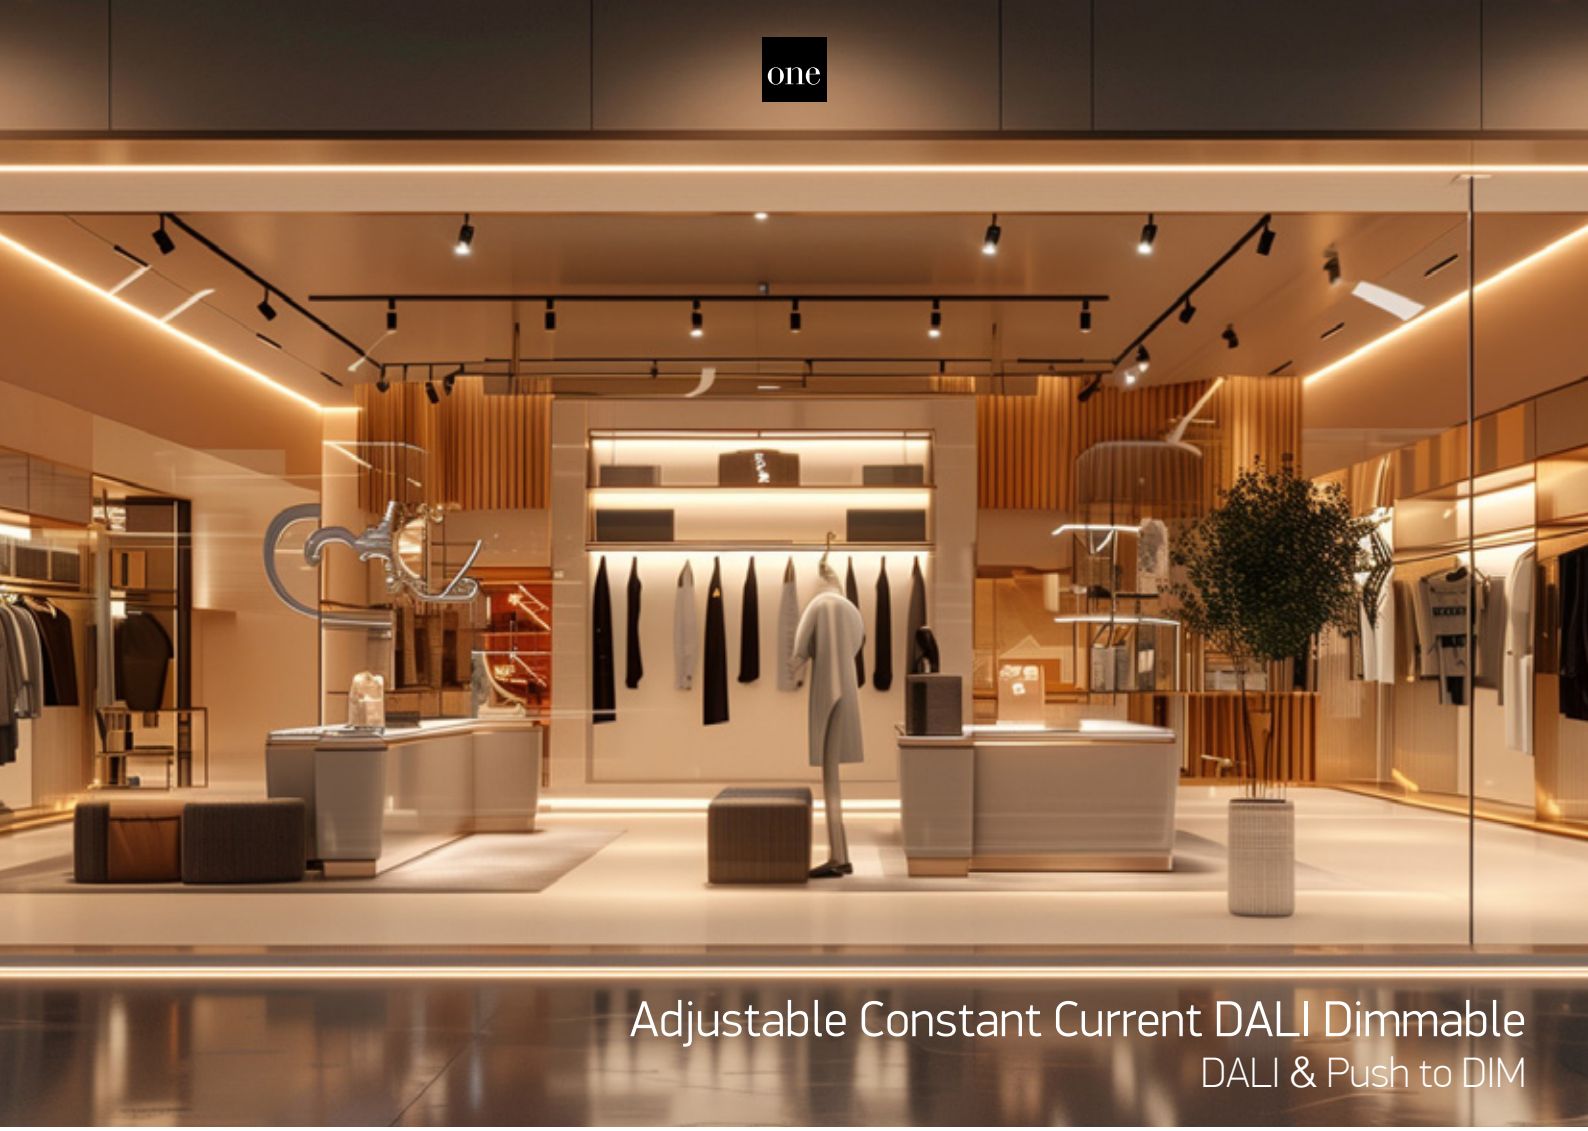

Adjustable Constant Current DALI Dimmable

DALI & Push to DIM



89026AL | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.

PUSH TO DIM · DALI DIMMABLE · QUICK FIX · CE · 5 YEAR

new

IP20

LED Current Selection

	1	2	3	4
160mA	●	●	○	○
200mA	○	○	●	○
250mA	●	○	●	○
300mA	○	●	●	○
350mA	●	●	●	○
400mA	●	○	○	●
450mA	○	●	○	●
500mA	●	●	○	●
550mA	○	○	●	●
600mA	●	○	●	●
650mA	○	●	●	●
700mA	●	●	●	●



Output Current	160mA	200mA	250mA	300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Power	4,80-8W	6-10W	5-12,50W	6-15W	7-17,50W	8-20W	9-22,50W	10-25W	11-25,85W	12-25,80W	13-26W	14-26W



89044L | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.

PUSH TO DIM · DALI DIMMABLE · QUICK FIX · CE · 5 YEAR

new

IP20

LED Current Selection

	1	2	3
700mA	○	○	○
750mA	●	○	○
800mA	○	●	○
850mA	●	●	○
900mA	○	○	●
950mA	●	○	●
1000mA	○	●	●
1050mA	●	●	●



Output Current	700mA	750mA	800mA	850mA	900mA	950mA	1000mA	1050mA
Output Power	14-35W	15-37,50W	16-40W	17-42,50W	18-43W	19-43,70W	20-40W	21-40W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89026AL	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM
89044L	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM



one

Control & Dimming

Pages 769-776

24





Infrared Motion Sensors




22006 | 400W (LED) / 800W (Incandescent) | Infrared motion sensor



IP44

Detection Angle: 180°
Detection Distance: Max. 12m (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation height: 1,8-2,5m






22022 | 400W (LED) / 800W (Incandescent) | IR Motion Sensor

Sensor head IP65 / Sensor controller IP20.



IP20
IP65

Detection Range: 120º / 360º
Detection Distance: 3m / 6m (adjustable) (<24°C)
Ambient Light: <10-2000lux (adjustable)
Time Delay: 5s, 30s, 1min, 3min, 5min, 8min (adjustable)
Detection Moving Speed: 0,6-1,5m/s
Working Humidity: <93% RH
Ambient Temperature: -20ºC up to +40ºC
Installation height: 1,8-2,5m (wall mount)
Installation height: 2,2-4m (ceiling mount)



Order Code	Colour	Power	Input	Class		Notes
22006	White	400W (LED) / 800W (Incandescent)	230V	⧈	50	-
22022	White	400W (LED) / 800W (Incandescent)	230V	⧈	50	-

Infrared Ceiling Sensors



22008




22008 | 200W (LED) / 800W (Incandescent) | Recessed infrared motion sensor



IP20

Detection Angle: 360°
Detection Distance: Max. 6m (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation height: 2,2-4m






22004 | 300W (LED) / 800W (Incandescent) | Surface infrared motion sensor



IP20

Detection Range: 360°
Detection Distance: Max. 6m (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation height: 2,2-4m






22014 | 1000W (LED) / 2000W (Incandescent) | Surface infrared presence sensor

ON when detecting presence.



IP20

Detection Angle: 360°
Detection Distance: Max. 10m (<24°C)
Time Delay: 10sec ± 3sec to 30min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation height: 2,2-6m



Order Code	Colour	Power	Input	Class		Notes
22008	White	200W (LED) / 800W (Incandescent)	230V	⧈	100	-
22004	White	300W (LED) / 800W (Incandescent)	230V	⧈	50	-
22014	White	1000W (LED) / 2000W (Incandescent)	230V	⧈	50	-

RF Bluetooth Controller



89102L | RF Bluetooth to DALI / 1-10V

Assign DALI address using DIP switches.

5 YEAR

IP20

Application Easy Things.



Order Code	Input	Class		Notes
89102L	100-240V		1	Compatible with Amazon Alexa & Google Home



12-24V DALI, Push to DIM Controller




89100L | DALI & Push to DIM Dimmer 12-24V DC | 75W@12V DC / 150W@24V DC | PWM dimming only

PUSH TO DIM
DALI
2 YEAR
IP20

DALI to PWM
- Built-in push dimming
- Dimming range 0,1-100%

PUSH TO DIM
- No status changing < 0,05sec
- Push ON/OFF 0,1-1sec
- Dimming up or down 1,5-10sec
- Set 100% brightness > 11sec

DALI
- DALI agreement includes 16 groups & 64 addresses
- DALI agreement can be divided into 16 scenarios




Order Code	Input	Power	Output	Class	Dimmable		Notes
89100L	12-24V DC	75W@12V / 150W@24V	12-24V	⧈	YES	200	DALI & Push to DIM

DALI & Push to DIM To TRIAC



89104LT | DALI / Push to DIM to TRIAC Dimmer | 100W@110V DC / 200W@240V DC

PUSH TO DIM
DALI
3 YEAR
IP20

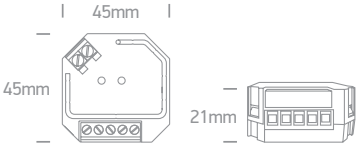

Order Code	Input	Power	Output	Dimmable		Notes
89104LT	100-240V	100W@110V / 200W@240V	100-240V	YES	50	-



89302

12-36V RGB+W Repeater



89302 | 12-36V DC | Constant voltage RGB+W data repeater | 4 channels x 5A | PWM dimming only

DIMMABLE

2 YEAR

IP20

Repeats the signal when dimming constant voltage fittings e.g. LED strips.



Order Code	Input	Power	Output	Class	Dimmable		Notes
89302	12-36V DC	60W@12V DC / 120W@24V DC	12-36V DC	III	YES	100	-

12-36V DALI & Push to DIM Dimmer



89100LP | DALI & Push to DIM Dimmer 12-36V DC | 4x60W@12V / 4x120W@24V / 4x180W@36V | 4 channels x 5A


PUSH TO DIM

DALI DIMMABLE

3 YEAR

IP67

* Push to DIM mode dims all channels together.



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100LP	12-36V DC	4x60W@12V DC / 4x120W@24V DC / 4x180W@36V DC	12-36V	⧈	YES	18	DALI & Push to DIM



Microwave Motion Sensor




22000 | 300W | Microwave motion sensor

Can be installed inside fittings.

IP20

- Can be installed inside fittings
- Adjustable sensitivity 20%-100%
- ON TIME 5s-30mins
- Daylight sensor 2-50lux



Order Code	Input	Power	Output	Class		Notes
22000	230V	300W	230V		100	-

Day/Night Photocell Sensor




22020 | 1000W | Photocell Day/Night Sensor | Plastic

Ambient Light:<5-15lux.

IP44

Automatic day/night operation.



Order Code	Colour	Input	Power	Output	Class		Notes
22020	Black	100-240V	1000W	100-240V		50	-



Remote Controllers




20030 | 12-24V DC | Constant voltage wireless dimmer | 3 channels x 3A

DIMMABLE

CE 2 YEAR

IP20

Remote controller for dimming any constant voltage 12-24V LED fitting including LED strips, LED lamps, LED modules. 50 meters range, 2 memory settings, dimming by touch.

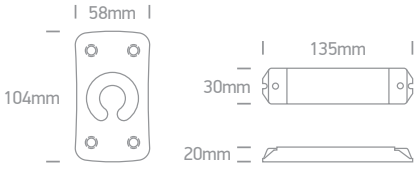




20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A

DIMMABLE


CE 2 YEAR

IP20

Remote controller for changing colour temperature from daylight to extra warm white. Suitable for use with LED strips 7835/DEW. 50 meters range, includes dimmer control and programme mode.

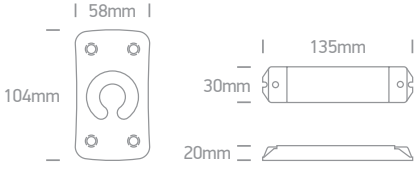

Order Code	Colour	Input	Power	Output	Class	Dimmable		Notes
20030	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-
20032	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-

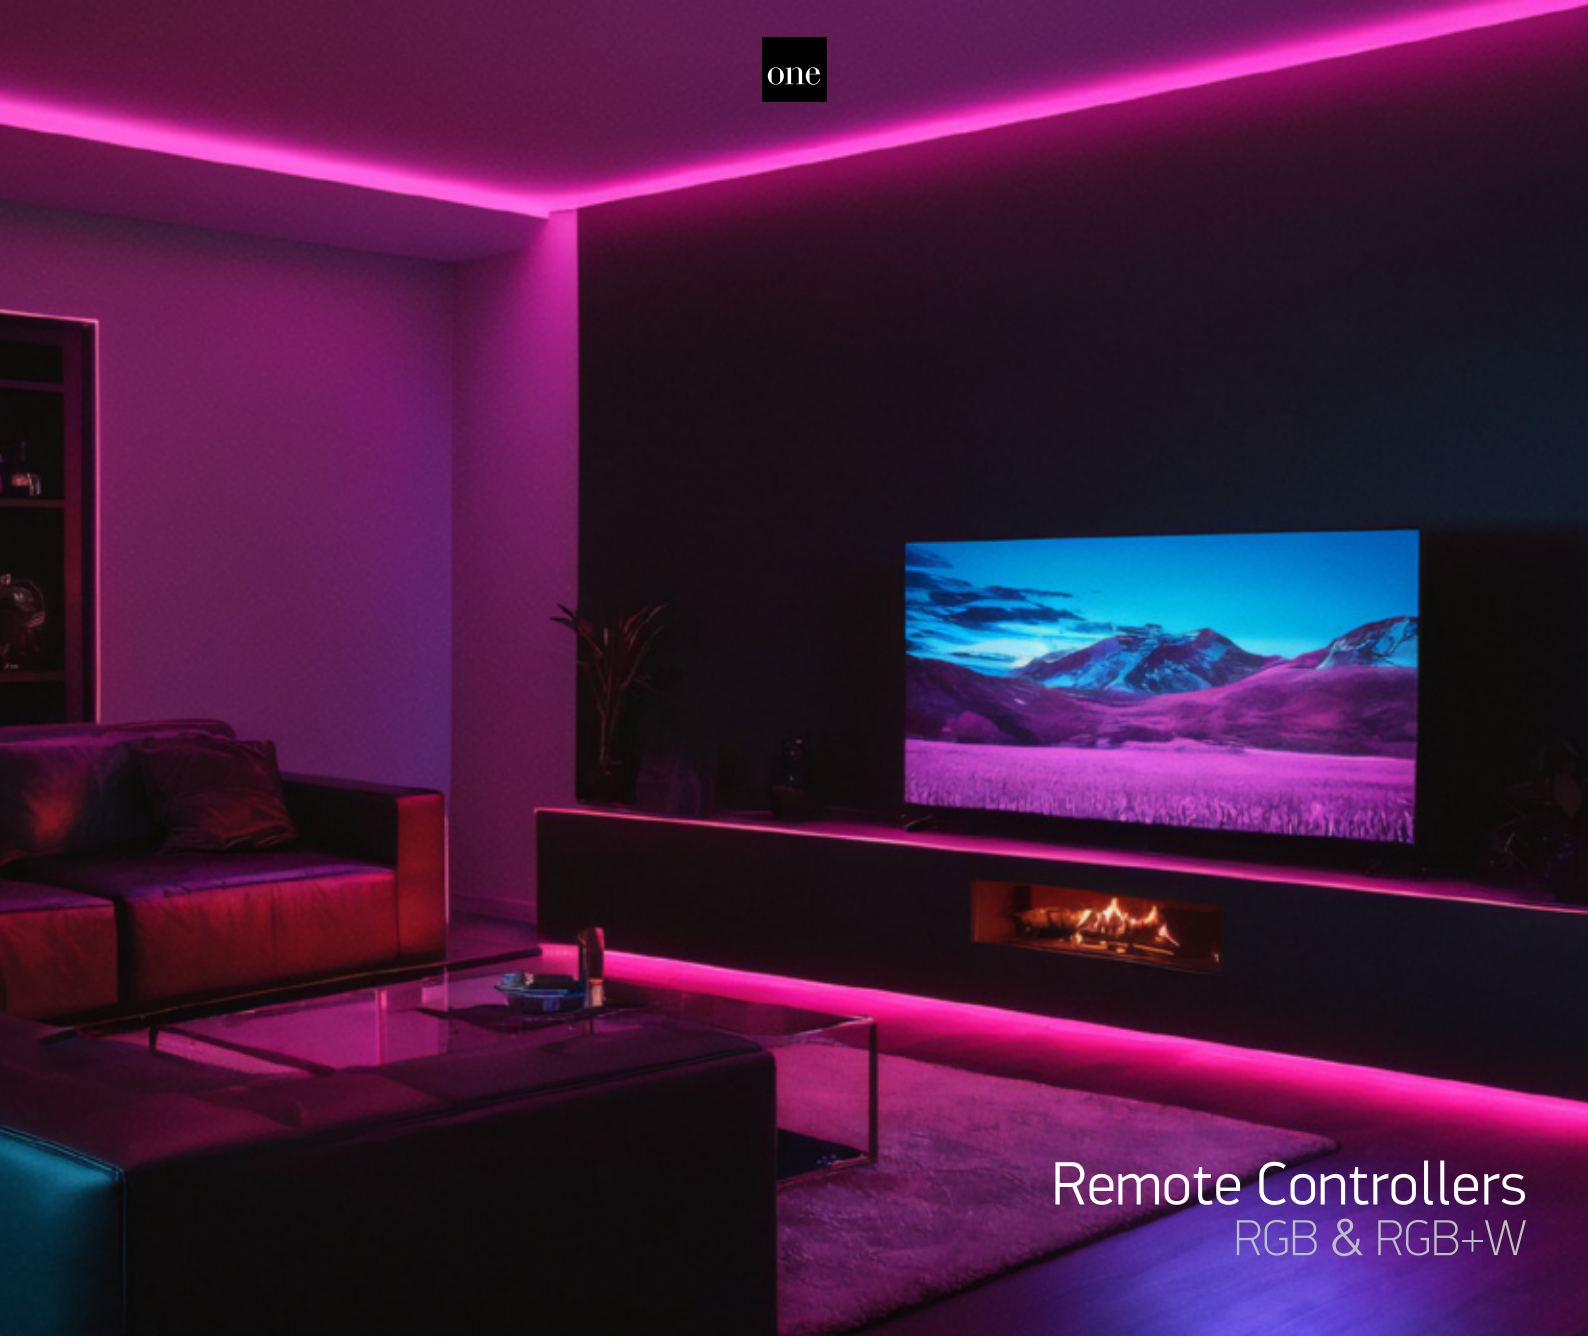

Remote Controllers
RGB & RGB+W




20034 | 12-24V DC | RGB wireless controller & dimmer | 3 channels x 3A

DIMMABLE

2 YEAR

IP20

Remote controller for changing colours (RGB). Suitable for use with LED strips 7830/RGB.
50 meters range, includes dimmer control and programme modes.

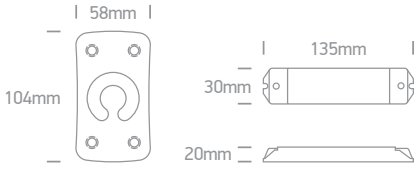




20036 | 12-24V DC | RGB+W wireless controller & dimmer | 4 channels x 3A

DIMMABLE

2 YEAR

IP20

Remote controller for changing colours (RGB+W). Suitable for use with LED strips 7830/RGBW.
50 meters range, includes dimmer control and programme modes.

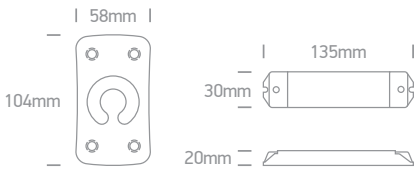

Order Code	Colour	Input	Power	Output	Class	Dimmable		Notes
20034	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-
20036	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-


save
energy
now!
ecolamp
10,5w
LED
one
LIGHT
shrink
the
energy
bills!
give me
light!
ecolamp
5,5w
LED
one

Lamps

Pages 779-804

25





7103ALG/C

7106ALG/C

7107ALG/W

G9 Lamps



7106GPH | 60W | G9 | Dimmable | PHILIPS


HALO

DIMMABLE

CE 2 YEAR

offer








7103ALG | 4W | SMD LED | G9

LED 80 CRI

CE 2 YEAR








7106ALG | 6W | SMD LED | G9

LED 80 CRI

CE 2 YEAR







7107ALG | 7W | SMD 2835 | G9

LED 80 CRI

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7106GPH	G9	Extra warm white	2700K	60W	-	230V	YES	100
7103ALG/C	G9	Cool white	4000K	4W	400lm	230V	NO	100
7103ALG/W	G9	Warm white	3000K	4W	400lm	230V	NO	100
7106ALG/C	G9	Cool white	4000K	6W	600lm	230V	NO	100
7106ALG/W	G9	Warm white	3000K	6W	600lm	230V	NO	100
7107ALG/C	G9	Cool white	4000K	7W	700lm	230V	NO	100
7107ALG/W	G9	Warm white	3000K	7W	700lm	230V	NO	100

G9 Dimmable



7106ALGD/W

7103ALGD/W




7103ALGD | 3,5W | SMD LED | G9 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR








7106ALGD | 5W | SMD LED | G9 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7103ALGD/W	G9	Warm white	3000K	3,5W	300lm	230V	YES	100
7106ALGD/W	G9	Warm white	3000K	5W	450lm	230V	YES	100



LED Lamps




7101AL | 2W | COB LED | G4 | Silicone

LED 80 CRI

CE 2 YEAR








7201G | 2W | COB LED | MR11 | GU10

LED 80 CRI

CE 2 YEAR

offer








7307BG | 7W | SMD LED | MR16 | GU10

LED 80 CRI

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7101AL/W	G4	Warm white	3000K	2W	200lm	-	12V AC/DC	NO	100
7201G/D	GU10	Daylight	6000K	2W	110lm	30°	230V	NO	100
7307BG/C	GU10	Cool white	4000K	7W	550lm	90°	230V	NO	100
7307BG/W	GU10	Warm white	3000K	7W	550lm	90°	230V	NO	100

MR16 GU10 for enclosed fittings



7305EG



7305EG | 5W | COB LED | MR16 | GU10


Suitable for high ambient temperature enclosed fittings.

LED 80 CRI

CE 3 YEAR

IP44







7305EGD | 5W | COB LED | MR16 | GU10 | Dimmable


Suitable for high ambient temperature enclosed fittings.

LED 80 CRI TRIAC DIMMABLE

CE 3 YEAR

IP44





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7305EG/W	GU10	Warm white	3000K	5W	500lm	38°	230V	NO	100
7305EGD/W	GU10	Warm white	3000K	5W	500lm	38°	230V	YES	100



Dimmable MR16 GU10




7306KGD | 6,5W | COB LED | MR16 | GU10 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR

offer





Zoomable Dimmable MR16 GU10




Zoomable 24°- 60°

7306GZ | 7W | COB LED | MR16 | GU10 | Zoomable | Dimmable

LED 98 CRI TRIAC DIMMABLE

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306KGD/C/45	GU10	Cool white	4000K	6,5W	500lm	45°	230V	YES	50
7306GZ/W	GU10	Warm white	3000K	7W	510lm	24°- 60°	230V	YES	10



7306GCD/EW

7306GC/W

Full Spectrum CRI97




7306GC | 7W | COB LED | MR16 | GU10 — Full spectrum CRI97.

LED 97 CRI

CE 2 YEAR








7306GCD | 7W | COB LED | MR16 | GU10 | Dimmable — Full spectrum CRI97.

LED 97 CRI TRIAC DIMMABLE

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306GC/W	GU10	Warm white	3000K	7W	500lm	36°	230V	NO	100
7306GCD/EW	GU10	Extra warm white	2700K	7W	510lm	36°	230V	YES	100



MR16 GU10 COB LED




7301CG | 1W | COB LED | MR16 | GU10

LED 85 CRI

CE 3 YEAR








7303CG | 3W | COB LED | MR16 | GU10

LED 85 CRI

CE 3 YEAR








7306CG | 6W | COB LED | MR16 | GU10

LED 85 CRI

CE 3 YEAR








7306CBG | 6W | COB LED | MR16 | GU10

Black body.

LED 85 CRI

CE 3 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7301CG/W	GU10	Warm white	3000K	1W	80lm	60°	230V	NO	100
7303CG/W	GU10	Warm white	3000K	3W	250lm	60°	230V	NO	100
7306CG/C	GU10	Cool white	4000K	6W	520lm	60°	230V	NO	100
7306CG/W	GU10	Warm white	3000K	6W	500lm	60°	230V	NO	100
7306CG/EW	GU10	Extra warm white	2700K	6W	480lm	60°	230V	NO	100
7306CG/W/24	GU10	Warm white	3000K	6W	500lm	24°	230V	NO	100
7306CBG/W	GU10	Warm white	3000K	6W	500lm	60°	230V	NO	100



Honeycomb MR16 GU10 COB LED



7306CHG | 6W | COB LED | MR16 | GU10 | Honeycomb

LED 85 CRI

CE 3 YEAR

DARK LIGHT



60°

60mm

50mm

MR16 GU10 Emergency



Emergency 3 hours

7304GE | 4W | SMD 2835 | MR16 | GU10 | Emergency 3Hrs Maintained | Dimmable

Leading & Trailing edge.

LED 90 CRI DIMMABLE

CE 2 YEAR



60°

To switch OFF, turn OFF-ON-OFF within 2 seconds.

53mm

50mm

Dimmable MR16 GU10 COB LED



7306CGD | 6W | COB LED | MR16 | GU10 | Dimmable

LED 85 CRI TRIAC DIMMABLE

CE 3 YEAR



60°

55mm

50mm

Blue MR16 GU10 COB LED



7306CG/BL | 5W | COB LED | MR16 | GU10

LED CE

2 YEAR



60°

55mm

50mm

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable		Notes
7306CHG/W	GU10	Warm white	3000K	6W	330lm	60°	230V	NO	100	-
7304GE/W	GU10	Warm white	3000K	4W	300lm	60°	230V	YES	10	Supplied with battery
7306CGD/C	GU10	Cool white	4000K	6W	520lm	60°	230V	YES	100	-
7306CGD/W	GU10	Warm white	3000K	6W	500lm	60°	230V	YES	100	-
7306CGD/EW	GU10	Extra warm white	2700K	6W	480lm	60°	230V	YES	100	-
7306CG/BL	GU10	Blue	-	5W	-	60°	230V	NO	100	-





7307M | 7W | COB LED | 700mA | Dimmable


LED module suitable for MR16 fittings.

LED 90 CRI DIMMABLE

QUICK FIX CE 5 YEAR

IP65







7313M | 13W | COB LED | 700mA | Dimmable


LED module suitable for MR16 fittings.

LED 90 CRI DIMMABLE

QUICK FIX CE 5 YEAR

IP65





Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input		Dimmable		Notes
7307M/W	Warm white	3000K	7W	700lm	36°	700mA	30cm	YES	50	Requires 700mA driver
7313M/W	Warm white	3000K	13W	1300lm	36°	700mA	30cm	YES	50	Requires 700mA driver

Dim To Warm GU10
Dimmable

2800K

2200K



7306GDV | 5,5W | SMD 2835 | MR16 | GU10 | Dim to warm


Leading & Trailing edge.

LED 90 CRI DIMMABLE

CE 2 YEAR







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306GDV/EWW	GU10	Extra warm white	2800K-2200K	5,5W	350lm	38°	230V	YES	100



7315G/W/45

7310H/W

PAR30 COB LED




7310H/C

7310H/C | 10W | COB LED | PAR30 | E27

LED 90 CRI

CE 2 YEAR








7310H/W

7310H/W | 10W | COB LED | PAR30 | E27

LED 90 CRI

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7310H/C	E27	Cool white	4000K	10W	750lm	40°	230V	NO	20
7310H/W	E27	Warm white	3000K	10W	750lm	40°	230V	NO	20



R111 GU10 LED

7315GB/W/45




7315G | 13W | SMD LED | R111 | GU10

LED 80 CRI

CE 2 YEAR





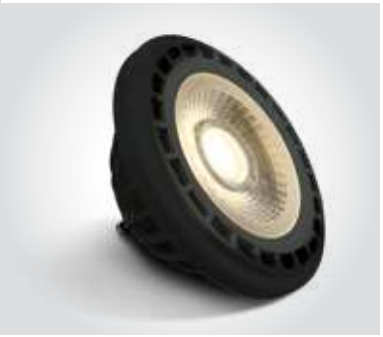

7315GB | 13W | SMD LED | R111 | GU10

Black body.

LED 80 CRI

CE 2 YEAR





Dimmable R111 GU10 LED




7315GD | 15W | SMD LED | R111 | GU10 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7315G/C/45	GU10	Cool white	4000K	13W	1250lm	45°	230V	NO	20
7315G/W/45	GU10	Warm white	3000K	13W	1250lm	45°	230V	NO	20
7315GB/C/45	GU10	Cool white	4000K	13W	1250lm	45°	230V	NO	20
7315GB/W/45	GU10	Warm white	3000K	13W	1250lm	45°	230V	NO	20
7315GD/W/45	GU10	Warm white	3000K	15W	1200lm	45°	230V	YES	20



10106NA/W/D/35



10106NA/AL/D/35

Dimmable R111 LED



10106NA/W | 6x1W@350mA / 6x3W@700mA | LED | R111 | Dimmable

LED 85 CRI DIMMABLE

QUICK FIX CE 2 YEAR

offer



LED module suitable for R111 fittings.



Use driver 89030A. (non-dimmable).





10106NA/AL | 6x1W@350mA / 6x3W@700mA | LED | R111 | Dimmable

LED 85 CRI DIMMABLE

QUICK FIX CE 2 YEAR


offer



LED module suitable for R111 fittings.



Use driver 89030A. (non-dimmable).



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
10106NA/W/D/35	Daylight	6000K	6x1W/6x3W	1100lm@3W	35°	350mA/700mA	YES	20
10106NA/AL/D/35	Daylight	6000K	6x1W/6x3W	1100lm@3W	35°	350mA/700mA	YES	20



Dimmable R111 LED



7512D | 12x1W | CREE LED | 350mA | R111 | Dimmable

Requires 350mA driver.

LED 80 CRI DIMMABLE QUICK FIX CE 2 YEAR

offer



LED module suitable for R111 fittings.



Use driver 89015. (non-dimmable).





7524D | 12x2W | CREE LED | 500mA | R111 | Dimmable

Requires 500mA driver.

LED 80 CRI DIMMABLE QUICK FIX CE 2 YEAR

offer



LED module suitable for R111 fittings.



Use driver 89030C. (non-dimmable).





7524BD | 12x2W | LED | 500mA | R111 | Dimmable

Requires 500mA driver.

LED 80 CRI DIMMABLE QUICK FIX CE 2 YEAR

offer



LED module suitable for R111 fittings.



Use driver 89030C. (non-dimmable).



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7512D/D/30	Daylight	6000K	12x1W	710lm	30°	350mA	YES	40
7512D/W/30	Warm white	3000K	12x1W	560lm	30°	350mA	YES	40
7524D/W/30	Warm white	3000K	12x2W	830lm	30°	500mA	YES	40
7524BD/W/30	Warm white	3000K	12x2W	860lm	30°	500mA	YES	20



Classic A60 Special Functions



9G10L | 10W | SMD LED | E27 | Night operating

ON when < 5lux, OFF when >300lux.

LED 80 CRI

CE 2 YEAR

offer



Automatic day/night operation

120mm

60mm



9G10V | 10W | SMD LED | E27 | 3-Step colour temperature changing

LED 80 CRI CCT V

CE 2 YEAR

offer



ON OFF ON OFF ON

2700K 4000K 6000K

120mm

60mm



9G09/RGBW | 9W | SMD LED | E27 | RGBW + Remote

LED 80 CRI DIMMABLE

CE 2 YEAR



Supplied with remote control.

110mm

60mm



9G09T | 9W | SMD 2835 | E27 | Wi-Fi | RGB + CCT V | Dimmable

LED 80 CRI DIMMABLE

CCT V CE 2 YEAR

RGB

2700K-6500K

tuya

Smart Life

amazon alexa

Google Home

116mm

60mm

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G10L/EW/E	E27	Extra warm white	2700K	10W	800lm	230V	NO	100
9G10V/E	E27	CCT V	2700K-4000K-6000K	10W	800lm	230V	NO	100
9G09/RGBW	E27	RGB + Warm white	RGB + 3000K	9W	720lm (3000K)	100-240V	YES	100
9G09T	E27	RGB + CCT V	RGB + 2700K-6500K	9W	780lm	230V	YES	120

Classic Lamps LED






9G12B | 10W | SMD LED | E27

LED 80 CRI

CE 2 YEAR








9G12D | 12W | SMD LED | E27 | 3-Step dimming | Dimmable


LED 80 CRI DIMMABLE

CE 2 YEAR

offer








Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G12B/W/E	E27	Warm white	3000K	10W	1010lm	230V	NO	100
9G12B/EW/E	E27	Extra warm white	2700K	10W	980lm	230V	NO	100
9G12D/EW/E	E27	Extra warm white	2700K	12W	1050lm	230V	YES	100



GX53

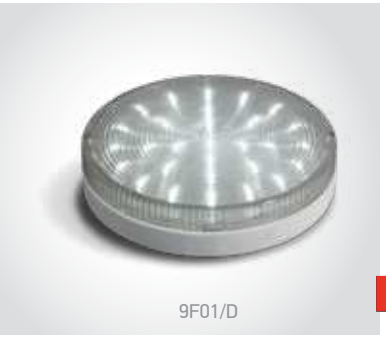

9F01/D

9F01 | 1,5W | LED | GX53


LED CE

2 YEAR

offer





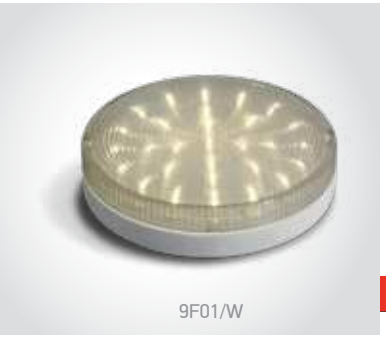

9F01/W

9F01 | 1,5W | LED | GX53

LED CE

2 YEAR

offer







9F07L/C

9F07L | 7W | SMD LED | GX53

LED 80 CRI

CE 2 YEAR








9F07L/W

9F07L | 7W | SMD LED | GX53

LED 80 CRI

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9F01/D	GX53	Daylight	6000K	1,5W	120lm	230V	NO	100
9F01/W	GX53	Warm white	3000K	1,5W	120lm	230V	NO	100
9F07L/C	GX53	Cool white	4000K	7W	600lm	230V	NO	100
9F07L/W	GX53	Warm white	3000K	7W	600lm	230V	NO	100



9G80N/C/LE

High Power LED




9G80N | 80W | SMD 2835 | E40

LED 80 CRI

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9G80N/C/LE	E40	Cool white	4000K	80W	8800lm	120°	230V	NO	4



9T05RD/A/E

9G04RAD/A/E


Retro Amber Lamps LED
Dimmable



9G03RAD | 6,5W | LED | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE 2 YEAR








9T05RD | 5W | LED | T28 | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE 2 YEAR








9G04RAD | 7W | LED | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE 2 YEAR








9G06RD | 7W | LED | G125 | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G03RAD/A/E	E27	Amber	2200K	6,5W	800lm	230V	YES	100
9T05RD/A/E	E27	Amber	2200K	5W	500lm	230V	YES	100
9G04RAD/A/E	E27	Amber	2200K	7W	800lm	230V	YES	50
9G06RD/A/E	E27	Amber	2200K	7W	520lm	230V	YES	20



Retro Lamps LED



9C02R | 2W | LED | E14

LED 80 CRI
CE 2 YEAR








9G03R | 4W | LED | E27

LED 80 CRI
CE 2 YEAR








9G06RD | 5W | LED | G125 | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE
CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9C02R/EW/SE	E14	Extra warm white	2700K	2W	250lm	230V	NO	100
9G03R/EW/E	E27	Extra warm white	2700K	4W	470lm	230V	NO	100
9G06RD/EW/E	E27	Extra warm white	2700K	5W	600lm	230V	YES	20



Decorative Lamps




9G08K/A

9G08K | 8W | LED | E27

Decorative lamps.

LED CE

2 YEAR



Order Code	Lampholder	Glass Colour	Watts	Input	Dimmable	
9G08K/A	E27	Amber	8W	230V	NO	6



Decorative Lamps




9G04E/A

9G04E | 4W | LED | E27

Decorative lamps.

LED CE

2 YEAR





9G08D/A

9G08D | 8W | LED | E27


Decorative lamps.

LED CE

2 YEAR



9G08D/DC





9G08E/A

9G08E | 8W | LED | E27


Decorative lamps.

LED CE

2 YEAR



9G08E/DC



Order Code	Lampholder	Glass Colour	Watts	Input	Dimmable	
9G04E/A	E27	Amber	4W	230V	NO	8
9G08D/A	E27	Amber	8W	230V	NO	6
9G08D/DC	E27	Dark chrome	8W	230V	NO	6
9G08E/A	E27	Amber	8W	230V	NO	8
9G08E/DC	E27	Dark chrome	8W	230V	NO	8




T8 Tubes Glass



9018L | 18W | SMD 2835 | T8 | Glass

LED 80 CRI

CE 2 YEAR






9022L | 24W | SMD 2835 | T8 | Glass

LED 80 CRI

CE 2 YEAR






9026L | 25W | SMD LED | T8 | Rotating


LED 80 CRI

CE 2 YEAR

offer



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9018L/D	G13	Daylight	6500K	18W	2000lm	320°	230V	NO	25
9018L/C	G13	Cool white	4000K	18W	2000lm	320°	230V	NO	25
9018L/W	G13	Warm white	3000K	18W	2000lm	320°	230V	NO	25
9022L/D	G13	Daylight	6500K	24W	2650lm	320°	230V	NO	25
9022L/C	G13	Cool white	4000K	24W	2650lm	320°	230V	NO	25
9022L/W	G13	Warm white	3000K	24W	2650lm	320°	230V	NO	25
9026L/W	G13	Warm white	3000K	25W	2200lm	180°	230V	NO	20

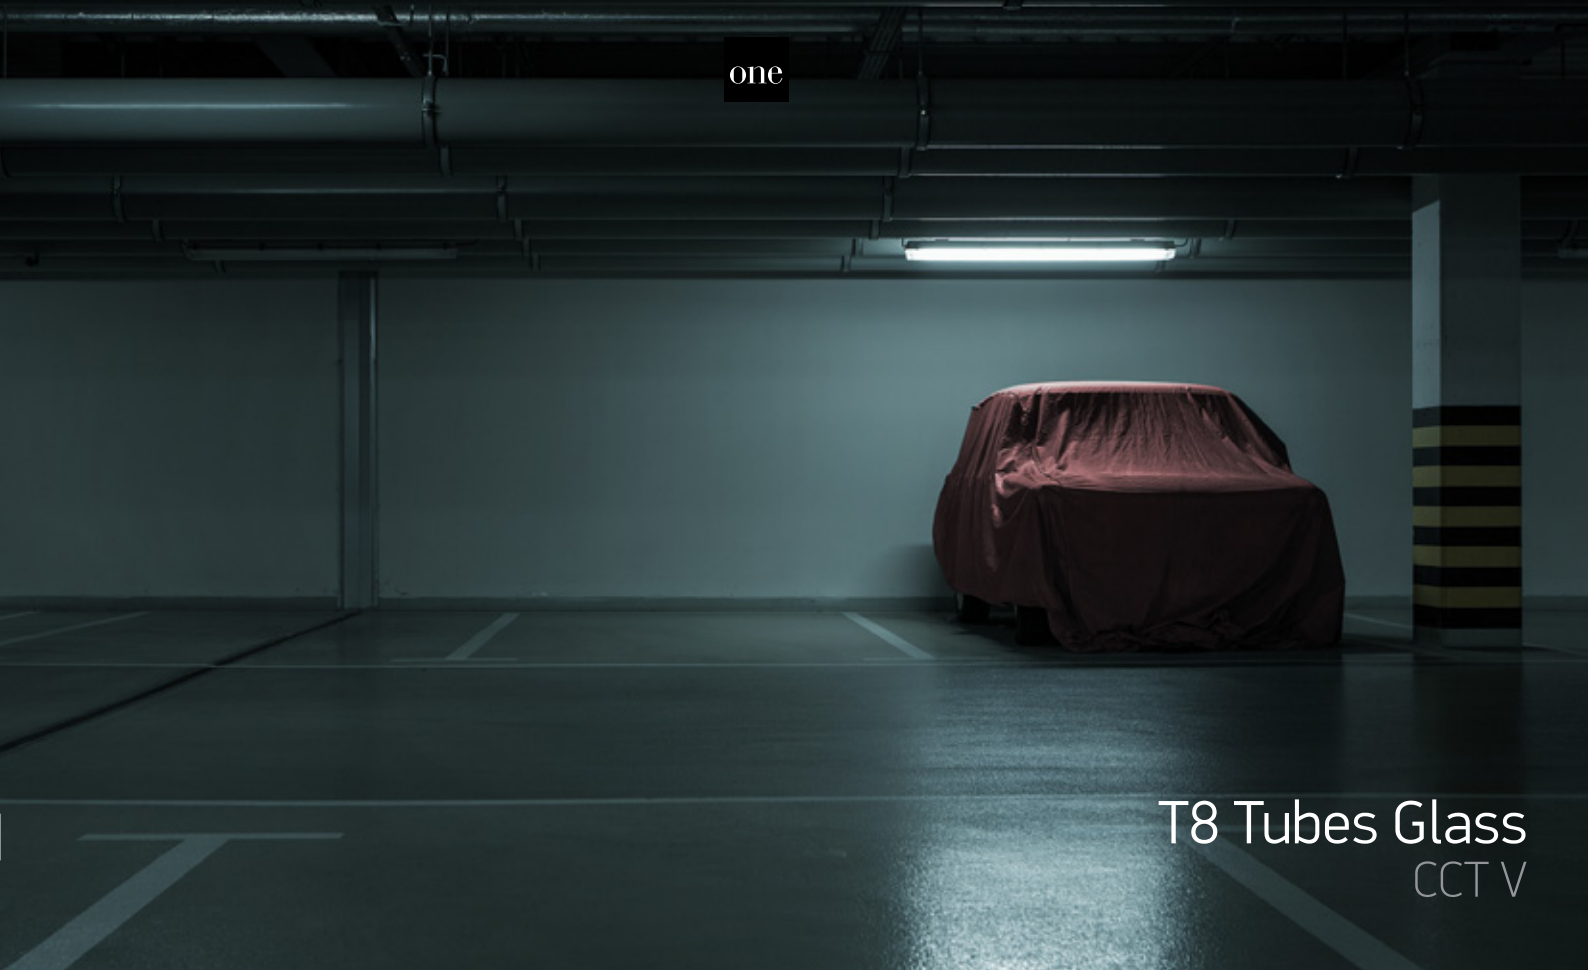

T8 Tubes Glass
CCT V




9009L | 9W | SMD 2835 | T8 | Glass

LED 80 CRI CCT V

CE 2 YEAR

new






9018L | 18W | SMD 2835 | T8 | Glass

LED 80 CRI CCT V

CE 2 YEAR

new






9022L | 24W | SMD 2835 | T8 | Glass

LED 80 CRI CCT V

CE 2 YEAR

new




Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9009L/V	G13	CCT V	3000K-4000K-6500K	9W	1000lm	240°	230V	NO	25
9018L/V	G13	CCT V	3000K-4000K-6500K	18W	2000lm	240°	230V	NO	12
9022L/V	G13	CCT V	3000K-4000K-6500K	24W	2650lm	240°	230V	NO	12



9007LA | 7W | SMD 2835 | T5 | Glass

LED 90 CRI

CE 2 YEAR






9016LA | 16W | SMD 2835 | T5 | Glass

LED 90 CRI

CE 2 YEAR






9018LA | 18W | SMD 2835 | T5 | Glass

LED 90 CRI

CE 2 YEAR



T9C Circular



9922L | 11W | LED | T9 | G10Q

LED 80 CRI

CE 2 YEAR

offer







9940L | 20W | LED | T9 | G10Q

LED 80 CRI

CE 2 YEAR

offer





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9007LA/C	G5	Cool white	4000K	7W	1000lm	320°	230V	NO	25
9016LA/C	G5	Cool white	4000K	16W	2400lm	320°	230V	NO	25
9018LA/C	G5	Cool white	4000K	18W	2800lm	320°	230V	NO	25
9922L/W	G10Q	Warm white	3000K	11W	1000lm	-	230V	NO	20
9940L/W	G10Q	Warm white	3000K	20W	1800lm	-	230V	NO	10



G45 LED Ball Lamps




9G01/GR/E | 0,5W | SMD LED | G45 | E27

LED CE

2 YEAR

offer








9G01/BL/B | 0,5W | SMD LED | G45 | B22

LED CE

2 YEAR

offer








9G01/GR/B | 0,5W | SMD LED | G45 | B22

LED CE

2 YEAR

offer








9G01/R/B | 0,5W | SMD LED | G45 | B22

LED CE

2 YEAR

offer





Order Code	Lampholder	Light Colour	Watts	Input	Dimmable	
9G01/GR/E	E27	Green	0,5W	230V	NO	200
9G01/BL/B	B22	Blue	0,5W	230V	NO	200
9G01/GR/B	B22	Green	0,5W	230V	NO	200
9G01/R/B	B22	Red	0,5W	230V	NO	200



www.1-light.eu



Accessories & Gadgets


Pages 807- 816

26






89003/EXT | 3-way extension for 350mA / 500mA LED fittings



Suitable for all 350mA/500mA LED fittings with quick-fix connectors.



89006A/EXT | 6-way extension for 700mA LED fittings



Suitable for all 700mA LED fittings with quick-fix connectors.



Ring Light Stand
CCT V



61134A | 10W | LED | CCT V | ABS + PC + Metal tripod

Includes phone/camera bracket.

LED BUILT IN

80 CRI

DIMMABLE


ADJUSTABLE

CCT V


CE

2 YEAR

IP20



Includes 7cm table tripod & 150cm floor tripod.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61134A	Black	CCT V	3000K-4000K-6000K	10W	800lm	100-240V		1	AC adaptor




Fast Connectors

0903F | 3-PIN Female connector




QUICK FIX · 200 · CE · 2 YEAR



0903M | 3-PIN Male connector




QUICK FIX · 200 · CE · 2 YEAR



0904F | 4-PIN Female connector




QUICK FIX · 500 · CE · 2 YEAR



0904M | 4-PIN Male connector



QUICK FIX · 200 · CE · 2 YEAR





0904MA | 4-PIN Male connector + Cable



QUICK FIX · 30cm · 1 · CE · 2 YEAR

offer



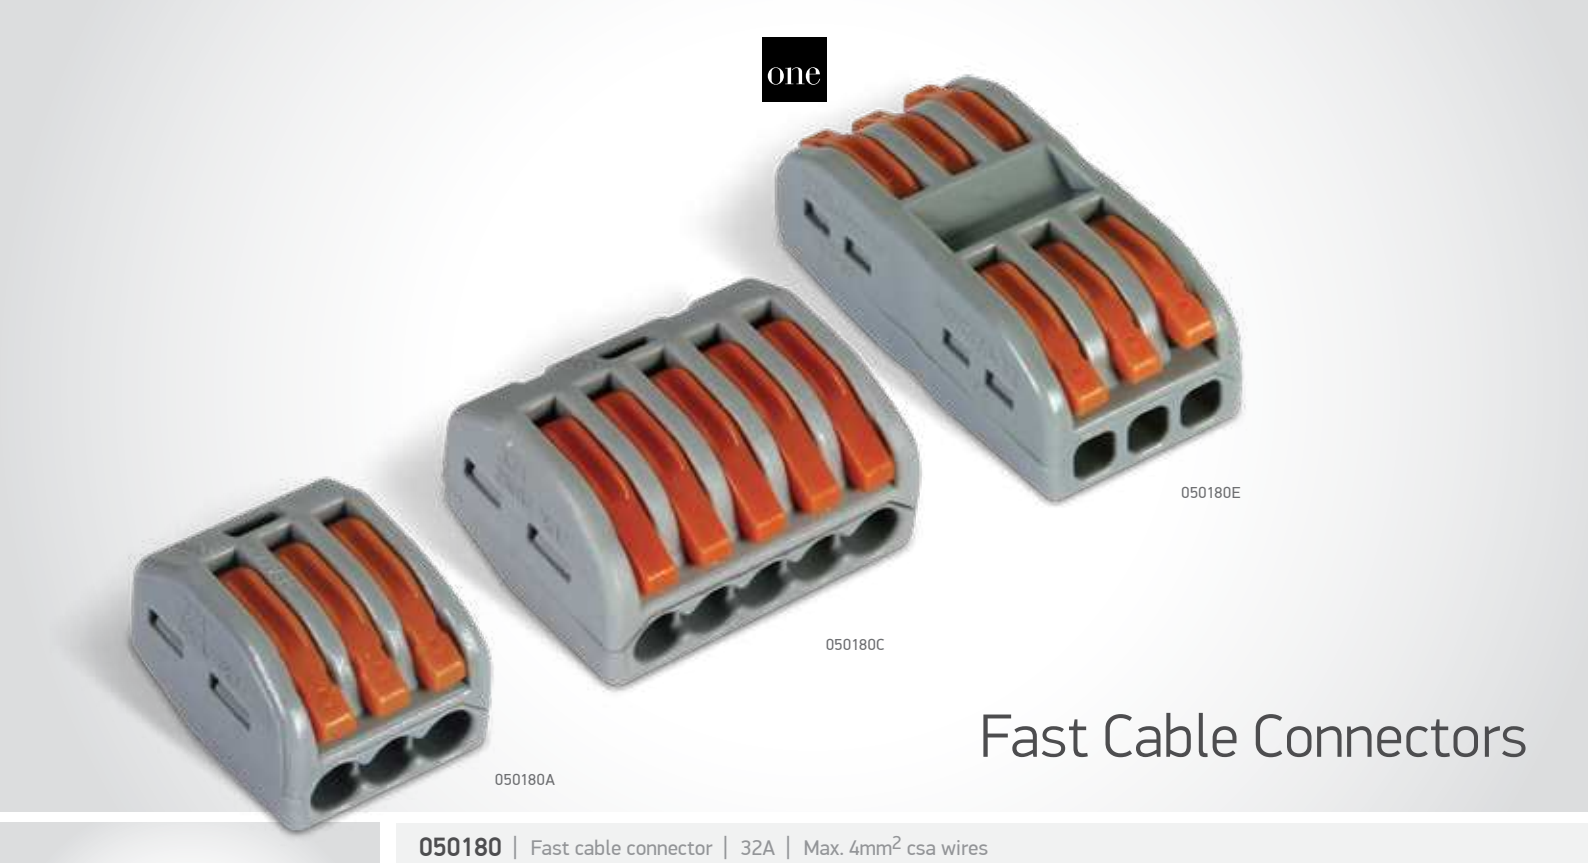


Fast Cable Connectors



050180 | Fast cable connector | 32A | Max. 4mm² csa wires

100

5 YEAR






050180A | Fast cable connector | 32A | 3-Port | Max. 4mm² csa wires

100

5 YEAR

IP20






050180C | Fast cable connector | 32A | 5-Port | Max. 4mm² csa wires

100

5 YEAR

IP20






050180E | Fast cable connector | 32A | 2x3-Port | Max. 4mm² csa wires

100

5 YEAR

IP20





Waterproof Connection Boxes




0800BA | Waterproof connection box 1 IN / 1 OUT | 16A | 450V | Cable diameter 4-11mm

50

2 YEAR

IP67






0800B | Waterproof connection box 1 IN / 1 OUT | Cable diameter 4-11mm

50

2 YEAR

IP67






0800A | Waterproof connection box 1 IN / 2 OUT | Cable diameter 4-14mm

50

2 YEAR

IP67






0800C | Waterproof connection box 2 IN / 2 OUT | 24A | 450V | Cable diameter 4-14mm

50

2 YEAR

IP67





Lampholders & Connectors



0950GA | 100-240V | GU10 Lampholder | Double insulated

18cm

50

5 YEAR






0950G | 100-240V | GU10 Lampholder with bracket | Double insulated

100

5 YEAR








0950GB | 100-240V | GU10 Lampholder with bracket | Double insulated

Loop connector IN/OUT.

40

5 YEAR








0802 | Connection box 3-Way IN/OUT fast connector


Loop connector IN/OUT.

10

5 YEAR

IP20



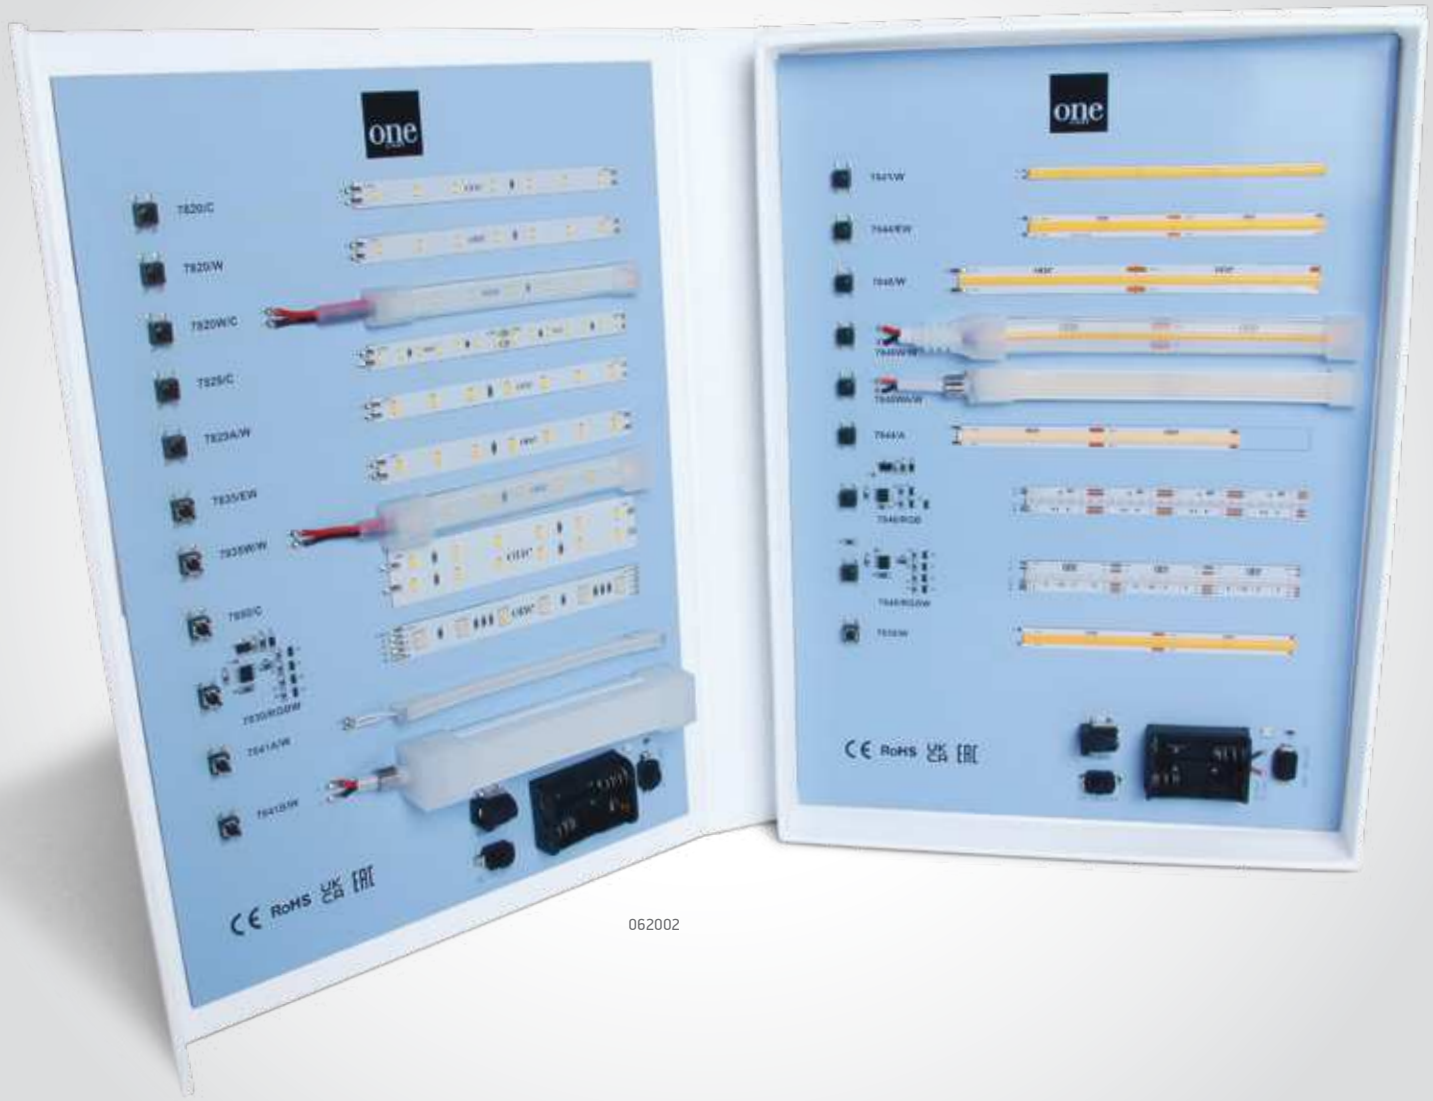

062002

Accessories




094004 | E27 / GU10 / E14 Testing panel

With power indicator.

1

2 YEAR

IP20





062002 | Display box for LED strips 7820/C, 7820/W, 7820W/C, 7829/C, 7829A/W, 7835/EW, 7835W/W, 7880/C, 7830/RGBW, 7846/RGB, 7846/RGBW, 7839/W, 7843/W, 7844/EW, 7846/W, 7846W/W, 7846WA/W, 7844/A, 7841A/W & 7841B/W


Requires 24V DC driver

1

2 YEAR

IP20

offer





70038

Battery Lights



70038 | COB LED | Wardrobe / Magnet portable light


3xAAA Batteries included.

LED BUILT IN · 12 · CE · 2 YEAR

offer










70044 | 0,5W | LED | Sensor

3xAAA Batteries included.

LED BUILT IN · CE · 2 YEAR

new



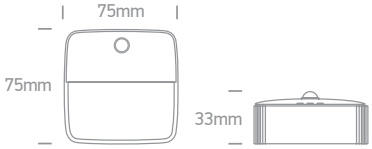

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	
70044	White	Warm white	3000K	0,5W	35lm	50

Gadgets



61136



61138



61138 | Wireless charger 3 in 1 for Smart Devices | ABS + PC


Includes USB cable and 230V adaptor.

48

2 YEAR

IP20







61136 | 8W | LED | Star projector / Speaker | Plastic

USB cable and 230V adaptor.


LED BUILT IN

2 YEAR

IP20



4Hrs automatic shutdown function



Order Code	Colour	Watts	Input	Class		Notes
61136	Black	8W	5V / 230V	III	1	Bluetooth / USB connectable

Accessories



7010P | Plastic spike for garden spots

200

2 YEAR








Ceiling Fans

Pages 819-828

27

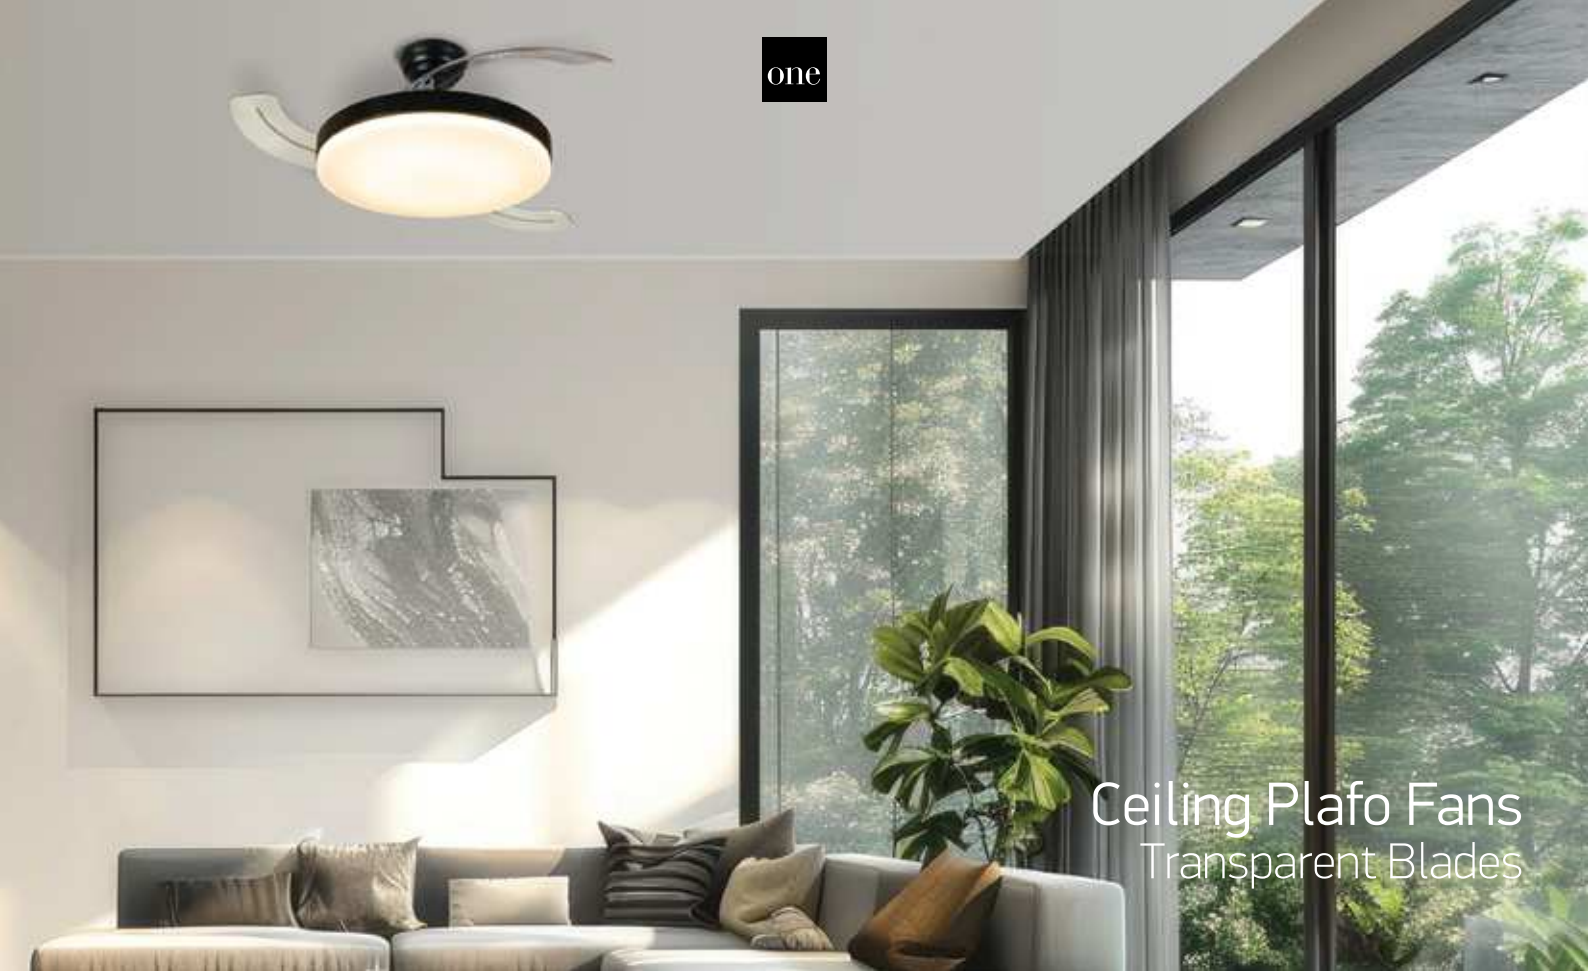

Ceiling Plafo Fans
Transparent Blades



6300/W/V

6300 | Metal body | Transparent PC blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152B.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/W.

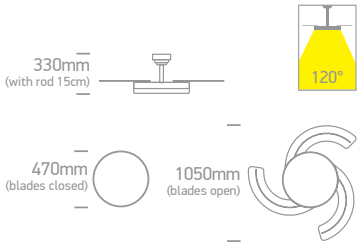



6300/B/V

6300 | Metal body | Transparent PC blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152B.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.

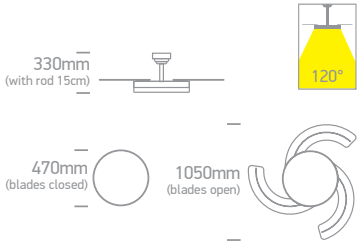



6300/BR/V

6300 | Metal body | Tinted brown PC blades | Rod mounted | 6 Speed | Winter reverse mode


LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20



Extra Remote control 030152B.



Complete with 15cm & 30cm rod.

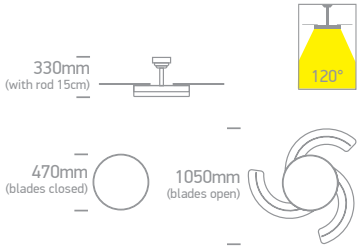

Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6300/W/V	White	CCT V	3000K-4000K-5500K	32W	3500lm	120°	25W	230V	⏚	1	Complete with remote control
6300/B/V	Black	CCT V	3000K-4000K-5500K	32W	3500lm	120°	25W	230V	⏚	1	Complete with remote control
6300/BR/V	Brown	CCT V	3000K-4000K-5500K	32W	3500lm	120°	25W	230V	⏚	1	Complete with remote control




6316/W

6316 | Metal body | White ABS blades | Rod mounted | 6 Speed | Winter reverse mode

DC MOTOR | 3 YEAR | CE


new

IP20


Extra Remote control 030152C.


Complete with 15cm & 30cm rod.


Optional 1m rod 030156/W.




6316/B

6316 | Metal body | Black ABS blades | Rod mounted | 6 Speed | Winter reverse mode

DC MOTOR | 3 YEAR | CE


new

IP20


Extra Remote control 030152C.


Complete with 15cm & 30cm rod.


Optional 1m rod 030156/B.



Order Code	Colour	FAN Watts	Input	Class		Notes
6316/W	White	30W	230V		1	Complete with remote control
6316/B	Black	30W	230V		1	Complete with remote control



White Body Ceiling Fans
White ABS Blades




6302C | Metal body | White ABS blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new DC MOTOR · CE · 3 YEAR · IP20



Extra Remote control 030152A.





6302 | Metal body | White ABS blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/W.





6304 | Metal body | White ABS blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/W.





6306 | Metal body | White ABS blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/W.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6302C/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6302/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6304/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	45W	230V	⏚	1	Complete with remote control
6306/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V	⏚	1	Complete with remote control



Black Body Ceiling Fans
Black ABS Blades




6302C | Metal body | Black ABS blades | Ceiling mounted | 6 Speed | Winter reverse mode

new IP20 — LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR




Extra Remote control 030152A.






6302 | Metal body | Black ABS blades | Rod mounted | 6 Speed | Winter reverse mode

new IP20 — LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR

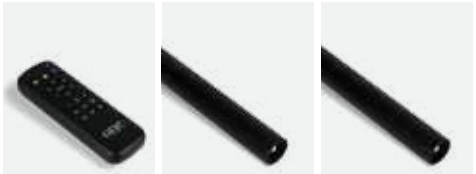


Extra Remote control 030152A. | Complete with 15cm & 30cm rod. | Optional 1m rod 030156/B.






6304 | Metal body | Black ABS blades | Rod mounted | 6 Speed | Winter reverse mode

new IP20 — LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR

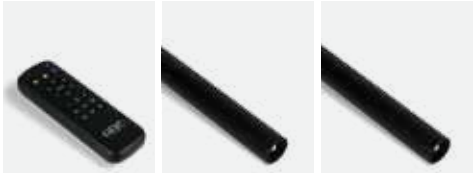


Extra Remote control 030152A. | Complete with 15cm & 30cm rod. | Optional 1m rod 030156/B.






6306 | Metal body | Black ABS blades | Rod mounted | 6 Speed | Winter reverse mode


new IP20 — LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR

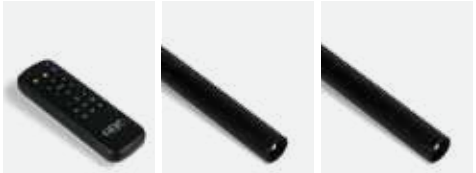

Extra Remote control 030152A. | Complete with 15cm & 30cm rod. | Optional 1m rod 030156/B.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6302C/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6302/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6304/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	45W	230V	⏚	1	Complete with remote control
6306/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V	⏚	1	Complete with remote control

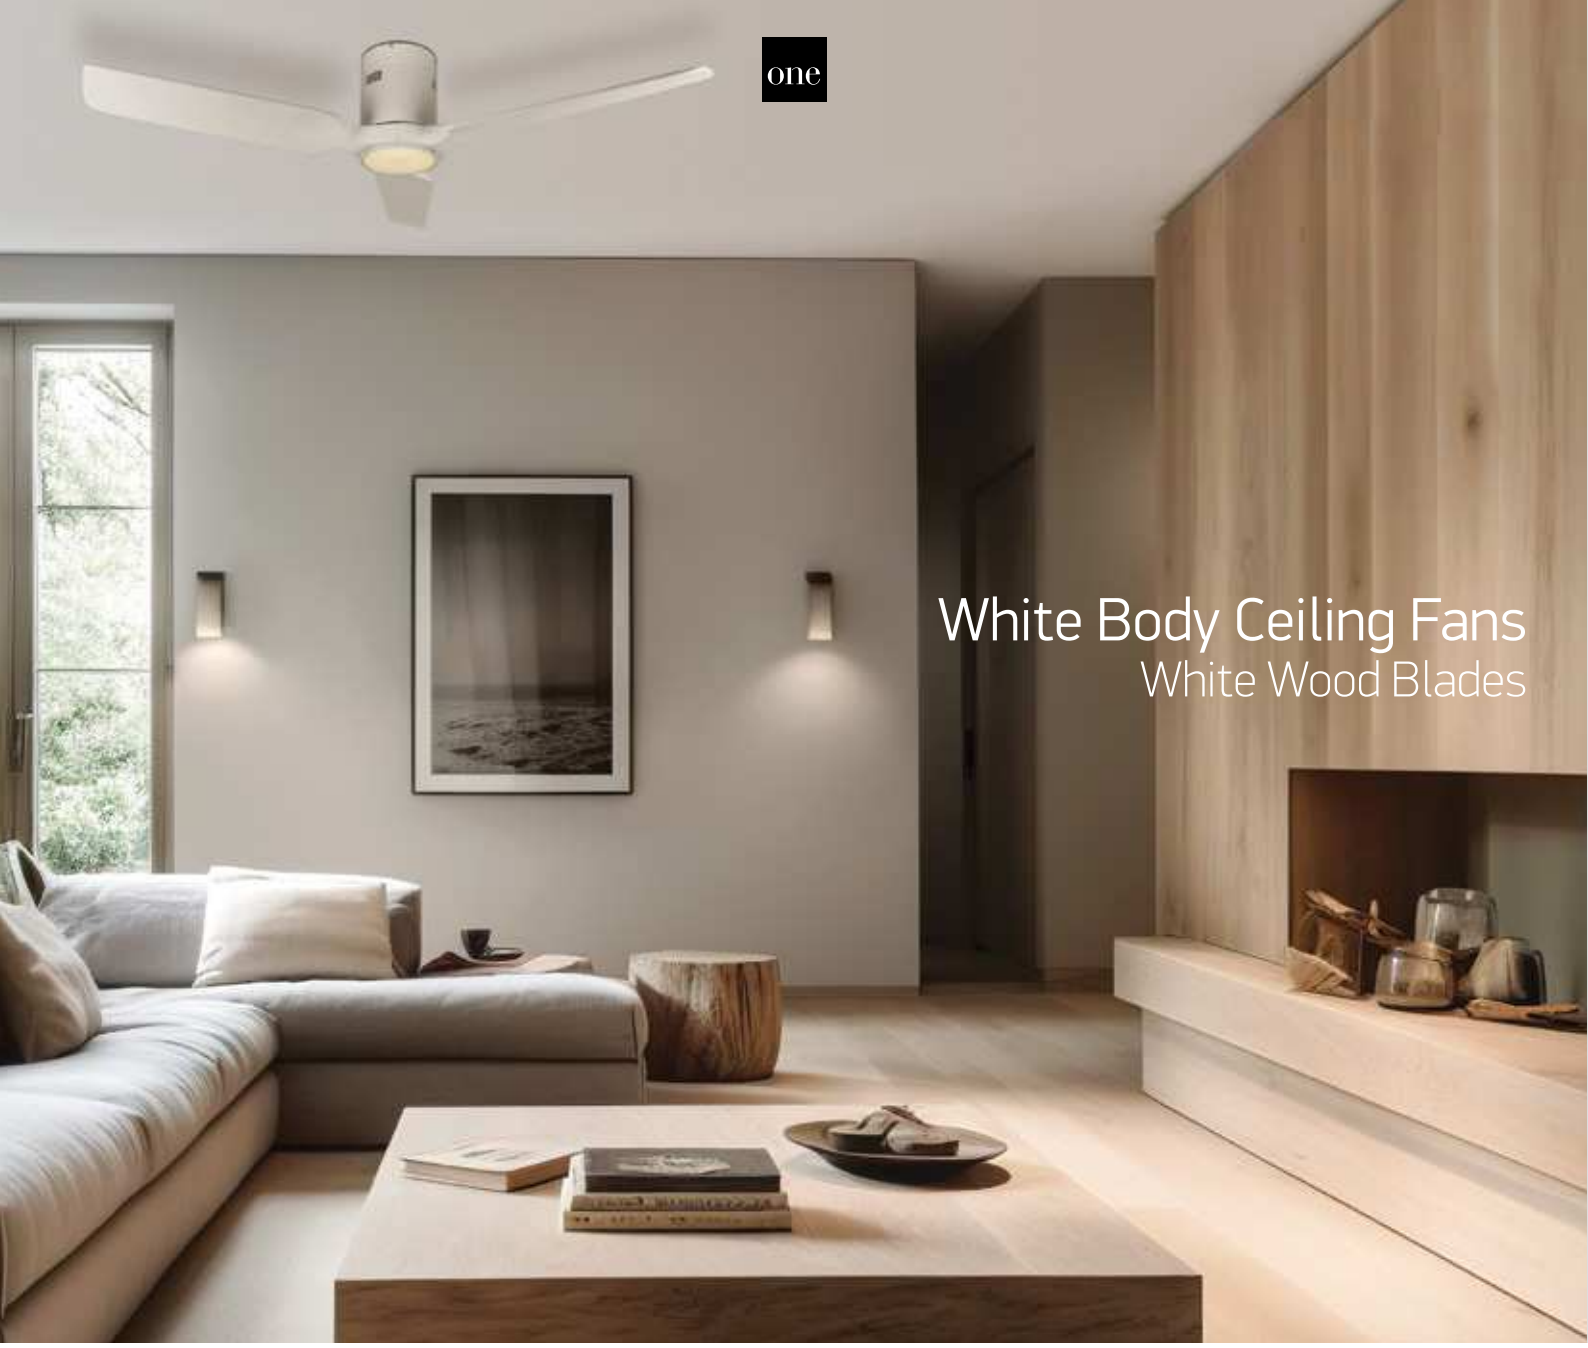

White Body Ceiling Fans
White Wood Blades




6310C | Metal body | White wood blades | Ceiling mounted | 6 Speed | Winter reverse mode


LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20



Extra Remote control 030152A.





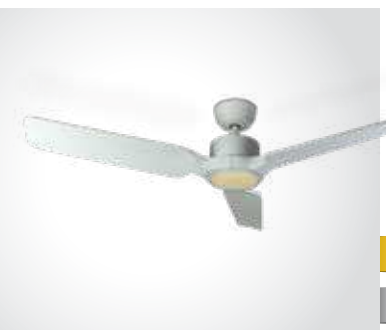

6310 | Metal body | White wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.




Optional 1m rod 030156/W.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6310C/W/V	White	CCT V	3000K-4000K- 5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6310/W/V	White	CCT V	3000K-4000K- 5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control

Black Body Ceiling Fans
Black Wood Blades

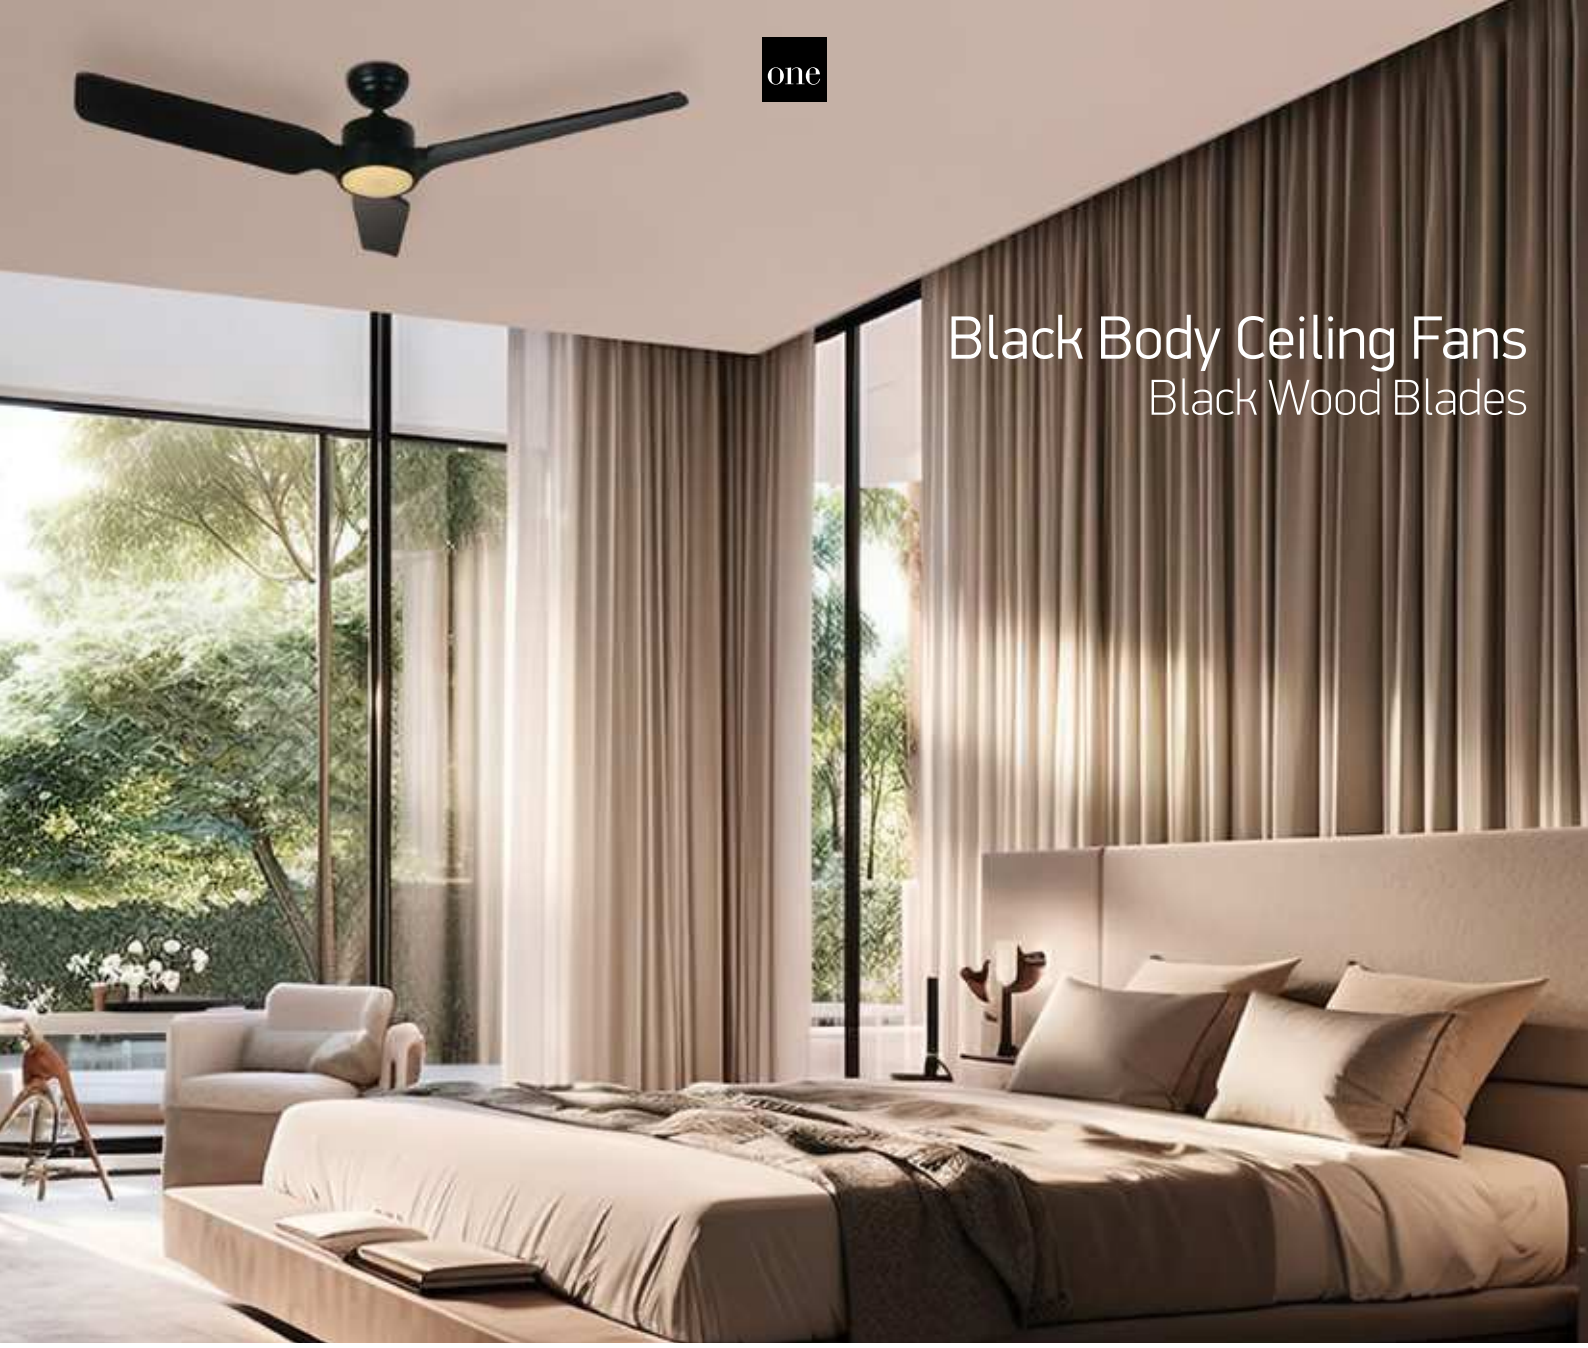




6310C | Metal body | Black wood blades | Ceiling mounted | 6 Speed | Winter reverse mode





Extra
Remote control
030152A.







6310 | Metal body | Black wood blades | Rod mounted | 6 Speed | Winter reverse mode






Extra
Remote control
030152A.




Complete with
15cm & 30cm rod.



Optional 1m rod
030156/B.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6310C/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6310/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control

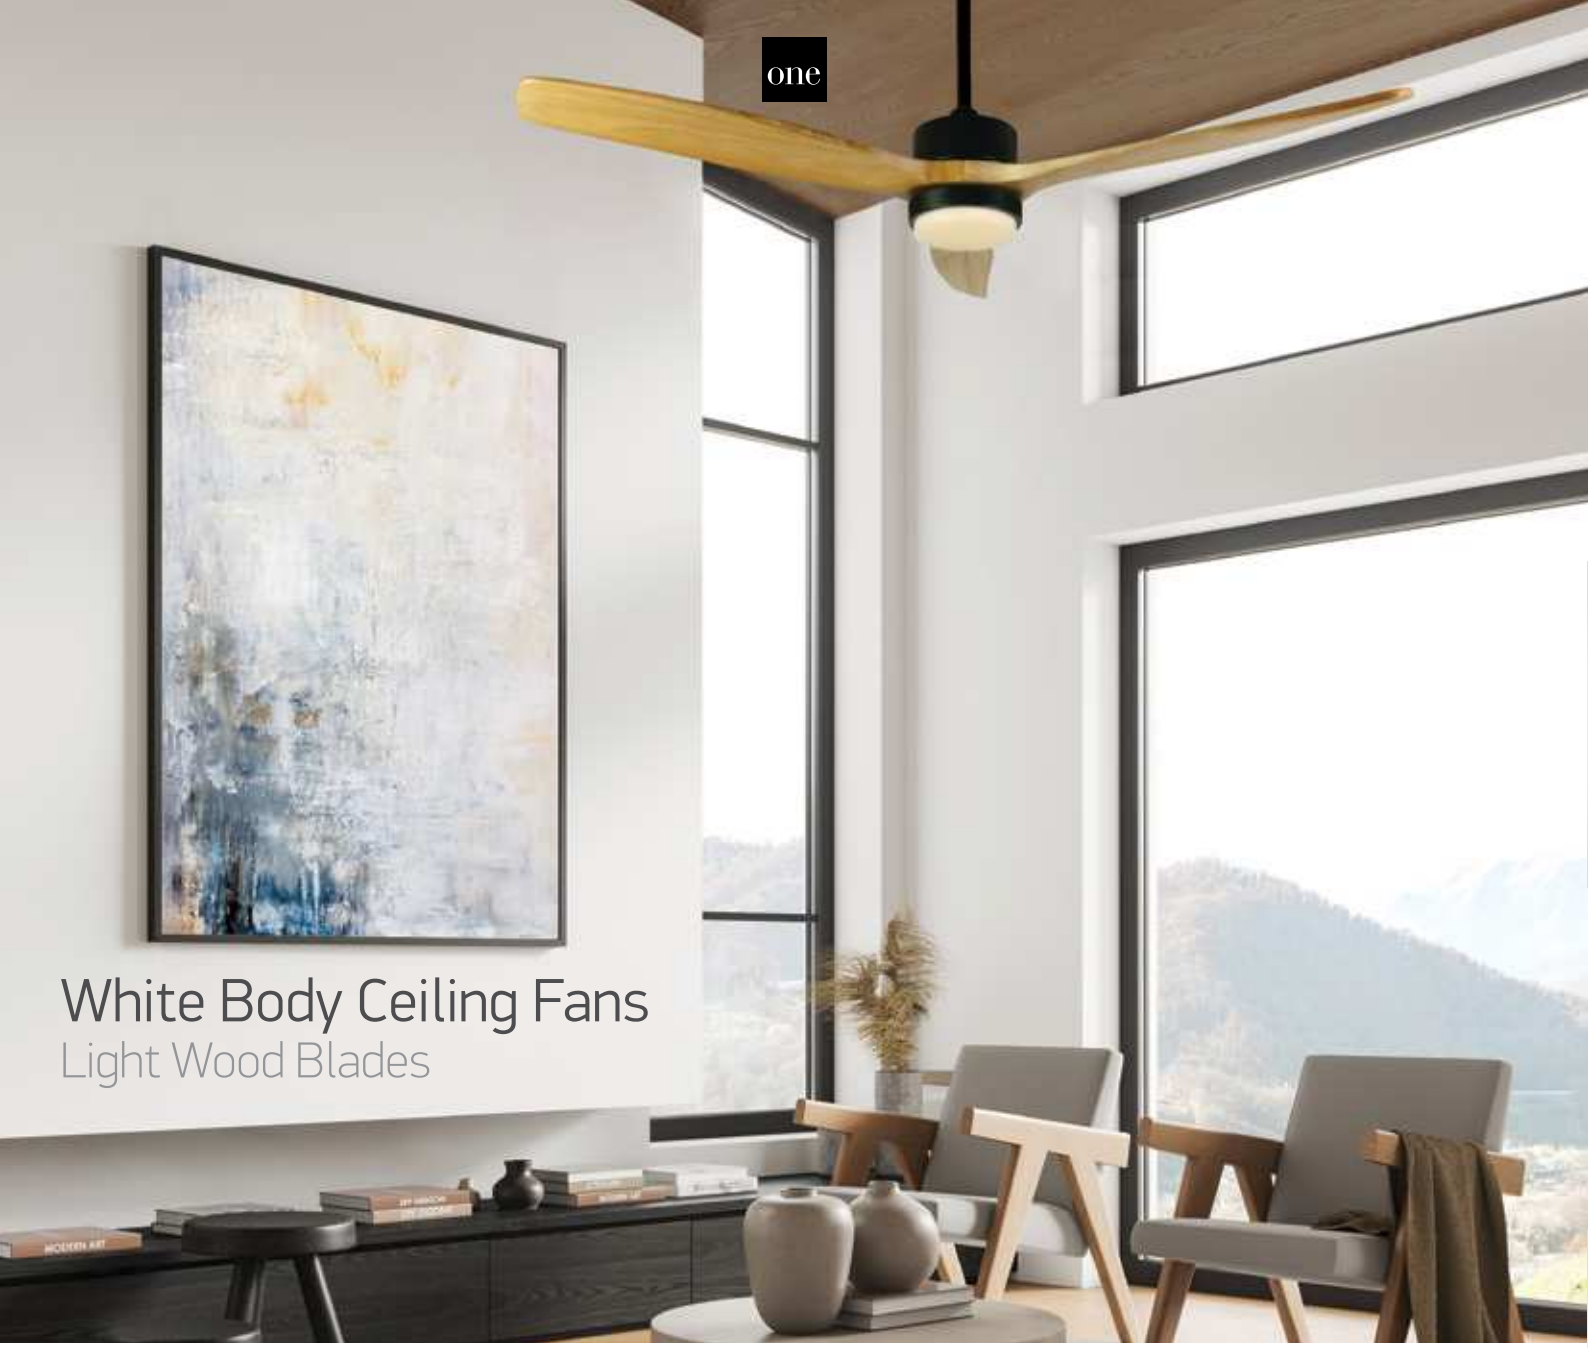

White Body Ceiling Fans
Light Wood Blades




6312LC | Metal body | Light wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20



Extra Remote control 030152A.







6308L | Metal body | Light wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/W.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6312LC/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	25W	230V	⏚	1	Complete with remote control
6308L/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control

Black Body Ceiling Fans
Light Wood Blades




6312LC | Metal body | Light wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new DC MOTOR · CE · 3 YEAR · IP20



Extra Remote control 030152A.








6314LC | Metal body | Light wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new DC MOTOR · CE · 3 YEAR · IP20



Extra Remote control 030152A.







6308L | Metal body | Light wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.





6312L | Metal body | Light wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.





6314L | Metal body | Light wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6312LC/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	25W	230V	⏚	1	Complete with remote control
6314LC/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V	⏚	1	Complete with remote control
6308L/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6312L/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	25W	230V	⏚	1	Complete with remote control
6314L/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V	⏚	1	Complete with remote control

Black Body Ceiling Fans
Dark Wood Blades




6312DC | Metal body | Dark wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20



Extra Remote control 030152A.








6314DC | Metal body | Dark wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20



Extra Remote control 030152A.







6308D | Metal body | Dark wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.





6312D | Metal body | Dark wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.





6314D | Metal body | Dark wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · new · DC MOTOR · CE · 3 YEAR · IP20




Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.




Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6312DC/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	25W	230V	⏚	1	Complete with remote control
6314DC/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V	⏚	1	Complete with remote control
6308D/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6312D/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	25W	230V	⏚	1	Complete with remote control
6314D/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V	⏚	1	Complete with remote control





24002 | 30W LED | 35W FAN | 6 Speed | Plastic + PC

LED BUILT IN
80 CRI
DIMMABLE
CCT V
DC MOTOR
2 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	FAN Watts	Input	Class		Notes
24002/W	White	CCT V	3000K-4000K-6000K	30W	2600lm	35W	230V		1	Complete with remote control



one
LIGHT



Marketing

Pages 831-832

28

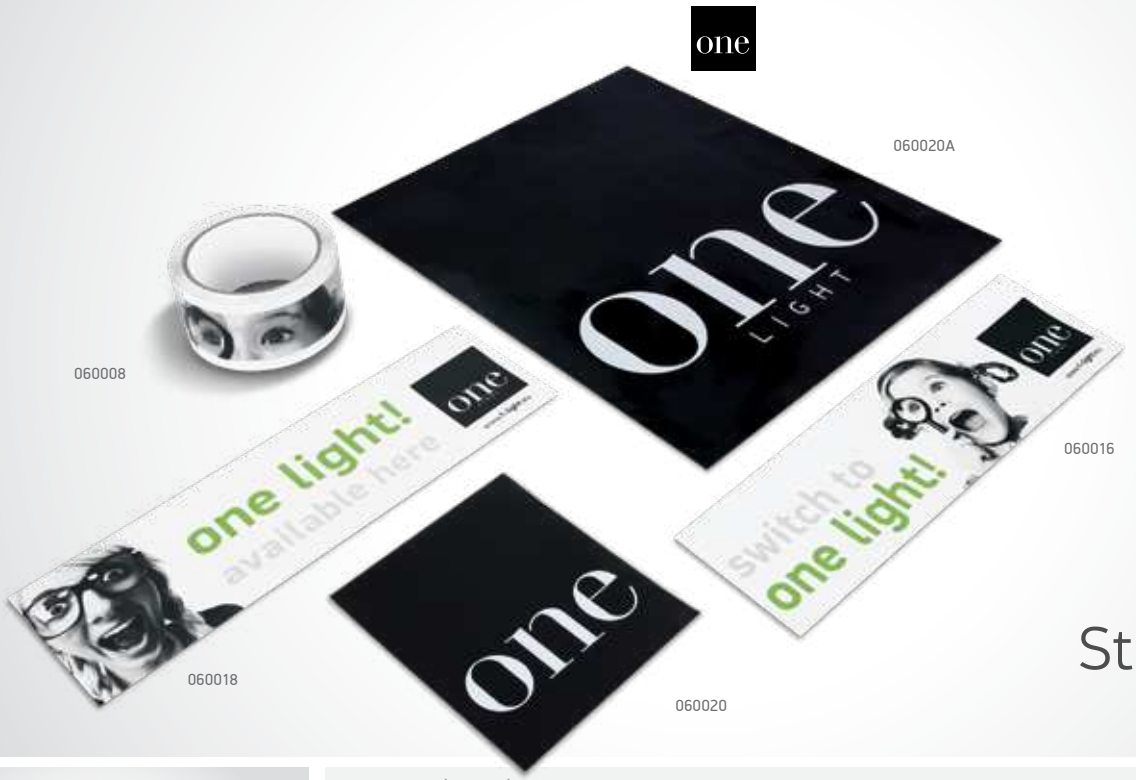

Stickers & Tape



060020 | one | Sticker

offer





060020A | one | Sticker

offer







060016 | switch to one light | Sticker **060018** | one light available here | Sticker

offer





060008 | Packing Tape

offer





T-Shirts, Bags & Pads




060052 | ONE LIGHT Catalogue 2025 | Edition 1

5

new



060010 | A5 Note Pad



offer




060014 | Large Plastic Bag

offer

060012 | Small Plastic Bag

offer



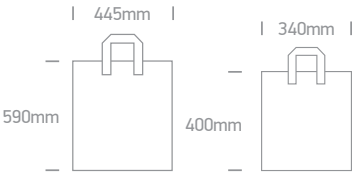



060026 | T-Shirt | SMALL

060027 | T-Shirt | MEDIUM

060028 | T-Shirt | LARGE

060029 | T-Shirt | XLARGE

offer

Special Offers
Last Pieces
2025



IP20 offer



89060WD
12V DC Dimmable 1-10V Driver 3x20W

5 YEAR

IP20 offer

Slightly yellow base

LED BUILT IN



62022C
62022C/SY/W/W White Warm white

Lamp type: 36W | SMD 2835 | 230V
Description: Plafo
(Complete with driver)

2 YEAR

IP20 offer



65305B
65305B/MC Brushed chrome

Lamp type: 3x40W | G9 | 100-240V
Description: Decorative

3 YEAR

IP65 offer

LED BUILT IN



70106A
70106A/C Cool white

Lamp type: 40W | LED | 100-240V
Description: Street Lights
(Complete with driver)

3 YEAR

IP65 offer

LED BUILT IN



70106D
70106D/C Cool white

Lamp type: 140W | LED | 100-240V
Description: Street Lights
(Complete with driver)

3 YEAR

offer



9S13
9S13/GR/E Green E27

Lamp type: 13W | E27 | 230V
Description: Spiral Colour CFL E27

2 YEAR

one

INDEX 2025

EDITION 1

030248	239, 240
050017	170, 171, 172, 173
050042	79
050044	149
050084	703, 704, 705
050086	131
050086A	131
050088	131
050088A	131
050090	347, 348, 350
050098	36
050099	34
050100	132
050102	132
050104	61
050106	422
050106A	NEW
050106B	NEW
050106C	NEW
050106D	NEW
050108	170, 171, 172, 173
050112	367, 368, 531, 532
050114FA	710
050114GB	710
050114HA	709
050114HB	710
050122	247
050162	76
050170	352, 354, 355
050170C	352, 354
050170D	354
050170D/../V	NEW
050176	626
050178	80
050180	810
050180A	810
050180C	810
050180E	810
050182	14, 48
050182R	14, 48
050182RA	14, 48
050182RB	14, 48
050206	425
050208	426
050210	681
050250	686
050280	62
050300A	281, 282
050300AH	281, 282
050300B	281, 282, 283, 284
050300BH	281, 282, 283, 284
050302	139
050326	718
050378A	54
050378B	54, 427
050378C	54, 427
060008	831
060010	832
060012	832
060014	832
060016	831
060018	831
060020	831
060020A	831
060026	832
060027	832
060028	832
060029	832
060052	NEW, 832
062002	813
0742	294
0750A	281, 282, 430
0750B	281, 282, 283, 284, 430
0800A	811
0800B	811
0800BA	811
0800C	811
0802	812
0903F	809
0903M	809
0904F	809
0904M	809
0904MA	809
094004	813
0950G	812
0950GA	812
0950GB	812
0990	540
0992	540
0994	691
0996	692
10004	153
10007	153
10100	186
10101C	81
10101L	39
10101LA	39
10102	3
10102H	72
10103	5
10103A	84
10103B	40
10103BTR	85
10103E	42
10103FA	163
10103FA/../V	165
10103H	57
10103LB	NEW
10103M	71
10103N	44
10103NP	77
10103P	71
10103T	177
10104M	83
10105	5
10105A1	8
10105AD	NEW, 17
10105ALG	NEW, 9, 10
10105C4	593
10105CJ	25
10105CM	7
10105D1	12
10105D2	12
10105D4	12
10105D8	NEW, 18
10105D9	15
10105DG	11
10105E	174
10105E1	16
10105FD	52
10105GL2	24
10105GT1	31
10105GT2	31
10105GU	6
10105H	13
10105K	187
10105M	19, 20
10105MD	21
10105R1	28
10105R1P	28
10105R2	29
10105R2P	30
10105RM	34
10105TG	11
10105TR	32
10105X	4
10105XS	4
10105Y	NEW
10105YTR	NEW
10106DC	56
10106DH	59
10106G	82
10106L	82
10106NA	791
10106P	77
10106PF	79
10106V	77
10106X	60
10106XTR	89
10107A	NEW
10107B	197
10107B/../V	NEW
10107BT	86
10107CA	181
10107CD	191
10107DB	NEW, 73
10107DC	49
10107DF	80
10107DFV	80
10107DL	72
10107H	72
10107K	61
10107M	69
10107PV	78
10107T	177
10107UV	193
10107WD	69
10107WP	73
10107Z	54
10108A	46
10108CF	202
10108D	45
10108D1	47
10108ED	174
10108FA	163
10108FA/../V	165
10108FD	184
10108H	70
10108J	84
10108R	45
10109D	192
10109D/../V	NEW
10109F	26
10109FD	201
10109FD/../V	NEW
10110CA	181
10110CE	179
10110FD	52
10110G	203
10110H	58
10110HTR	90
10110K	187
10110P	75
10110TD	200
10110U	NEW, 195
10112	185
10112A	NEW
10112BTR	87
10112C	NEW, 75
10112DC	56
10112DH	59
10112FA	163
10112FA/../V	165
10112HA	48
10112K	62
10112KD	174
10112P	74
10112R	76
10112TD	50
10112TP	75
10112X	60
10112XTR	89
10112Z	54
10113B	197
10113B/../V	NEW
10113UV	193, 194
10114CE	179
10115CA	181
10115CD	191
10115CF	202
10115E	174
10115FD	52
10115G	203
10115T	177
10116FD	183, 184
10118B	198
10118B/../V	NEW
10118DC	56
10118DH	59
10118FA	164

10118FA/../V 166
10118TD 200
10120 186
10120CA 182
10120CE 179
10120FD 201
10120FD/../V NEW
10120G 204
10120K 188
10120UV 193, 194
10120X 60
10120Z 54
10122D 192
10122D/../V NEW
10122FD 184
10124 176
10124T 178
10124U NEW, 195
10125B 198
10125B/../V NEW
10125TD 200
10128 185
10130A 174
10130CA 182
10130CF 202
10130FA 164
10130FA/../V 166
10130K 188
10130KA 188
10130U 195
10130U/../V NEW, 195
10130UV 193, 194
10140F 169
10142 186
10148P 169
10148PE 169
10150G 204
10160CA 182
11070RD 155
11070TR 160
11101B 119
11103A 93
11103B 117
11103C 93
11103D 125
11103K 118
11103L 123
11103LB 123
11103LC 121
11103M 143
11103N 122
11104K 132
11105 93
11105A1 107
11105ABG 104
11105ABGL 103
11105AC 100
11105AL 100
11105C 95
11105CGU 96
11105D4 108
11105D8 107
11105DT 108
11105DTR 113
11105F 112
11105GU 94
11105M 105, 106
11105TG 108
11105TR 113
11105U 102
11105UA 102
11105UB 102
11105UTR 113
11106K 126
11106LB 208
11106M 143
11106PF 149
11106PK 136
11106T 138
11107B 127
11107BT 150
11107C 140
11107FD 133
11107K 132
11107P 136
11107RA 147
11107T 138
11107TTR 150
11107WD 135
11108LA 142
11109B 140
11109FA 112
11109KD 126
11109L 208
11110AB 156
11110E 211
11110N 154
11110TR 160
11111C 139
11112 130
11112E 134
11112H 131
11112L 208
11112P 137
11112RA 147
11112RB 148
11112T 150
11112TA 133
11113D 136
11113E 141
11115G 215, 216
11120E 211
11126F 212
11128G 215, 216
11130BT 207
11130E 211
11150B 214
11207C 140
11207WD 135
12101 417
12105AB 376
12105AC 375
12105AL NEW, 374
12105B 375
12105E 374
12105E1 366
12105E2 366
12105E3 366
12105E4 385
12105E6 385
12105F 363
12105H 365
12105J 364
12105K 364
12105L 363
12105M 367
12105MA 368
12105N NEW, 369
12105NA 370
12105T 371
12105TA 372
12105Y 377
12105YA 378
12106B 437
12106X 431
12107B 435
12107K 422
12107KA 422
12107R NEW
12107V 424
12108C 424
12108D 425
12108DB 425
12108FD 443
12108LA 416
12108T 423
12108X 439
12108XA 440
12110D 421
12110H 433
12110HA 436
12110HB 433
12110R NEW
12112A 429
12112D NEW, 442
12112H 434
12112T 423
12112X 431
12112Z 427
12112ZA 428
12115D 423
12115F 430
12115G 415
12115HA 436
12115L 441
12116FD 443
12118R NEW
12120 373
12120A 429
12120D NEW, 442
12120F 430
12120X 432
12120Z 427
12120ZA 428
12122C 424
12122D 426
12124 373
12124H 434
12124X 432
12125D NEW, 442
12125L 441
12125R NEW
12126 373
12128A 429
12130D NEW, 442
12130LA 444
12130Z 427
12132 373
12134 373
12135L 441
12138G 379
12142 379
12144 380
12144A 380
12205NA 370
12205T 371
12205TA 372
12205Y 377
12205YA 378
12207B 435
12208LA 416
12208XA 440
12307B 435
12406B 437
12406C 438
12606C 438
12906B 437
12906C 438
20030 775
20032 234, 775
20034 776
20036 776
22000 774
22004 770
22006 769
22008 770
22014 770
22020 774
22022 769
24002 828
36002 360
36004 360
38001A 263
38002A 263
38005A 263
38006A 263
38006B 263
38006C 263
38007A 263
38007B 263

38007C 263
38016 546
38018 546
38101A 266
38101B 266
38101C 266
38101D 266
38102A 266
38102B 266
38102C 266
38103 265
38104B 264
38104B/../V NEW
38104L 261
38105 265
38108B 264
38108B/../V NEW
38108N 620
38110 265
38110BD 619
38112C 614
38114B 264
38114B/../V NEW
38114DE 618
38114EE 618
38114EL 616
38114GE 618
38114M 615
38114N 620
38114R 613
38114T 620
38115C 615
38115D 617
38115L 261
38115LB 706
38115LB/../V NEW
38116P 617
38118C 614
38118E 699
38118K 611
38118LA 705
38118LC 703
38118M 701
38118N 612
38120C 615
38120D 613
38120L 350
38120R 613
38130LB 706
38130LB/../V NEW
38135L 350
38136E 699
38136LA 705
38136LC 703
38136ME 701
38140AU 356
38145AR 358
38145AR/../V NEW
38145BR NEW
38145LA 705
38145LC 703
38148N 349
38150A 353
38150A/../V NEW
38150AR 358
38150B 351
38150B/../V NEW
38150BR 359
38150BU 351
38150BU/../V NEW
38150C 351
38150C/../V NEW
38150E 352, 354
38150LB 706
38150LB/../V NEW
38151A 353
38151A/../V NEW
38152R 357
38152R/../V NEW
38152RC 357
38152RC/../V NEW
38152RL 357
38158E 699
38158M 701
38160A 355
38160A/../V NEW
38161A 355
38161A/../V NEW
38207L 262
38215L 262
38218E 700
38225M 348
38230L 262
38236E 700
38236LC 704
38236M 702
38245LC 704
38248L 350
38248M 347
38248M/../V 348
38250M 348
38258E 700
38280 707
40001A 315
40002A 315
40002C 315
40003 319
40003A 315
40003R 321
40020 316
41002 322
41002A 322
41004 319
41004A 317
41004B 321
41008 319
41008A 317
41008B 321
41010 319
41010A 317
41012 320
41012A 318
41012B 321
41016 320
41016A 318
41016B 321
41018 320
41018A 318
41020 317, 319
41022 320
41022A 318
41024A 318
41026R 316
41030 322
41032 316
41034R 321
42001 325
42001A 323
42001B 324
42001R 328
42001RB 327
42001TR 326
42002 325
42002A 323
42002B 324
42002R 328
42002RB 327
42002TR 326
42003 NEW, 325
42004A 330
42004C 330
42006BX 330
42012A 325
42012AA 323
42012AB 324
42012AR 328
42012ARB 327
42012ATR 326
42012B 325
42012BA 323
42012BB 324
42012BR 328
42012BRB 327
42012BTR 326
42012C 325
42022 329
42022A 329
42022B 329
42026 325
42026A 323, 324
42032 329
42032A 329
42100A 331
42100AA 331
42100AL NEW
42100B 331
42100BA 331
42100BL 331
42100E 332
42100EA 332
42100EL 332
42102A 333
42102B 333
42102BL 333
42104B 335
42106A 334
42106B 334
42106BL 334
42108 338
42108A 338
42108AL 338
42108L 338
42110 339
42112AA 335
42112BA 335
42114A 339
42114B 339
42114BL 339
42114C 340
42114CL 340
42116C 339
42118 340
42118L 340
42120B 333
42122A 338
42124AA 335
42124BA 335
42126AA 342
42126BA 342
42128A 336
42128B 336
42128C 336
42130A 341
42130B 341
42132 341
42132L 341
42134 337
42134A 337
42134B 342
42136 342
50006B 64
50012H 58
50012HTR 90
50024HTR 90
50101 81
50102B 65
50103ATR 88
50103H 57
50103L 43
50104M 83
50105ALG 9
50105AR 24
50105GT1 31
50105K 189
50105M 22
50105MA 23
50105R1 27
50105RM 36
50105TG 11
50106B 63

50107B 67
50108A 46
50110CE 180
50110H 58
50110HTR 90
50110UV 196
50114CE 180
50115UV 196
50116FA 167
50116FA/../V 168
50120B 190
50120CE 180
50122D 192
50122FA 167
50122FA/../V 168
50125UV 196
50130B 190
50130FA 167
50130FA/../V 168
50130UV 196
50140B 170
50140BAU 171
50140BR 173
50140BRU 173
50140BU 170
50140BU/../V 170
50140BW NEW, 172
50148AU 171
50148RE 173
50202B 65
50203ATR 88
50207B 67
50302B 66
50306B 63
50307B 67
50401L 43
50403ATR 88
50406B 63
50406C 68
50502B 66
50506B 64
50507B 67
50601L 43
50902B 66
50906C 68
51010TR 114
51012H 146
51024H 146
51100TR 159
51101AL 119
51101B 119
51103AB 99
51103L 124
51103LB 124
51103LW 124
51105 97
51105AB 99
51105ABG 104
51105B 101
51105B1 111
51105D 111
51105GA 98
51105N 109
51105TA 110
51105TG 111
51106A 129
51106M 144
51107 128
51110 156
51110A 129
51110AD 157
51110ATR 158
51110N 154
51111C 139
51112 130
51112E 134
51112H 131
51120 210
51120B 213
51125 209
51130 210
51140 209
51140TR 214
51201AL 120
51205ABG 104
51205B 101
51205N 109
51206M 144
51211C 139
51212E 134
51230 210
51240B 213
51301AL 120
51401AL 120
51406B 145
51506B 145
60001 418
60008 414
60008A 414
60010 418
60038 389
60040 389
60042 389
6005 387
60056 388
60106 619
60106A 619
60116 579
60118 600
60132 584
60158 588
60162 588
60168 588
6017 388
60178B 592
6017A 388
6017G 387
60204 621
60208 622
60208A 622
6022 387
6030 388
61000 558
61000A 558
61046 597
61050A 552
61050B 552
61066 345
61066T 345
61076 597
61080 598
61082 555
61082A 554
61082B 555
61084 559
61086 561
61086A 562
61088 559
61090 557
61092 558
61094 557
61096 560
61098 560
61100 556
61102 556
61104 560
61106 557
61108 346
61110 346
61110A 346
61116 579
61116A 600
61118 563
61118A 563
61120 599
61122 599
61126 621
61132A 606
61132B 606
61134A 808
61136 815
61138 815
62006 NEW
62006A NEW
62006B NEW
62006C NEW
62006D NEW
62010 489
62010A 489
62014 489
62018AF 501
62018F 502
62022A 491
62022B 491
62024C 490
62025 500
62026A 492
62026B 492
62026C 492
62026D 492
62030F 502
62038F 502
62102 488
62104 488
62112 511
62115F 513
62116A 579
62116F 175
62116FA 175
62118D 495
62120 594
62120A 594
62122F 514
62125D 495
62130AF 514
62130F 513
62130L NEW, 507
62130N 504
62132N 503
62132N/../V 504
62132NA 510
62132NA/../V NEW
62134N NEW, 505
62135NA 511
62140AE 516
62140BAU 517
62140BF 516
62140BFU 517
62140BRU 518
62140F 515
62140FB 499
62140RE 516
62140RF 515
62142N 503
62142N/../V NEW
62142NA 510
62142NB 574
62144N 506
62144NB 567
62146 497
62146A 497
62148A 575
62148B 575
62148L 508
62148L/../V NEW, 508
62150BFU 517
62150BRU 518
62150D 495
62152 499
62154 494
62156C 564
62156D 564
62160 498
62160A 498
62160FB 499
62162A 587
62164A 589
62166B 591
62170A 586
62170B 586

62172A 582
62172B 582
62172C 582
62180NB 574
62182 509
62182A 509
62184A 577
62184B 577
62310A 381
62401AL 414
6300 819
63016A 543, 544
6302 821, 822
63020 542
63022 543, 544
63022A 543, 544
63022B 543, 544
63028 689
63028A 689
63028B 689
6302C 821, 822
63038 545
6304 821, 822
63040 541
63042 541
63044 541
63046 565
63046A 565
63046B 565
63048 566
63050 567
63054A 571
63054C 571
63056 572
63058 573
6306 821, 822
63062 570
63066 569
63066A 569
63068 570
63068A 570
63072 538
63076A NEW
63076C NEW
63076D NEW
63076E NEW
6308D 827
6308L 825, 826
6310 823, 824
63100N 709
63100N/V 712
63100NA 708
63105M 531
63105MA 532
63105N 533
63108A 534
63108AT NEW
63108B 534
6310C 823, 824
63110C 576
63112 576
63114 567
63116 580
63116A 580
63122 536
63122B 536
63124 535
63124B 535
63124C 535
63126 539
63126A 539
6312D 827
6312DC 827
6312L 826
6312LC 825, 826
63130P 590
63132P 584
63134P 583
63136 585
63138 585
63140 537
63140B 537
63140C 537
63142 547, 548
63142A 548
63144A 568
63144B 568
63146A NEW
63146B NEW
63146C NEW
63146D NEW
6314D 827
6314DC 827
6314L 826
6314LC 826
63150 NEW
63150A NEW
63150B NEW
63150C NEW
63150N 709
63150N/V 712
63150NA 708
63150NL 711
63152A NEW
63152B NEW
63152C NEW
63154A NEW
63154B NEW
63154C NEW
63154D NEW
6316 820
63166P 591
63174C 581
63184C 578
63200N 710
63200N/V 712
63200NA 708
63240NL 711
64002 487
64004 487
64010 487
65004A NEW
65004B NEW
65004C NEW
65004D NEW
65004E NEW
65018T 300
65018T/../V NEW
65019T 307
65024T 299
65024TA 300
65025T 300
65025T/../V NEW
65026T 299
65026T/../V NEW
65028AT 303
65028BT 303
65028CT 303
65102 414
65105BT 307
65105CT 308
65105DT NEW
65105E 386
65105EA 386
65105GT 310
65105N 383, 384
65105NA 608
65105NAT 305
65105NB 382
65105NBA 608
65105NT NEW, 306
65105WT 307
65107 416
65108AT 292
65108T 292
65111AT 311
65118AT 311
65144 606
65146 605
65146A 605
65147 605
65147A 605
65148A NEW
65148B NEW
65168T 302
65170AT 301
65170BT 301
65170BT/../V NEW
65172AT 304
65172BT 304
65205E 386
65205N 383, 384
65226T 294
65305N 383, 384
65306BT 289
65405N 383, 384
65406BT 290
65505N 383, 384
65506BT 289
65518T 309
65519T 310
65520T 310
65522T 310
65524T 292
65610AT 277
65611NT 279, 280
65612NT 279, 280
65614NT 279, 280
65619T 294
65620AT 278
65620T 293
65620TA 293
65626T 294
65628T 293
65642AT 285, 286
65642BT 285, 286
65642CT 285, 286
65644T 291
65646T 292
65650AT 297, 298
65650BT 297, 298
65650CT 297, 298
65650T 298
65652T 291
65656AT 287, 288
65656BT 287, 288
65656CT 287, 288
65656DT 287, 288
65660AT 281, 282
65660BT 281, 282
65660BTL 284
65660BTT 283
65662AT 295, 296
65662BT 295, 296
65664AT 304
65664BT 304
65668T 312
65738 603
65738A 604
65740 607
65740A 607
65744 604
65746 601
65746A 601
65746B 602
65746R 601
65748 NEW
65906BT 290
67034 678
67050 688
67076 456
67076A 456
67094 671
67098 671
67100 672
67102 672
67124 471
67126 484
67130 397
67130A 400

67130C 395
67130D 399
67130DD 399
67130E 397
67130F 400
67132A 406
67132C 403
67132D 405
67138 451
67138A 451
67138C 447, 448
67138D 447, 448
67138E 447, 449
67138EL 452
67138F 450
67138L 452
67142A 391
67142B 391
67142C 403
67142D 393
67142F 392
67142G 392
67142H 394
67142K 394
67170 472
67174 479
67176 479
67196A 664
67196B 664
67196BG 663
67196C 664
67198AG 661
67198G 661
67200G 662
67202G 662
67204 407
67204B 407
67204E 670
67204G 670
67208 408
67208B 408
67210 408
67216 407
67218 528
67218E 528, 729
67218R 528, 729
67220A NEW
67220B NEW
67220E NEW
67242 484
67280AN 524
67280ANE 524, 728
67280BN 524
67280E 526
67280EA 526
67280N 524
67282AN 523
67282ANE 523, 728
67282BN 523
67282E 525
67282EA 525
67282N 523
67328 409
67336 484
67340A 467
67354 467
67358 678
67359 475
67359A 476
67359B 476
67360 475
67360A 476
67362 522
67362A 522
67362C 460
67363 522
67363A 522
67364 463
67366 519
67366/../V NEW
67366E 519, 728
67368 519
67368/../V NEW
67370 520
67370/../V NEW
67372 520
67374 457
67374A 457
67376 466
67376A 466
67378A 465
67380 445
67380A 445
67384 521
67384A 521
67386A 473
67386C 473
67388B 474
67388C 474
67390 527
67392 460
67394 463
67394A 463
67396 473
67396A 473
67398 468
67398A 468
67398C 468
67400A 396
67400B 396
67400D 404
67400E 404
67402 500
67406 683
67406A 683
67406B 683
67406C 683
67406D 684
67406E 684
67408 688
67410 682
67410A 682
67412 466
67414 478
67417 478
67418 478
67420 410
67420A 410
67420AL 482
67420B 410
67422 470
67422A 470
67426 398
67426A 398
67426B 402
67426C 402
67426D 401
67430A 477
67438 496
67440 455
67440A 455
67442 481
67442B 481
67444C 481
67448 493
67448A 493
67450 469
67450A 469
67452 512
67454 413
67456 660
67458 660
67460A 676
67460B 676
67462 685
67464G 661
67466A 420
67466B 420
67466C 420
67470 675
67470A 675
67472 464
67472A 464
67474A 459
67478 483
67480A 453
67480B 453
67482 660
67484 483
67488A 667
67488B 667
67488C 667
67490 677
67490A 677
67492 458
67492P 458
67494 674
67494A 674
67496 687
67498 NEW, 528
67502A 480
67502B 480
67502C 480
67504 680
67504A 680
67506 679
67506A 679
67508A NEW
67508B NEW
67510 681
67510A 681
67510B 681
67512 470
67514 668
67516A 446
67516C 446
67518 390
67520 686
67520A 686
67524A 454
67524B 454
67526A1 462
67526A2 462
67526A3 462
67526B1 461
67526B2 461
67526B3 461
67530A 685
67530B 685
67532 469
67534A 673
67534B 673
67534C 673
67536A 392
67536B 392
68001 637
68002 637
68004 628
68004A 628
68006N 626
68007 625
68008 627
68030 629
68032 630
68048 635
68062 636
68064 636
68066 636
68068 634
68068A 634
68068C 634
68070 628
68072A 633
68072C 633
68074 631
68074A 631
68074B 631
68076 632
68076A 632
68080B 638

69002A 656
69006 655
69006G 653
69008 655
69015A 640
69015B 640
69015C 640
69016 641
69016A 641
69016AG 642
69016B 641
69016BG 642
69016G 642
69028A NEW
69040 647
69042 643
69042A 639
69042B 639
69042M 643
69044 639
69046G 654
69048G 654
69050 647
69052 644
69052A 644
69054 649
69054A 649
69056A 645
69056B 645
69056C 645
69058A 652
69058B 652
69058C 652
69060 648
69062 651
69064A 694
69064B 694
69064C 694
69066 695
69066A 695
69066B 696
69066D 696
69066M 695
69070A 646
69070B 646
69070C 646
69072 650
69074A 650
69074B 650
69074C 650
70038 814
70044 814
7008A 669
70105 724
7010P 816
70110 724
70112 723
70112/../V NEW, 723
70114 718
70116B 718
70116C 718
7020 713
7022 713
7028A 714
7028AG 717
7028CB 715
7028CC 715
7028CD 716
7028CE 716
7028CF 716
7030 713
7040 713
7046 665
7047 666
7052 668
7052B 668
7055A 720
7055B 720
7055B/RGB 719
7056A 722
7058 721
7058A 721
7058R 721
7068 659
7070 659
7072 690
7072A 690
7101AL 781
7103ALG 779
7103ALGD 780
7106ALG 779
7106ALGD 780
7106GPH 779
7107ALG 779
7201G 781
7301CG 785
7303CG 785
7304GE 786
7305EG 782
7305EGD 782
7306CBG 785
7306CG 785
7306CG/BL 786
7306CGD 786
7306CHG 786
7306GC 784
7306GCD 784
7306GDV 788
7306GZ 783
7306KGD 783
7307BG 781
7307M 787
7310H 789
7313M 787
7315G 790
7315GB 790
7315GD 790
7512D 792
7524BD 792
7524D 792
7811 271
7811E 271
7811F 271
7820 221
7820/BL 235
7820A 236
7820L 229
7820V 230
7820W 222
7820W/BL 235
7820WL 229
7822 221, 223, 230
7823 220
7824 221, 223, 230
7825 231
7826 222, 229
7827 226, 238
7827A 228, 238
7828 222, 229
7829 223
7829A 223
7830 237
7830W 238
7832 237
7833 220
7834 237
7835 225
7835/DEW 234
7835C 224
7835P 224, 225, 231
7835V 230
7835W 226
7837 224, 225, 231
7838M 241, 245, 246
7839 227
7840 259
7840A 260
7840B 260
7840D 260
7841 272
7841A 272
7841AF 272
7841B 272
7841BF 272
7841F 272
7842 259
7843 220
7843E NEW
7844 227
7844/A NEW
7844B 227
7844C 227
7844E NEW
7844P 227
7845 232
7846 227
7846/RGB 237
7846/RGBW NEW
7846B 227
7846C 227
7846P 227
7846RB 237
7846RC 237
7846RP 237
7846W 228
7846WA 228
7846WB 228
7846WC 228
7846WP 228
7848 219
7850 267
7850C 267
7850E 267
7850F 267
7850L 267
7850P 267
7860 267
7860C 267
7860E 267
7860F 267
7860L 267
7860P 267
7860R 267
7862 268
7862C 268
7862E 268
7862F 268
7862L 268
7862P 268
7864 269
7864C 269
7864E 269
7864F 269
7864P 269
7866 274
7866E 274
7866F 274
7868 273
7868E 273
7868F 273
7868P 273
7870 231
7872 270
7872C 270
7872E 270
7872P 270
7875 231
7880 233
7882 233
7884 233
7885 233
7887 232
7900 NEW, 243
7900C 241, 245, 246, 247
7900P 241, 245, 246, 247, 248
7900R 241, 245, 246, 247
7900TR 253
7901 243
7901A 271
7901AR 271

7901R 249
7901TR 242, 253
7902 241, 243
7902R 242, 249
7903 239
7903R 240
7903TR 240
7904 241, 244
7904ATR 253
7904R 250
7904TR 242, 253
7905 244
7906 248
7906D 248
7906R 251
7906TR 253
7908 255
7908A 255
7909TR 254
7910 246
7910A 247
7910AR 252
7910R 242, 252
7912 241, 245
7912A 245
7912R 242, 251
7914R 258
7915R 258
7918 258
7920 257
7922 256
7937T 255
7940 NEW
7940A NEW
7940B NEW
89001 NEW
89002 730
89002A 736
89002B 730
89002C 730
89003 807
89004 739
89004A 739
89004AT 740
89004T 740
89005 734
89005A 733
89005B NEW
89006A 807
89006AT 746
89006P 739
89006PA 739
89006PC 739
89007AL NEW, 765
89007T NEW, 740
89008 741
89008A 743
89008AT 746
89008UT 745
89009 735
89009L 763
89009UT NEW, 745
89010AT NEW, 740
89015 741
89015A 743
89015AL NEW, 765
89015AT 746
89015C 742
89015CT 746
89015L NEW, 765
89015T 746
89015V 749
89015W 748
89016UT 745
89020 741
89020C 742
89024UT 745
89025L 763
89026AL NEW, 766
89028AM 747
89028M 747
89030A 743
89030C 742
89030UT 745
89030V 749
89030VD 758
89030VL 755
89030W 748
89040AT 746
89040L 764
89040VT 751
89044L NEW, 766
89048 169, 171
89048T 744
89050LL 763
89050TLD 764
89050VT NEW, 751
89060 744
89060VL 755
89060VLD 756
89060VN 753
89060VR 758
89075V 749
89075VL 755
89075VT 751
89075W 748
89090VR 758
89100L 772
89100LP 773
89100V 750
89100VL 755
89100VLL 757
89100VLT 756
89100VN 753
89100VND 754
89100VP 759
89100VT 752
89102L 771
89104LT 772
89150V 750
89150VL 755
89150VLL 757
89150VLT NEW, 756
89150VN 753
89150VP 759
89150VPL NEW, 760
89150VT NEW, 752
89200V 750
89200VN 753
89200VND 754
89200VP 759
89200VT NEW, 752
89200X 761
89200XN 762
89240VL NEW, 756
89240VLL 757
89240VPL NEW, 760
89240XL NEW, 761
89240XR 762
89300VP 759
89302 773
89320V 750
89320X 761
89350VN 753
89350XN 762
89404 732
89406 731
89406R 731
89408 731
89410 731
89412 727
9007LA 803
9009L 802
9016LA 803
9018L 801
9018L/V 802
9018LA 803
9022L 801
9022L/V 802
9026L 801
9922L 803
9940L 803
9C004B 551
9C02R 798
9F01 795
9F07L 795
9G01 804
9G03R 798
9G03RAD 797
9G04E 800
9G04RAD 797
9G06RD 797, 798
9G08D 800
9G08E 800
9G08K 799
9G09 793
9G09T 793
9G10L 793
9G10V 793
9G12B 794
9G12D 794
9G80N 796
9T05RD 797

HEADQUARTERS

CYPRUS

ONE LIGHT LIMITED
www.1-light.eu
one@1-light.eu
0035722450833

UK

ONE-LIGHT (UK) LIMITED
www.1-lightuk.com
info@one-lightuk.com
00448445561515

AGENTS / DISTRIBUTORS

ALBANIA

BROTECH BRANDS SH.P.K.
www.brotechbrands.com
info@brotechbrands.com
00355672009191

AUSTRALIA

BP LIGHTING PTY LTD
www.bealpritchett.com.au
sales@bplighting.com.au
0061294376124

AUSTRIA

ELUX LICHTSYSTEME GMBH
www.elux-licht.at
office@elux-licht.at
004316154690

AZERBAIJAN

GSN LLC
www.gsn.az
hasan@gsn.az
00994102235505

BAHRAIN

ILLUMINATI FOR LIGHTING &
ELECTRICAL SOLUTIONS EST
sales@illuminati-solutions.net
0097366765467

SYNERGIA COMPANY W.L.L.
sales@synergiabh.com
0097317251237

WEZAN LIGHTING WLL
www.wezan.bh
info@wezan.bh
0097317893926

BELGIUM

LICHTKONING BV
www.lichtkoning.be
info@lichtkoning.be
003214709684

LUMOTRONIC BV
www.lumotronic.eu
sales@lumotronic.eu
003212231031

NIAGARA - NNLIGHT
www.nnlight.be
info@nnlight.be
003238771616

BOSNIA HERZEGOVINA

ABV SISTEM doo
www.ledrasvjeta.ba
aco.abv@gmail.com
0038766133044

ELEKTRO-MILAS doo
www.elektromilas.com
kontakt@elektro-milas.com
0038739830750

BULGARIA

ATG PLC
www.atg.bg
sales@atg.bg
00359896888490

ILLUMINARTE LTD
www.illuminarte.eu
info@illuminarte.eu
00359895304040

VALTRONIC OOD
www.valtronic.bg
office@valtronic.bg
00359899904419

CHILE

HOME CONTROL SA
www.homecontrol.cl
iluminacion@homecontrol.cl
0056229502000

CROATIA

ART-RASVJETA DOO
www.art-rasvjeta.hr
ozaljska@art-rasvjeta.hr
0038513697901

CYPRUS

DIMCO LTD
www.dimco.eu
dimco@dimco.eu
0035722446565

CZECH REPUBLIC

ATEH SPOL. s r.o.
www.ateh.eu
ateh@ateh.eu
00420777304463

DENMARK

LYSTEK APS
www.Lystek.dk
Kristoffer@Lystek.dk
004598252525

ESTONIA

ELEKTRI EKSPERT LTD
www.ledekspert.eu
info@ledekspert.eu
003726386416

AGENTS / DISTRIBUTORS

FRANCE

IDELUM SARL
www.idelum.com
info@idelum.com
0033478341014

SFN ECLAIRAGES
www.sfneclairages.com
info@sfneclairages.com
0033148390194

SIGMA LIGHT SAS
www.sigma-light.com
info@sigma-light.com
0033145427425

VANDA LIGHTING
www.onelight.fr
contact@vandalighting.fr
0033477813920

GERMANY

FIRSTLIGHT GMBH
www.firstlight-landshut.de
firstlight@t-online.de
004987196647343

H&B BELEUCHTUNGSSYSTEME GMBH
www.HundB.de
info@HundB.de
0049202280820

GREECE

V. KAFKAS SA
www.kafkas.gr
customercare@kafkas.gr
00302163003333

ZAMPELIS SA
www.zambelislights.gr
info@zambelislights.gr
00302299063519

HUNGARY

MAXI LIGHTING KFT.
www.maxilighting.hu
info@maxilighting.hu
003672281297

REVOLUM LIGHTING ZRT
www.revolum.hu
info@revolum.hu
0036708843830

SOL-LIGHT KFT
www.solinfo.hu
info@solinfo.hu
0036302753857

ICELAND

PFAFF
www.pfaff.is
esm@pfaff.is
003544140400

IRELAND

LIGHTVAULT
www.lightvault.ie
salesdesk@lightvault.ie
0035314642288

ITALY

AEOSS SRL
www.aeoss.lighting
info@aeoss.it
00390350402184

ANCO LEUCHTEN KG DES ZANGERLE KLAUS & CO.
www.ancoleuchten.it
info@ancoleuchten.it
00390473739 788

GRB GREEN SRLS
grbgreen.it@gmail.com
00393478436313

KING LED SRL
www.king-led.it
info@kingled.it
00393621444684

LED-TEC
www.led-tec.net
info@led-tec.net
00390471663124

JORDAN

ORIENT PALACE FOR LIGHTING
orient@opl-lighting.com
0096265532036

KAZAKHSTAN

BEWAHRT ENGINEERING
www.bw4.kz
bg@bewahrt.kz
0077787789565

KENYA

LUCITECH EA LTD
www.lucitechea.com
sales@lucitechea.com
00254725792364

KUWAIT

H O M INTERIORS
www.homkw.com
sales@homkw.com
0096592298018

LATVIA

EKOLUMENS
www.ekolumens.lv
riga@ekolumens.lv
0037129614164

LASD LV
www.lightstudio.lv
andrew@lightstudio.lv
0037166117660

SLM SOLUTIONS SIA
www.decolight.lv
info@decolight.lv
0037167376717

LEBANON

AYANIAN GROUP S.A.L
www.ayaniangroup.com
info@ayaniangroup.com
009619855790
0096176479974

LITHUANIA

UAB EKOLIUMENAS
www.ekoliumenas.lt
info@ekoliumenas.lt
0037068526055

UAB ENERGY GREEN
www.energygreen.lt
info@energygreen.lt
0037061550293

UAB GITOMA
www.gitoma.lt
info@gitoma.lt
0037066099994

UAB JOVESA
www.sietynas.lt
info@sietynas.lt
0037060229933

MALTA

VCT LTD
www.vct.com.mt
info@vct.com.mt
0035621432571

AGENTS / DISTRIBUTORS

MAURITIUS

MUBELO ELECTRICAL LTD
contact@mubelo.mu
002306985200

MOLDOVA

SMARTLIGHT (TOP LIGHT SRL)
www.smartlight.md
office@smartlight.md
0037378202020

MONTENEGRO

DC LIGHT SYSTEMS DOO
dragan.damjanovic@dclightsystems.me
0038267257533

IQ ENERGY DOO
www.iqenergy.me
igor.cenev@iqenergy.me
0038269202936

MOROCCO

SOCIETE LED'S PLAY
www.ledsplay-maroc.com
fbahechar@ledsplay.ma
00212661141404

NETHERLANDS

SPECTRUS B.V.
www.spectrus.nl
mail@spectrus.nl
0031570592786

NIGERIA

TREND YARD NIGERIA LIMITED
www.trend-yard.com
ziad@trend-yard.com
00234 803 777 7749

NORTH MACEDONIA

MANEKS DOO
www.maneks.mk
manex1@t.mk
003892601602

OMAN

AL KHALILI ELECTRICAL LLC
www.alkhalili.com
info@alkhalili.com
0096822035000

PERU

HILITE S.A.C.
www.hiliteperu.com
ventas@hiliteperu.com
005114229123

POLAND

ONE LIGHT SP. Z.O.O.
www.1light.pl
kontakt@1light.pl
0048602577183

PORTUGAL

DISLAMP LIGHTING
www.dislamp.pt
dislamp@dislamp.pt
00351234644148

QATAR

CUBE LAB TRADING AND DECORATION AND CONTRACTING
www.cubelight.net
info@cubelight.net
0097444510660

LEDWORLD WLL
www.ledworld-me.com
gerard.abboud@ledworld-me.com
0097455089801

ROMANIA

ABC-RO LIGHTING MANUFACTURE PRODUCTION SRL
www.abc-ro.ro
office@abc-ro.ro
0040724837143

archiLIGHT // HDB SMART SYSTEM SRL
www.archilight.ro
office@archilight.ro
0040773362824

IOKO ELECTRIC COMPANY SRL
www.lampiarhitecturale.ro
office@iokoelectric.ro
0040212100065

LUMIDEX EXPERT SRL
www.lumidex.ro
contact@lumidex.ro
0040723751731

VELTA INT SRL
www.ledhome.ro
office@ledhome.ro
0040737360000

RUSSIA

KD-TREND
irapan@mail.ru
0079114731867

SAUDI ARABIA

LUMIERE KSA
www.lumiereksa.net
ghassan@lumiereksa.net
00966114635101

NAMARAA SPECIALISTS EST FOR TRADING
www.namaraa.com
info@namaraa.com
00966112161316

SERBIA

KINETIC LIGHTING DOO
www.kinetic-lighting.rs
mladen.pasalic@kinetic-lighting.rs
00381216742032

LIGHT SYSTEMS DESIGN DOO
www.lsdesign.rs
emilija@lsdesign.rs
00381695002616

SAFE SYSTEM DOO
www.safesystem.rs
office@safesystem.rs
00381621459692

SELBI LIGHTING DOO
www.selbi.rs
office@selbi.rs
00381113392636

SLOVAKIA

ONE LIGHT SK S.R.O.
www.onelight.sk
objednavky@onelight.sk
00421908777938

SLOVENIA

DIMCO TRADE DOO
www.dimco-svetila.si
info@dimco-svetila.si
0038617296422

SPAIN

GRUPO MCI
www.grupo-mci.com
info@grupo-mci.com
0034936302800

AGENTS / DISTRIBUTORS

SWEDEN

REVOLT LIGHTING
www.revolt.lighting
hello@revolt.lighting
0046104890540

SWITZERLAND

IDEE LUMIERE
www.ideelumiere.ch
info@ideelumiere.ch
0041763746168

SOS-LIGHT SARL
www.sos-light.ch
info@sos-light.ch
0041763844076

TOGO

INFRALEC SAS
www.infralecsas.com
gm@infralecsas.com
0022899909090

TUNISIA

SOLEC
contact.solec@gmail.com
0021621208435

UAE

CUBE LIGHT TRADING LLC
www.cubelight.net
info.dubai@cubelight.net
0097144533095

DIB LIGHTING EQUIPMENT LLC
www.diblighting.com
nbitar@diblighting.com
0097143339060

LARSA LIGHTING LLC
www.larsalighting.com
info@larsalighting.com
0097143957284

LIGHT VISION LLC
www.lightvision.ae
light@lightvision.ae
0097126430606

LUMEN BRIGHT LIGHTING LLC
www.premierlight.net
sushil@lblights.com
00971503460334

UK

ONE-LIGHT (UK) LIMITED
www.1-lightuk.com
info@one-lightuk.com
00448445561515

UGANDA

CRYSTAL EURO LED LIGHTING LTD
amukiibi24@gmail.com
00256772495563
00256700345559

URUGUAY

TRIOS LIGHTING
www.trioslighting.com
info@trioslighting.com
0059827119260

USA

SOLAVANTI LIGHTING
www.solavantilighting.com
sales@solavantilighting.com
0012142219405

VIETNAM

WELIFE VIETNAM CO. LTD
www.welife-eco.com.vn
SCM@welifevn.com
0084963760002

ZAMBIA

ALUMEN FABRICATORS
www.alumenfabruicators.com
harry@alumenfabricators.com
00260965023382

NOTES



Please note:

Prices are subject to change without notification. ONE Light may change product specifications without notifying customers. ONE Light does not accept any responsibility for mistakes in this catalogue, we strongly advise customers to contact us to confirm specifications. Fitting sizes in catalogue may vary from actual fitting dimensions. Always check the actual fitting before cutting holes. ONE Light may discontinue any item from this catalogue without prior notice. No images or information may be copied or reproduced without written permission from ONE Light.

5 291889 080732

one
LIGHT

www.1-light.eu